



**POLITECNICO**  
MILANO 1863

# **Travlendar+ project**

## **Requirement Analysis and Specification Document**

RICCARDO FACCHINI

ANDREA GUGLIELMETTI

October 19, 2017

## Deliverable specific information

---

<b>Deliverable:</b>	RASD
<b>Title:</b>	Requirement Analysis and Verification Document
<b>Authors:</b>	Riccardo Facchini - Andrea Guglielmetti
<b>Version:</b>	0.8
<b>Date:</b>	October 19, 2017
<b>Download page:</b>	<a href="https://github.com/Riccardo95Facchini/FacchiniGuglielmetti.git">https://github.com/Riccardo95Facchini/FacchiniGuglielmetti.git</a>
<b>Copyright:</b>	Copyright © 2017, Riccardo Facchini - Andrea Guglielmetti – All rights reserved

---

## Contents

<b>Deliverable specific information</b>	<b>1</b>
<b>Table of Contents</b>	<b>2</b>
<b>List of Figures</b>	<b>3</b>
<b>List of Tables</b>	<b>4</b>
<b>1 Introduction</b>	<b>5</b>
1.1 Purpose	5
1.2 Scope	5
1.3 Stakeholders	5
1.4 Definitions, acronyms and abbreviations	6
1.4.1 Definitions	6
1.4.2 Acronyms	6
1.4.3 Abbreviations	6
1.4.4 Revision History	6
1.5 Reference documents	6
<b>2 Overall Description</b>	<b>7</b>
2.1 Product Perspective	7
2.2 Product Functions	9
2.3 User Characteristics	9
2.4 Domain Assumptions	9
<b>3 Specific Requirements</b>	<b>10</b>
3.1 External Interface Requirements	10
3.1.1 User Interfaces	10
3.1.2 Hardware Interfaces	10
3.1.3 Software Interfaces	11
3.1.4 Communication Interfaces	11
3.2 Functional Requirements	12
3.2.1 Registration	12
3.2.2 Login	16
3.2.3 Specify Means of Travel	19
3.2.4 Create Appointment	23
3.2.5 Change Appointment Information	27
3.2.6 Delete Appointment	31
3.2.7 Manage Breaks	34
3.2.8 Manage Account	38
3.3 Performance Requirements	42
3.4 Design Constraints	43
3.4.1 Standards Compliance	43
3.4.2 Hardware Limitations	43
3.5 Software System Attributes	44
3.5.1 Reliability	44
3.5.2 Availability	44
3.5.3 Safety and Privacy Constraints	44
3.5.4 Maintainability	44
3.5.5 Portability	44

## List of Figures

1	Class Diagram . . . . .	8
2	Registration activity diagram . . . . .	14
3	Registration sequence diagram . . . . .	15
4	Login activity diagram . . . . .	17
5	Login sequence diagram . . . . .	18
6	Specify Means of Travel use case . . . . .	20
7	Specify Means of Travel activity diagram . . . . .	21
8	Specify Means of Travel sequence diagram . . . . .	22
9	Create Appointment use case . . . . .	24
10	Create Appointment activity diagram . . . . .	25
11	Create Appointment sequence diagram . . . . .	26
12	Change Appointment Information use case . . . . .	28
13	Change Appointment Information & Delete Appointment activity diagram . . . . .	29
14	Change Appointment Information sequence diagram . . . . .	30
15	Delete Appointment use case . . . . .	32
16	Delete Appointment sequence diagram . . . . .	33
17	Create Breaks use case . . . . .	35
18	Manage Breaks activity diagram . . . . .	36
19	Create Breaks sequence diagram . . . . .	37
20	Manage Account overall use case . . . . .	39

**List of Tables**

1	<i>Registration</i> use case description . . . . .	13
2	<i>Login</i> use case description . . . . .	16
3	<i>Specify Means of Travel</i> use case description . . . . .	20
4	<i>Create Appointment</i> use case description . . . . .	24
5	<i>Change Appointment Information</i> use case description . . . . .	28
6	<i>Delete Appointment</i> use case description . . . . .	32
7	<i>Create Breaks</i> use case description . . . . .	35
8	<i>View Account Information</i> use case description . . . . .	39
9	<i>Modify personal information</i> use case description . . . . .	40
10	<i>Delete account</i> use case description . . . . .	41

## 1 Introduction

### 1.1 Purpose

This Requirement Analysis and Specification Document (RASD for short) document has the purpose of fully describing to a wide range of potential readers the system and to function as a base for legal agreements between developers and other parties.

In the following pages there will be precise descriptions of all the functional and non-functional requirements, the different scenarios and cases of interaction between the system and the users, with attention to what the users need from it, the domain of the system and the constraints that it implies.

The readers of this document comprise the developers of the system and its applications and agents from the local public transportation agencies or independent company in similar professions such as taxi businesses or bike/car sharing companies.

### 1.2 Scope

The scope of this project is to develop a system called Travlendar+ that will allow in the most possible efficient way the paring of daily commutes and the management of scheduled appointments and meetings, by providing for each situation the best alternatives of moving throughout the city both for work related reasons and for personal motives.

Users of Travlendar+ can create a calendar with every appointment paired with time and place, the system will then compute the best way of reaching each location in time by choosing between every commuting option available at the moment and taking into account the preferences expressed by the user in the customization settings, possible strikes of the local transportation services and the weather, if the location is too far and cannot be reached in time a warning is going to pop up on the screen of the user.

Each time a scheduled appointment is coming up a notification is going to appear in advance by a configurable amount of time, the user will then be able to confirm, change or refuse the proposed trip.

### 1.3 Stakeholders

Here are listed all the potential stakeholders with a brief description and how they may be affected by the system:

- **User:** All the individuals that will use the system to schedule their daily commute.
- **Public transportation companies:** Local and international companies that handle public transportation may have an advantage in giving an easy way to integrate their schedules with Travlendar+ as it could mean a higher number of sold tickets.
- **Taxi and Car/Bike sharing companies:** Given that is not always possible for each type of user to walk long distances and public transport does not reach every possible destination they may be interested in a partnership between their service and the system.
- **Mobile network carriers:** They have an interest in providing a network and contracts to connect devices to the service.

## 1.4 Definitions, acronyms and abbreviations

What follows is the list of all the main terms and abbreviations used in the document.

### 1.4.1 Definitions

- **User:** who is using the system to schedule their calendar.
- **Trip:** the plan to move from point A to point B done using one or more means.
- **Travel:** synonymous of trip.
- **System:** All the software needed to deliver all the functionalities desired, often used as a synonymous of Travlendar+.

### 1.4.2 Acronyms

- **RASD:** Requirement Analysis and Specification Document
- **SRS:** Software Requirement Specification. Synonymous of RASD
- **ETA:** Estimated Time of Arrival
- **GPS:** Global Positioning System
- **W3C:** World Wide Web Consortium
- **HTTP:** HyperText Transfer Protocol
- **HTTPS:** HyperText Transfer Protocol over Secure Socket Layer
- **SDK:** Software Development Kit
- **TCP:** Transfer Control Protocol
- **API:** Application Programming Interface
- **RAM:** Random Access Memory
- **UMTS:** Universal Mobile Telecommunications System
- **DB:** Database
- **DBMS:** Database Management System

### 1.4.3 Abbreviations

No other abbreviations aside from acronyms were used.

### 1.4.4 Revision History

- 

## 1.5 Reference documents

- Document of the assignment: Mandatory Project Assignments.pdf

## 2 Overall Description

### 2.1 Product Perspective

The system will have three main parts:

1. Mobile application version for phones and tablets.
2. Web browser version.
3. Backend structure to support the functioning of the service.

While the backend structure is needed for the functioning of the service provided, only one of the two applications is needed to interact with the system.

APIs for each component must be provided in order to allow future development and introduction of new functionalities like an automated system for buying of public transportation vehicles.

#### Class Diagram

In **Figure 1** is represented the class diagram for the main components of the system-to-be

#### Difference between Machine and World

The following is a distinction between the **Machine** and the **World**.

1. Machine: the Machine is the *Product-to-be* (often also referred to as *System* for short).  
The *Machine Domain* on the other hand is everything that the Machine can operate onto, meaning that it can manipulate it or more in general it can control.
2. World: the World is the physical world that interacts with the Machine or that it can be observed by it, it's the environment in which the System will gather information and will be affected by the actions performed.

Machine and World are connected by *Shared Phenomena*, the set of events of the World that are observable by the Machine and the ones the Machine can directly cause with its actions.

An example of a Shared Phenomena may be something as mundane as the rain, since it's clearly an event that happens in the World and at the same time is observable by the Machine via a forecast or a weather report.



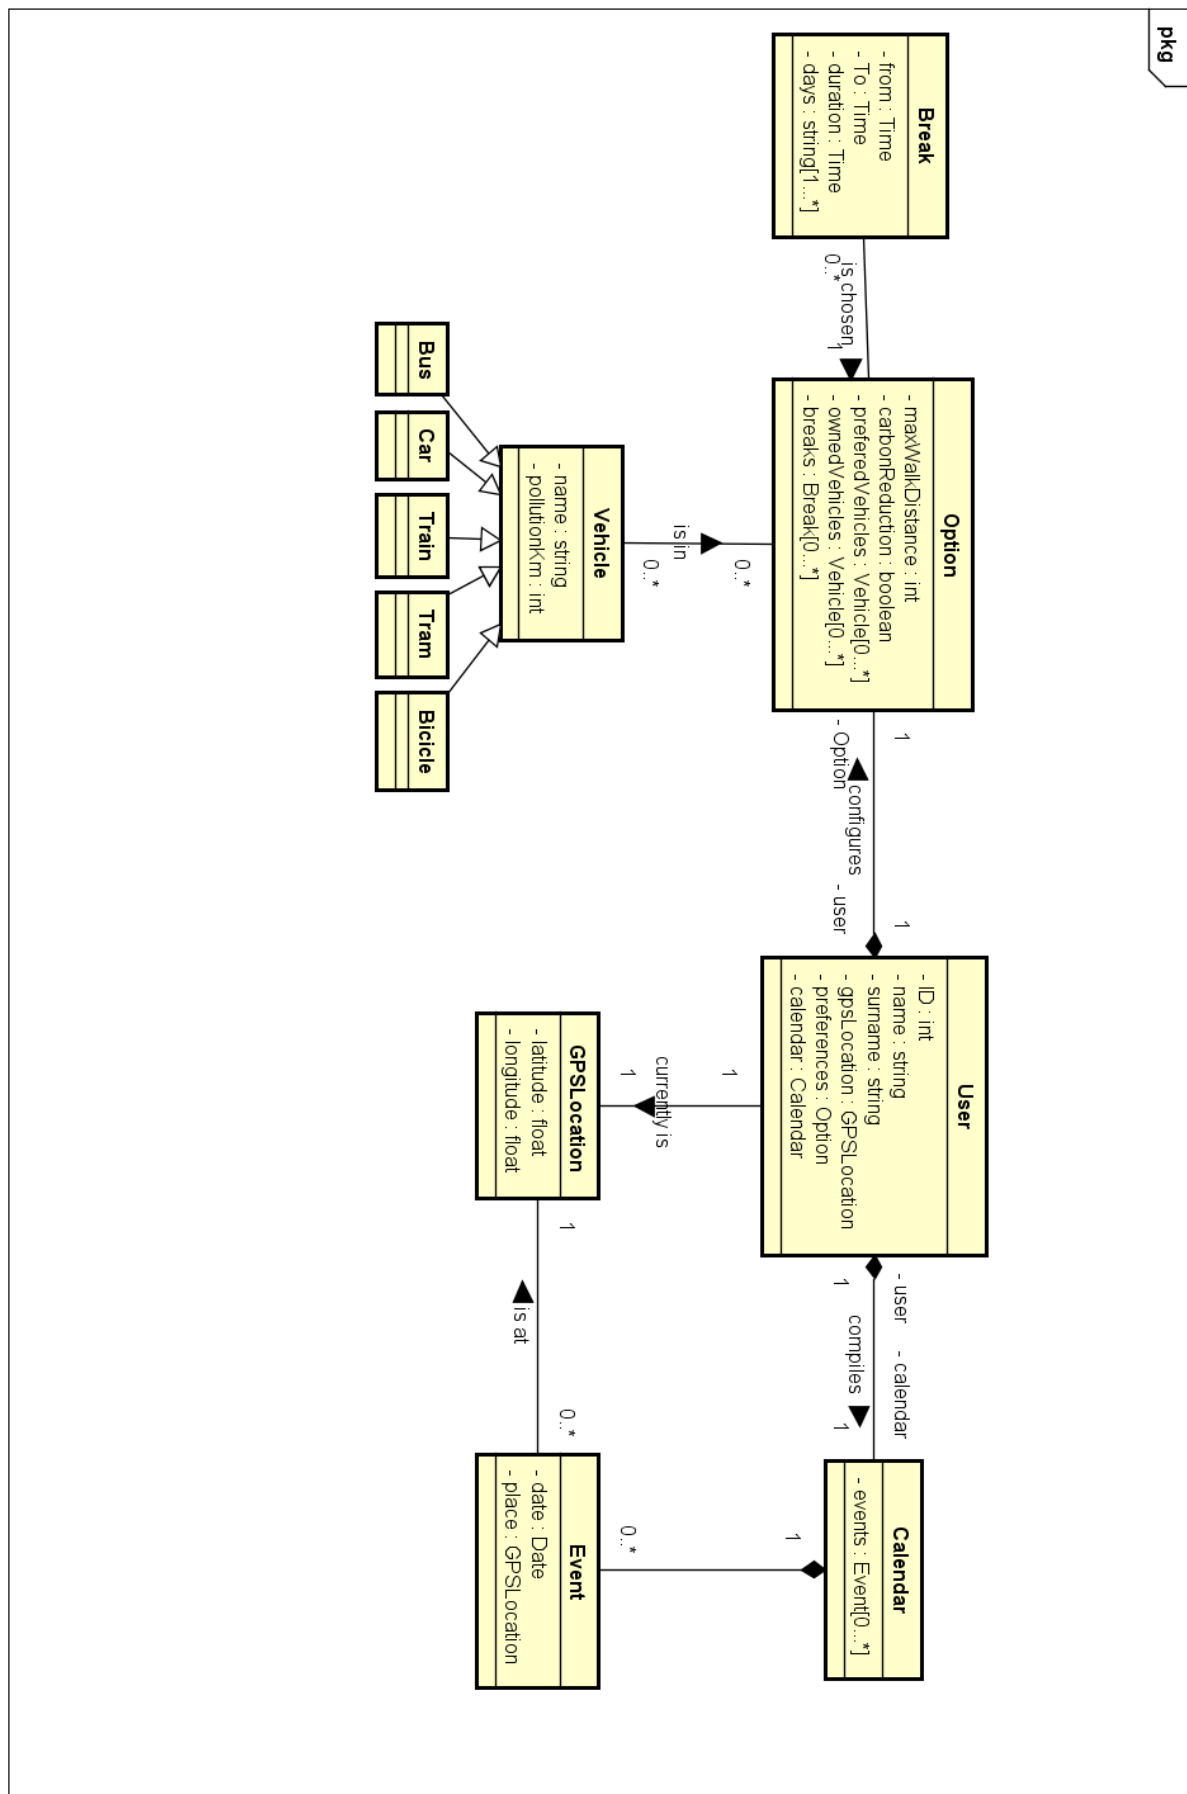


Figure 1: Class Diagram

## 2.2 Product Functions

The system allows each user to create their personal calendar by specifying place and time of each appointment and then view the proposed solution, to be more specific the user can:

1. Register to the system with username and password.
2. Logging to the service.
3. Manage the information of an account and delete it.
4. Specify means of travel preferences.
5. Create an appointment in the calendar.
6. Change appointment information.
7. Delete an appointment.
8. Schedule flexible lunch/breaks of specific length in a given interval.

## 2.3 User Characteristics

The users interested in using the system should be at least familiar with the concept of navigating a web page and using a smartphone in the day to day routine without needing any technical competence regarding the topic, they must be aware of the laws regarding the public circulation on the streets of the country they wish to use the services provided and need a valid driver licence if they want to use a car and they must possess an electronic payment method to use third party car/bike sharing options.

## 2.4 Domain Assumptions

We assume that the following statements are true:

1. It exists a combination of means of transportation that will take the user to his/her destination even if not before the desired time.
2. The GPS location of the user is always correct.
3. Weather forecasts have a 100% accuracy.
4. Public transportations always arrive on time.
5. Internet connection is never lost.
6. Is possible to integrate the system with already existing application from third party companies and public transportations.

## 3 Specific Requirements

### 3.1 External Interface Requirements

#### 3.1.1 User Interfaces

The main way the users can interact with the system is via the mobile application for their smartphone, the interface should be user-friendly and in particular easy to read, with large and high contrast text to minimize reading problems in direct sunlight; the second way of connecting to the services provided is to use the web application their personal computer. In both cases the user interfaces must satisfy the following constraints:

- The first page must always ask the user to login or register to service.
- After the login, the system redirects the user to his/her home page.
- (Web) A toolbar must be present in every page, except login and registration page.
- (Mobile) A toolbar must be present in the homepage.
- The *Create a meeting* page must provide a guided process to set-up a meeting and clearly show if the created meeting is not reachable in time from the location of a previous appointment.
- The *Manage meetings* page must show a list of user's meetings divided by day and hour, and allows the user to select a meeting to obtain further information.
- The interface must offer the possibility to choose between a set of different languages.
- The user interface must dynamically adapt to the screen size.
- The Mobile and Web application must use the same graphical elements.

In addition to these constraints, other platform-dependent constraints are provided:

- Web Application:  
All the pages must submit to W3C standards.
- Mobile Application:  
All mobile versions must follow the design guidelines provided by the respective platform manufacturer (Android, iOS, Windows ...).

#### 3.1.2 Hardware Interfaces

The web application needs any personal computer connected to the internet, while the mobile application must be able to connect to the network in order to exchange information with the server, such as destination and location of the user retrieved via the GPS of the mobile device.

Hardware requirements for both are later specified in [subsubsection 3.4.2](#)

### 3.1.3 Software Interfaces

Supported browsers for the web application should include Google Chrome, Mozilla Firefox, Opera, Safari, Internet Explorer and Edge, while the mobile application must be available on Android, iOS, Windows Phone and Blackberry OS.

The server side of the application requires:

- **Java EE**, to write the server application that perform the travel computation and the database access.
- **MySQL**, to memorize user information and meetings inside a relational database.

The client side of the application requires the latest version of the platform SDK.

### 3.1.4 Communication Interfaces

The client communicates to the server via HTTPS protocol using TCP.

In addition, the system must be able to use the API of other application in order to retrieves weather and news about road conditions or strike.

## 3.2 Functional Requirements

### 3.2.1 Registration

#### Purpose

The main purpose of the *Registration* use case is to provide the user a service which permits the subscription to the system. The user must fill a registration form with his/her personal information and accept the Terms and Conditions of use. After that a confirmation e-mail is sent to the specified e-mail.

#### Functional Requirements

R.1: The system must not accept an already registered e-mail.

R.2: The user must provide the following information:

- name
- surname
- e-mail
- password

R.3: The system cannot allow the user to proceed in the registration process if he/she does not accept the Terms and Conditions of use.

R.4: The system must send an e-mail to the user after he/she submits the form.

R.5: The system must generate a unique link for the registration e-mail.

R.6: The user must be able to exit the form any time.

#### Scenario

Alice is searching an app to track down her appointments. Searching on the Play Store app of her phone, she finds out an app called Travlendar+. She downloads it, compiles the registration form, clicks on the link inside the confirmation app and she is ready to use Travlendar+.

#### Use Case

The *Registration* use case is analysed in [Table 1](#)

#### Activity Diagram

The activity diagram of the *Registration* use case is showed in [Figure 2](#)

#### Sequence Diagram

The sequence diagram of the *Registration* use case is showed in [Figure 3](#)

<b>Name</b>	<b>Registration</b>
<b>Actors</b>	Non registered User
<b>Entry conditions</b>	–
<b>Flow of events</b>	<ol style="list-style-type: none"> <li>1. The user asks to the system to register to its service.</li> <li>2. The system shows the appropriate form to fill.</li> <li>3. The user fills the form inserting its own information.</li> <li>4. The user submits the form.</li> <li>5. The system checks if the e-mail is unique.</li> <li>6. The system sends to the specified e-mail address a confirmation e-mail with a unique link.</li> <li>7. The user must open the e-mail and click on the confirmation link.</li> <li>8. The system receives the confirmation, saves the data inside a database and notifies to the user.</li> </ol>
<b>Exit conditions</b>	The user is now registered and he/she can login and start to use the service.
<b>Exceptions</b>	Exceptions can occur when requirements <b>R.1.</b> , <b>R.2.</b> , <b>R.3.</b> are violated, in this case the system reloads the registration form and goes back to step 2. Registration process is also aborted when the user decides to complete it.

Table 1: *Registration* use case description

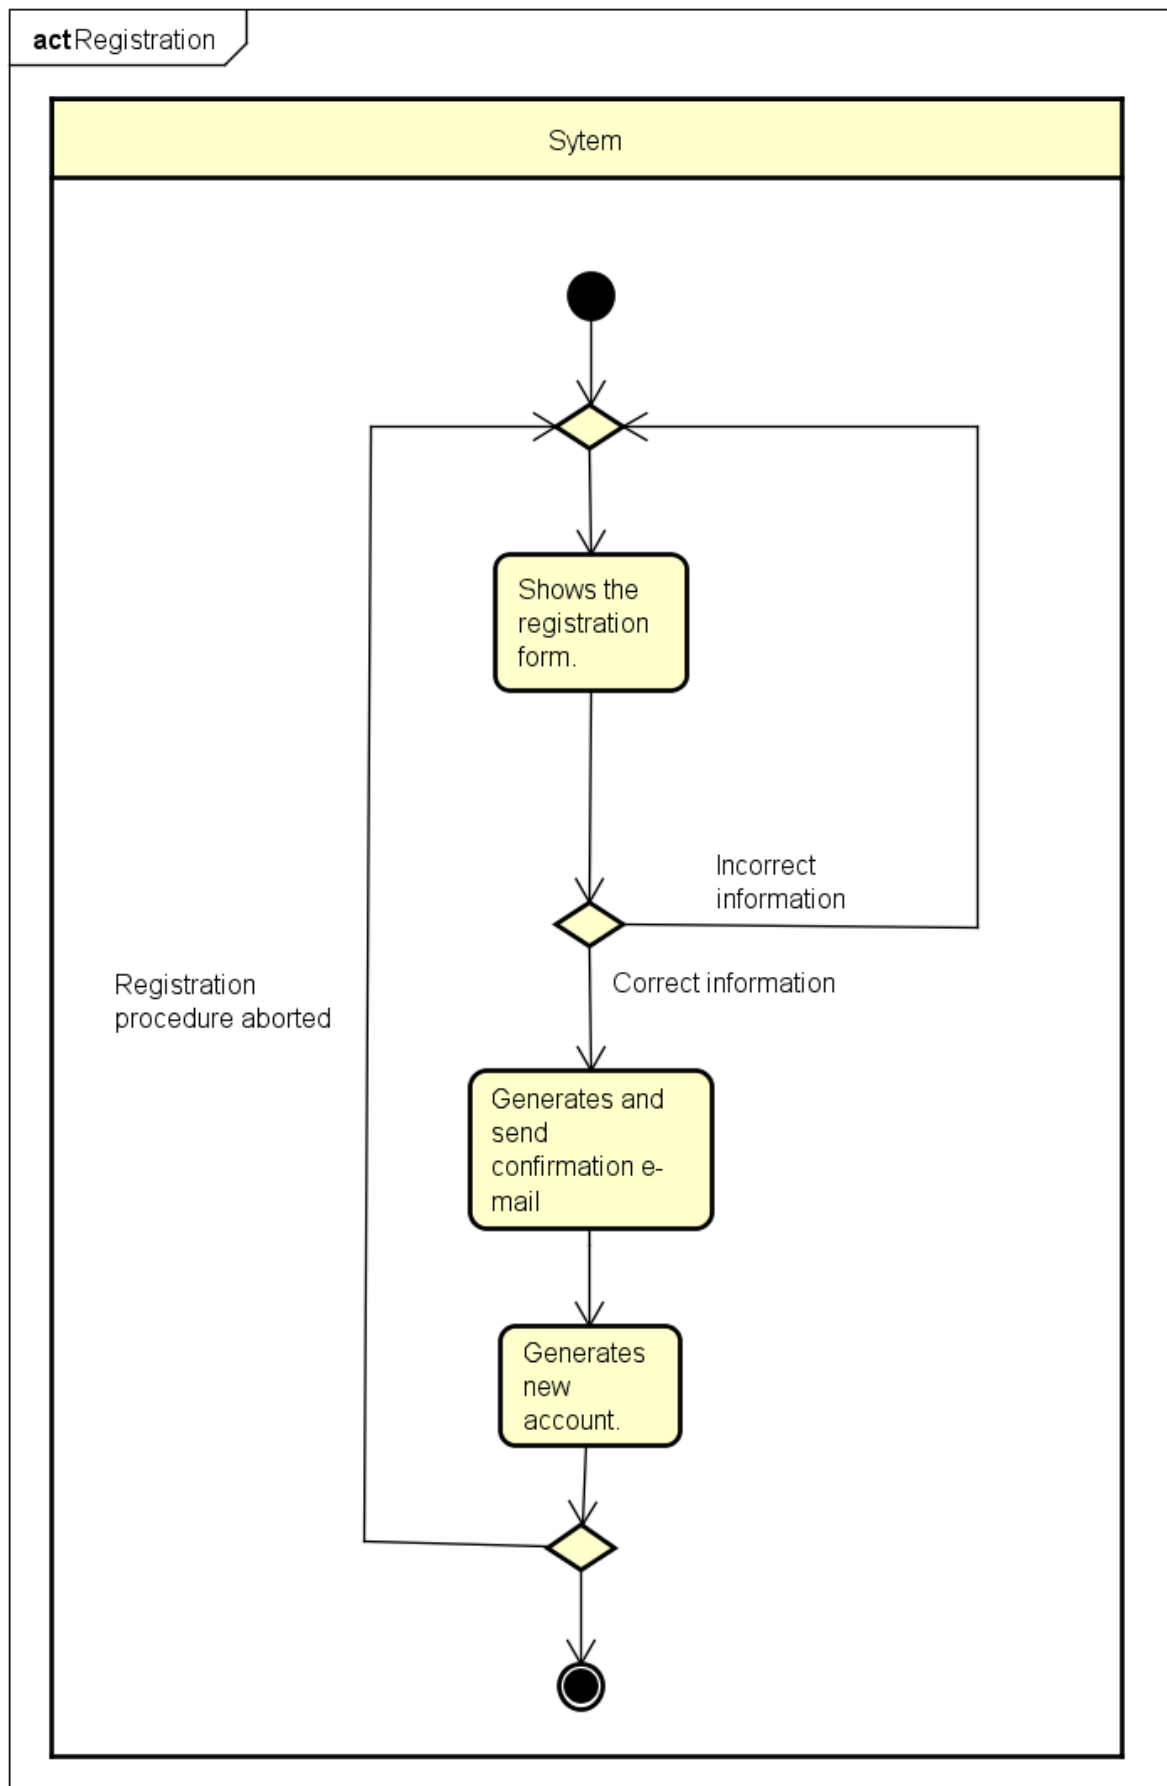


Figure 2: *Registration* activity diagram

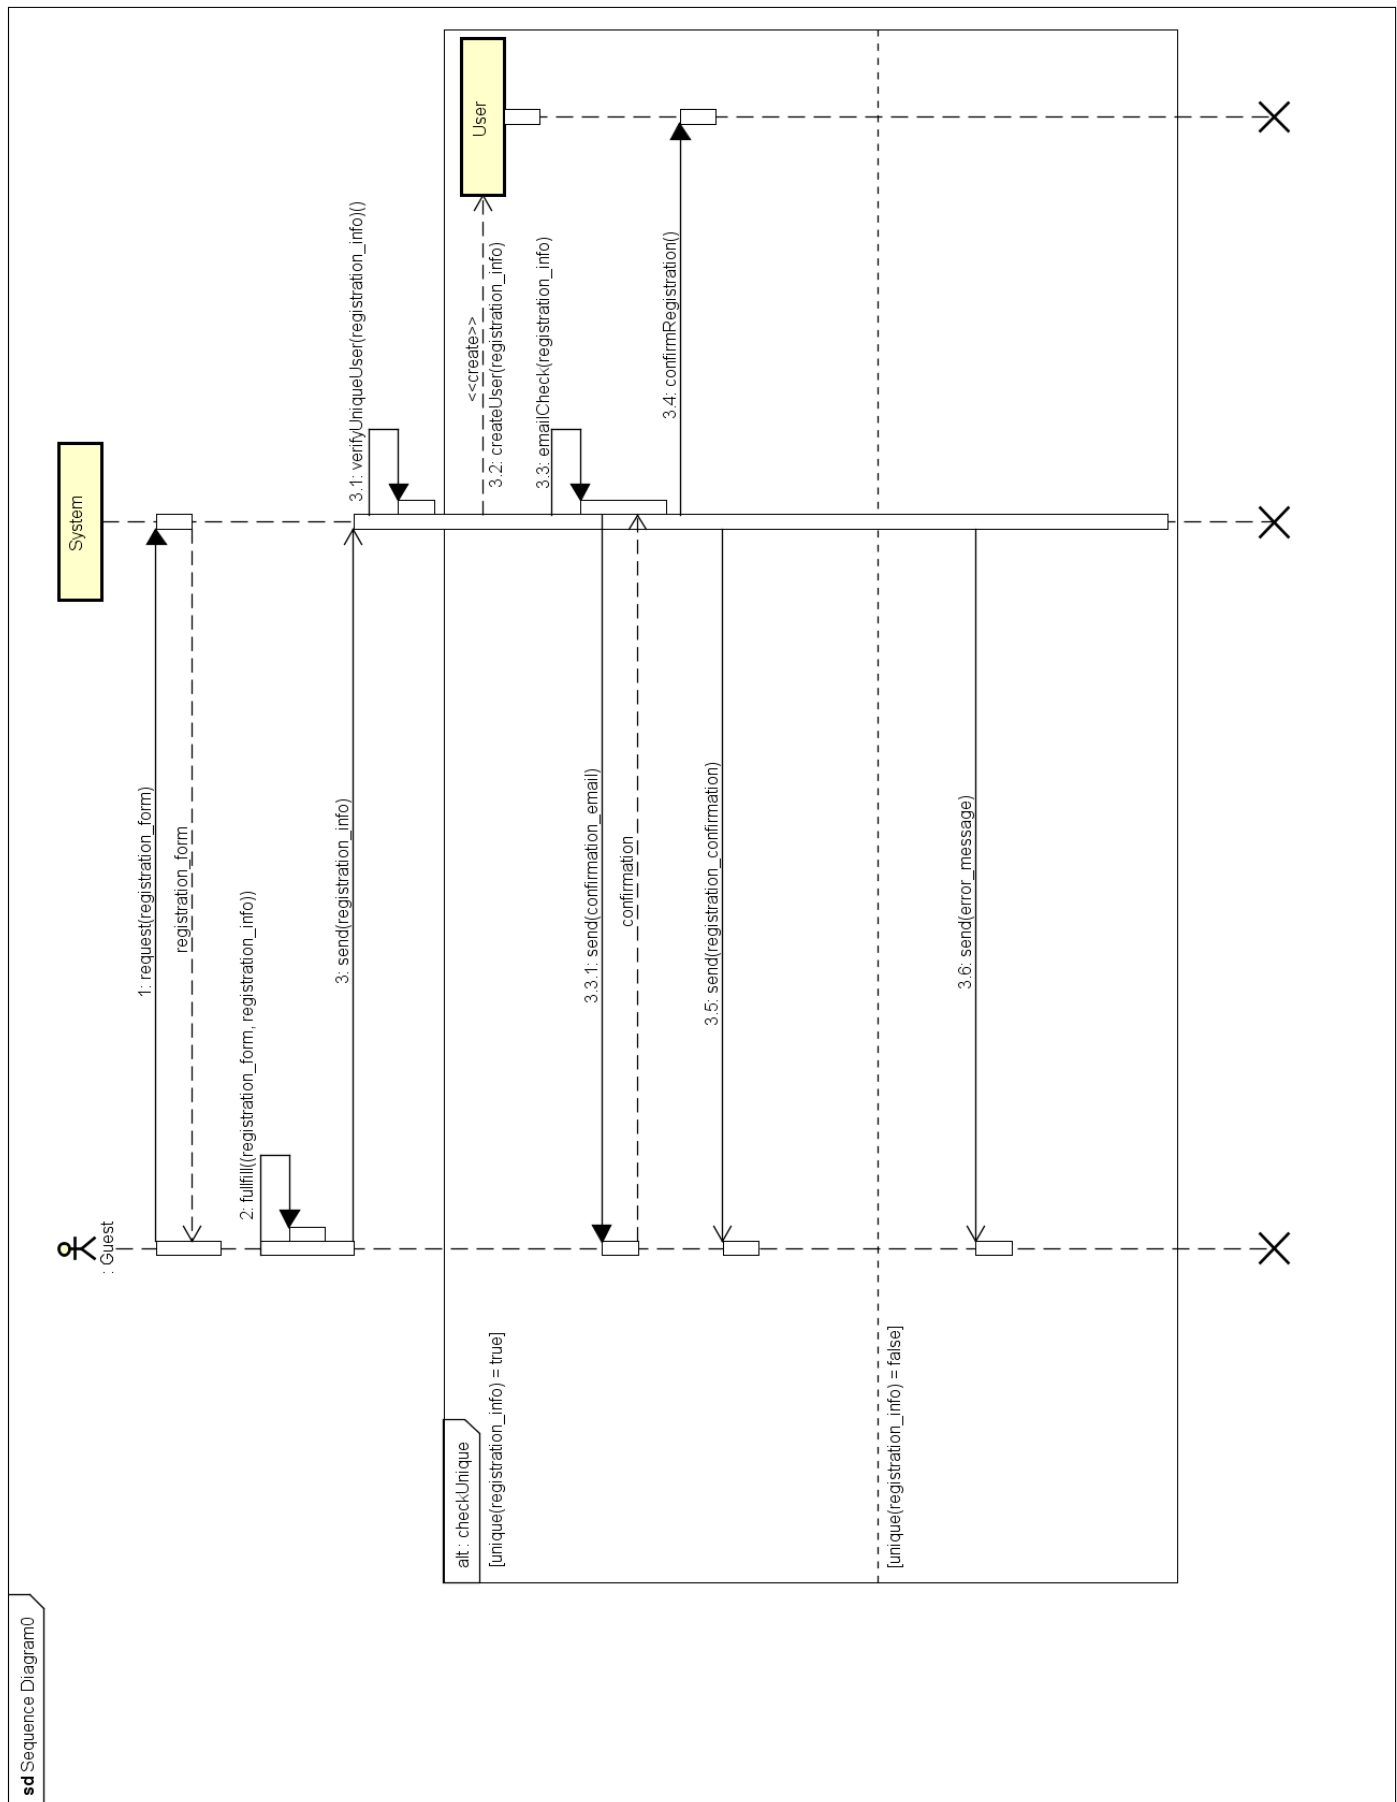


Figure 3: Registration sequence diagram



### 3.2.2 Login

#### Purpose

The purpose of *Login* functionality is grant access to *Travlendar+* to any registered user. The system requires an already inserted e-mail and corresponding password in order to access the service.

#### Functional Requirements

- R.7: The user must be already registered to the system to perform a successful login.
- R.8: The system must require the user to insert his/her e-mail and password to perform a login.
- R.9: The system must check if the password corresponds to a registered e-mail.
- R.10: The system grants access to its service only to authenticated users.
- R.11: The user can insert a new password if and only if he/she is a registered user and clicks on "*Forgot my password*".
- R.12: The password must correspond to the most recent one associated to the user's e-mail.

#### Scenario

Bob wants to login on *Travlendar+*. He opens the *Travlendar+*'s web site, then clicks on Login and eventually inserts his e-mail and password, but the system does not accept his data and prevents the login. Bob checks the e-mail inserted and finds a typo, he corrects it and submits again the data. Now all the information required are correct and the system accept the login.

#### Use Case

The *Login* use case is analysed in [Table 2](#).

#### Activity Diagram

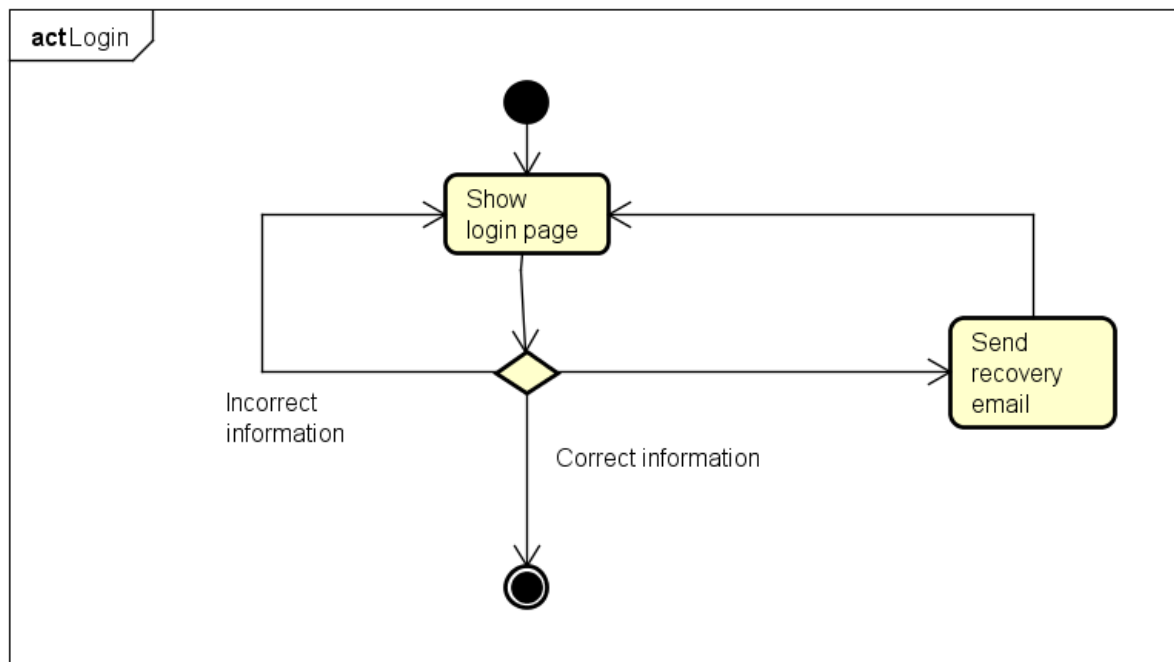
The activity diagram of the *Login* use case is showed in [Figure 4](#).

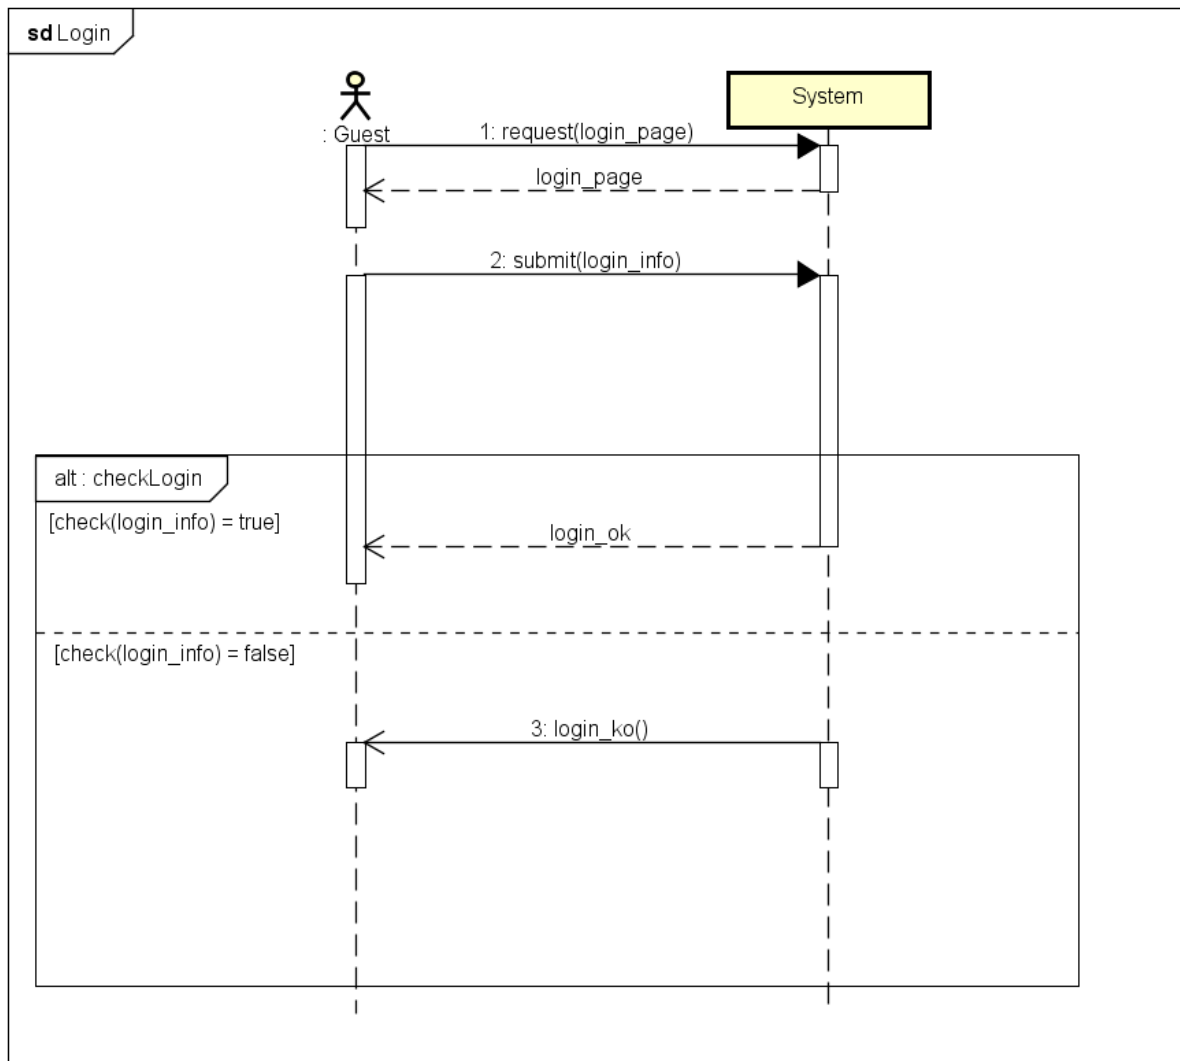
#### Sequence Diagram

The sequence diagram of the *Login* use case is showed in [Figure 5](#).

<b>Name</b>	<b>Login</b>
<b>Actors</b>	Non registered User
<b>Entry conditions</b>	The user is already registered into the system and wants to login.
<b>Flow of events</b>	<ol style="list-style-type: none"> <li>1. The user asks to the system to perform a login.</li> <li>2. The system shows the <i>Login</i> page.</li> <li>3. The user inserts his/her e-mail and password and submits.</li> <li>4. The system checks if the e-mail corresponds to a registered e-mail.</li> <li>5. The system checks if the password is associated to the entered e-mail.</li> </ol>
<b>Exit conditions</b>	The user is now logged in.
<b>Exceptions</b>	Exceptions occurs when the e-mail has never been registered to the system or when the password does not corresponds to the e-mail.

Table 2: *Login* use case description

Figure 4: *Login* activity diagram

Figure 5: *Login* sequence diagram

### 3.2.3 Specify Means of Travel

#### Purpose

The purpose of this functionality is to allow the user to select an order for his/her favourite means of travel and what vehicles he/she owns, the system will then take this data in consideration once it has to calculate a trip plan by giving precedence to the vehicles higher in the hierarchy. Both preferred and owned vehicles are optional information, if the user doesn't insert them the system will simply not be influenced when computing travels.

#### Functional Requirements

- R.13: The user must be logged in.
- R.14: A vehicle already selected in an option must not appear again in the list when the user is selecting one.
- R.15: The user must be able to change the inserted data at any time.
- R.16: The system must take the preferences into account each time it computes a travel.

#### Scenario

Bill loves to move using his bicycle, and wishes to use it each time he can, so he decides to place it as his favourite vehicle by opening the Travlendar + app and after logging in he selects the "Options" icon, then he proceeds to open the "Select favourite vehicles" section and presses the "+" sign to add one, he then chooses "Bicycle" from the list he is presented with.

Bill then remembers to also add the Bicycle to his owned vehicles, so the app won't suggest him to use a bike sharing company, to do that he selects the "Owned vehicles" option and just like before he presses the "+" sign and then picks "Bicycle" from the list to add it.

#### Use Case

The *Specify Means of Travel* use case is analysed in [Table 3](#) and in [Figure 6](#)

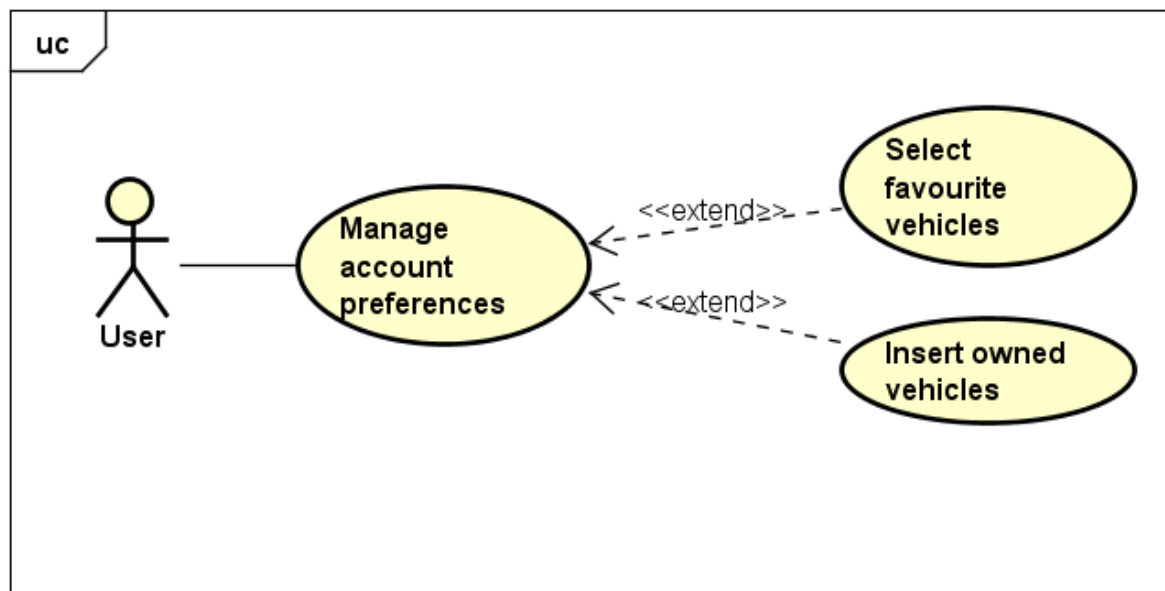
#### Activity Diagram

The activity diagram of the *Specify Means of Travel* use case is showed in [Figure 7](#)

#### Sequence Diagram

The sequence diagram of the *Specify Means of Travel* use case is showed in [Figure 8](#)

<b>Name</b>	<b>Specify Means of Travel</b>
<b>Actors</b>	User
<b>Entry conditions</b>	The user must be logged in
<b>Flow of events</b>	<ol style="list-style-type: none"> <li>1. The user opens the app's options.</li> <li>2. The user selects either the option to order the vehicles preferences or the one to add an owned one.</li> <li>3. The user selects the "+" sign to add a vehicle.</li> <li>4. The system provides a list of vehicles not already selected to the user.</li> <li>5. The user chooses a vehicle from the list.</li> <li>6. The system stores the choice in the database.</li> </ol>
<b>Exit conditions</b>	The user has selected one or more vehicles in his/her preference and/or in the owned section.
<b>Exceptions</b>	If the use already selected all possible vehicles the system won't allow another insertion.

Table 3: *Specify Means of Travel* use case descriptionFigure 6: *Specify Means of Travel* use case

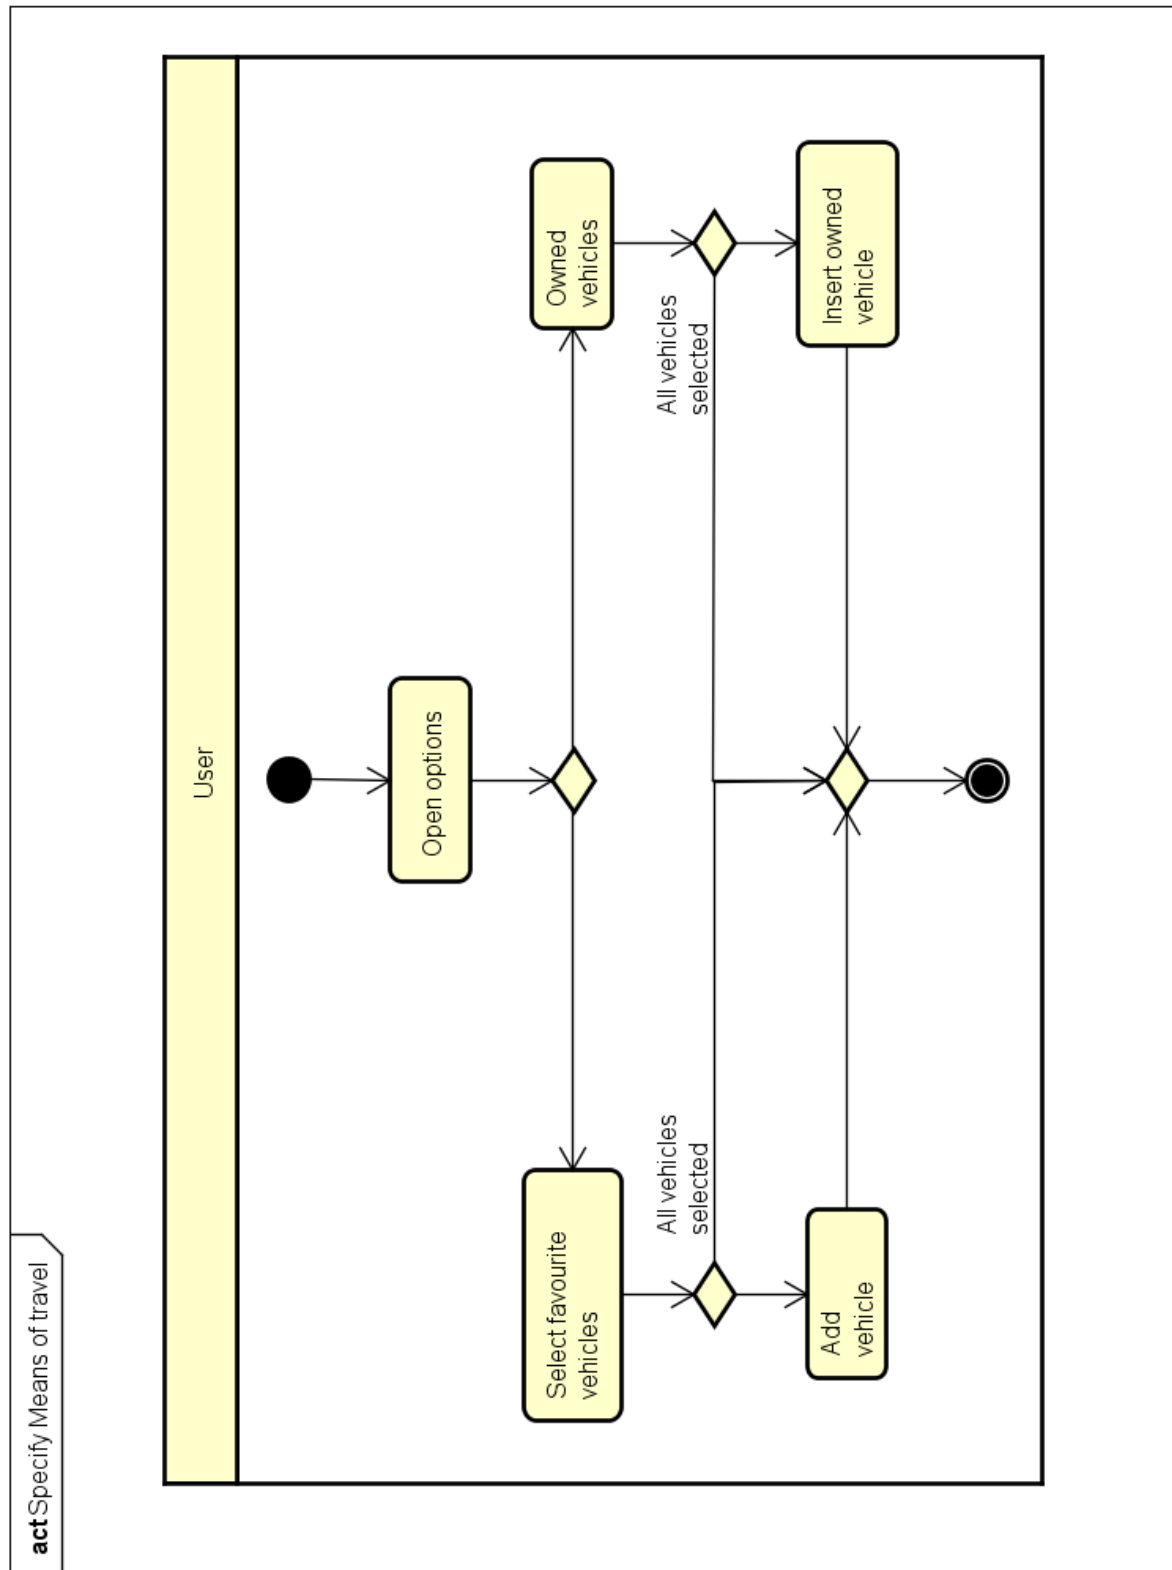


Figure 7: *Specify Means of Travel* activity diagram

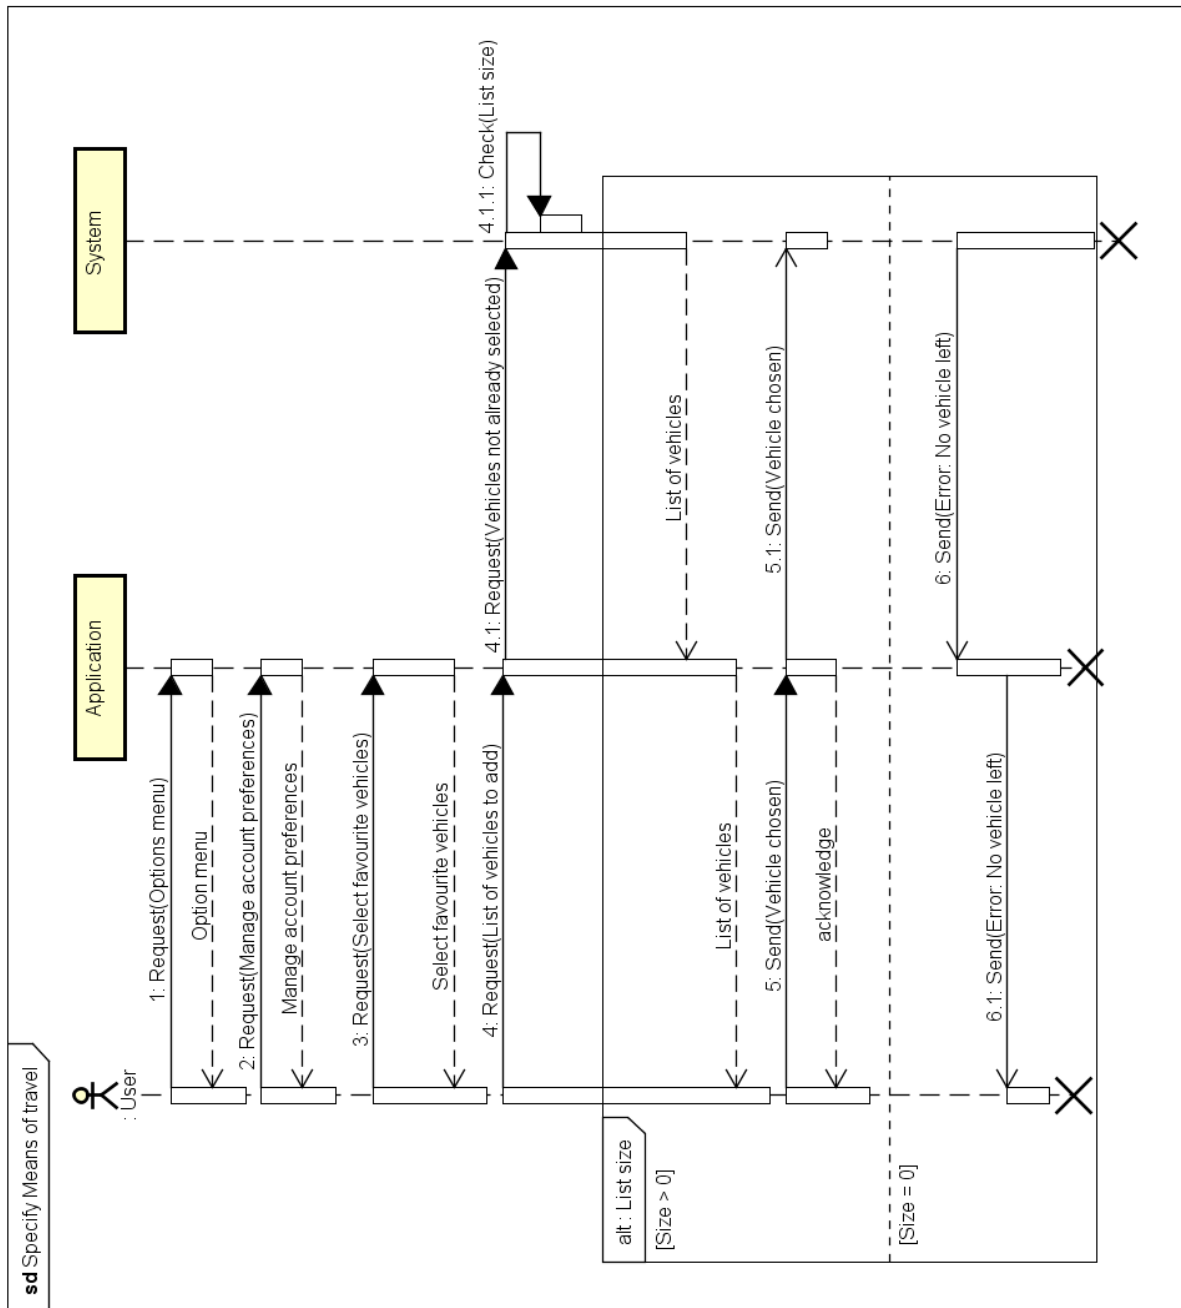


Figure 8: *Specify Means of Travel* sequence diagram

### 3.2.4 Create Appointment

#### Purpose

This function allows the user to create and register an appointment in the calendar. The user inserts the appointment's name, the time and location in which occurs and the time and location from where the system must calculate the path. The system then calculates the best path based on the user's preferences, the weather of appointment day and possible strikes. If the appointment place is not reachable in time the system warns the user.

#### Functional Requirements

R.17: The user must be logged in.

R.18: The user must be able to abort the operation any time.

R.19: The user must insert:

- Appointment name.
- Appointment time and location.
- Starting time and location.

R.20: The starting and destination locations must exist.

R.21: The appointment time must be after the starting time.

R.22: Both the appointment time and the starting time must not be in the past.

R.23: If the appointment is not reachable in time a warning must alert the user.

R.24: If the appointment duration overlaps with a previous created appointment, a warning must alert the user.

R.25: If between the starting time and the appointment time there are one or more appointments, a warning must alert the user.

R.26: The user must be able to adjust appointment information after a warning.

R.27: The user must be able to ignore the warning if and only if the appointment does not overlap with others previous created appointments.

R.28: The system must calculate the best path every time the appointment information changes.

#### Scenario

Jessica has taken an appointment with her dentist on 27th October at 8:00 am. She opens her *Travlendar+* app, selects "*Create an appointment*" and inserts the name of the event, the time and the address of the dentist's studio. She also inserts from where and when the app must calculate the path, she sets the starting time at 7:30 am and, since she is at home, the starting location via GPS.

#### Use Case

The *Create Appointment* use case is analysed in [Table 4](#) and in [Figure 9](#).

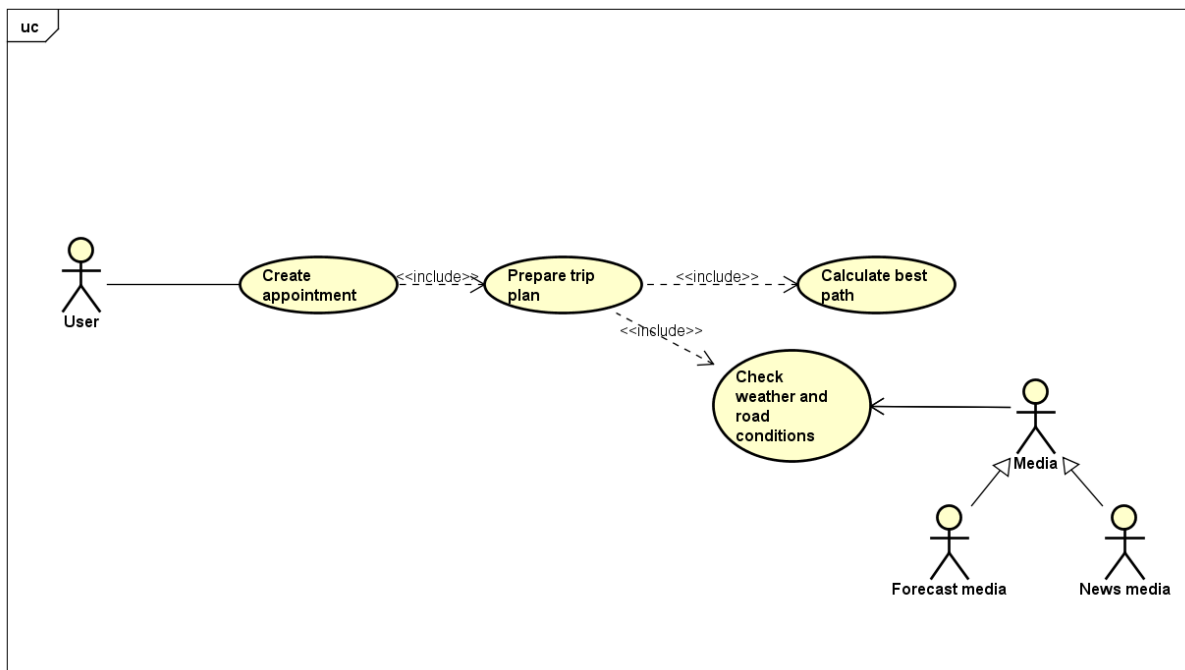
#### Activity Diagram

The *Create Appointment* activity diagram is showed in [Figure 10](#).

#### Sequence Diagram

The *Create Appointment* sequence diagram is showed in [Figure 11](#).



Figure 9: *Create Appointment* use case

<b>Name</b>	<b>Create appointment</b>
<b>Actors</b>	User
<b>Entry conditions</b>	The user must be logged in
<b>Flow of events</b>	<ol style="list-style-type: none"> <li>1. The user select "Create an appointment."</li> <li>2. The user fills the form inserting the data required by the requirement <b>R.19</b>.</li> <li>3. The system calculates the best path.</li> </ol>
<b>Exit conditions</b>	The system saves the appointment informations.
<b>Exceptions</b>	<p>Exceptions can occur when information about time and location of the appointment does not follows the requirements, in this case a warning is generated. If the warning is about the non-reachability of the appointment in time the system asks to the user if he/she wants to modify appointment information or to ignore the warning. Instead, if the created appointment overlaps with another appointment the system warns the user asking to modify appointment information. If the created appointment does not overlaps with other appointments, but is not reachable in time the user can choose to ignore the warning and let the system to create the appointment. If the user chooses to abort the operation the appointment will not be saved.</p>

Table 4: *Create Appointment* use case description

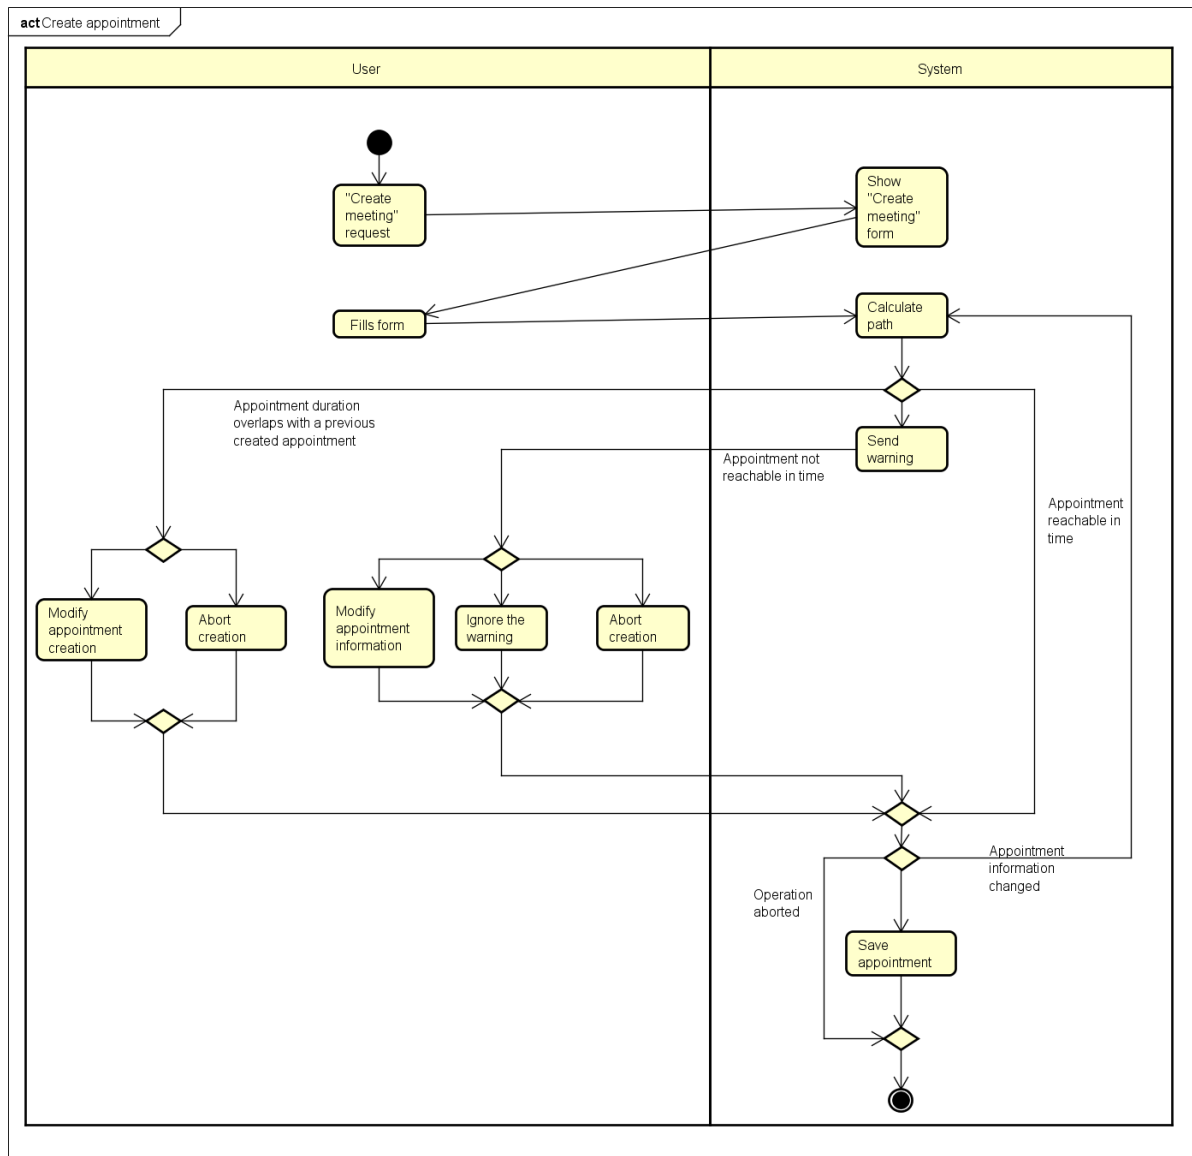


Figure 10: *Create Appointment* activity diagram

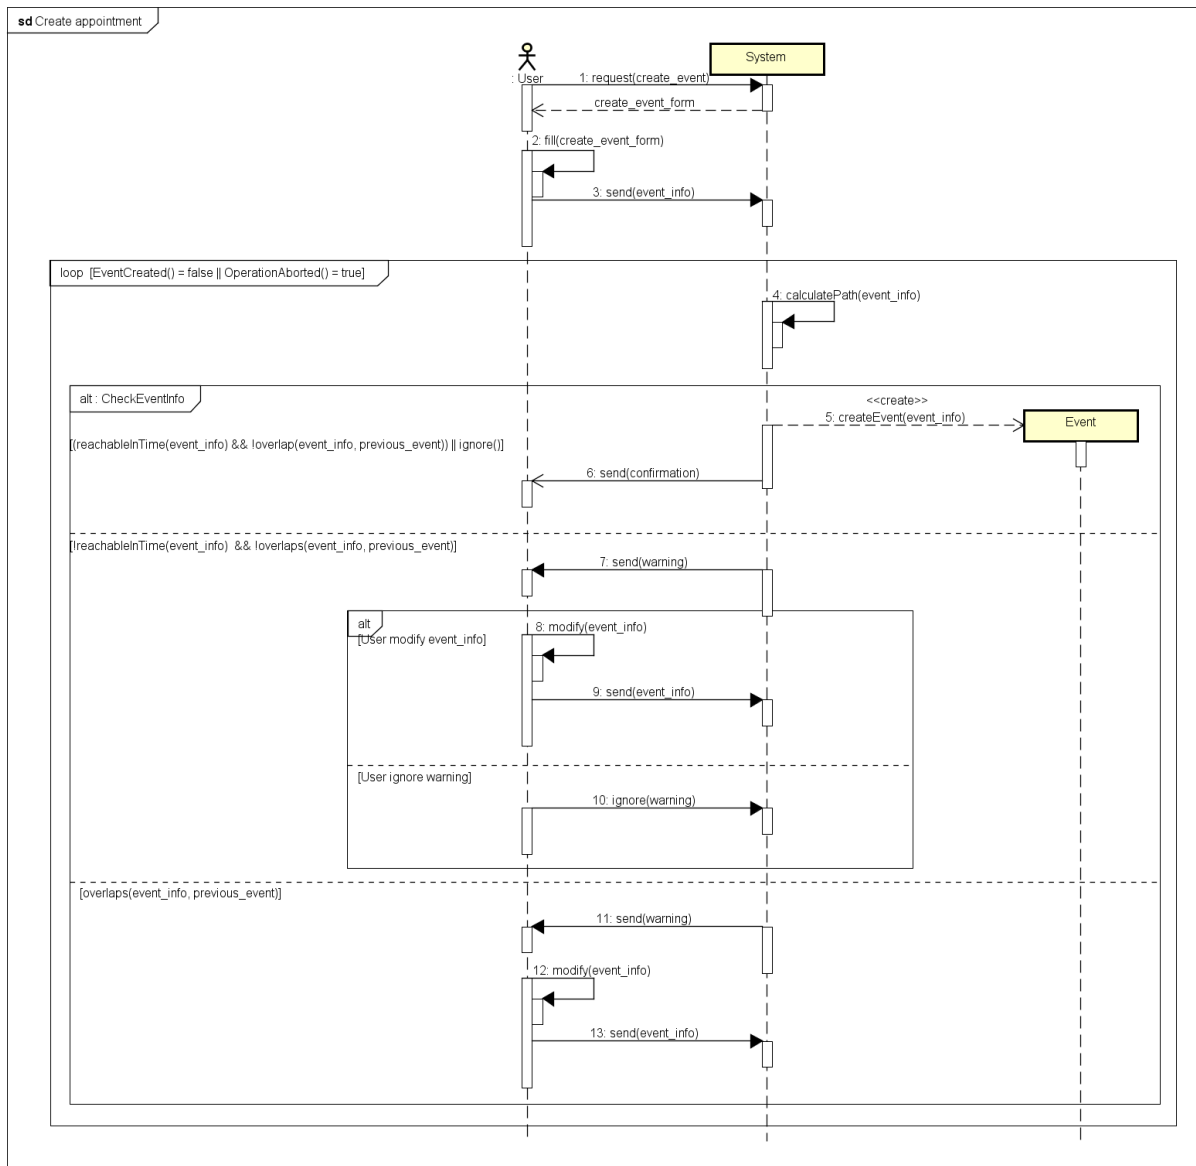


Figure 11: *Create Appointment* sequence diagram

### 3.2.5 Change Appointment Information

#### Purpose

This function allows the user to select an appointment already registered in the calendar and then change parameters as he/she wishes, the system will then compute again the trip and store the changes made in the database.

#### Functional Requirements

R.29: The user must be logged in.

R.30: The user must have at least one upcoming event saved.

R.31: The user must be able to change information as many times as he/she wishes.

R.32: Past events cannot be changed.

#### Scenario

Anna has taken an appointment with her doctor for next week at 3:00 pm and she already recorded it using Travlendar+, but she remembers that she has to bring her son to football practice before 3:15 pm, she decides then to call her doctor and re-schedules the appointment for 2:00 pm, once the call is finished she opens Travlendar+ and proceeds to open "Manage meetings", and then after selecting the appointment selects "Change meeting details", where she can change the time of the appointment and then saves it.

#### Use Case

The *Change Appointment Information* use case is analysed in [Table 5](#) and in [Figure 12](#)

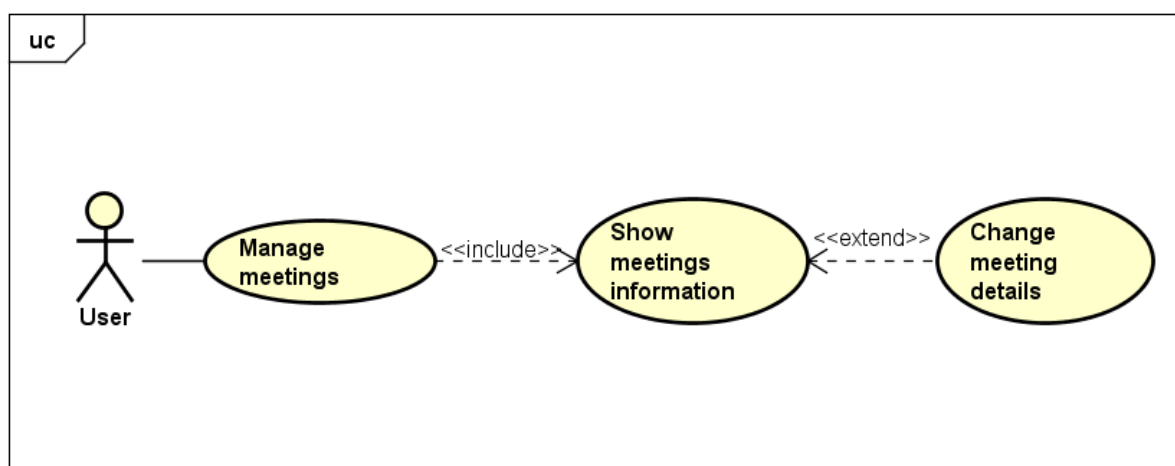
#### Activity Diagram

The activity diagram of the *Change Appointment Information* use case is showed in [Figure 13](#)

#### Sequence Diagram

The sequence diagram of the *Change Appointment Information* use case is showed in [Figure 14](#)

<b>Name</b>	<b>Change Appointment Information</b>
<b>Actors</b>	User
<b>Entry conditions</b>	The user must be logged in and must have at least one upcoming event.
<b>Flow of events</b>	<ol style="list-style-type: none"> <li>1. The user opens the app.</li> <li>2. The user selects the "Manage meetings" section.</li> <li>3. The user selects the meeting he/she wants to change.</li> <li>4. The user selects "Change meeting details".</li> <li>5. The user changes the meeting as he/she wishes by providing at least one of the following: <ol style="list-style-type: none"> <li>(a) Date of the meeting.</li> <li>(b) Time of the meeting.</li> <li>(c) Location of the meeting.</li> <li>(d) Name of the meeting.</li> </ol> </li> <li>6. The user saves the changes.</li> <li>7. The system updates the meeting in the database and computes again the trip.</li> </ol>
<b>Exit conditions</b>	The user changed a meeting.
<b>Exceptions</b>	If the meeting has expired and the user tries to change it, the application will avoid it.

Table 5: *Change Appointment Information* use case description

Figure 12: *Change Appointment Information* use case

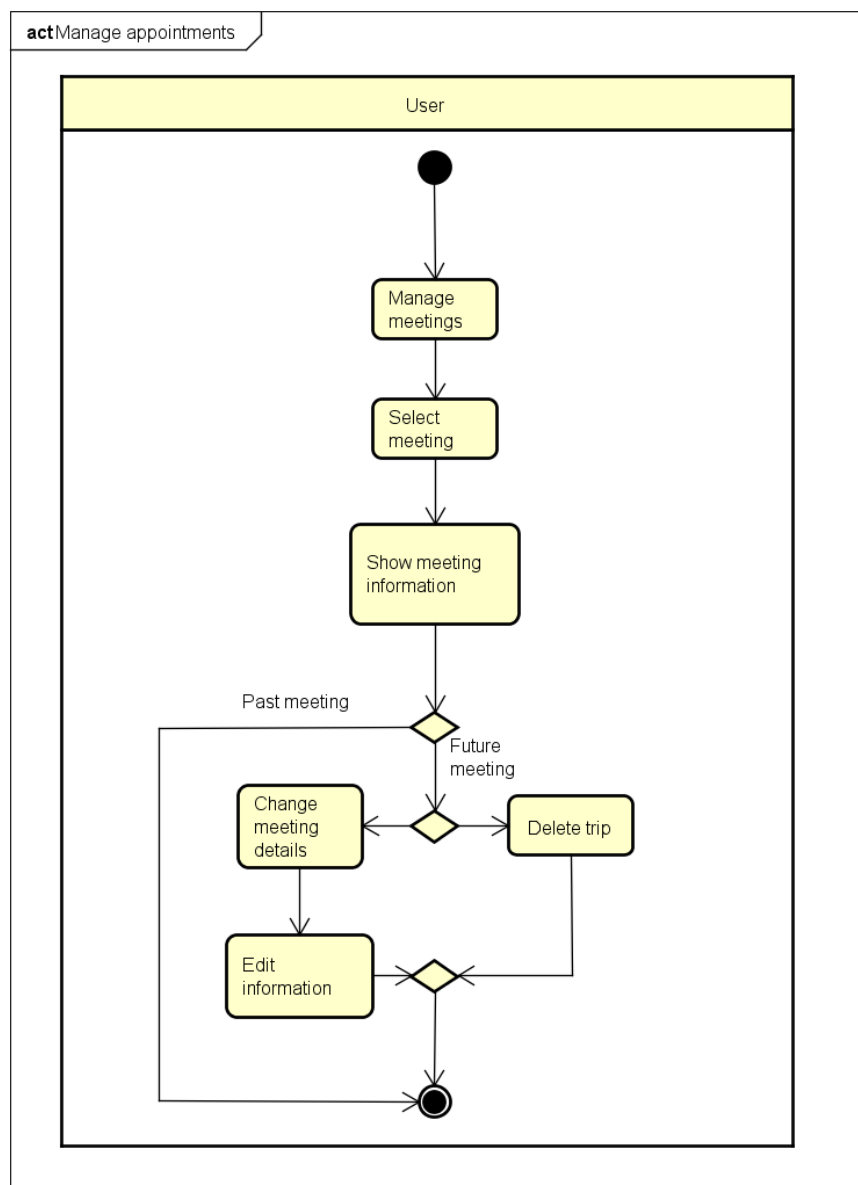


Figure 13: *Change Appointment Information & Delete Appointment* activity diagram

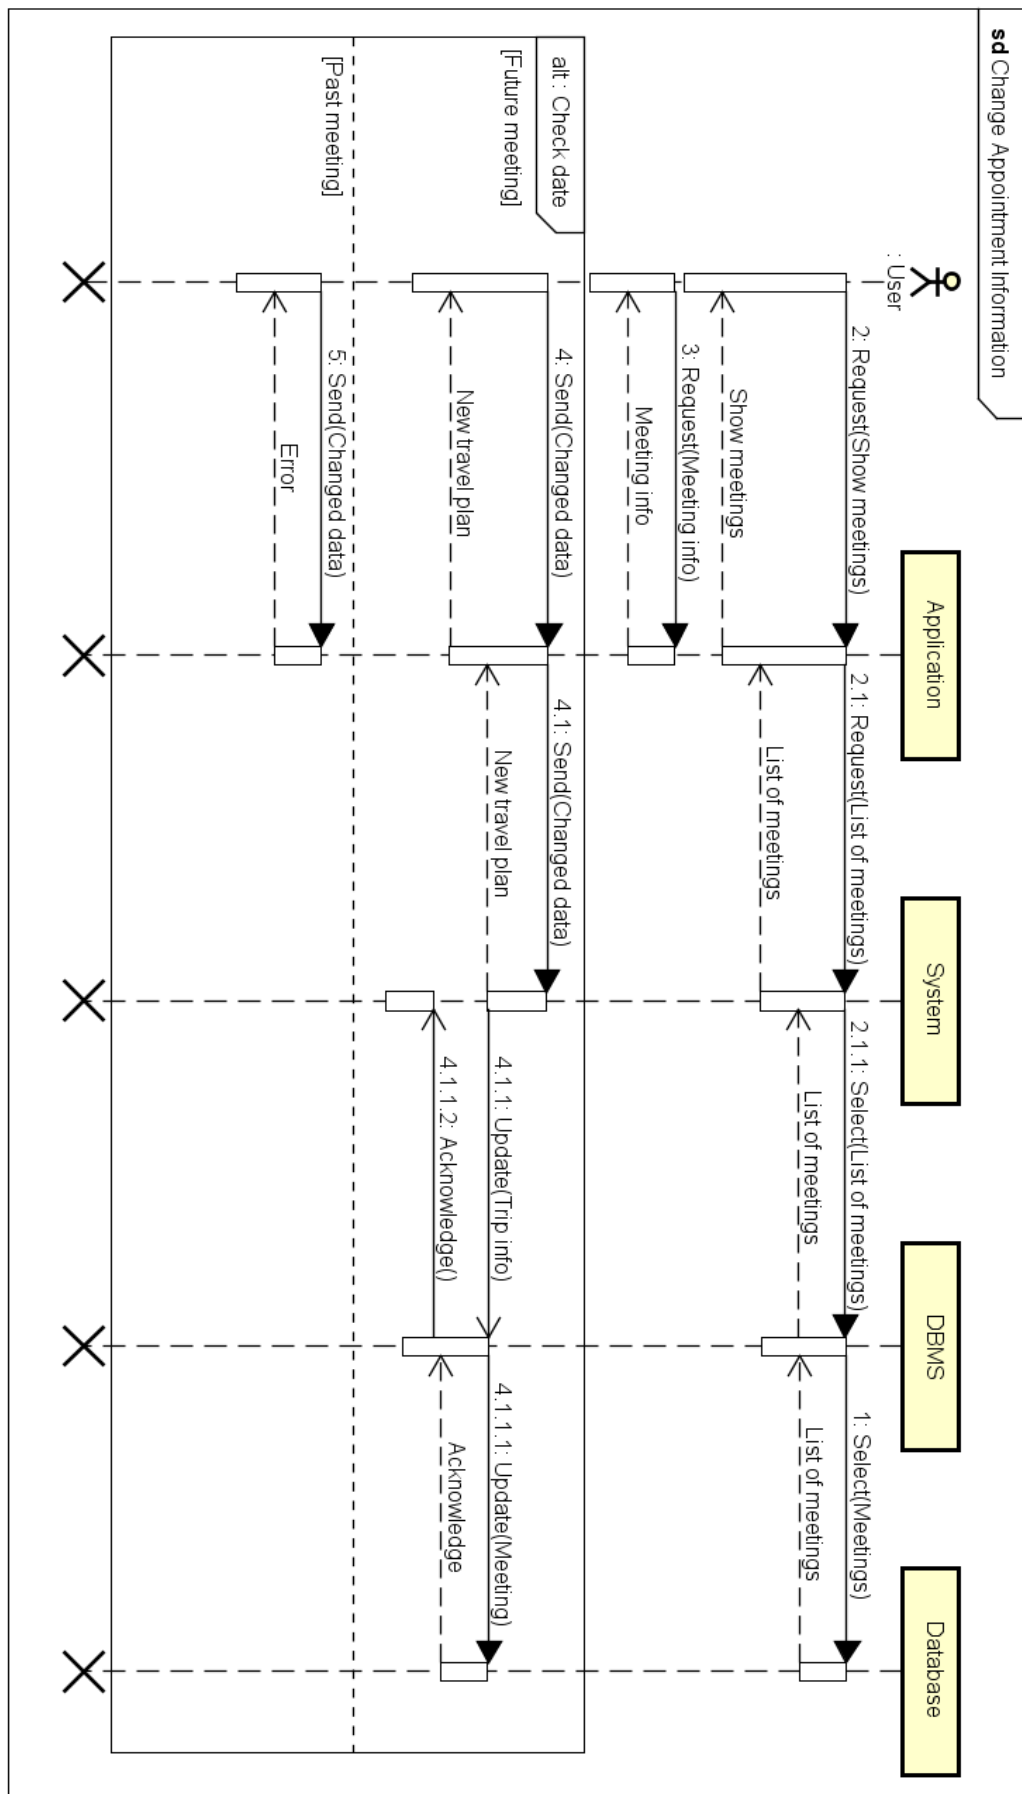


Figure 14: *Change Appointment Information* sequence diagram

### 3.2.6 Delete Appointment

#### Purpose

This function allows the user to select an appointment already registered in the calendar and removing it, the system will then notify the DBMS to remove it from the database.

#### Functional Requirements

- R.33: The user must be logged in.
- R.34: The user must have at least one upcoming event saved.
- R.35: Once a meeting is deleted all data regarding it is lost.
- R.36: Past events cannot be deleted.

#### Scenario

Emily decided with her friends to go out for dinner Saturday and inserted the place and time in a meeting using Travlendar+, but one of the other girls later proposed to have dinner at home, and since Emily has the biggest dining room she invited all the others to her place, since she doesn't need any more a travel planned she deletes the meeting previously created by selecting it in the "Manage meetings" section, she then proceeds to remove it by pressing the "Delete trip" button.

#### Use Case

The *Delete Appointment* use case is analysed in [Table 6](#) and in [Figure 15](#)

#### Activity Diagram

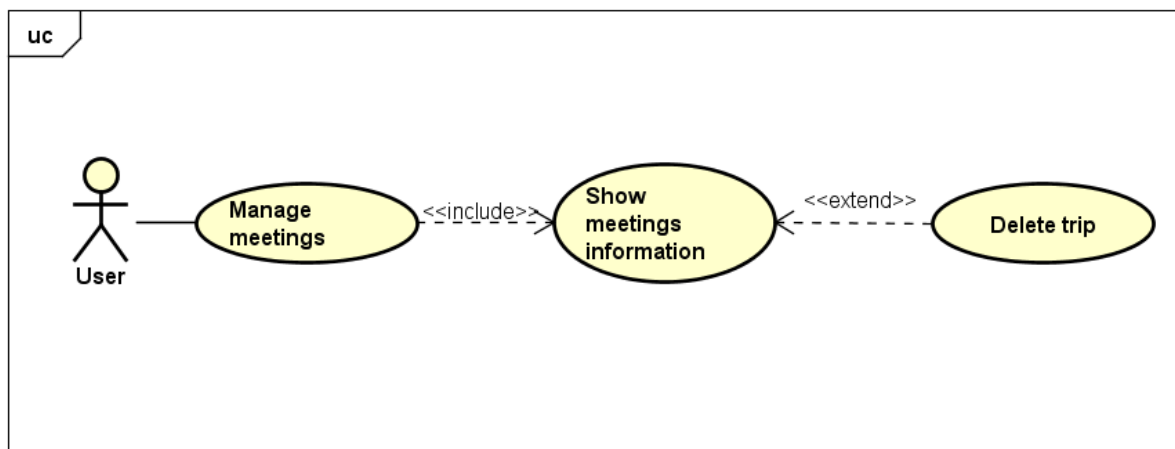
The activity diagram of the *Delete Appointment* use case is showed in [Figure 13](#) alongside *Change Appointment Information* from [subsection 3.2.5](#).

#### Sequence Diagram

The sequence diagram of the *Delete Appointment* use case is showed in [Figure 16](#)



<b>Name</b>	<b>Delete Appointment</b>
<b>Actors</b>	User
<b>Entry conditions</b>	The user must be logged in and must have at least one upcoming event.
<b>Flow of events</b>	<ol style="list-style-type: none"> <li>1. The user opens the app.</li> <li>2. The user selects the "Manage meetings" section.</li> <li>3. The user selects the meeting he/she wants to delete.</li> <li>4. The user presses the "Delete trip" button.</li> <li>5. The system sends the delete request to the DBMS.</li> <li>6. The DBMS deletes the entry selected by the user from the database.</li> </ol>
<b>Exit conditions</b>	A meeting was deleted.
<b>Exceptions</b>	If the meeting has expired and the user tries to delete it, the application will avoid it.

Table 6: *Delete Appointment* use case description

Figure 15: *Delete Appointment* use case

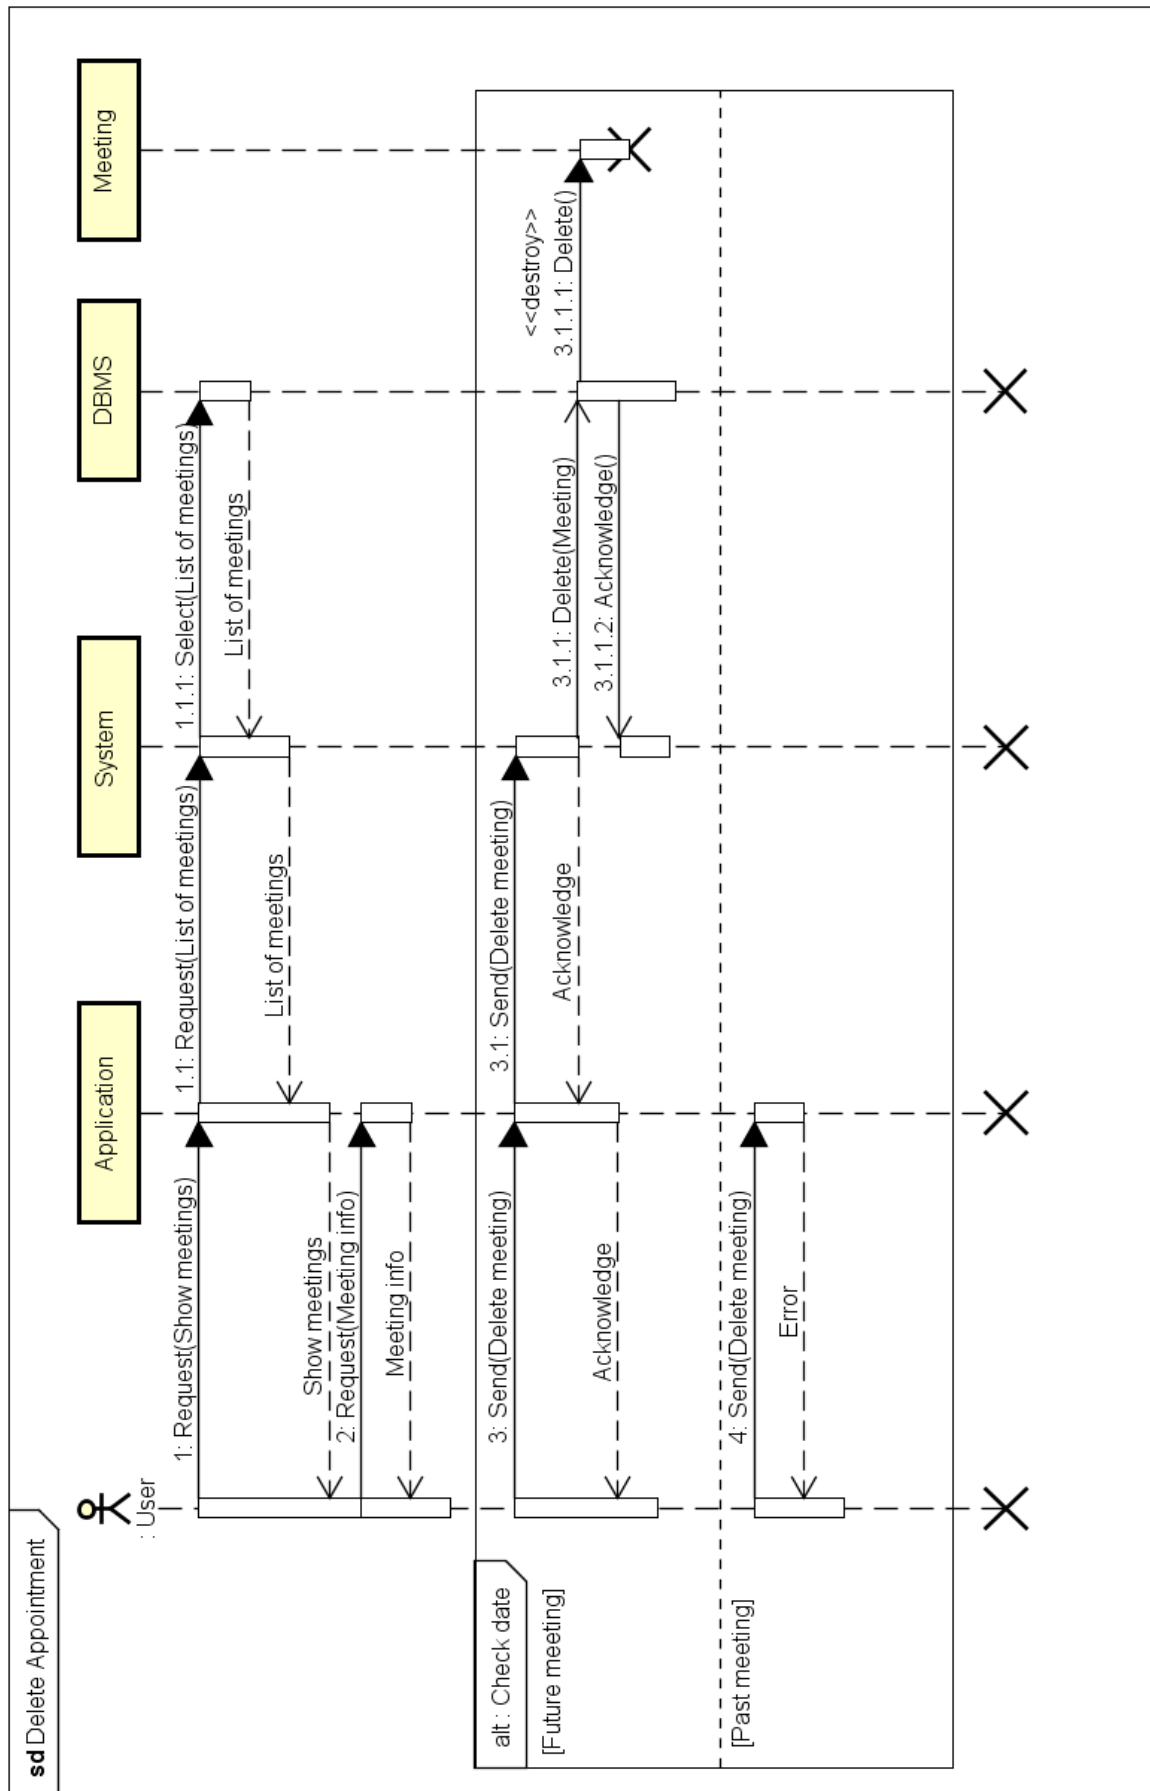


Figure 16: *Delete Appointment* sequence diagram

### 3.2.7 Manage Breaks

#### Purpose

The functionality delivered by *Manage Breaks* refers to the possibility of scheduling a flexible time in which the system will reserve a given amount of minutes to any kind of break, with the option of changing or deleting said break in the future.

**Note** that we will focus on the creating aspect, since treating also changing and deleting would offer no additional insight.

#### Functional Requirements

R.37: The user must be logged in.

R.38: The user must insert the following parameters:

- (a) Starting time (From).
- (b) Duration of the break.
- (c) Days of the week.
- (d) End time (To).

#### Scenario

Jimmy has a 3 hours window on Monday between school and soccer practice, from 12:30 am to 15:30 am in which he wants to have lunch and then study the remaining time.

He decides to use Travlendar+ to schedule a flexible break, first he opens the app on his smartphone, then after going into "Manage account preferences" he adds a break of 30 minutes in the spare time he has by using the "Create break" option and filling the necessary fields.

#### Use Case

The *Create Breaks* use case is analysed in [Table 7](#), in [Figure 17](#) are also represented the "Delete break" and "Change break" functions.

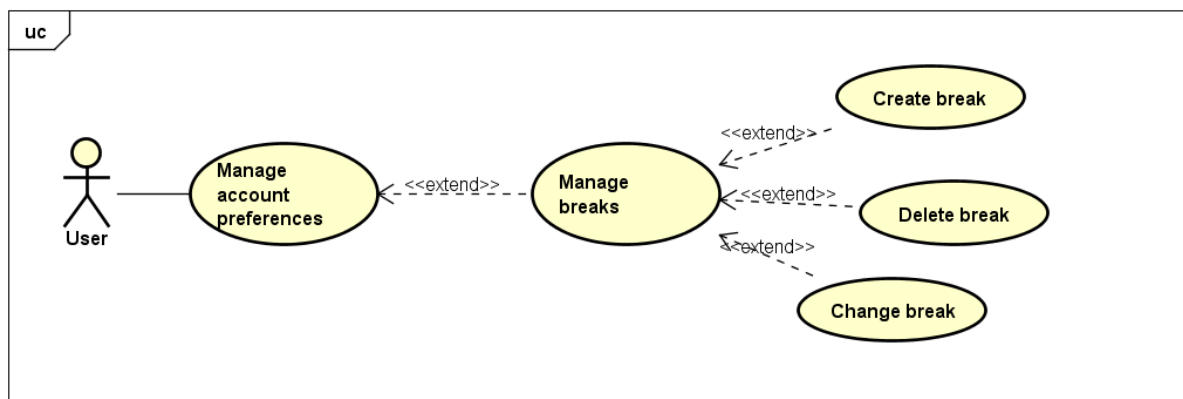
#### Activity Diagram

The activity diagram of the *Manage Breaks* use case is showed in [Figure 18](#)

#### Sequence Diagram

The sequence diagram of the *Create Breaks* use case is showed in [Figure 19](#)

<b>Name</b>	<b>Create Breaks</b>
<b>Actors</b>	User
<b>Entry conditions</b>	The user must be logged in.
<b>Flow of events</b>	<ol style="list-style-type: none"> <li>1. The user opens the app.</li> <li>2. The user opens the options menu.</li> <li>3. The user enters in "Manage account preferences".</li> <li>4. The user selects "Create break".</li> <li>5. The user fills the requested fields with the desired information.</li> <li>6. The user saves the changes.</li> <li>7. The system sends the data to the DBMS.</li> <li>8. The DBMS stores the data about the break.</li> </ol>
<b>Exit conditions</b>	The user created a break
<b>Exceptions</b>	If the user doesn't choose a day of the week the system will act like if every day was selected.

Table 7: *Create Breaks* use case description

Figure 17: *Create Breaks* use case

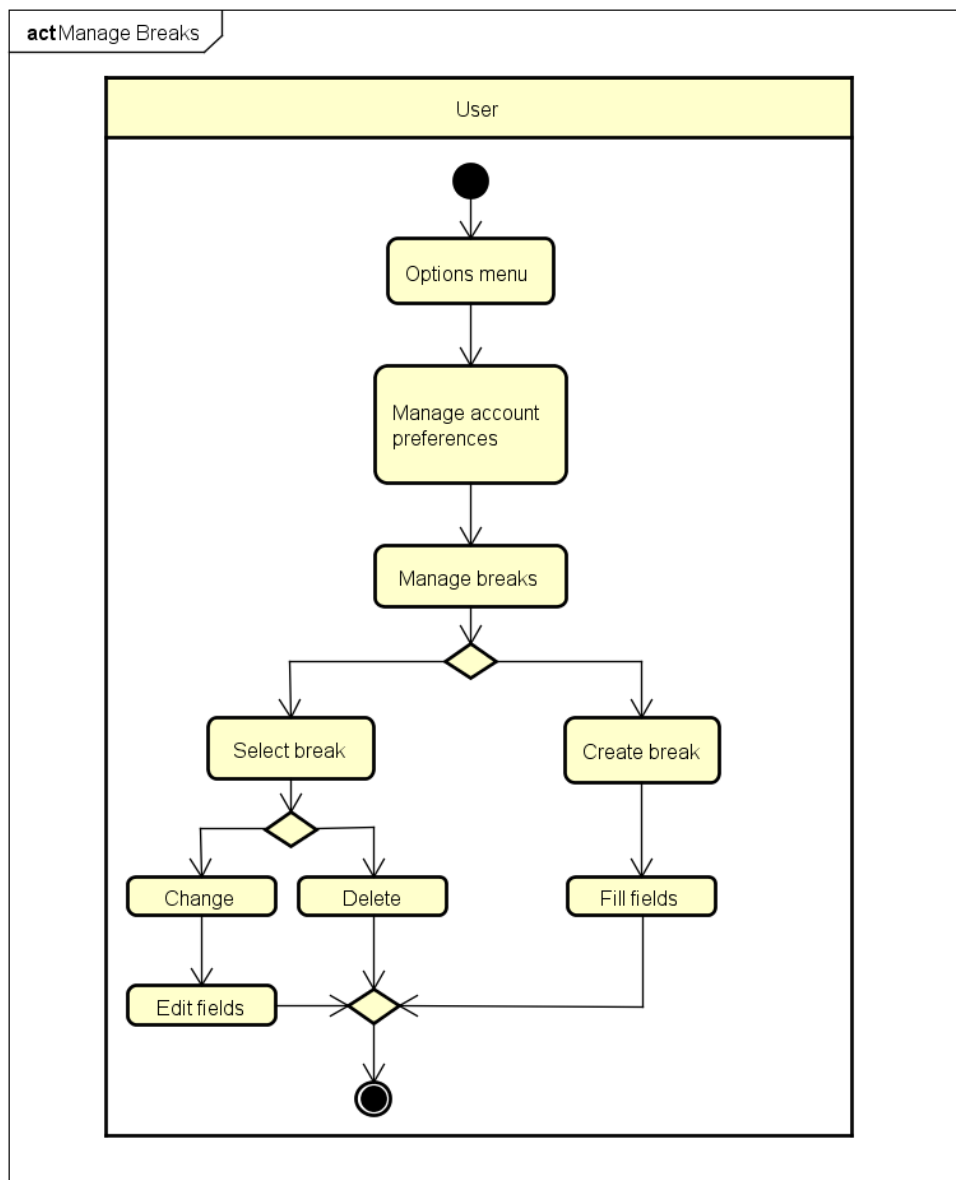


Figure 18: *Manage Breaks* activity diagram

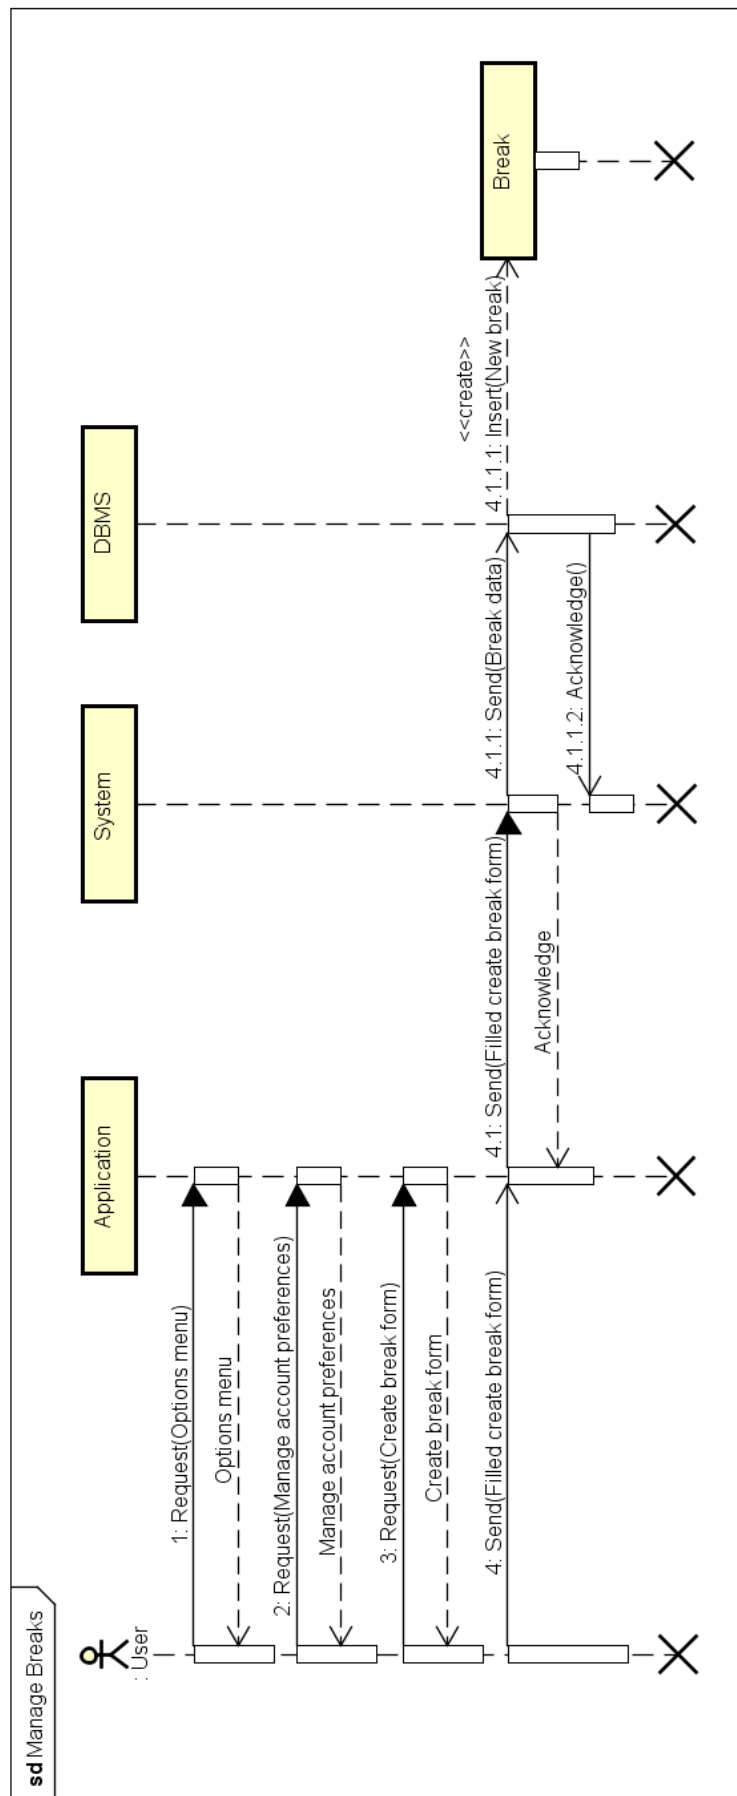


Figure 19: *Create Breaks* sequence diagram

### 3.2.8 Manage Account

**Purpose** The main purpose of this use case is to grant the user the possibility to view his/her personal information, update it or to delete the account.

#### Functional Requirements

- R.39: The user must be logged in.
- R.40: The system must show all the information inserted during the registration process, except the password.
- R.41: The system allows the user to update every information except the e-mail used to login.
- R.42: The user must insert the old password and twice the new password in order to update his/her password.
- R.43: The system allows to change the password if and only if the old one has been inserted correctly.
- R.44: The system does not allow the user to update the password if the new one has not been inserted twice.
- R.45: The system makes every change permanent as soon as the user confirms the operation.
- R.46: The user can delete his/her account if and only if he/she inserts the current password.
- R.47: The system removes from the database the user's personal information if and only if the user deletes his/her account.

#### Scenario

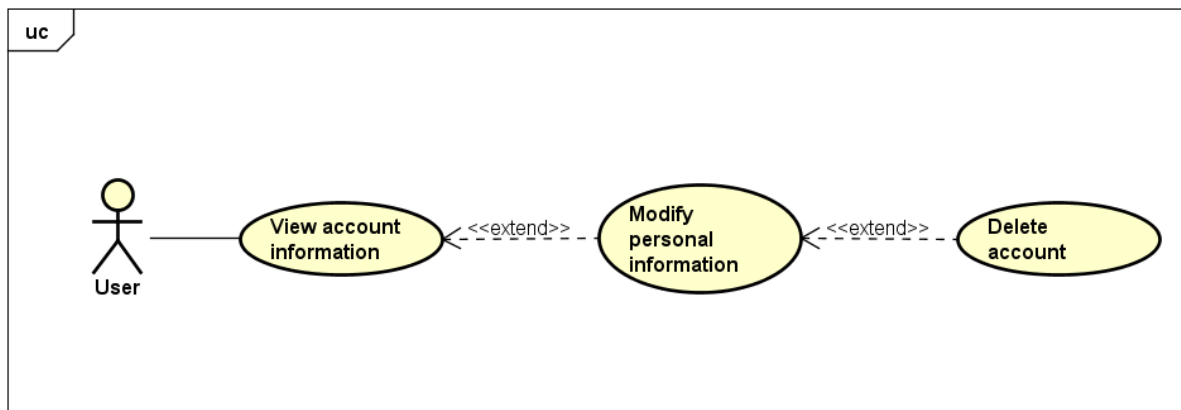
##### Scenario 1

Carlo wants to change his password because it does not seem quite strong for him. He opens his *Travlendar+* app, selects "*Show my information*", "*Modify my information*" and then "*Modify password*". He enters his old password and the new password twice. The old password is written correctly, so the system accepts the new password.

##### Scenario 2

Bob does not use very often *Travlendar+*, so he decides to uninstall the app, but first he wants to delete his account. He opens the app, selects "*Show my information*", "*Modify my information*" and then "*Delete my account*" and, in order to confirm his choice, inserts his password. The system deletes all the Bob's personal information from the database. Now Bob must register again to use *Travlendar+* services.

**Use Case** The use case is analysed in [Figure 20](#) and in [Table 8](#), [Table 9](#) and in [Table 10](#).

Figure 20: *Manage Account* overall use case

<b>Name</b>	<b>View account information</b>
<b>Actors</b>	User
<b>Entry conditions</b>	The user must be logged in.
<b>Flow of events</b>	<ol style="list-style-type: none"> <li>1. The user opens the app.</li> <li>2. The user opens the options menu.</li> <li>3. The user enters in "<i>Show personal information</i>".</li> <li>4. The system shows the user's personal information.</li> </ol>
<b>Exit conditions</b>	The system lets the user checks his/her information.
<b>Exceptions</b>	

Table 8: *View Account Information* use case description



<b>Name</b>	<b>Modify personal information</b>
<b>Actors</b>	User
<b>Entry conditions</b>	The user must be logged in.
<b>Flow of events</b>	<ol style="list-style-type: none"> <li>1. The user opens the app.</li> <li>2. The user opens the options menu.</li> <li>3. The user enters in "<i>Show personal information</i>".</li> <li>4. The user selects "<i>Modify my information</i>".</li> <li>5. The user enters the updated information.</li> <li>6. The user confirms the changes.</li> </ol>
<b>Exit conditions</b>	The system saves the information.
<b>Exceptions</b>	If one of the requirements from <b>R.41:</b> to <b>R.44:</b> is not satisfied the system ignores the changes and reload the " <i>Modify my information</i> " page.

Table 9: *Modify personal information* use case description

<b>Name</b>	<b>Delete account</b>
<b>Actors</b>	User
<b>Entry conditions</b>	The user must be logged in.
<b>Flow of events</b>	<ol style="list-style-type: none"> <li>1. The user opens the app.</li> <li>2. The user opens the options menu.</li> <li>3. The user enters in "<i>Show personal information</i>".</li> <li>4. The user selects "<i>Modify my information</i>".</li> <li>5. The user selects "<i>Delete my account</i>".</li> <li>6. The user inserts his/her password.</li> <li>7. The user confirms the operation.</li> </ol>
<b>Exit conditions</b>	The system deletes the user's account and the user is not registered anymore.
<b>Exceptions</b>	If the user enters the wrong password the system prevents the account cancellation.

Table 10: *Delete account* use case description

### 3.3 Performance Requirements

Without taking into consideration the speed of the internet connection, in order to guarantee an acceptable user experience the following requirements must be satisfied:

- Navigation between pages of the system must happen in 0.5s or less.
- The best travel plan must be computed in 5s or less.
- No limit of registered users in the database.
- No limit of schedulable appointments.
- At least 1000 users must be able to use the service at the same time.

### **3.4 Design Constraints**

#### **3.4.1 Standards Compliance**

The web application must comply with the standards dictated by W3C, while the mobile application must follow the Oracle guidelines for Java programming.

#### **3.4.2 Hardware Limitations**

Minimum system requirements for the two applications:

- Web application
  - 512Mb of RAM.
  - 2Mb/s internet connections.
  - 800X600 screen resolution.
- Mobile application
  - 1Gb of RAM.
  - 3G UMTS internet connections.
  - 100Mb of free space.

The system should also be able to process operations in parallel.

### **3.5 Software System Attributes**

#### **3.5.1 Reliability**

Each trip plan computed given the preferences expressed by the user and the weather forecast and strikes must not differ more than 5% from the optimal travel distance or ETA.

#### **3.5.2 Availability**

The system to be must guarantee an availability of no less than 98%.

#### **3.5.3 Safety and Privacy Constraints**

The user oversees his/her own security while travelling and must grant access to the current location, information about former trips and personal data are stored but only the user itself has access to them.

#### **3.5.4 Maintainability**

The system must be developed in such a way that future implementation of new features and changes to existing ones can be done seamlessly, in other words the system has to be modular and scalable.

#### **3.5.5 Portability**

As already mentioned in [subsubsection 3.1.3](#) the software must be available on different configurations, it must be as environment independent as possible, meaning that it has to work on different platforms with the minimum amount of changes to the software itself.