
Matched high-input native activity histories

C20 and C60 within-condition medoids • f = 0.01 • individual histories, never ensemble-average fields

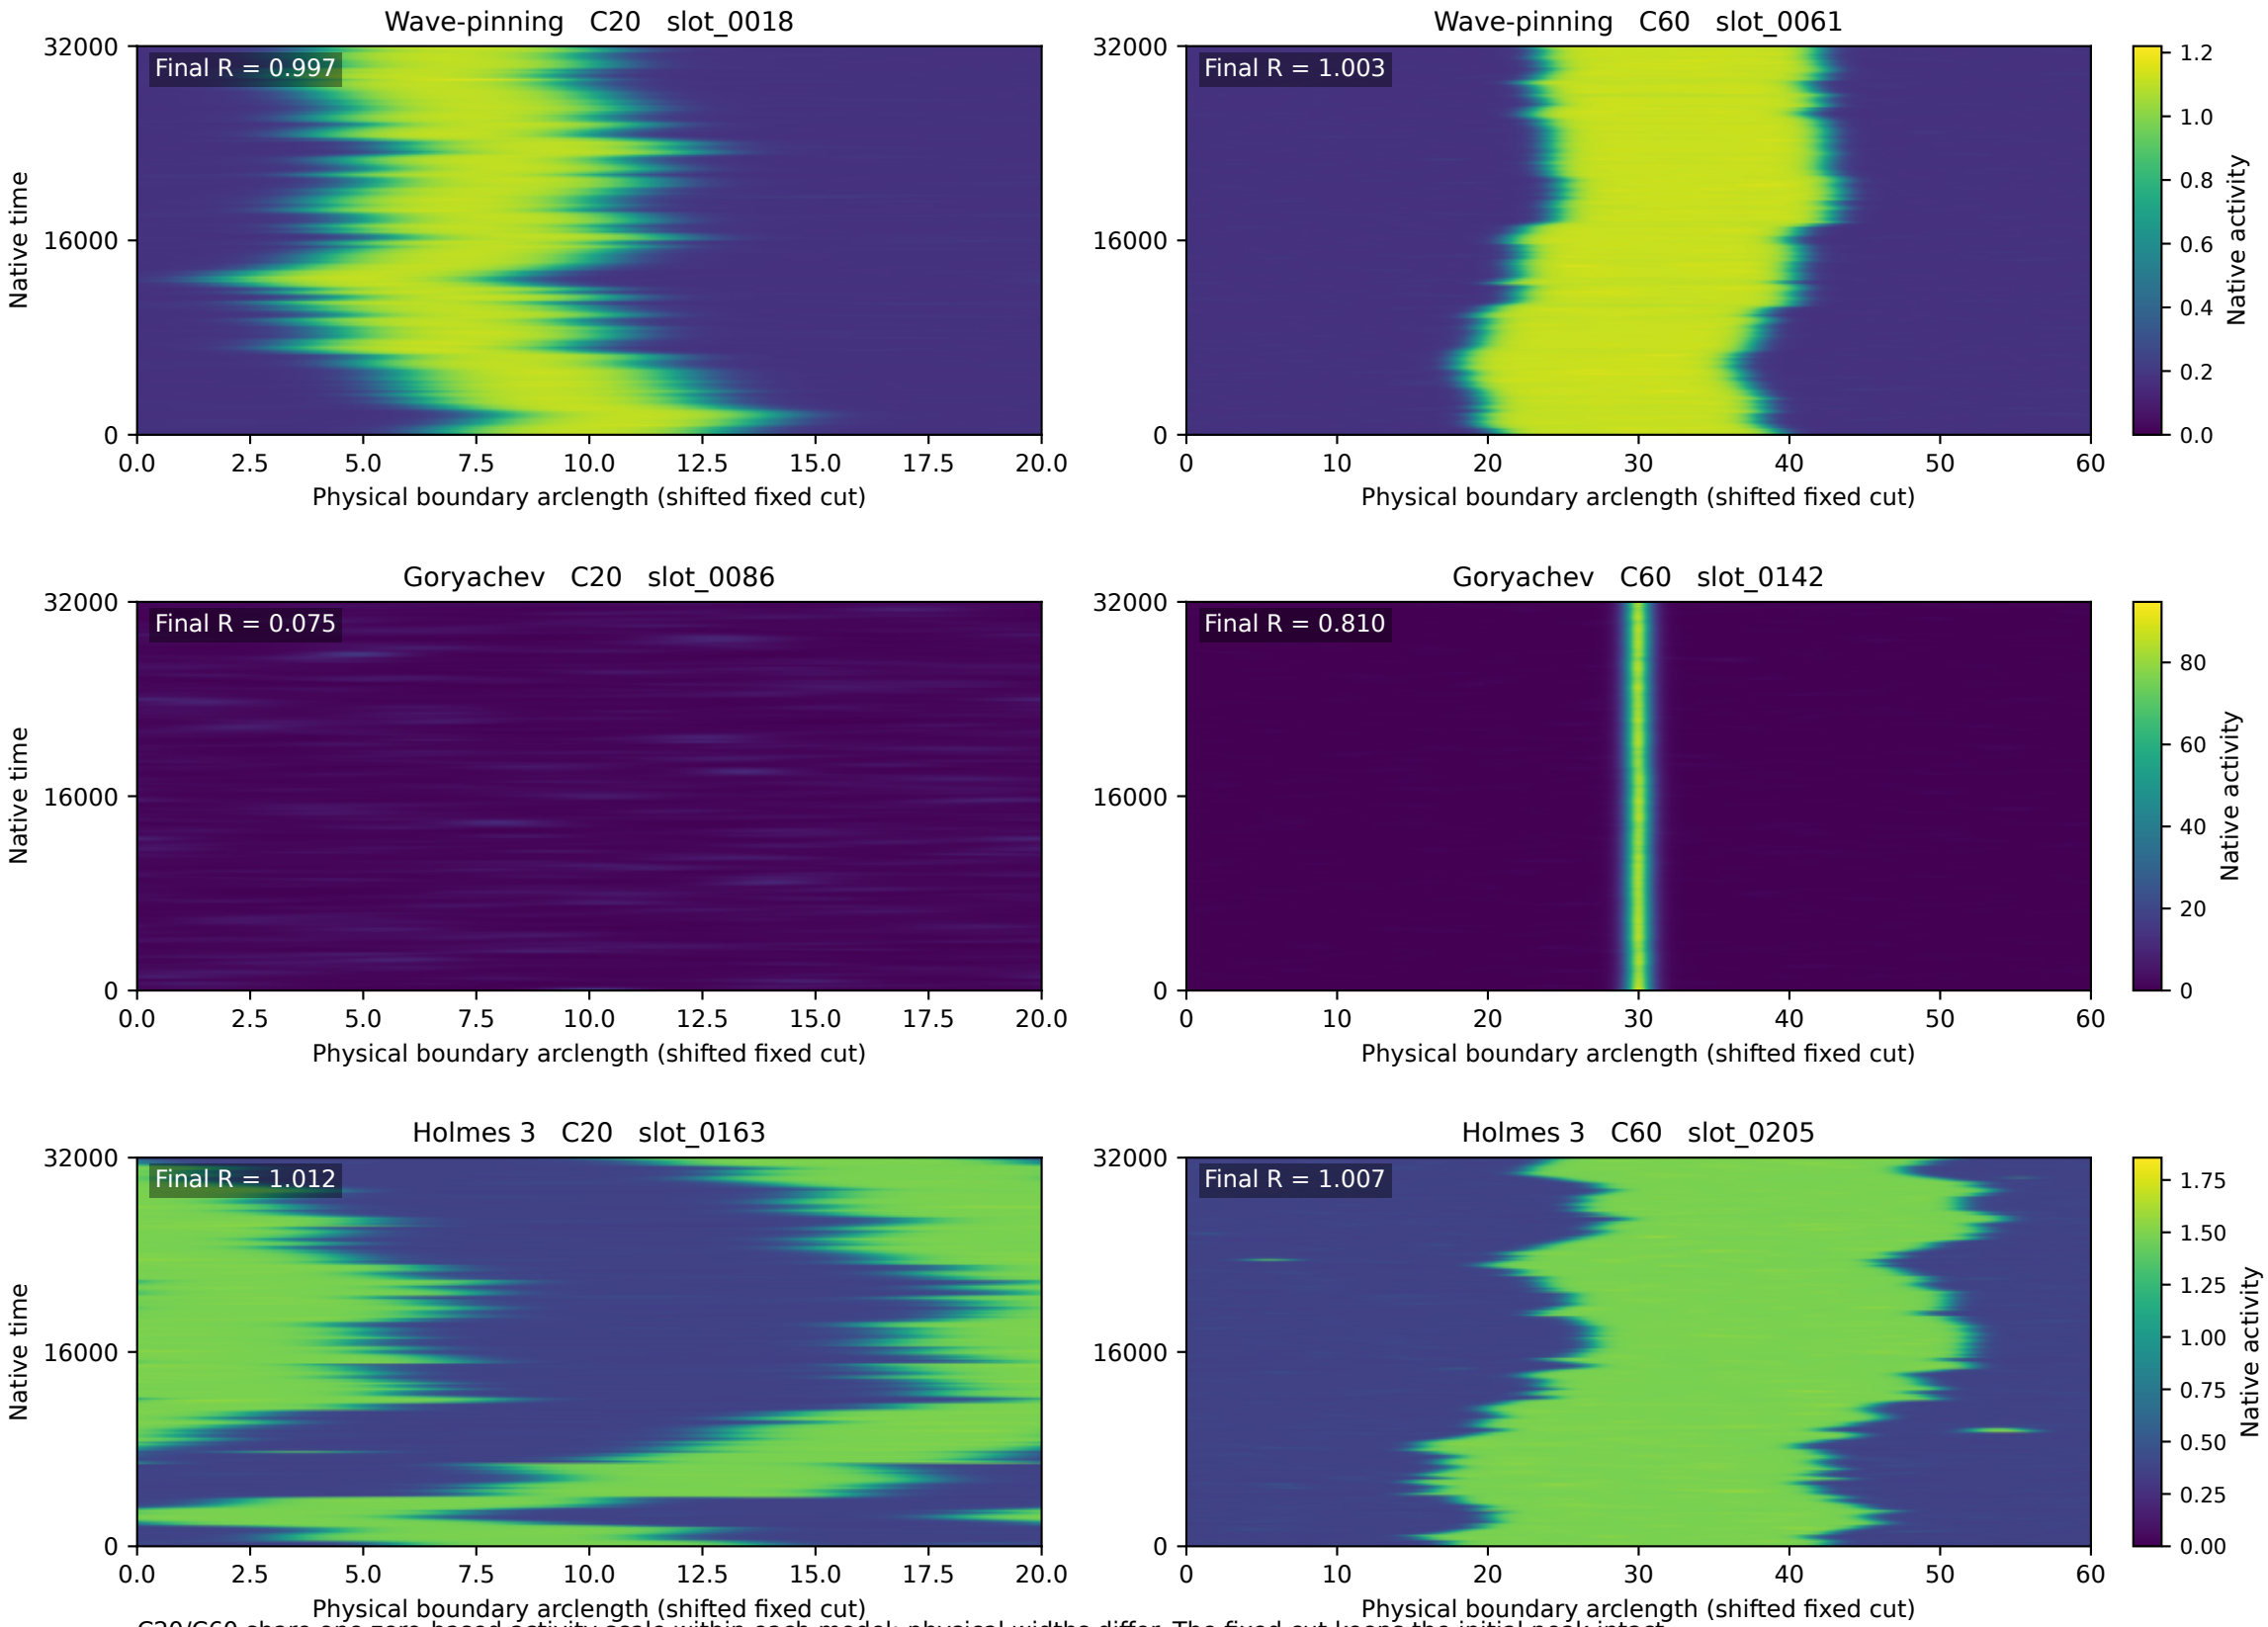

C20/C60 share one zero-based activity scale within each model; physical widths differ. The fixed cut keeps the initial peak intact.

Medoids minimize median/IQR-standardized distance using final initial-axis memory, minimum R, time-mean R and multisite fraction.

These examples illustrate native local organization; the complete seed population, magnitude gates and pair coverage determine quantitative claims.