Wave-pinning · Stationary cue at fixed angle or fixed initial arc


P = M_1 / M_1(initial): direction and length show the activity vector. Grey rightward guide: initial P = 1.

At cue withdrawal — After 13,000 cue-free units


0.0 — 0.5 — 1.0

Fraction of initial angular target error closed (colour clipped to 0–1)

A · Fixed cue-centre angle

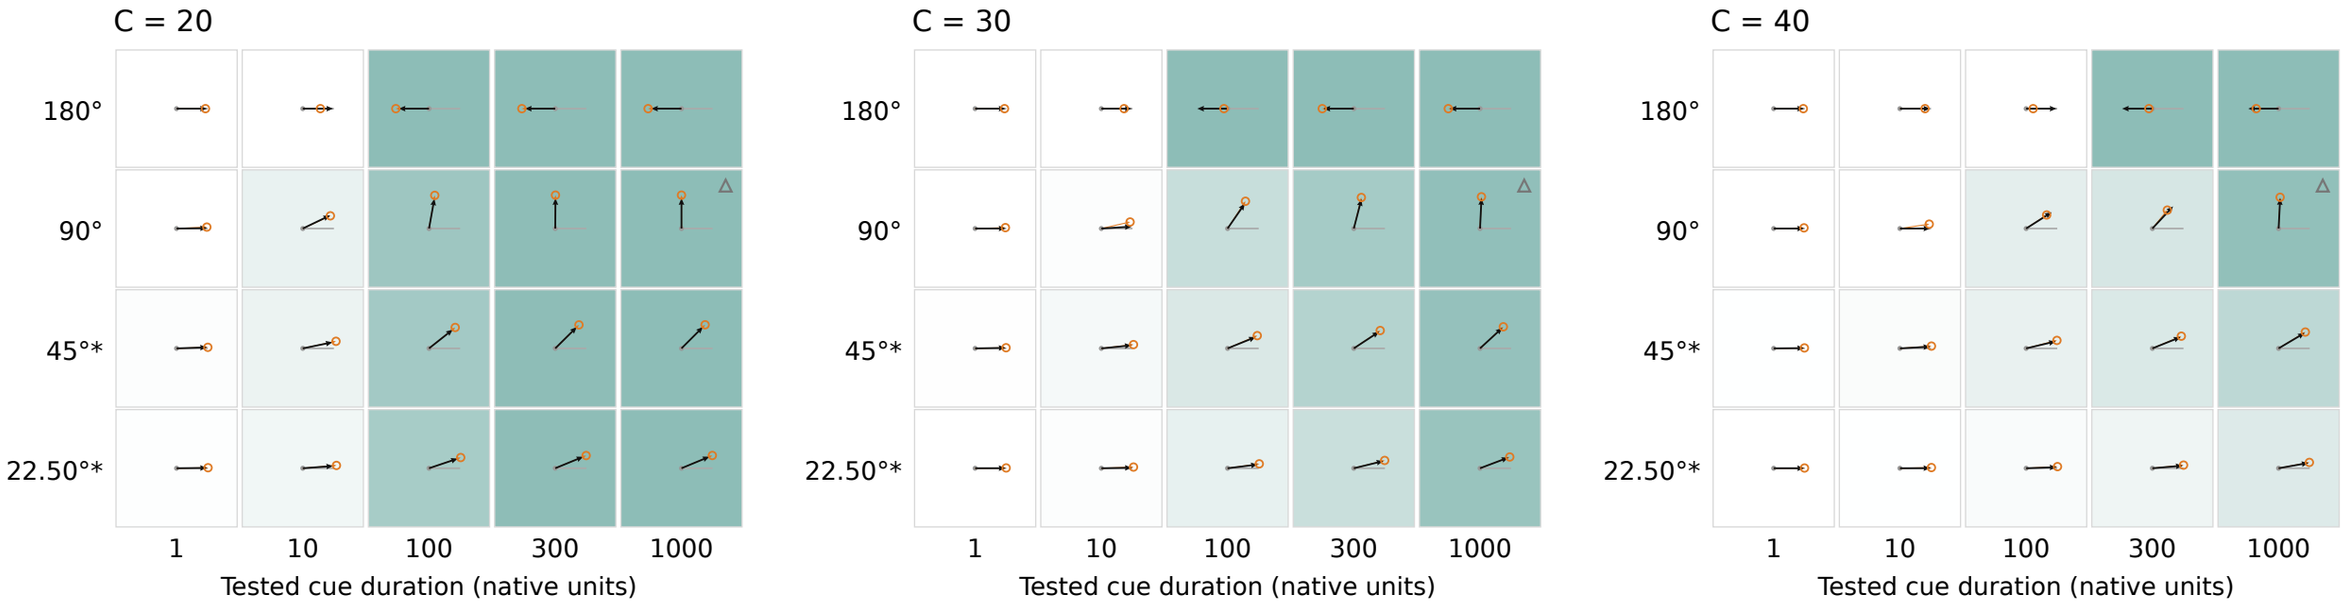

B · Fixed initial cue-centre arc

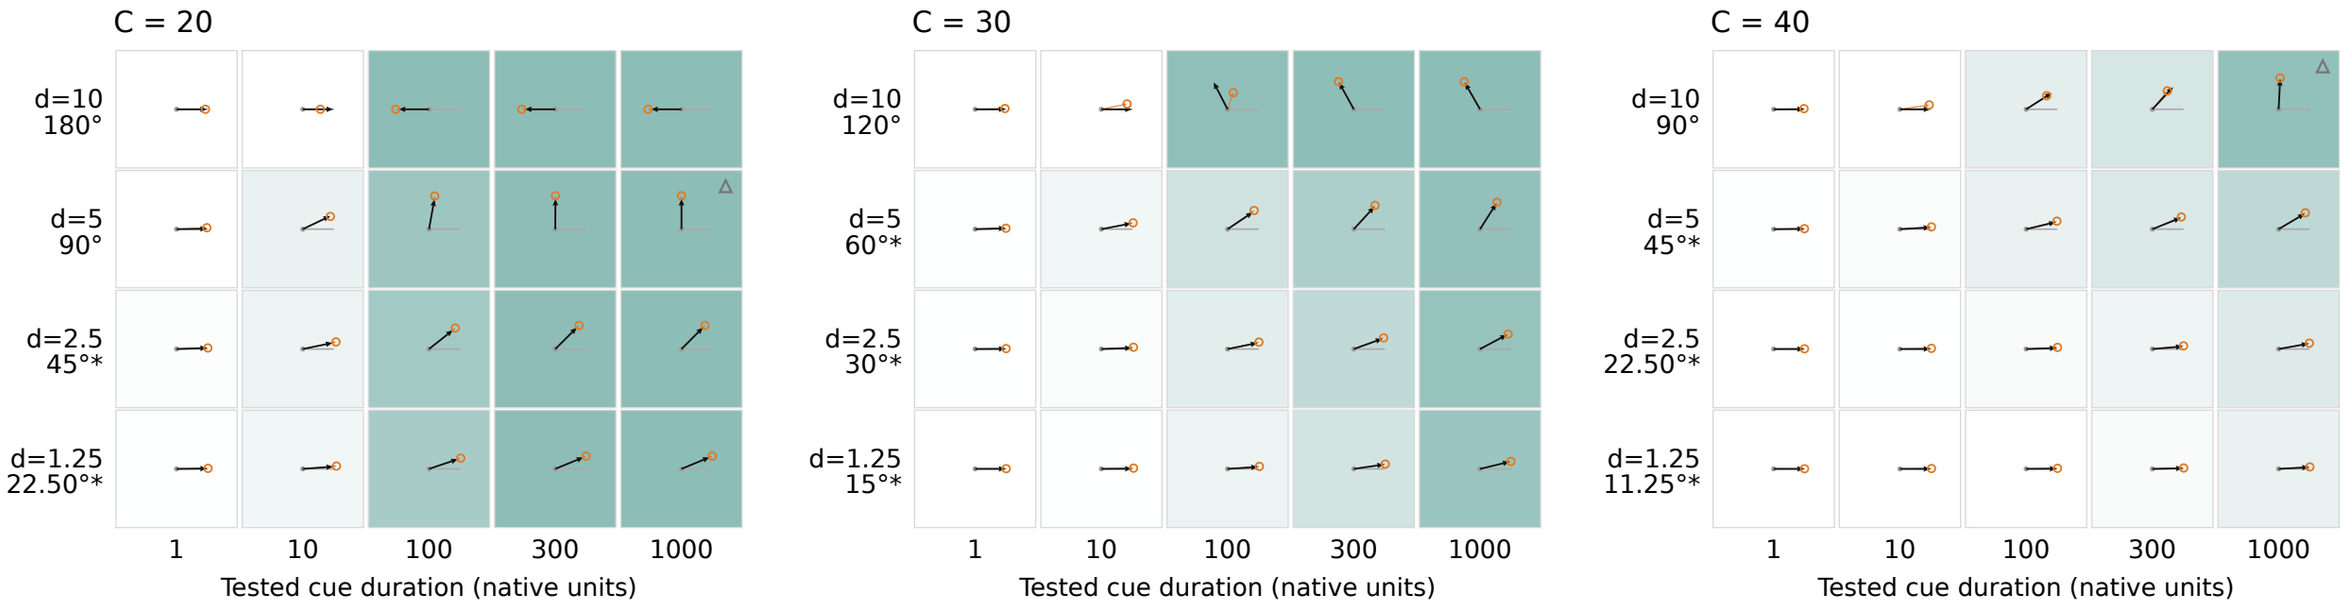

Native full physical support = 3; prescribed peak = 0.1. Initial angular supports (left → right): 54.00°, 36.00°, 27.00°.

* Cue footprint intersects the original half-contrast core; every overlap is retained. Spring centres stay fixed in material coordinates.

Weak R < 0.1: magnitude-only circles, with no assigned heading. □ failed finite full-field tail check; △ unavailable full-field tail check.

One vector scale throughout: Δglyph = 0.24 P; equal x/y scales. Duration columns are categories. Both arms: 480 rows, 355 unique histories.

Target-relative colour uses wrapped angular distances; it is neither a binary success gate nor a minimum-duration estimate. Native clocks differ between models.

Goryachev · Stationary cue at fixed angle or fixed initial arc


P = M₁ / M₁(initial): direction and length show the activity vector. Grey rightward guide: initial P = 1.

At cue withdrawal — After 13,000 cue-free units


0.0 — 0.5 — 1.0

Fraction of initial angular target error closed (colour clipped to 0–1)

A · Fixed cue-centre angle

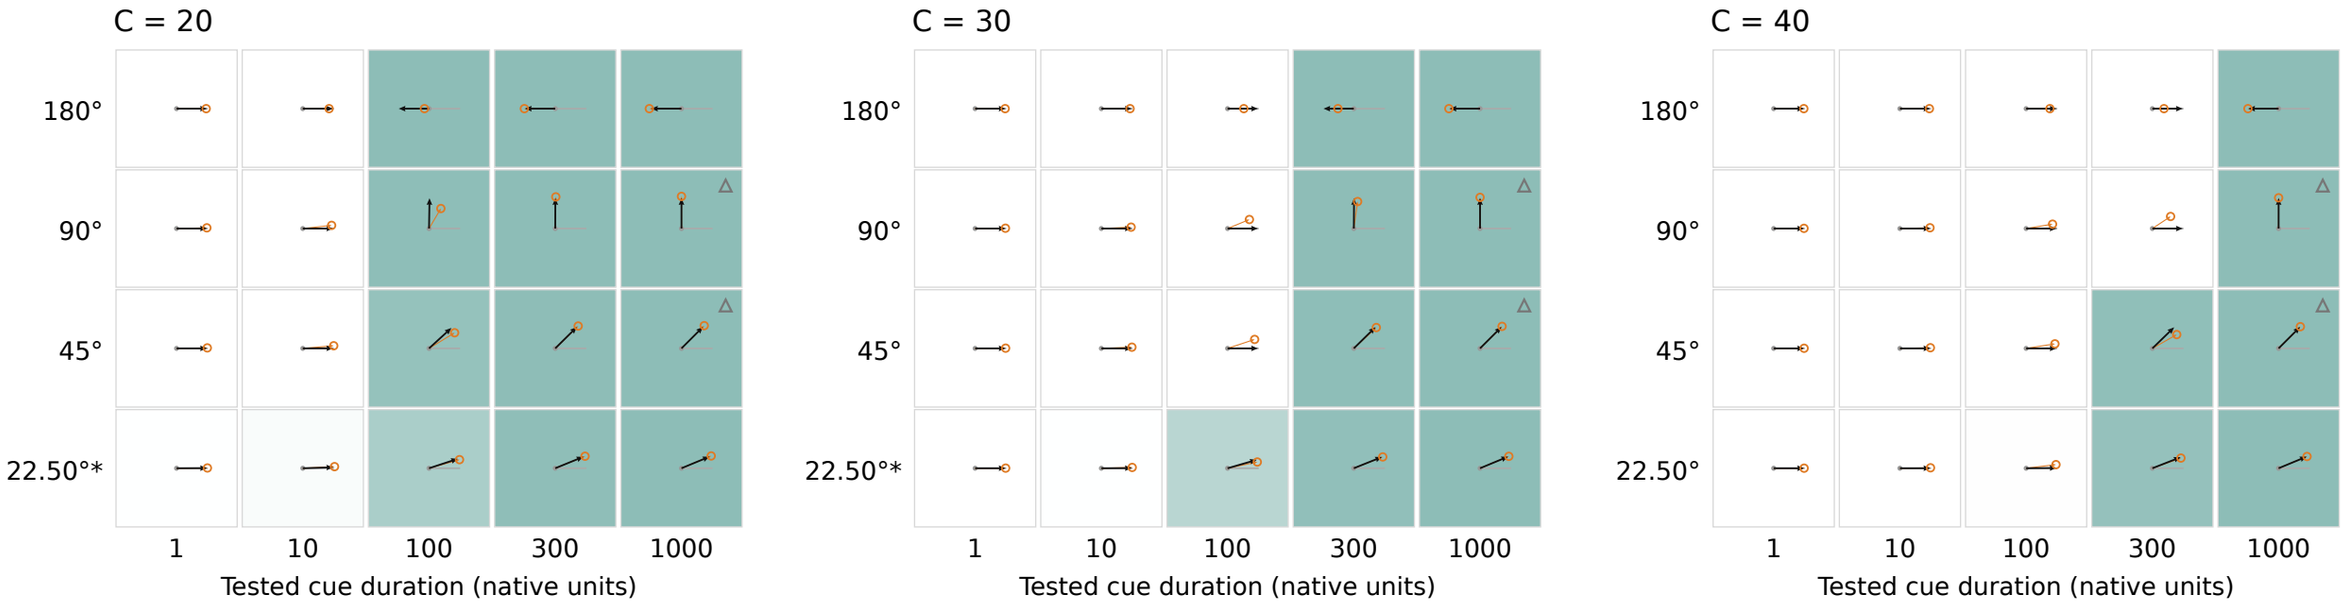

B · Fixed initial cue-centre arc

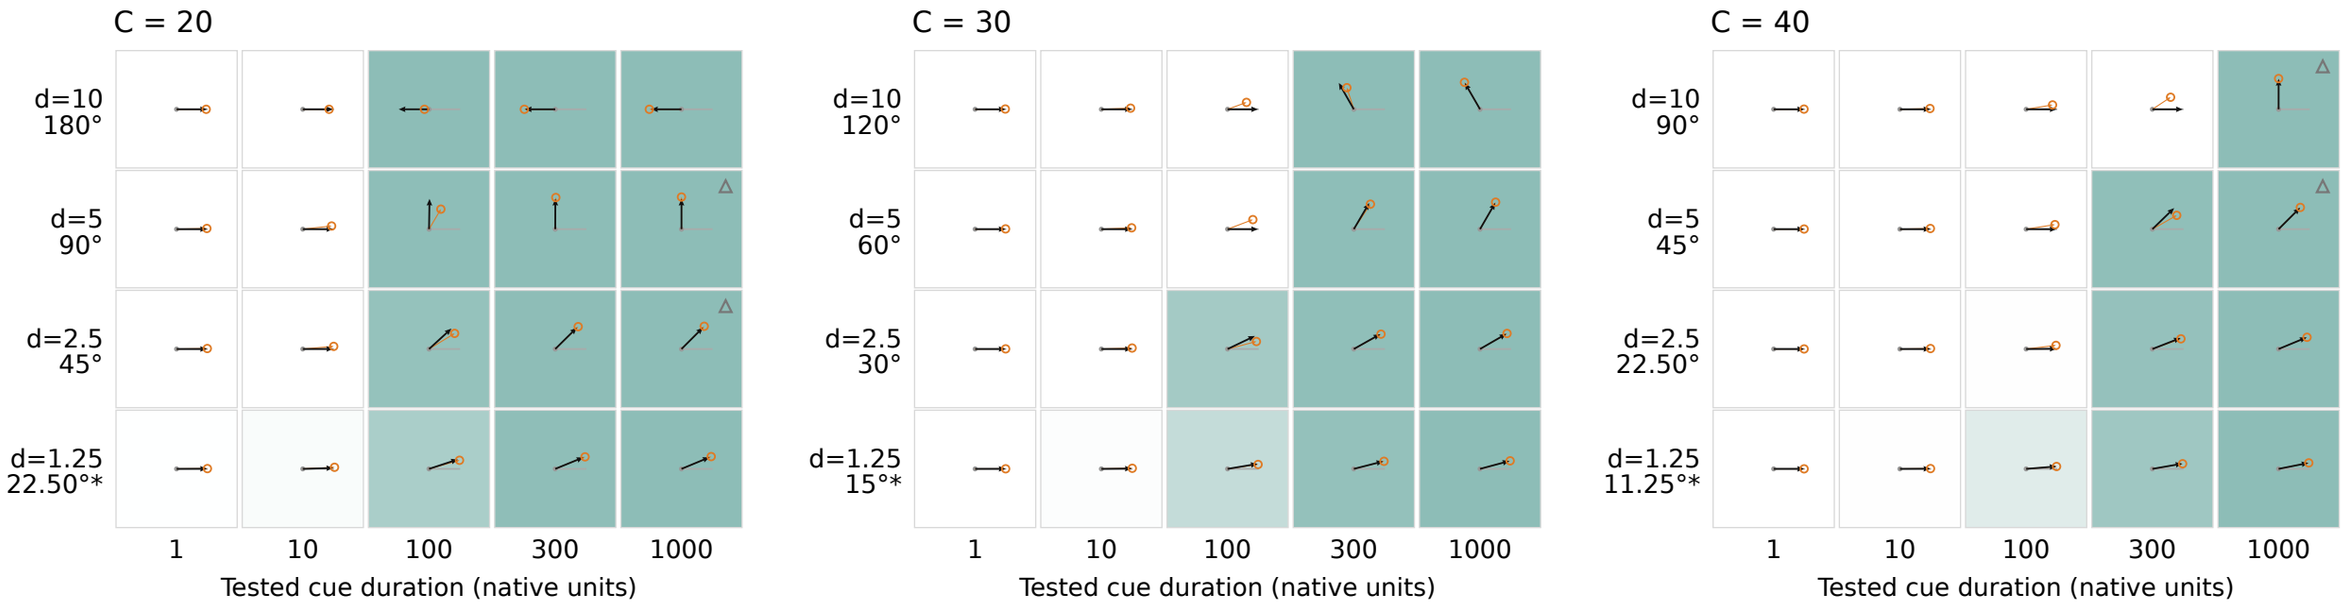

Native full physical support = 3; prescribed peak = 6.4. Initial angular supports (left → right): 54.00°, 36.00°, 27.00°.

* Cue footprint intersects the original half-contrast core; every overlap is retained. Spring centres stay fixed in material coordinates.

Weak R < 0.1: magnitude-only circles, with no assigned heading. □ failed finite full-field tail check; △ unavailable full-field tail check.

One vector scale throughout: Δglyph = 0.24 P; equal x/y scales. Duration columns are categories. Both arms: 480 rows, 355 unique histories.

Target-relative colour uses wrapped angular distances; it is neither a binary success gate nor a minimum-duration estimate. Native clocks differ between models.

Holmes · Stationary cue at fixed angle or fixed initial arc


P = M₁ / M₁(initial): direction and length show the activity vector. Grey rightward guide: initial P = 1.

At cue withdrawal After 13,000 cue-free units


0.0 0.5 1.0

Fraction of initial angular target error closed (colour clipped to 0–1)

A · Fixed cue-centre angle

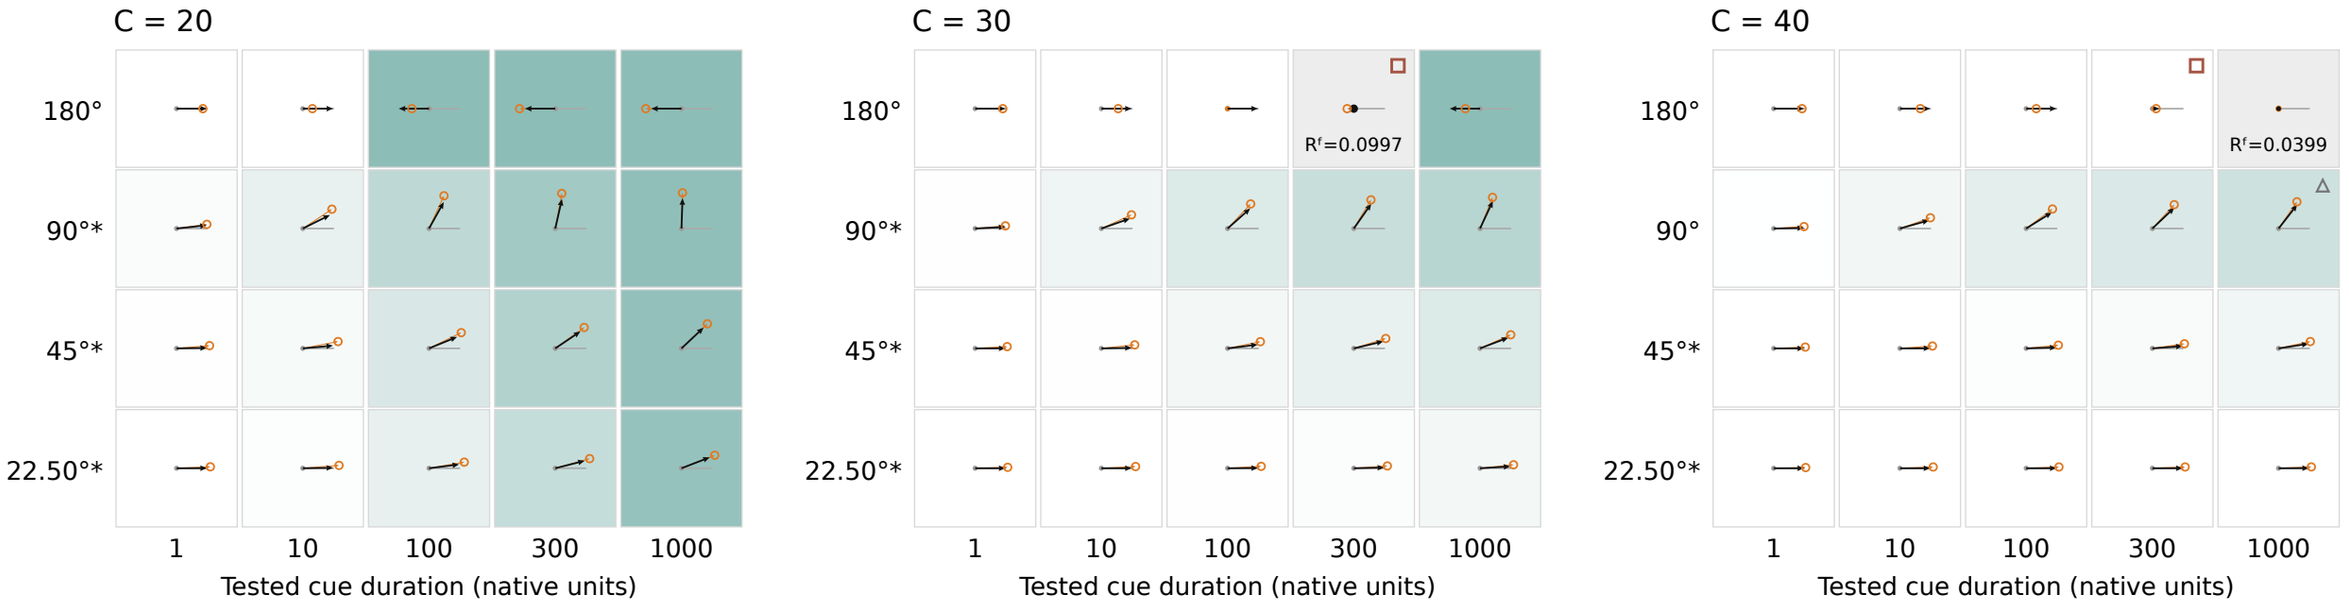

B · Fixed initial cue-centre arc

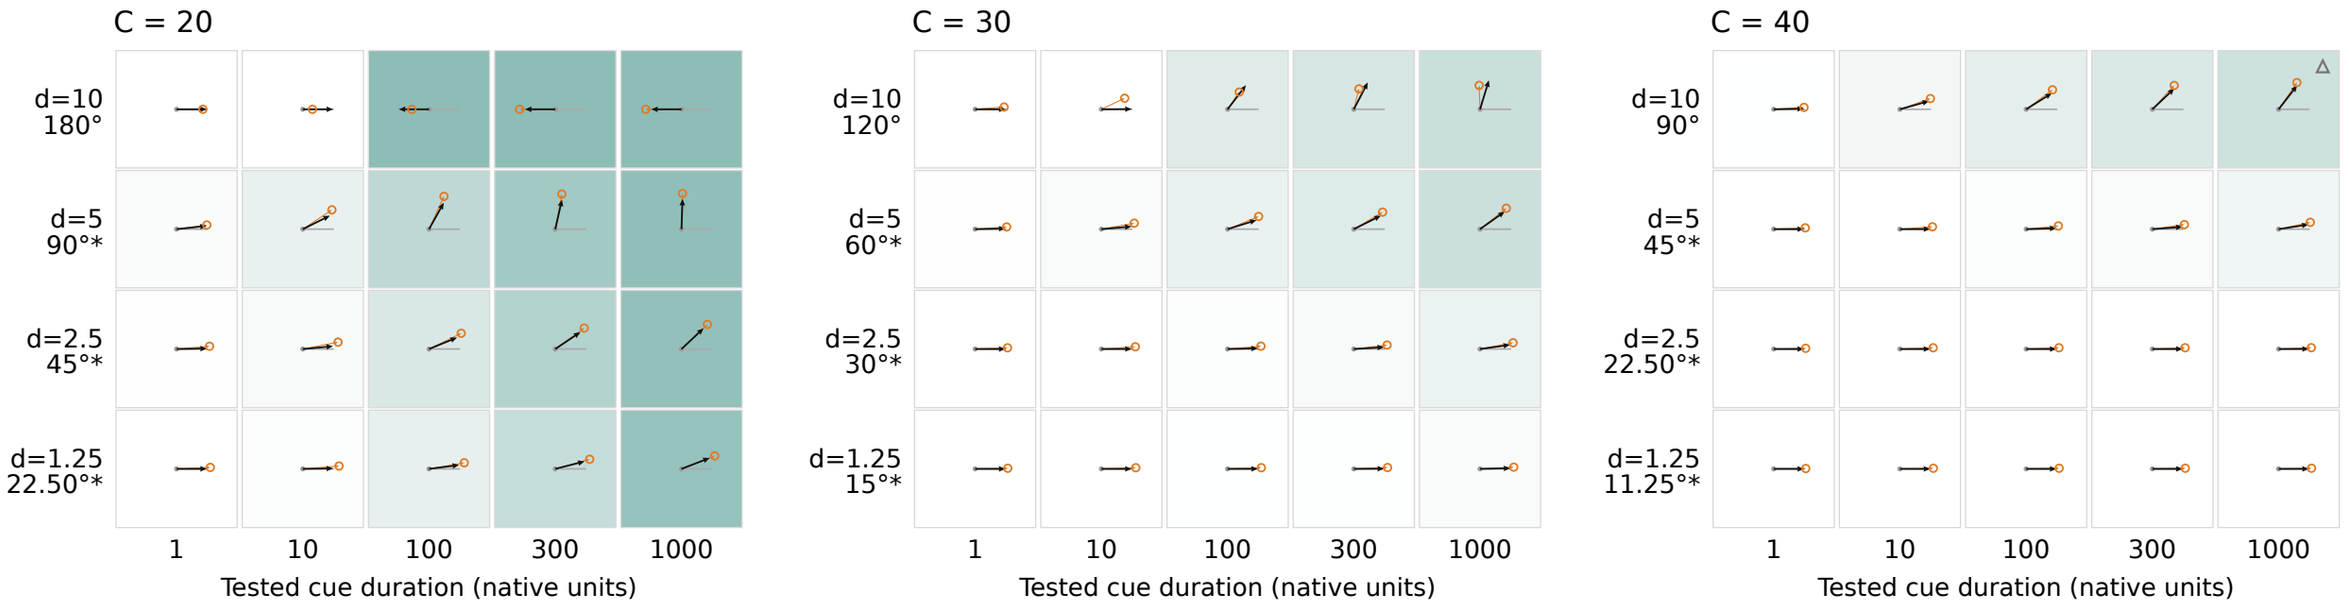

Native full physical support = 3; prescribed peak = 1. Initial angular supports (left → right): 54.00°, 36.00°, 27.00°.

* Cue footprint intersects the original half-contrast core; every overlap is retained. Spring centres stay fixed in material coordinates.

Weak R < 0.1: magnitude-only circles, with no assigned heading. □ failed finite full-field tail check; △ unavailable full-field tail check.

One vector scale throughout: Δglyph = 0.24 P; equal x/y scales. Duration columns are categories. Both arms: 480 rows, 355 unique histories.

Target-relative colour uses wrapped angular distances; it is neither a binary success gate nor a minimum-duration estimate. Native clocks differ between models.

Spring · Stationary cue at fixed angle or fixed initial arc


P = M₁ / M₁(initial): direction and length show the activity vector. Grey rightward guide: initial P = 1.

At cue withdrawal — After 13,000 cue-free units


0.0 — 0.5 — 1.0

Fraction of initial angular target error closed (colour clipped to 0–1)

A · Fixed cue-centre angle

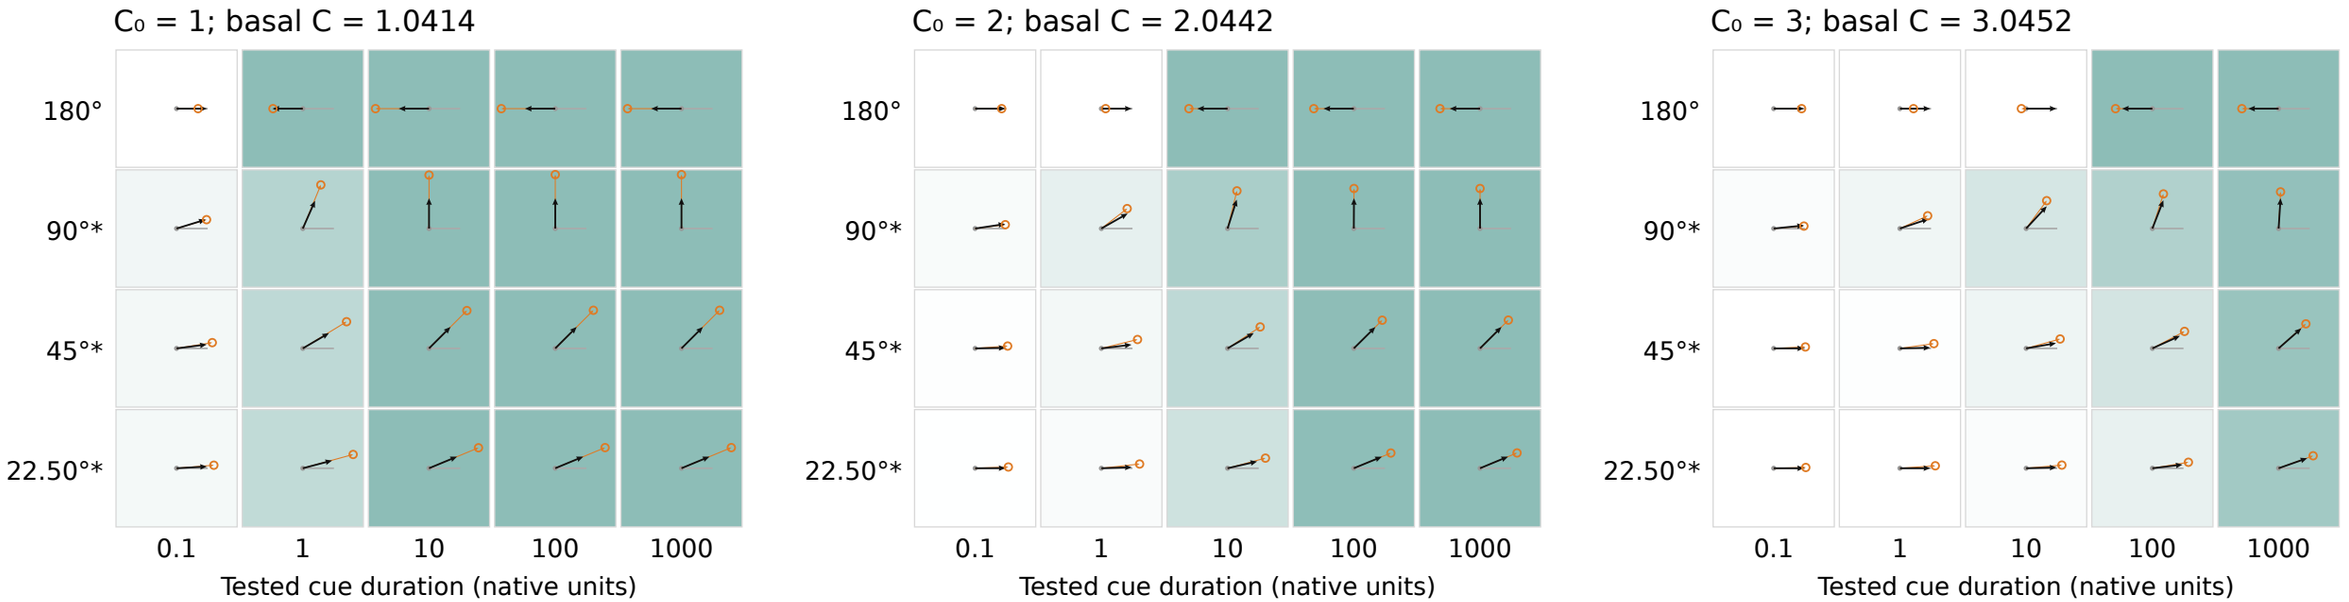

B · Fixed initial cue-centre arc

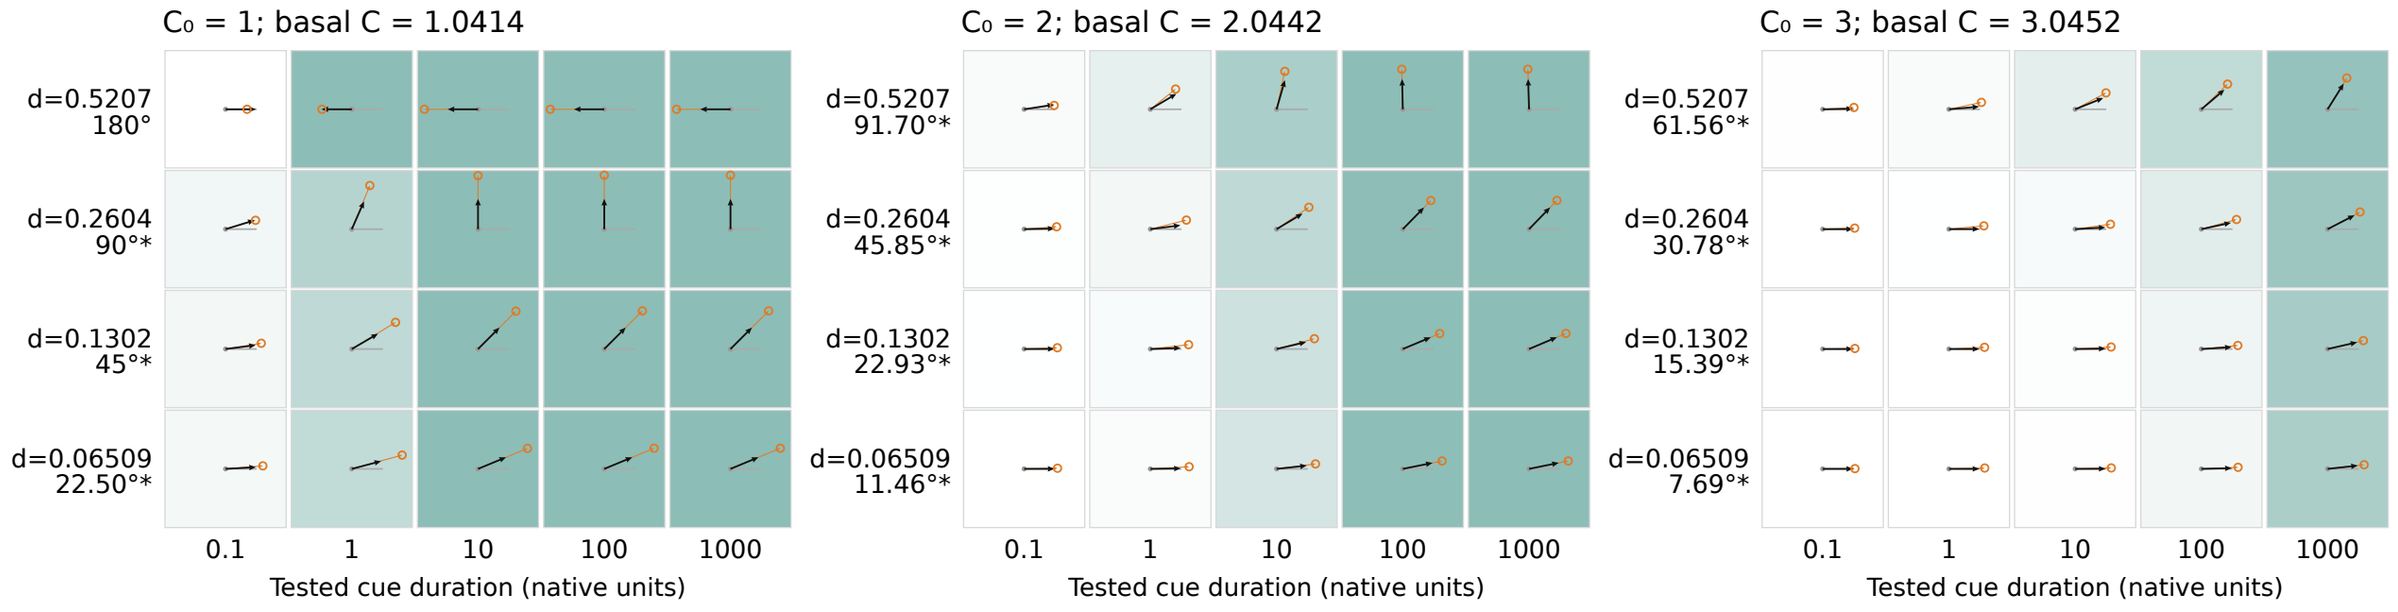

Native full physical support = 0.2; prescribed peak = 4. Initial angular supports (left → right): 69.14°, 35.22°, 23.64°.

* Cue footprint intersects the original half-contrast core; every overlap is retained. Spring centres stay fixed in material coordinates.

Weak R < 0.1: magnitude-only circles, with no assigned heading. □ failed finite full-field tail check; △ unavailable full-field tail check.

One vector scale throughout: Δglyph = 0.24 P; equal x/y scales. Duration columns are categories. Both arms: 480 rows, 355 unique histories.

Target-relative colour uses wrapped angular distances; it is neither a binary success gate nor a minimum-duration estimate. Native clocks differ between models.