What multiple threshold regions look like in native profiles

C=20, f=1; first prespecified pilot path per model. Snapshot conditioning is diagnostic, not representative sampling.

Wave-pinning · native t=16040

2 threshold regions; R=0.885, A=1.922, Q=0.461

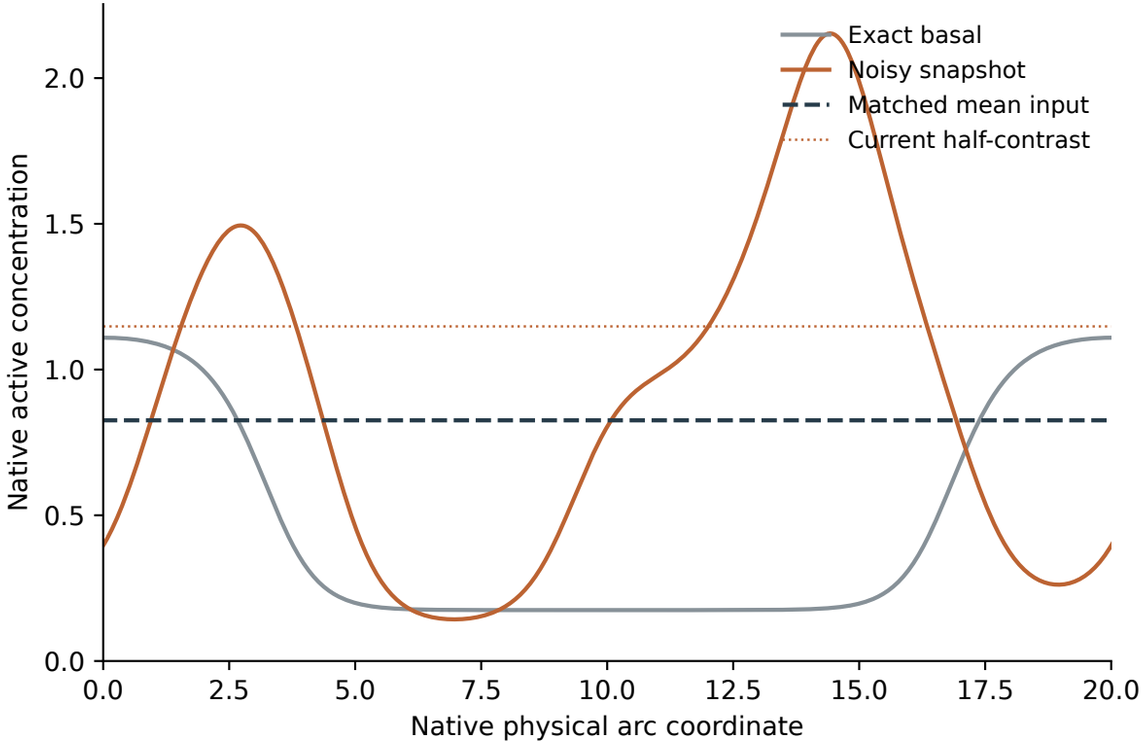

Goryachev · native t=16040

2 threshold regions; R=0.072, A=1.091, Q=0.066

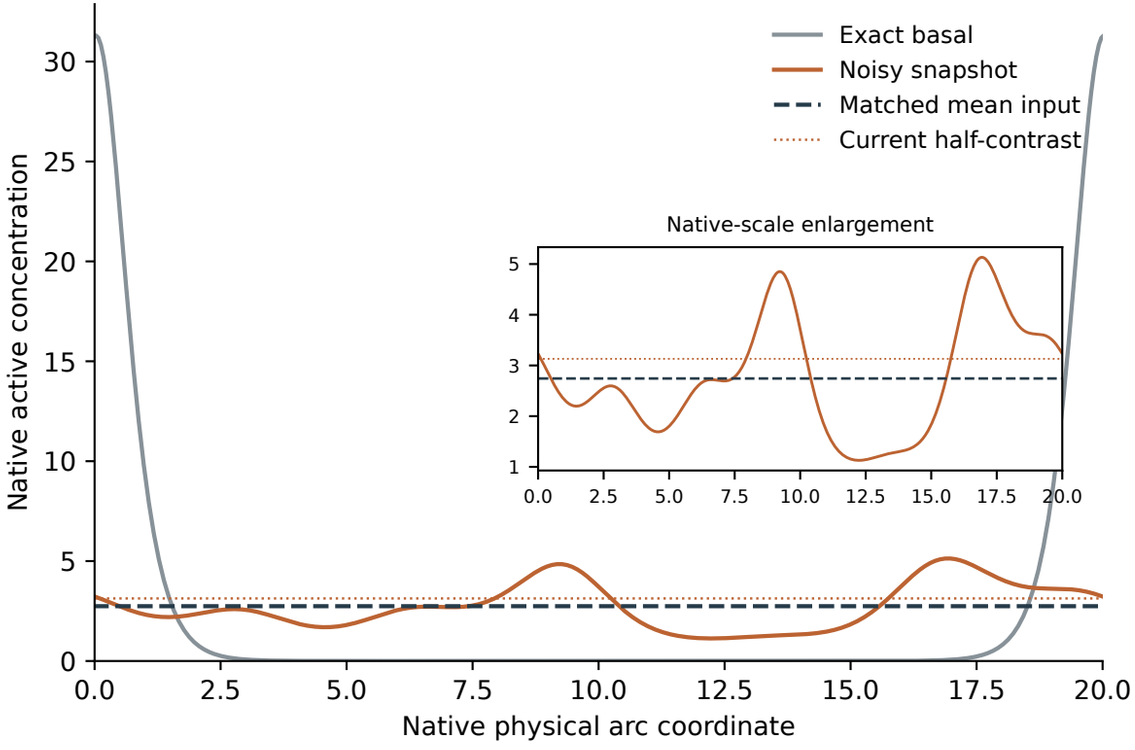

WP selection: among its saved frames with >1 current half-contrast region, contrast ≥10% of basal, and R≥0.75, choose nearest the window midpoint.
Gory uses the same native time on its own independent path. The two models have separate native concentration scales; neither profile is peak-normalized.
The matched mean control receives the declared ensemble mean at every location. A low first moment or many threshold regions alone does not identify a mechanism.
Threshold arcs are morphology descriptors: they do not establish equal-strength peaks, functional competition, site lineage, or an event class.