

Existing noise regimes · Wave-pinning, C=20

Independent weak/strong condition medoids · identical starting basal · shared zero-based native scale

Positive input: increasing f raises mean and standard deviation together; this is not a zero-mean variance sweep.

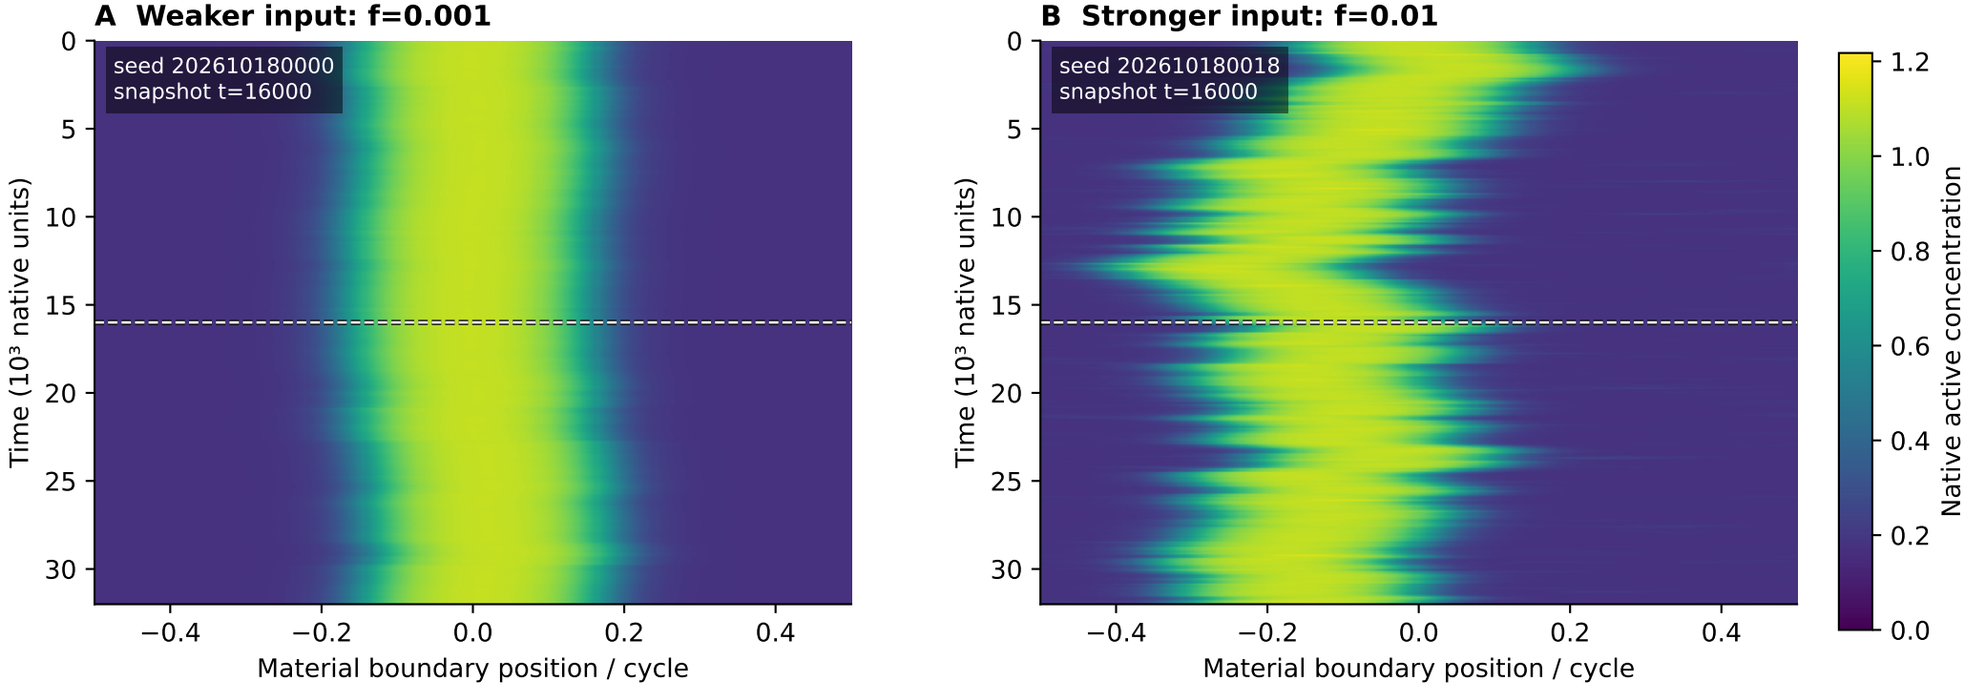

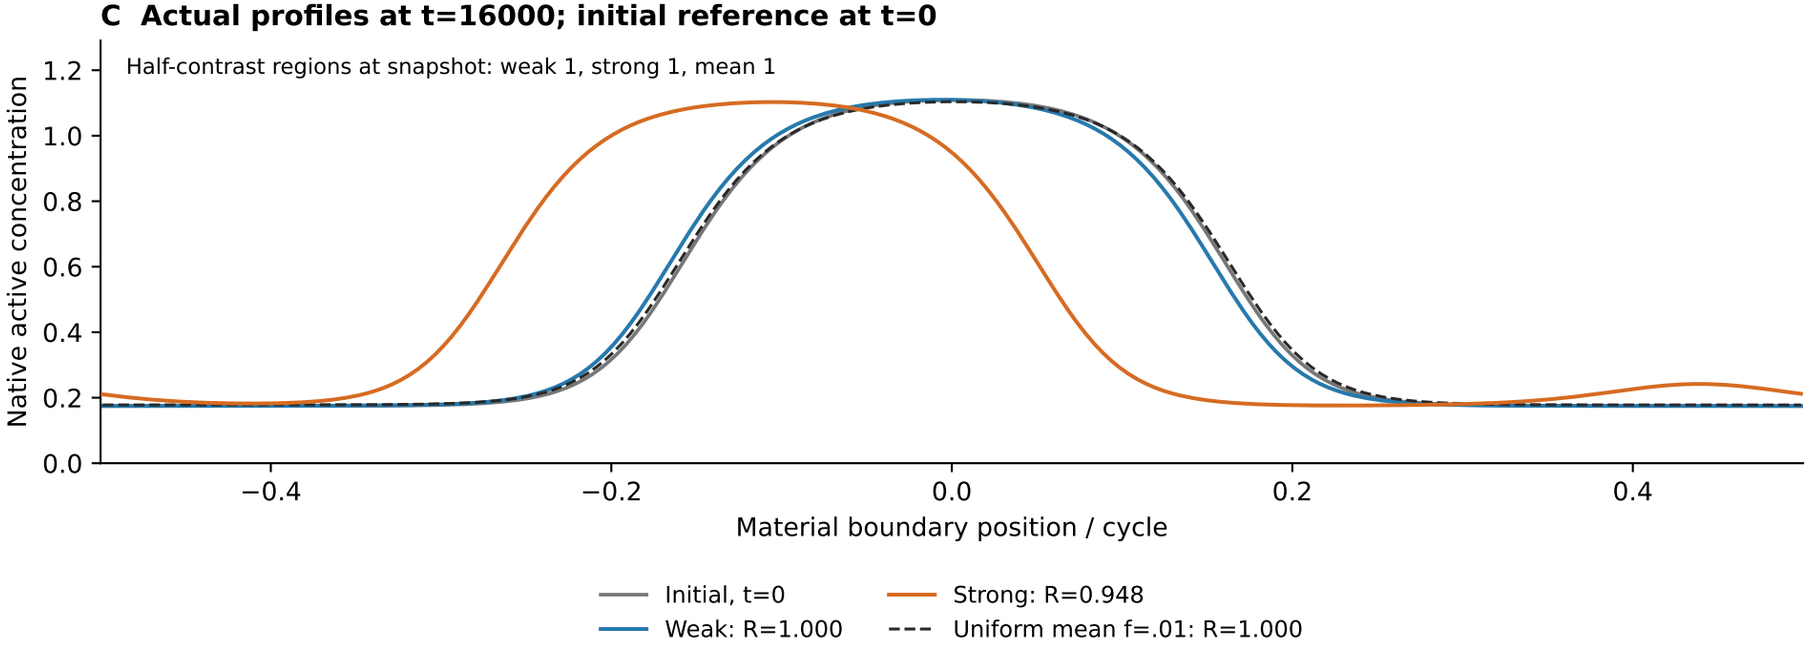

Snapshot: middle saved time; this strong-input medoid has no multiple-region sample.


The weak snapshot uses the identical native time; these are separate realizations, not paired forcing paths.


Multiple threshold regions describe local organization; counts do not establish competition or site lineage. Native units are uncalibrated.

Existing noise regimes · Holmes 3, C=60

Independent weak/strong condition medoids · identical starting basal · shared zero-based native scale

Positive input: increasing f raises mean and standard deviation together; this is not a zero-mean variance sweep.

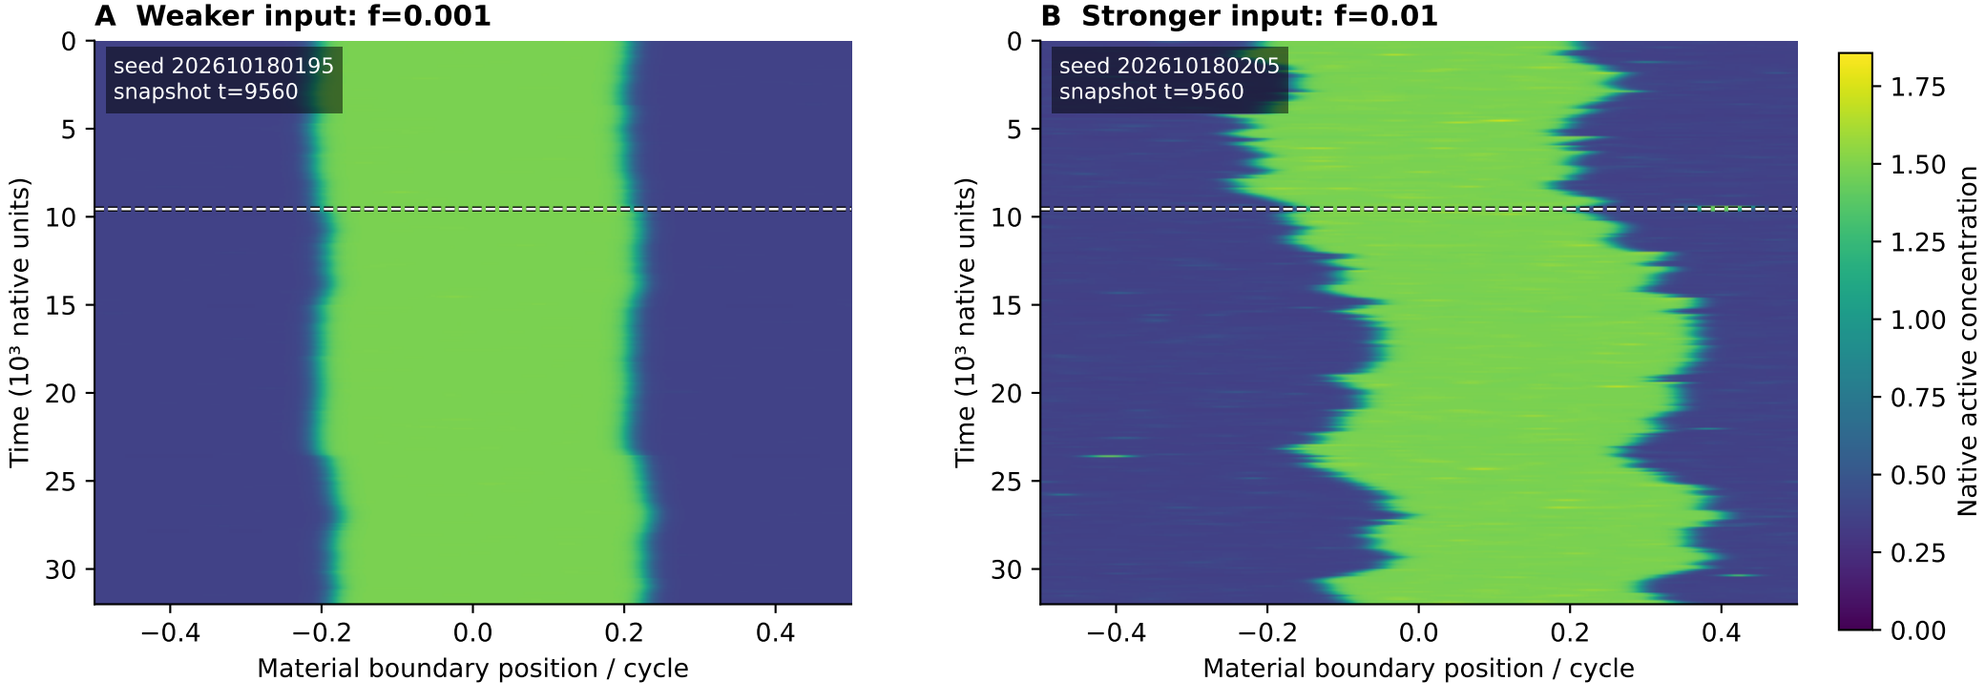

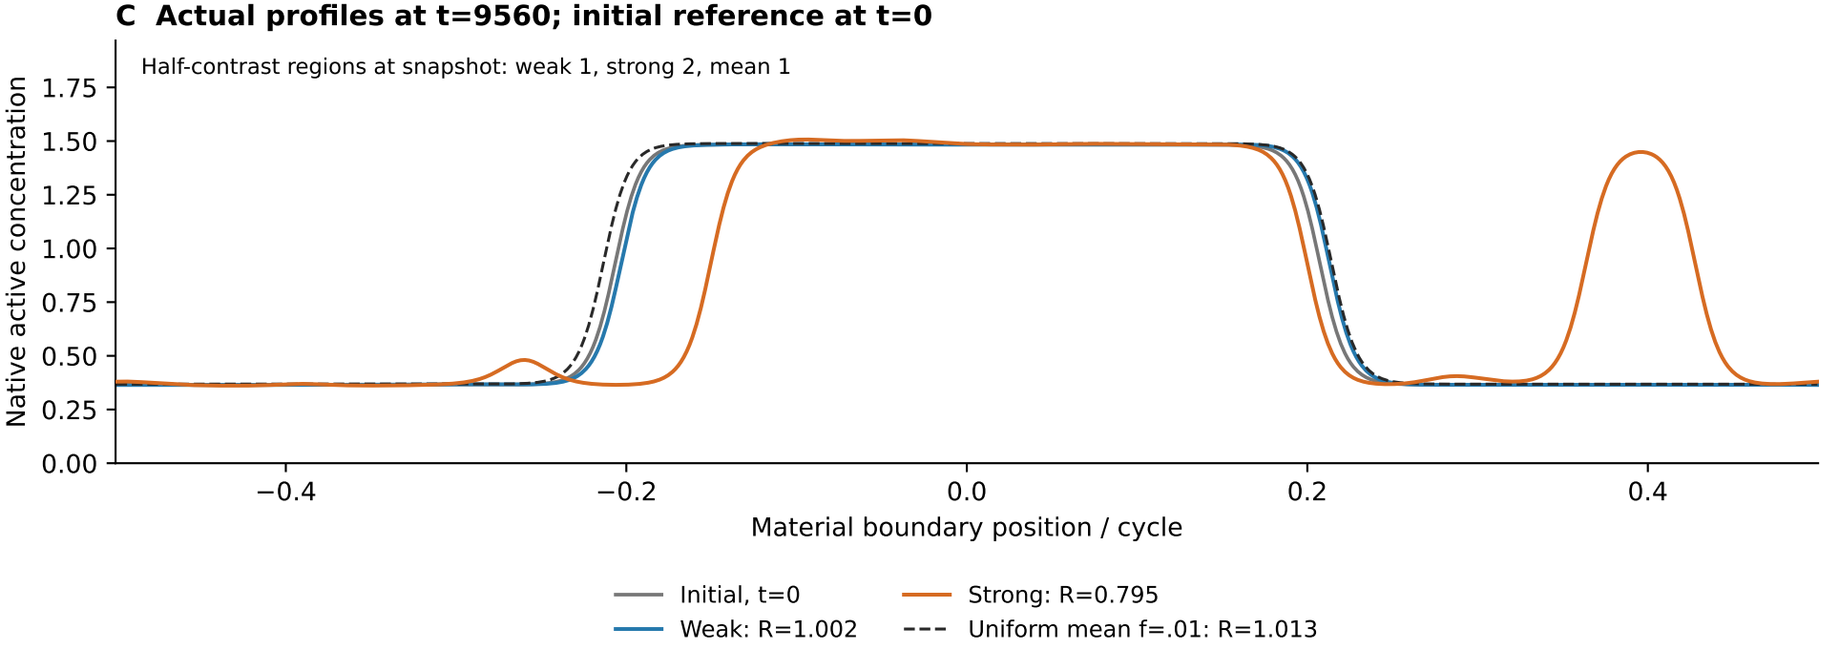

Snapshot: saved field in the strong medoid's qualified multiregion sample run t=9385–9740.


The weak snapshot uses the identical native time; these are separate realizations, not paired forcing paths.


Multiple threshold regions describe local organization; counts do not establish competition or site lineage. Native units are uncalibrated.

Existing noise regimes · Spring ring, C_0=3

Independent weak/strong condition medoids · identical starting basal · shared zero-based native scale

Positive input: increasing f raises mean and standard deviation together; this is not a zero-mean variance sweep.

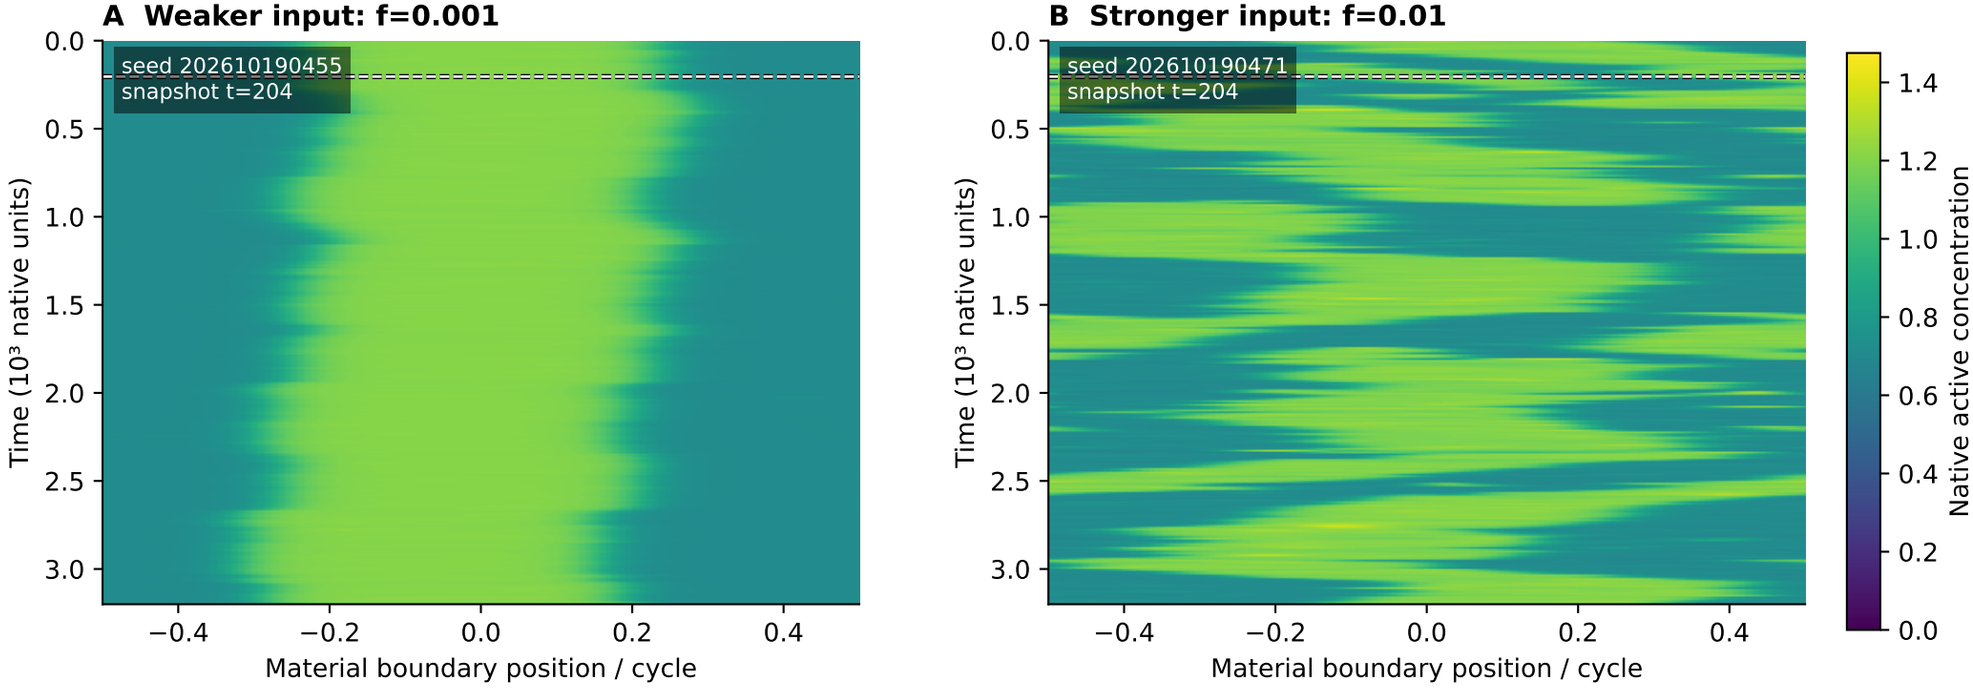

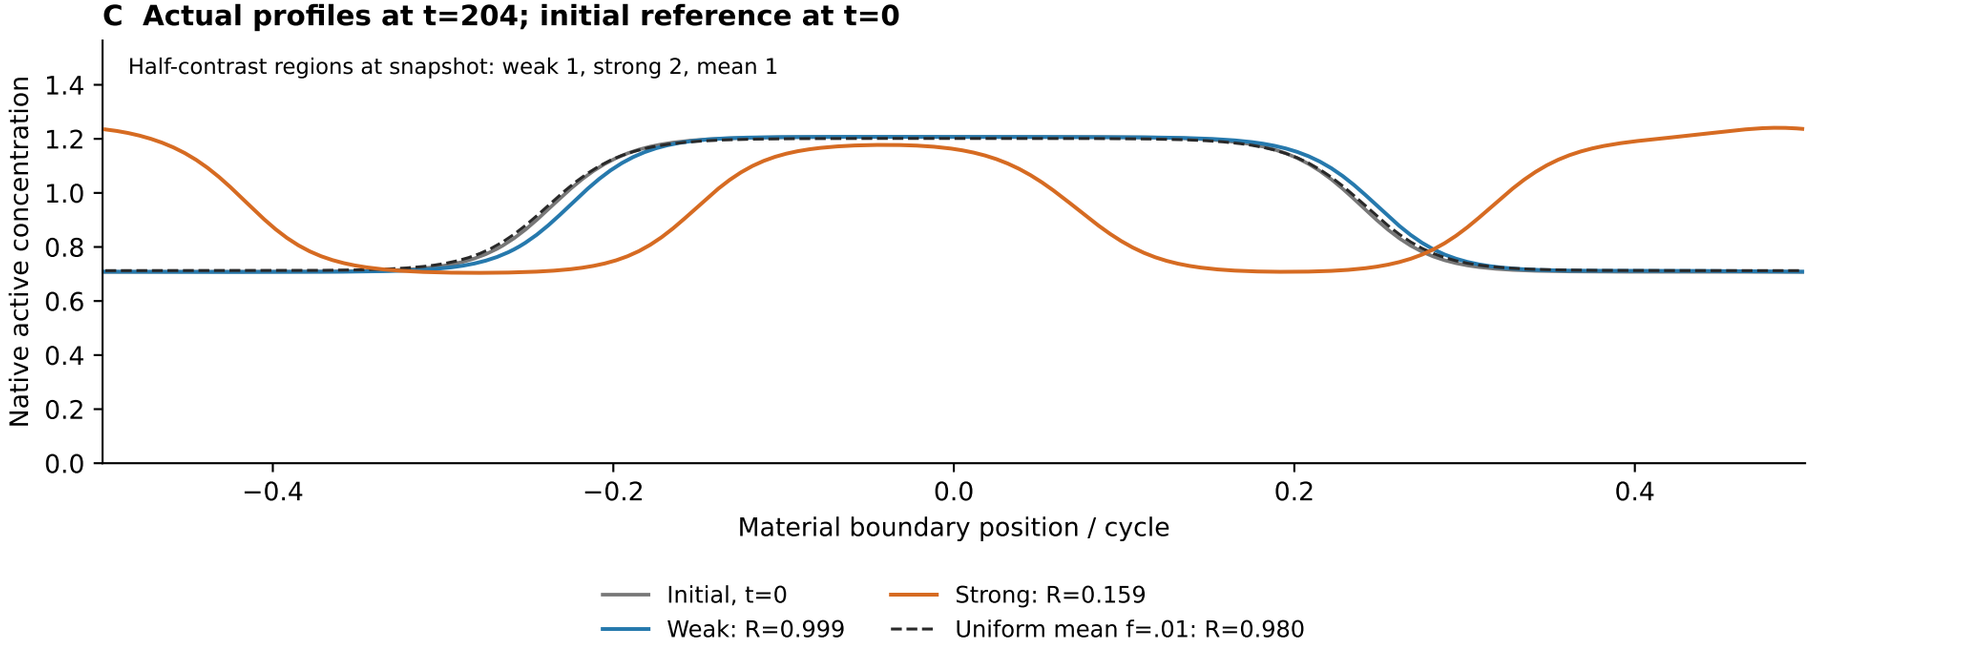

Snapshot: saved field in the strong medoid's qualified multiregion sample run t=130–280.5.


The weak snapshot uses the identical native time; these are separate realizations, not paired forcing paths.

Multiple threshold regions describe local organization; counts do not establish competition or site lineage. Native units are uncalibrated.

Existing noise regimes · Goryachev, C=20

Independent weak/strong condition medoids · identical starting basal · shared zero-based native scale

Positive input: increasing f raises mean and standard deviation together; this is not a zero-mean variance sweep.

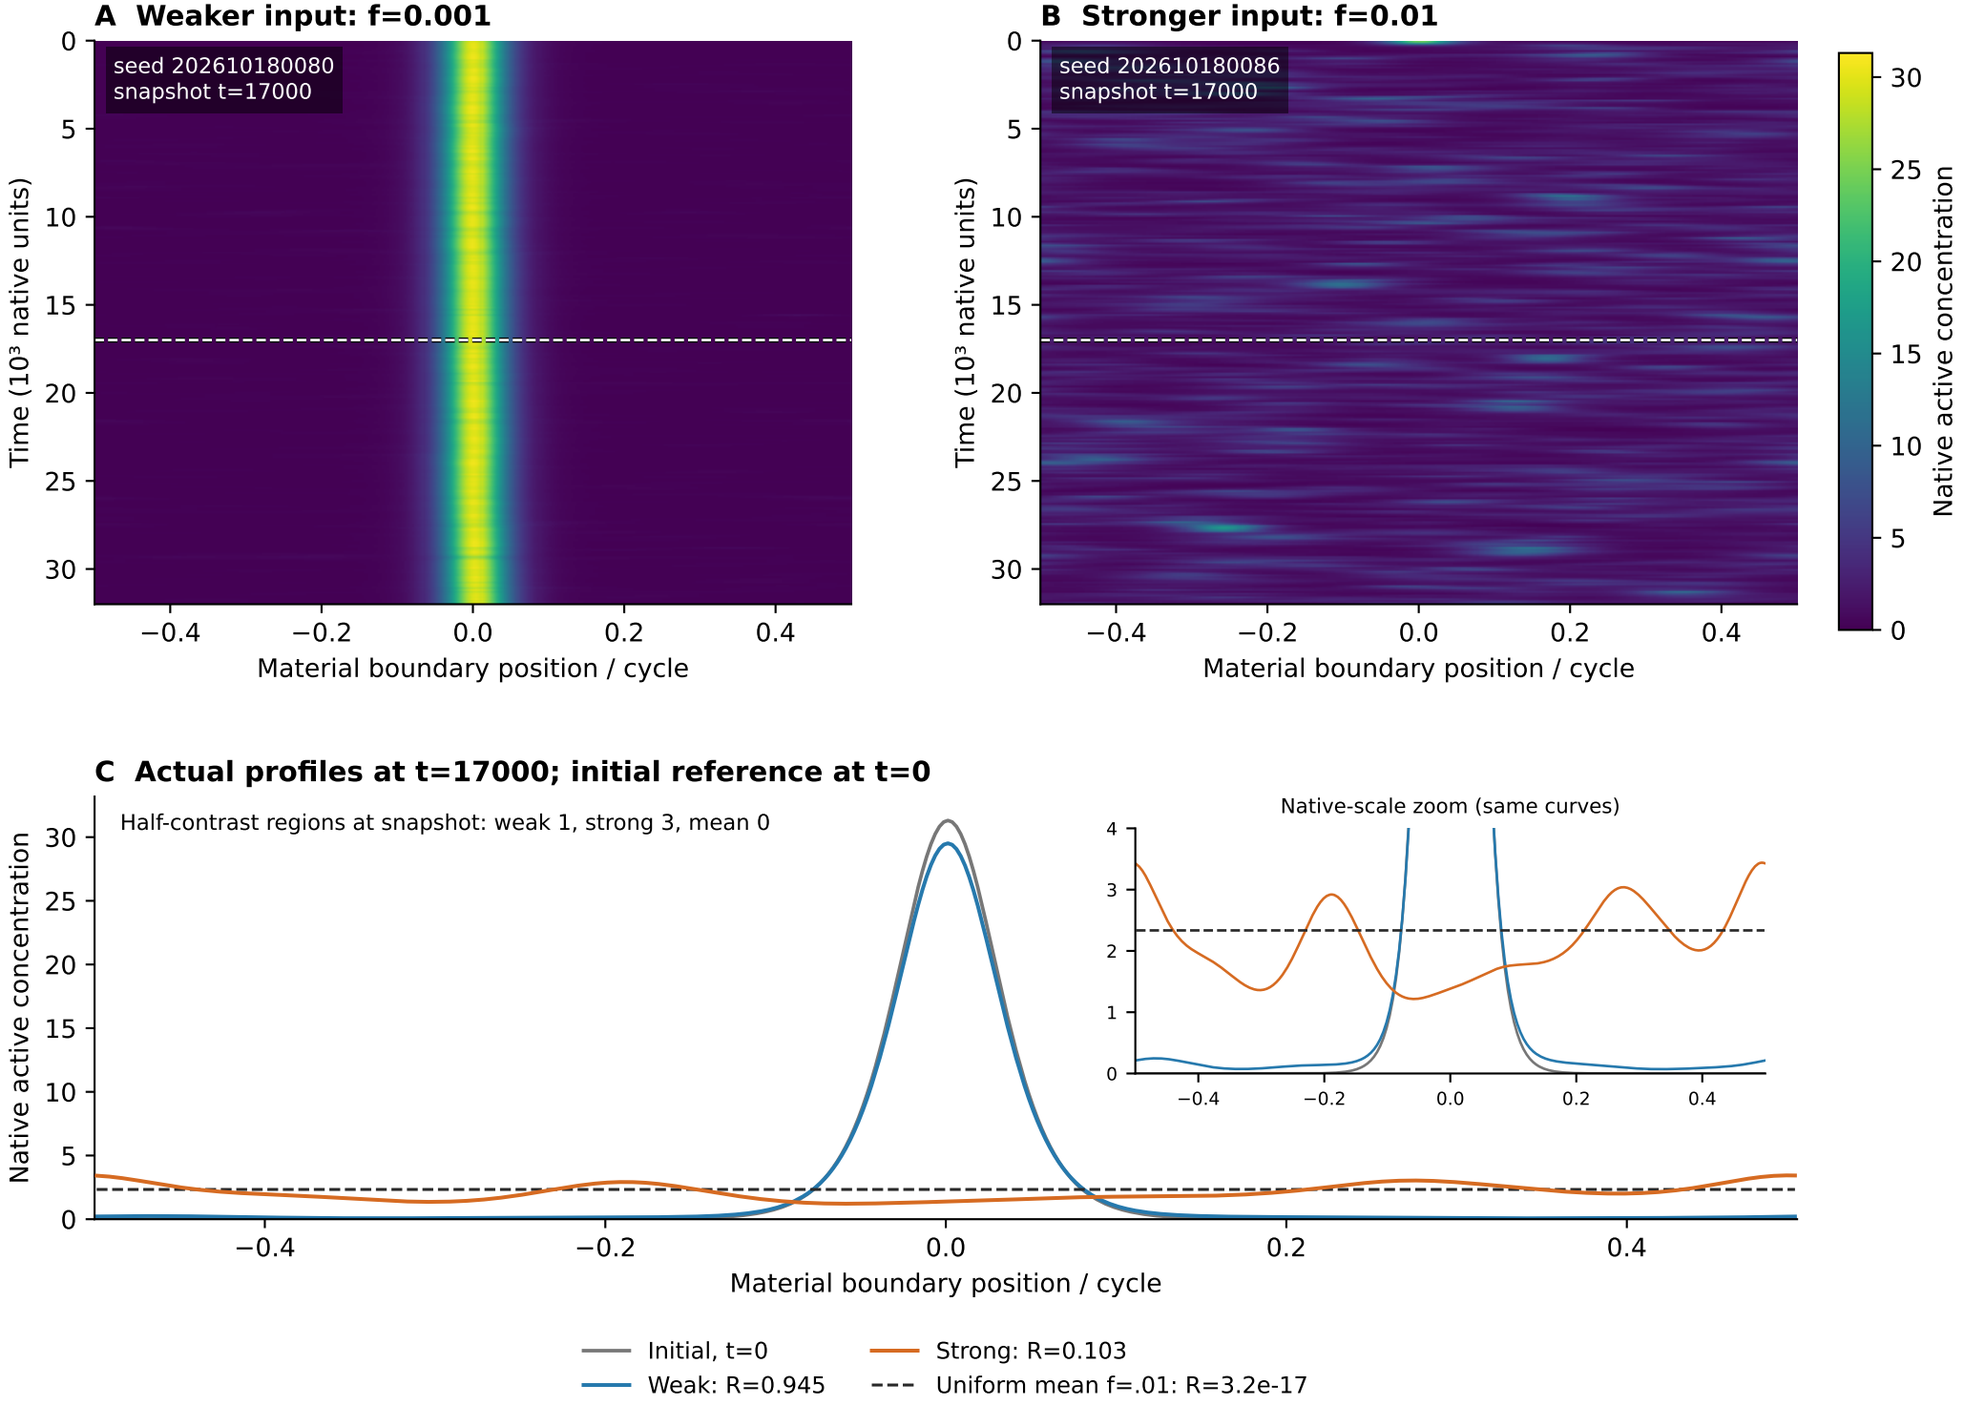

Snapshot: saved field in the strong medoid's qualified multiregion sample run t=16670–17300.

The weak snapshot uses the identical native time; these are separate realizations, not paired forcing paths.

Mean-input control loses polarity: the stronger noisy case is a forced-pattern regime, not intact-pole wandering.