
Existing noise regimes · Goryachev, C=20

Independent weak/strong condition medoids · identical starting basal · shared zero-based native scale

Positive input: increasing f raises mean and standard deviation together; this is not a zero-mean variance sweep.

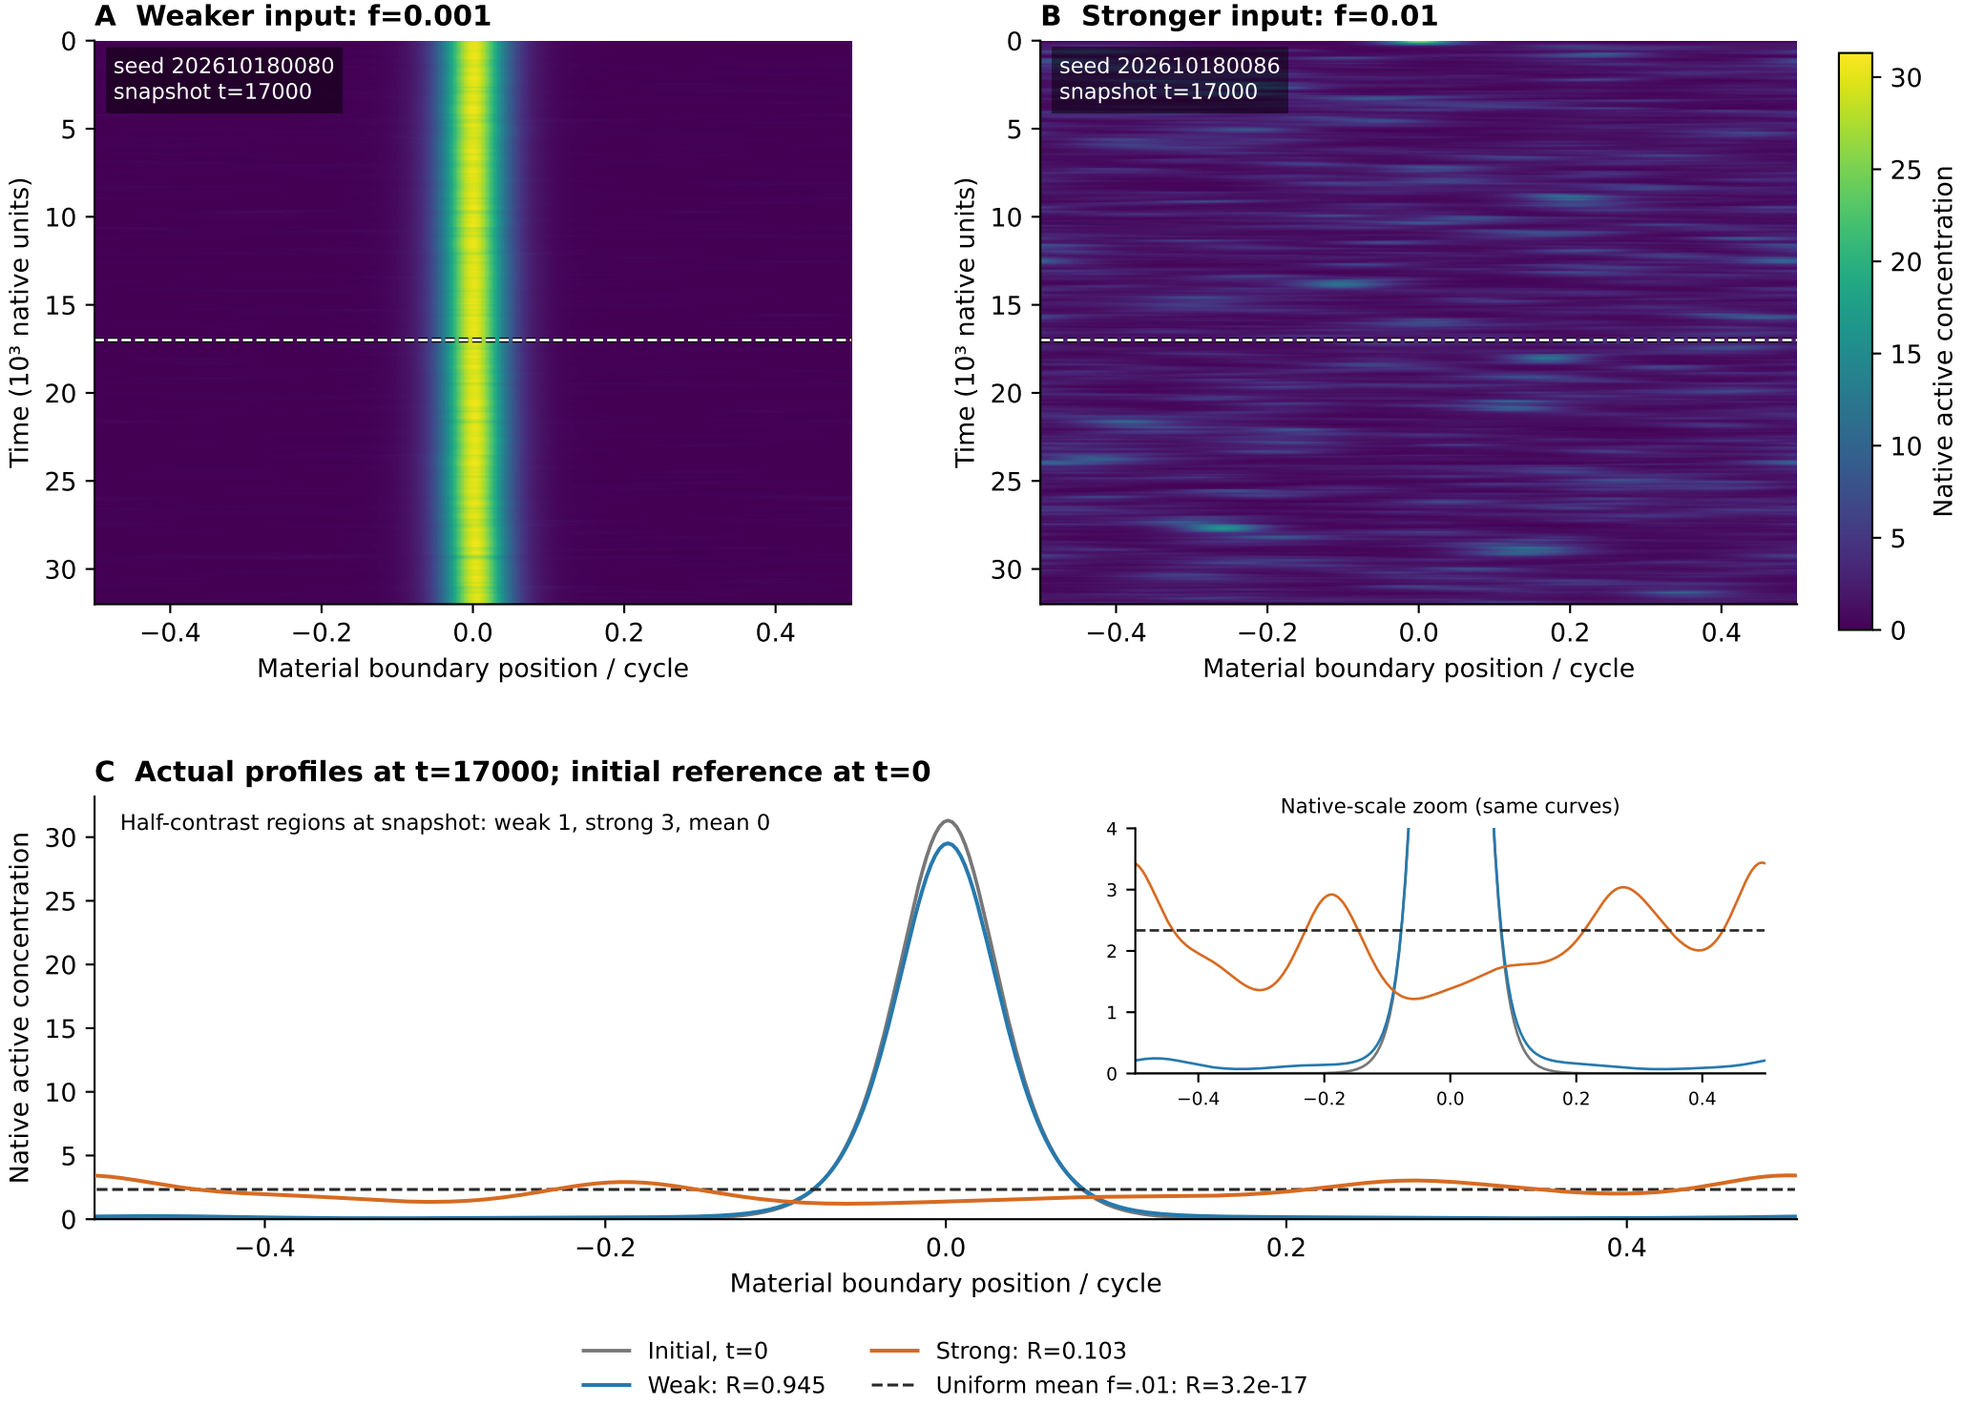

Snapshot: saved field in the strong medoid's qualified multiregion sample run t=16670–17300.

The weak snapshot uses the identical native time; these are separate realizations, not paired forcing paths.

Mean-input control loses polarity: the stronger noisy case is a forced-pattern regime, not intact-pole wandering.