

Existing noise regimes · Spring ring, C₀=3

Independent weak/strong condition medoids · identical starting basal · shared zero-based native scale

Positive input: increasing f raises mean and standard deviation together; this is not a zero-mean variance sweep.

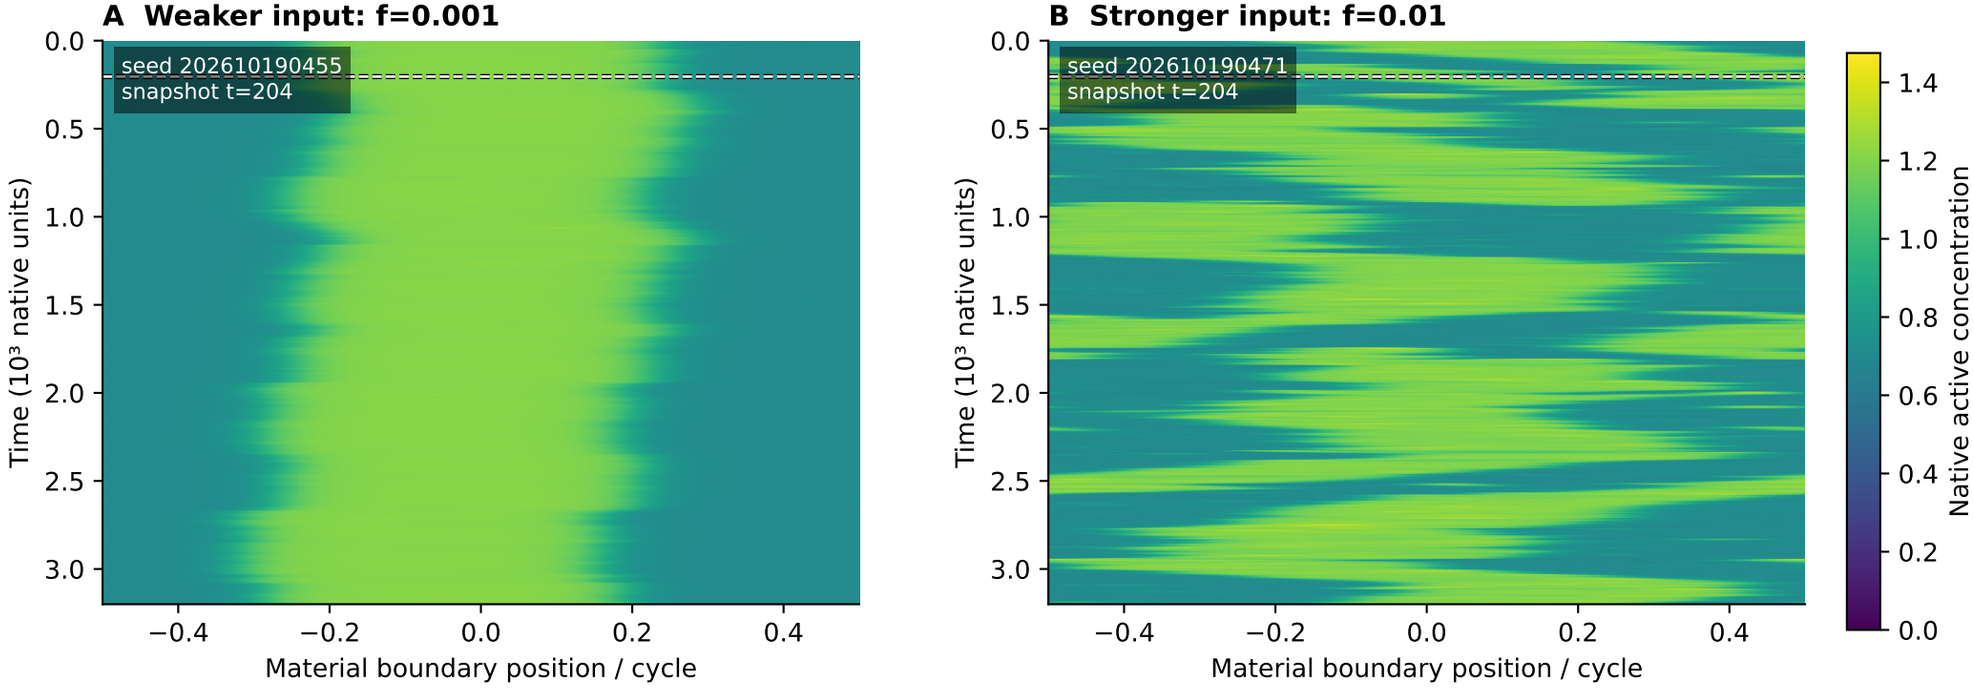

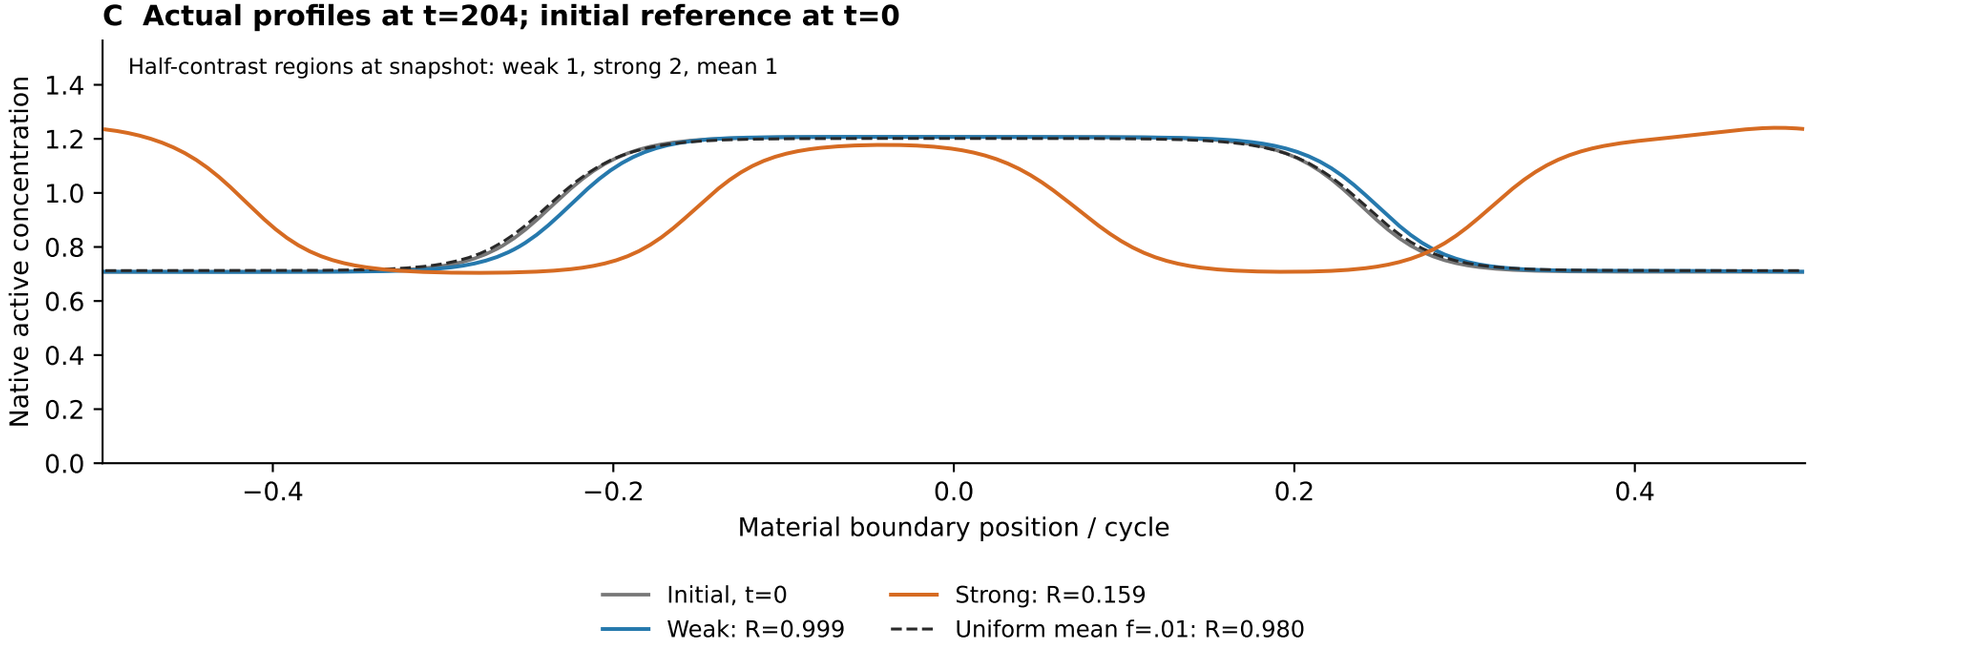

Snapshot: saved field in the strong medoid's qualified multiregion sample run t=130–280.5.

The weak snapshot uses the identical native time; these are separate realizations, not paired forcing paths.

Multiple threshold regions describe local organization; counts do not establish competition or site lineage. Native units are uncalibrated.