
Wave-pinning, C=20: all nine input strengths

Second-half descriptor medoid per condition, with smallest-seed tie breaking. Common zero-based native activity scale across this page.

f=0.001/0.003/0.01/0.03/0.1: n=12. Other four levels: n=2 (both tie). These examples do not estimate frequency.

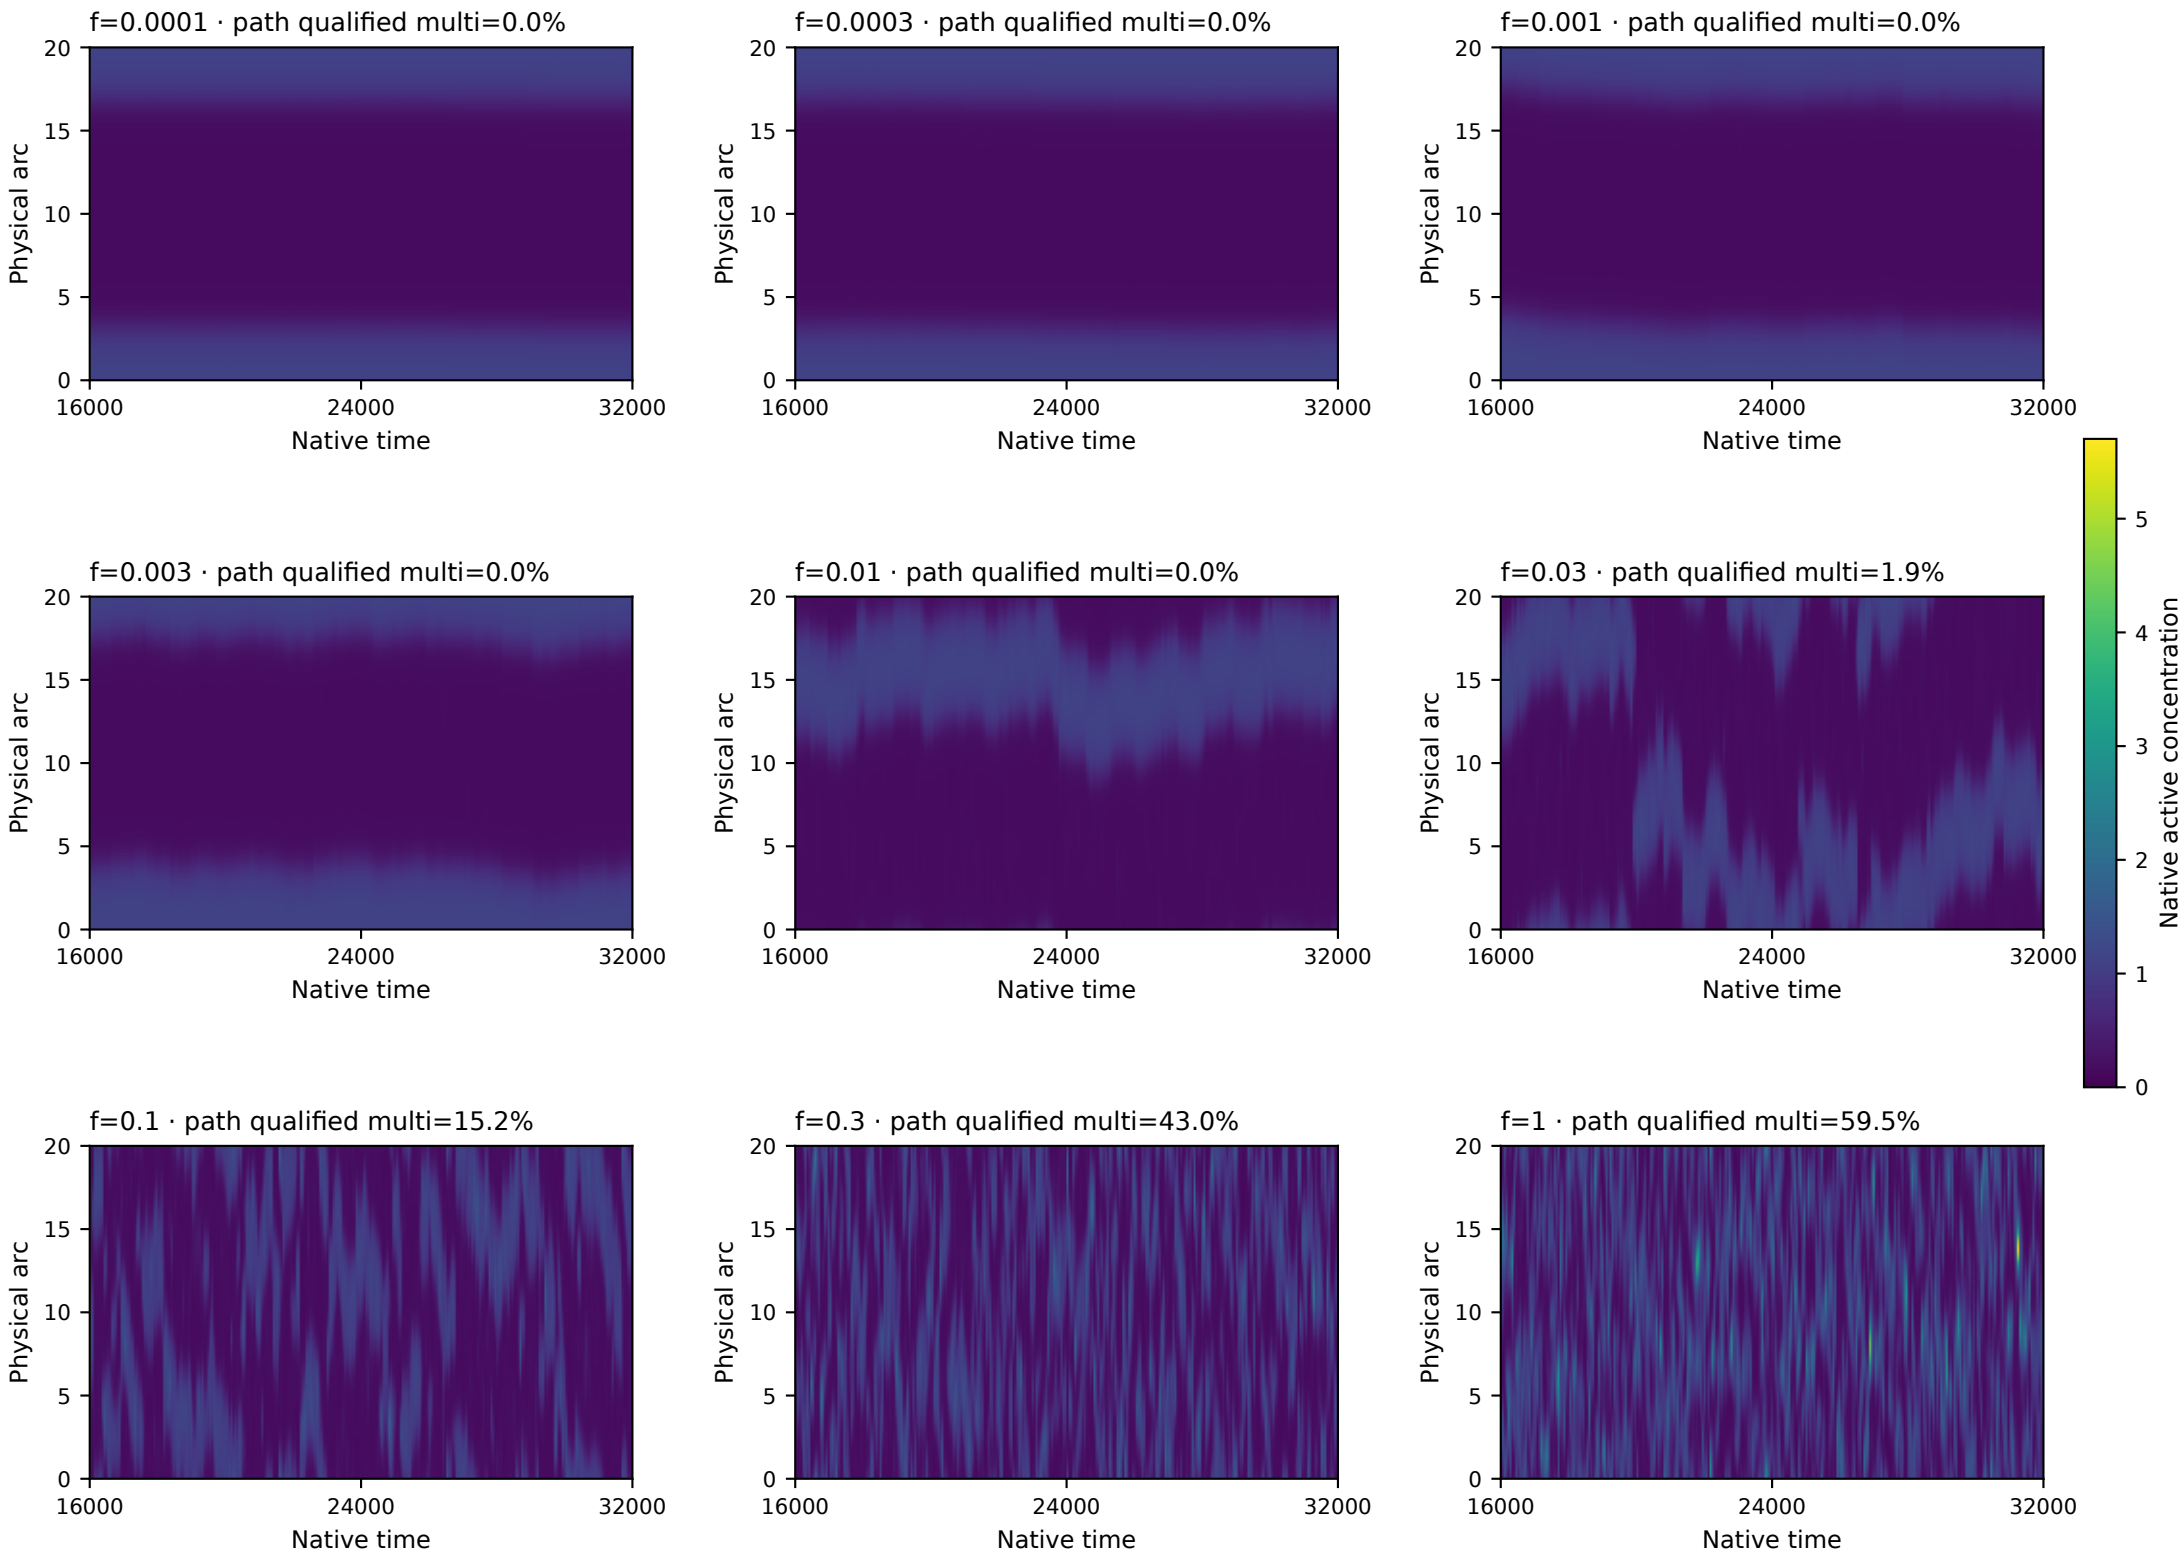


No field alignment, per-history peak normalization, birth/establishment or lifetime classifier. Multi-region counts are qualified at contrast≥10% of own basal.

The first half is discarded as an observed-window choice, without assuming stationarity. Model clocks and input laws remain native and uncalibrated.

Wave-pinning, C=40: all nine input strengths

Second-half descriptor medoid per condition, with smallest-seed tie breaking. Common zero-based native activity scale across this page.

f=0.001/0.003/0.01/0.03/0.1: n=12. Other four levels: n=2 (both tie). These examples do not estimate frequency.

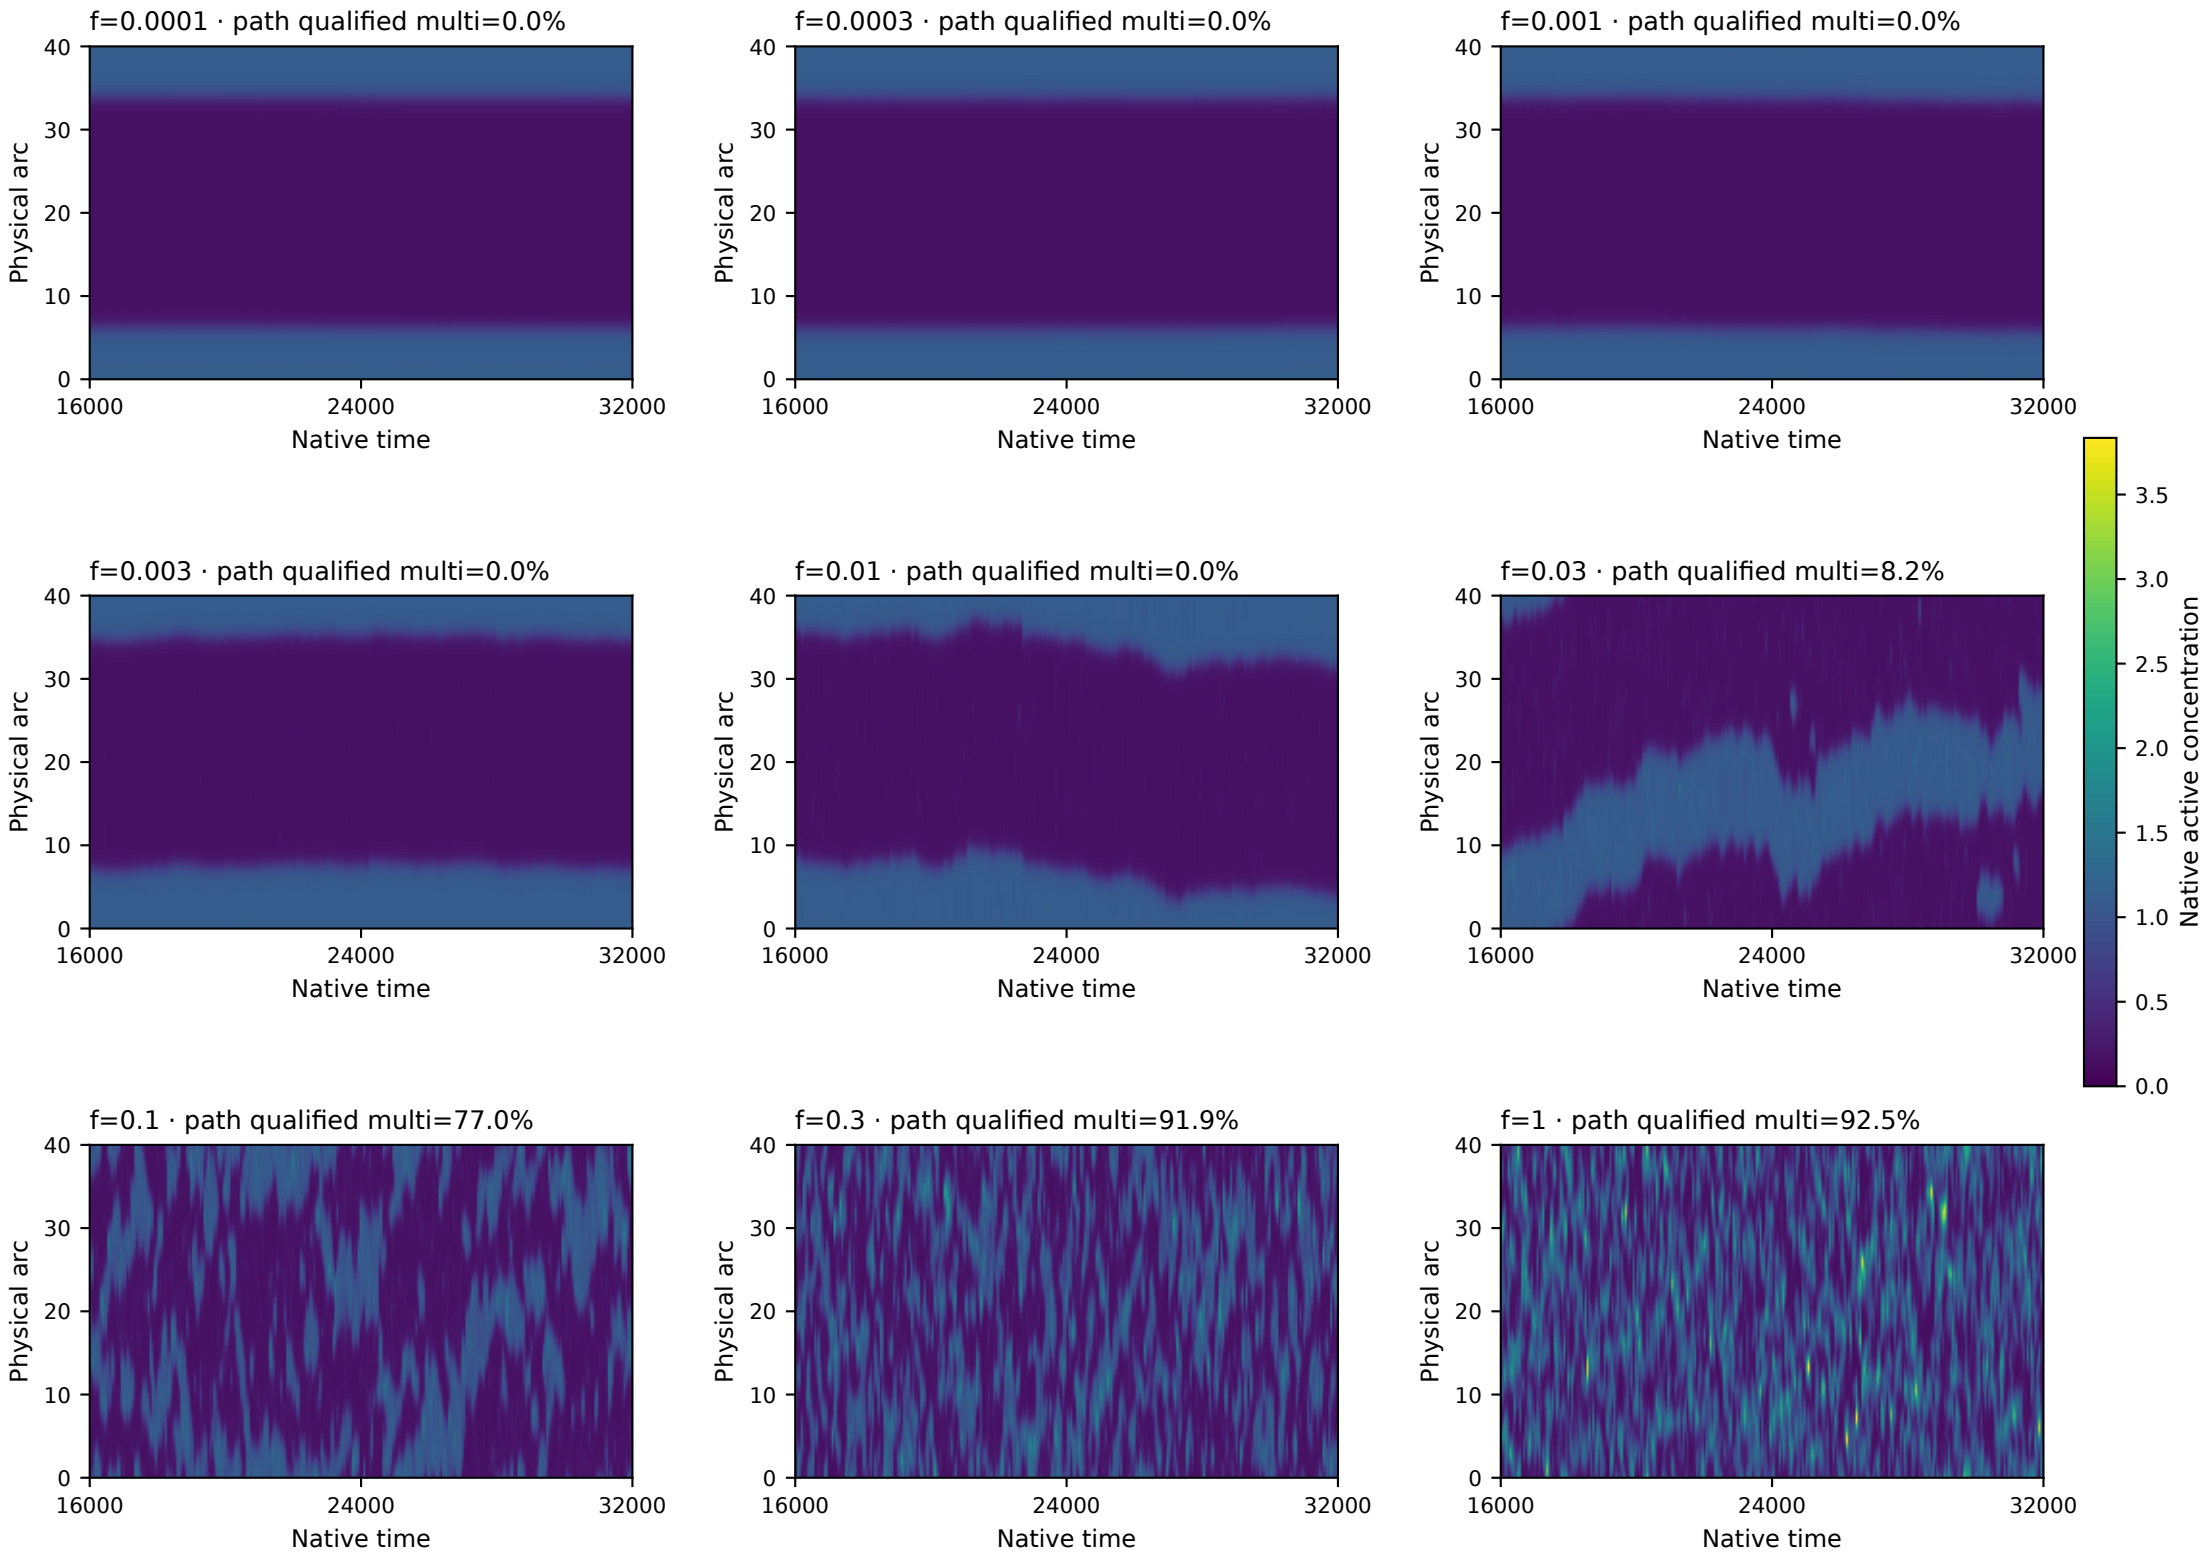


No field alignment, per-history peak normalization, birth/establishment or lifetime classifier. Multi-region counts are qualified at contrast≥10% of own basal.

The first half is discarded as an observed-window choice, without assuming stationarity. Model clocks and input laws remain native and uncalibrated.

Wave-pinning, C=60: all nine input strengths

Second-half descriptor medoid per condition, with smallest-seed tie breaking. Common zero-based native activity scale across this page.

f=0.001/0.003/0.01/0.03/0.1: n=12. Other four levels: n=2 (both tie). These examples do not estimate frequency.

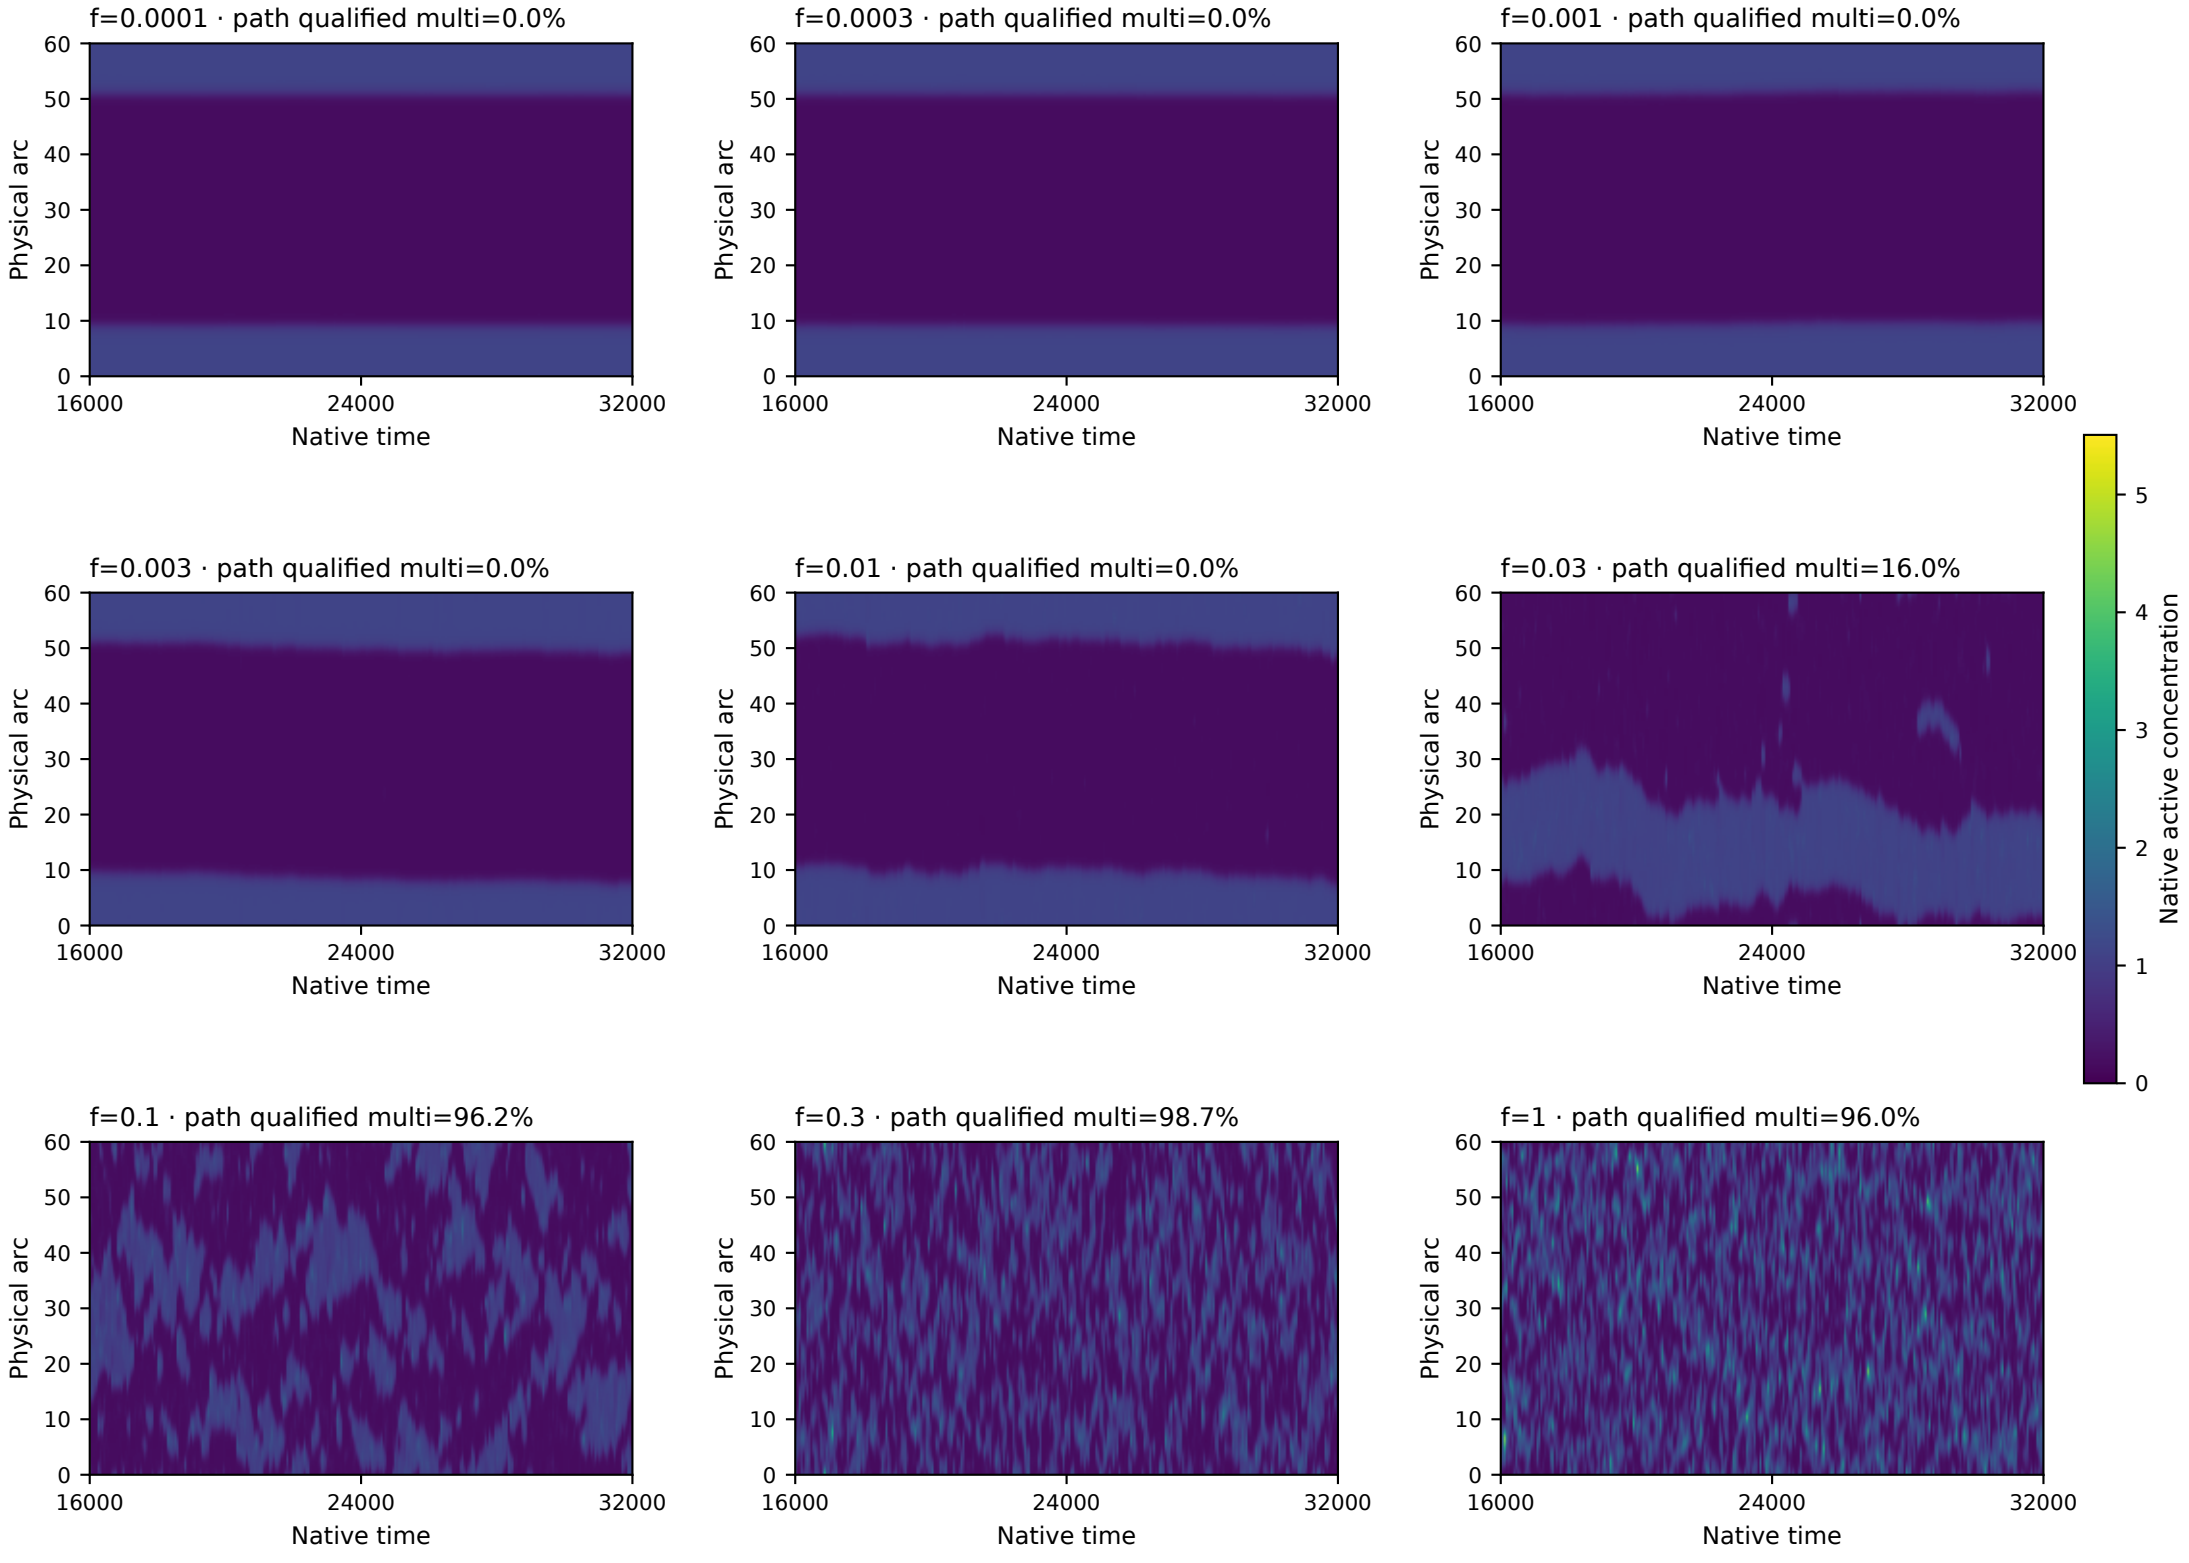


No field alignment, per-history peak normalization, birth/establishment or lifetime classifier. Multi-region counts are qualified at contrast≥10% of own basal.

The first half is discarded as an observed-window choice, without assuming stationarity. Model clocks and input laws remain native and uncalibrated.

Goryachev, C=20: all nine input strengths

Second-half descriptor medoid per condition, with smallest-seed tie breaking. Common zero-based native activity scale across this page.

f=0.001/0.003/0.01/0.03/0.1: n=12. Other four levels: n=2 (both tie). These examples do not estimate frequency.

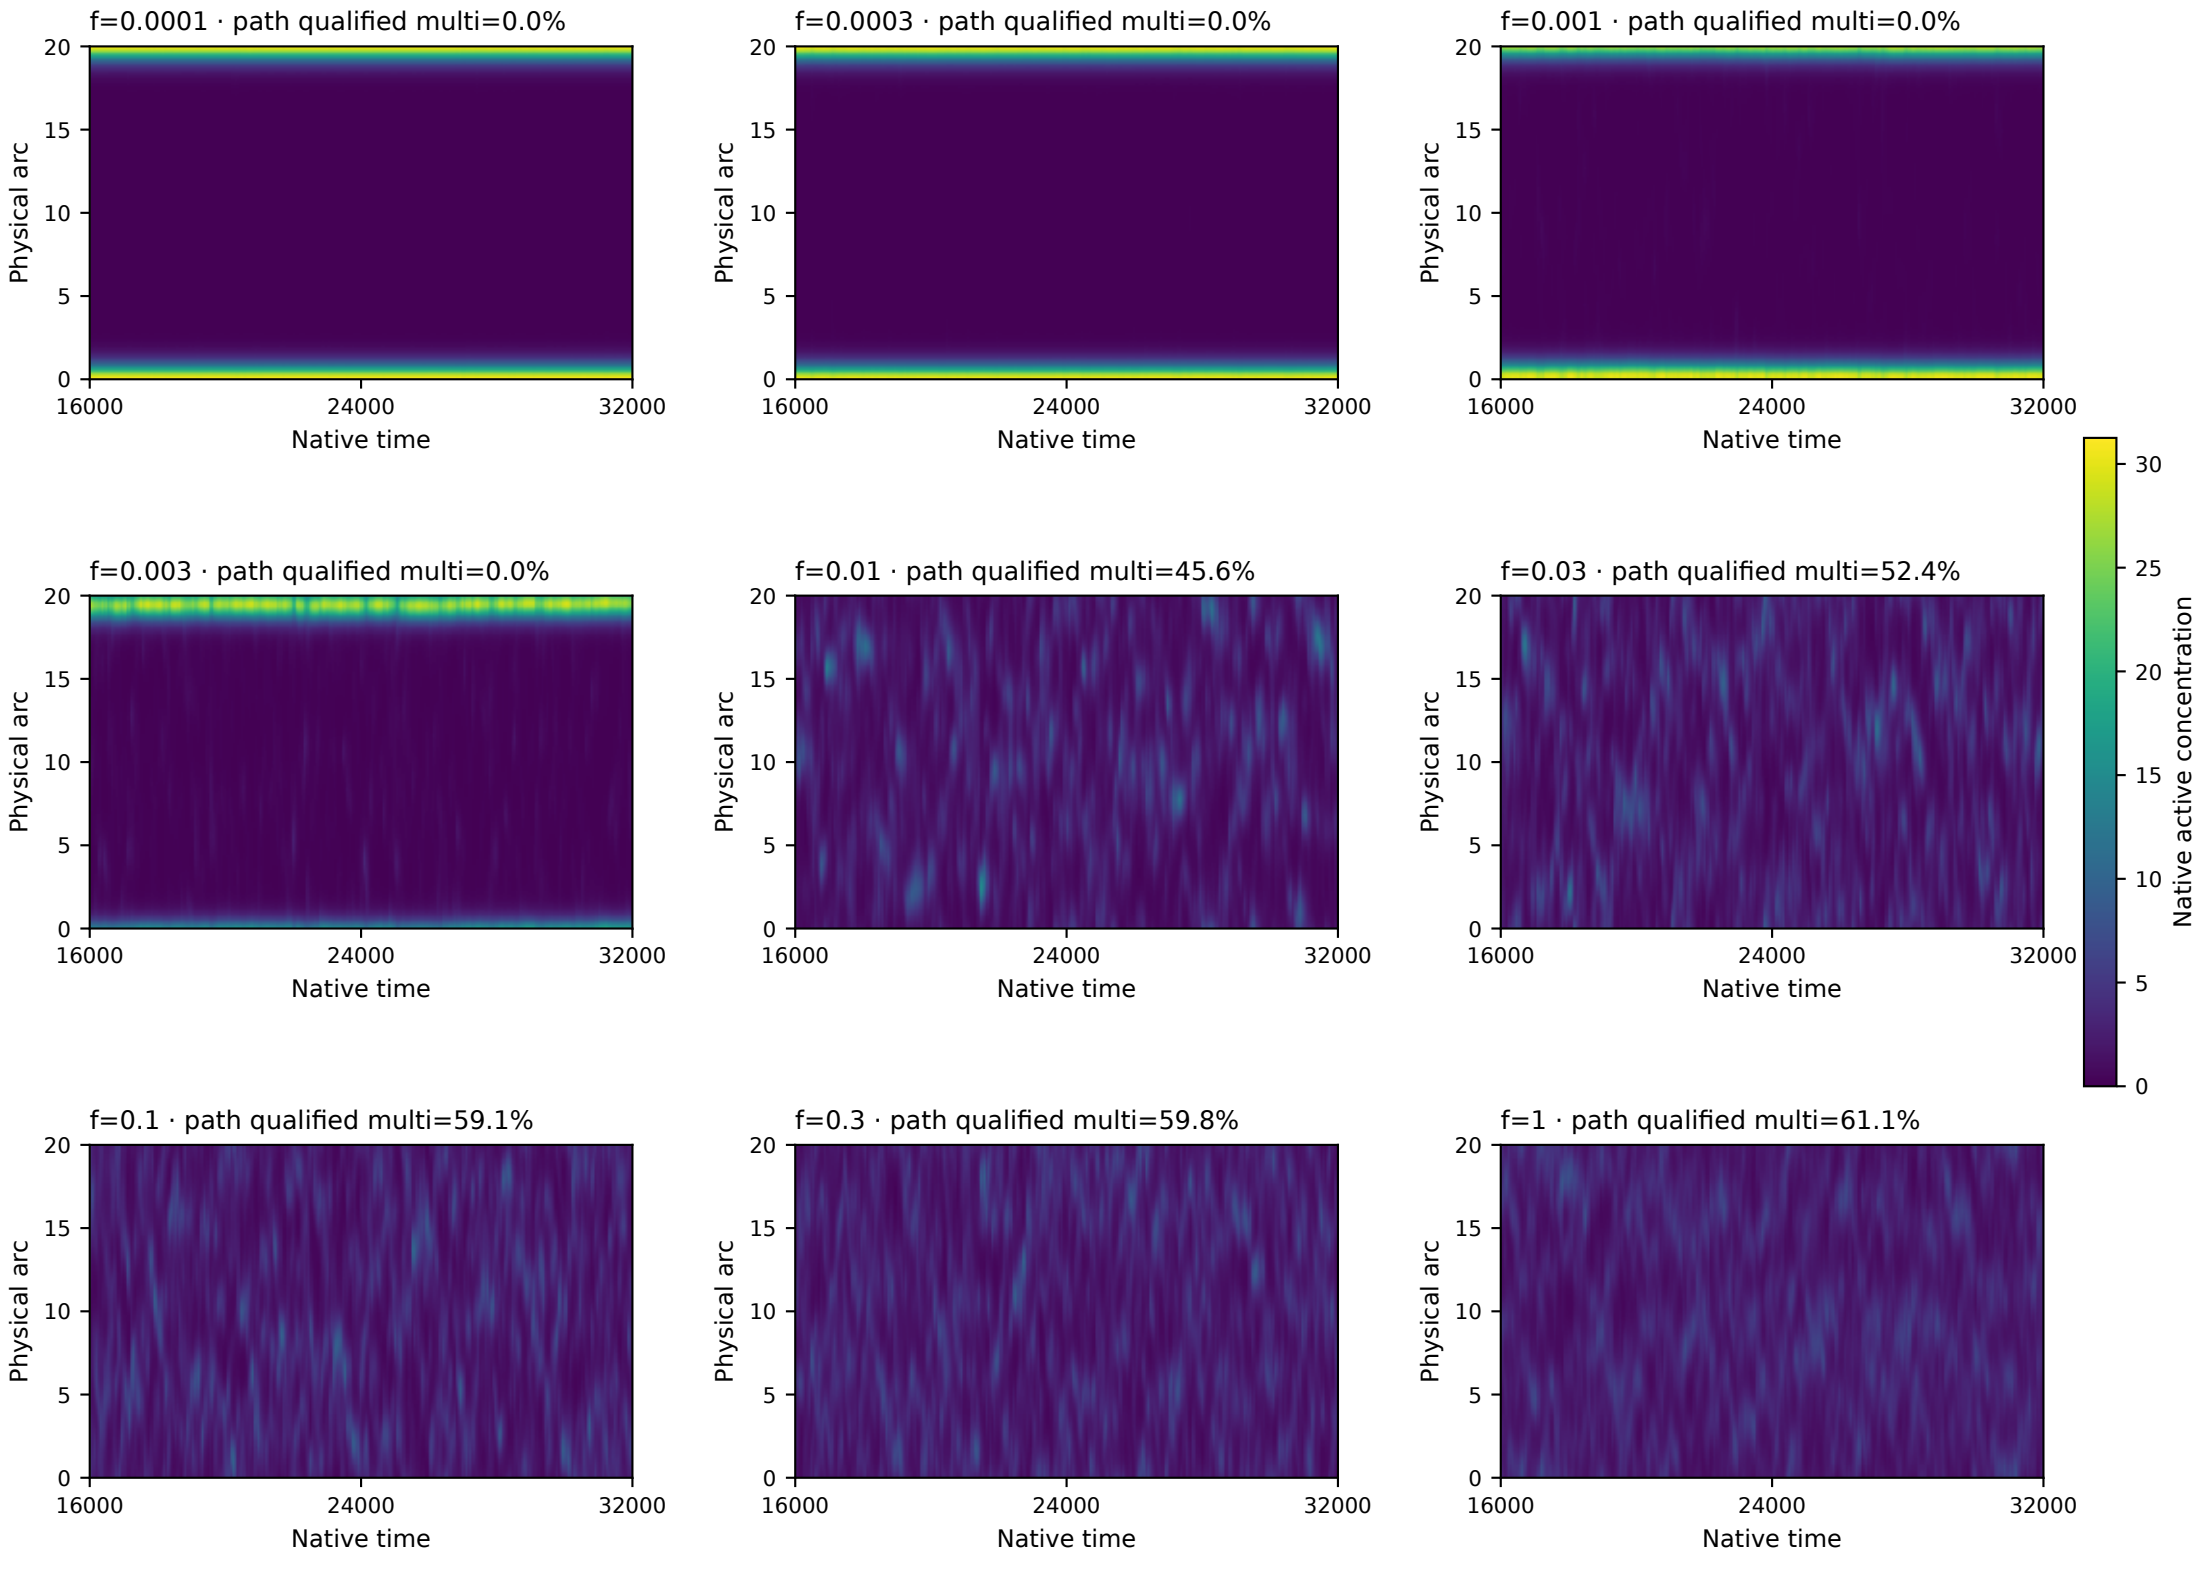


No field alignment, per-history peak normalization, birth/establishment or lifetime classifier. Multi-region counts are qualified at contrast≥10% of own basal.

The first half is discarded as an observed-window choice, without assuming stationarity. Model clocks and input laws remain native and uncalibrated.

Goryachev, C=40: all nine input strengths

Second-half descriptor medoid per condition, with smallest-seed tie breaking. Common zero-based native activity scale across this page.

f=0.001/0.003/0.01/0.03/0.1: n=12. Other four levels: n=2 (both tie). These examples do not estimate frequency.

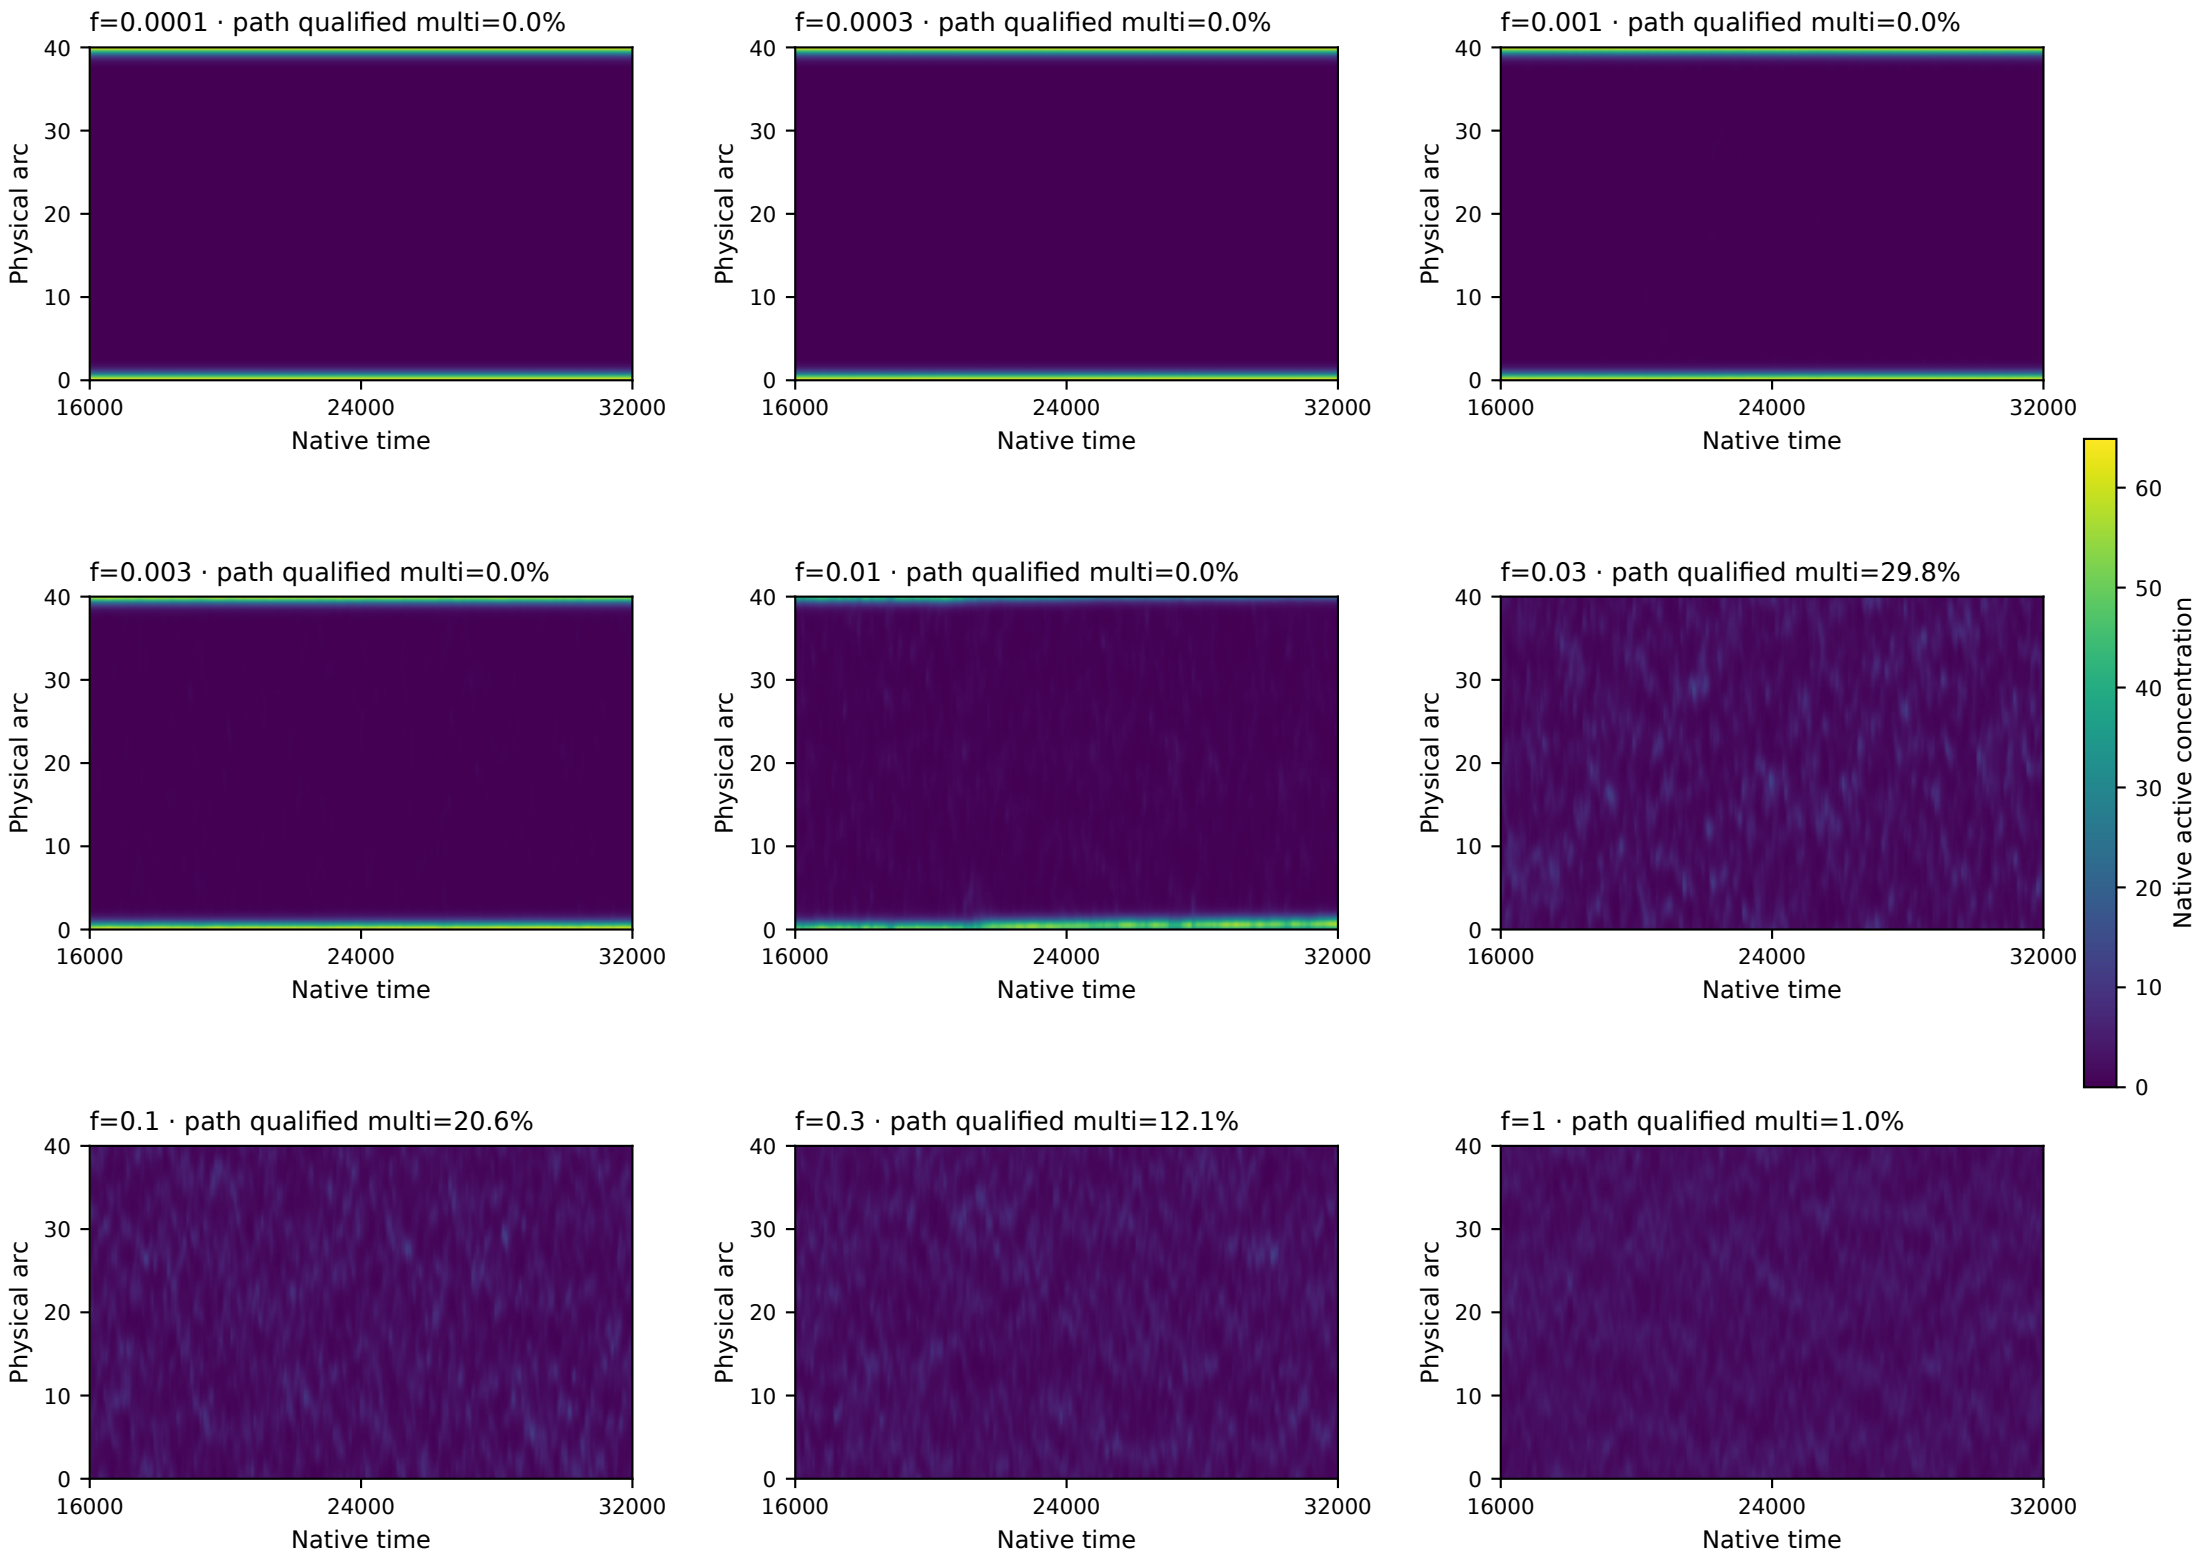


No field alignment, per-history peak normalization, birth/establishment or lifetime classifier. Multi-region counts are qualified at contrast≥10% of own basal.

The first half is discarded as an observed-window choice, without assuming stationarity. Model clocks and input laws remain native and uncalibrated.

Goryachev, C=60: all nine input strengths

Second-half descriptor medoid per condition, with smallest-seed tie breaking. Common zero-based native activity scale across this page.

f=0.001/0.003/0.01/0.03/0.1: n=12. Other four levels: n=2 (both tie). These examples do not estimate frequency.

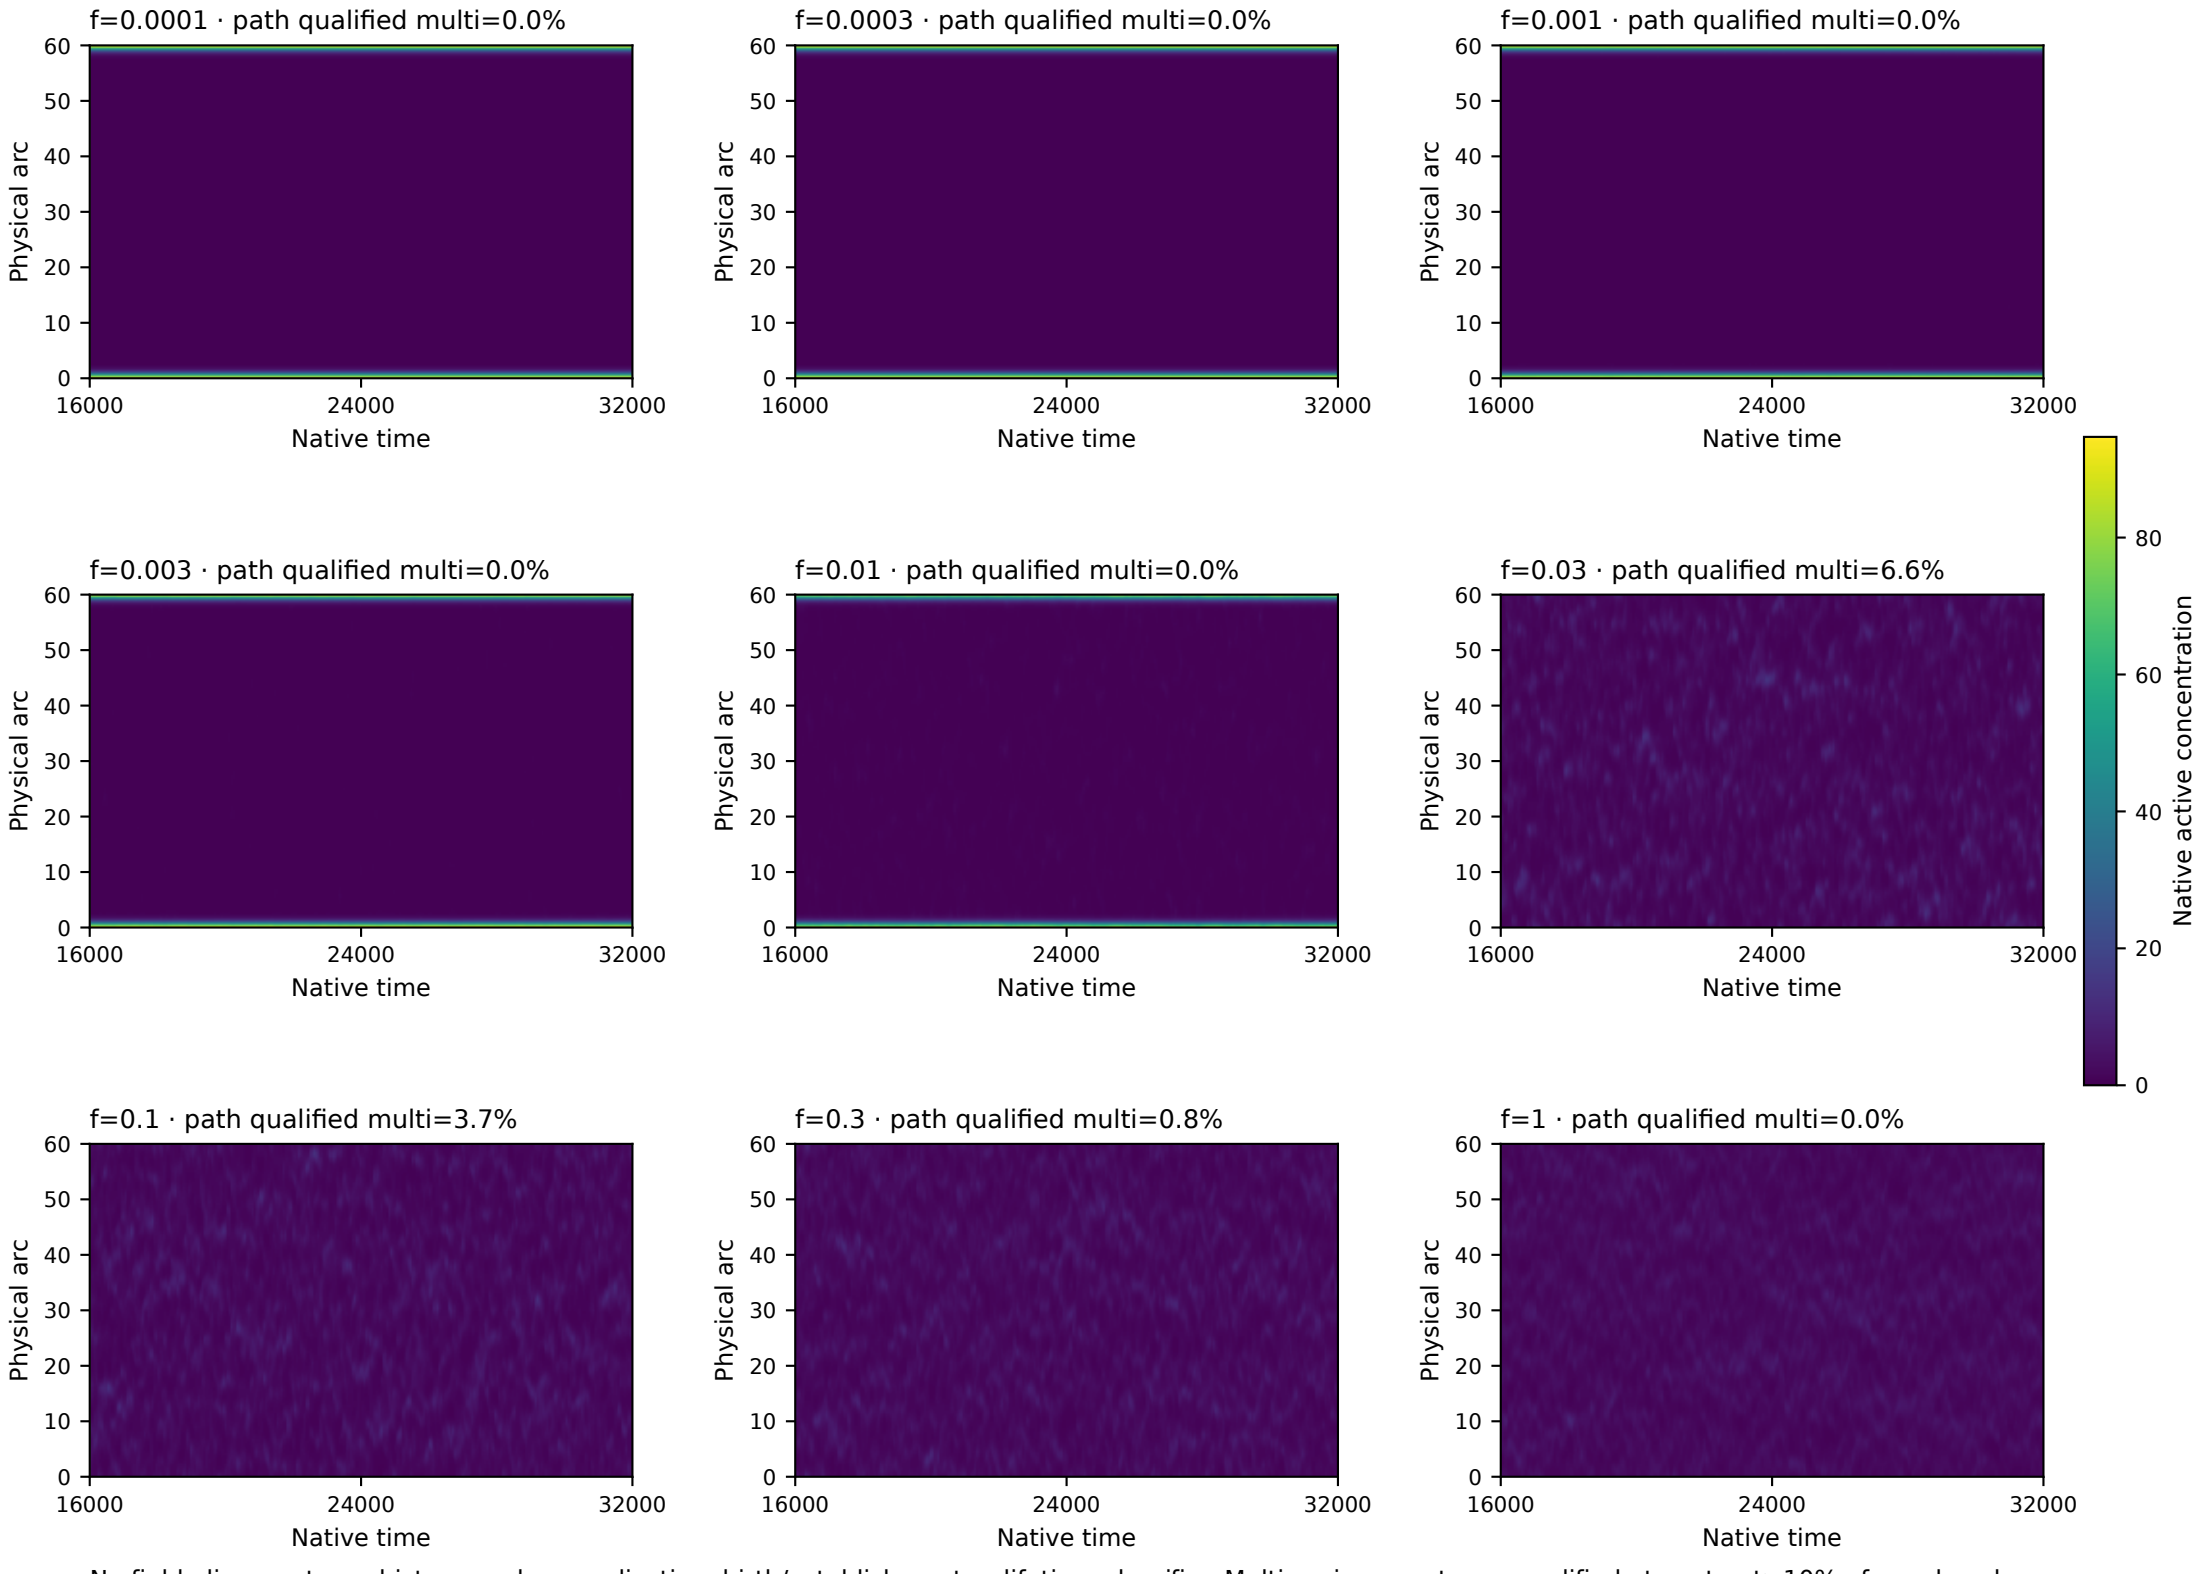


No field alignment, per-history peak normalization, birth/establishment or lifetime classifier. Multi-region counts are qualified at contrast≥10% of own basal.

The first half is discarded as an observed-window choice, without assuming stationarity. Model clocks and input laws remain native and uncalibrated.

Holmes 3, C=20: all nine input strengths

Second-half descriptor medoid per condition, with smallest-seed tie breaking. Common zero-based native activity scale across this page.

f=0.001/0.003/0.01/0.03/0.1: n=12. Other four levels: n=2 (both tie). These examples do not estimate frequency.

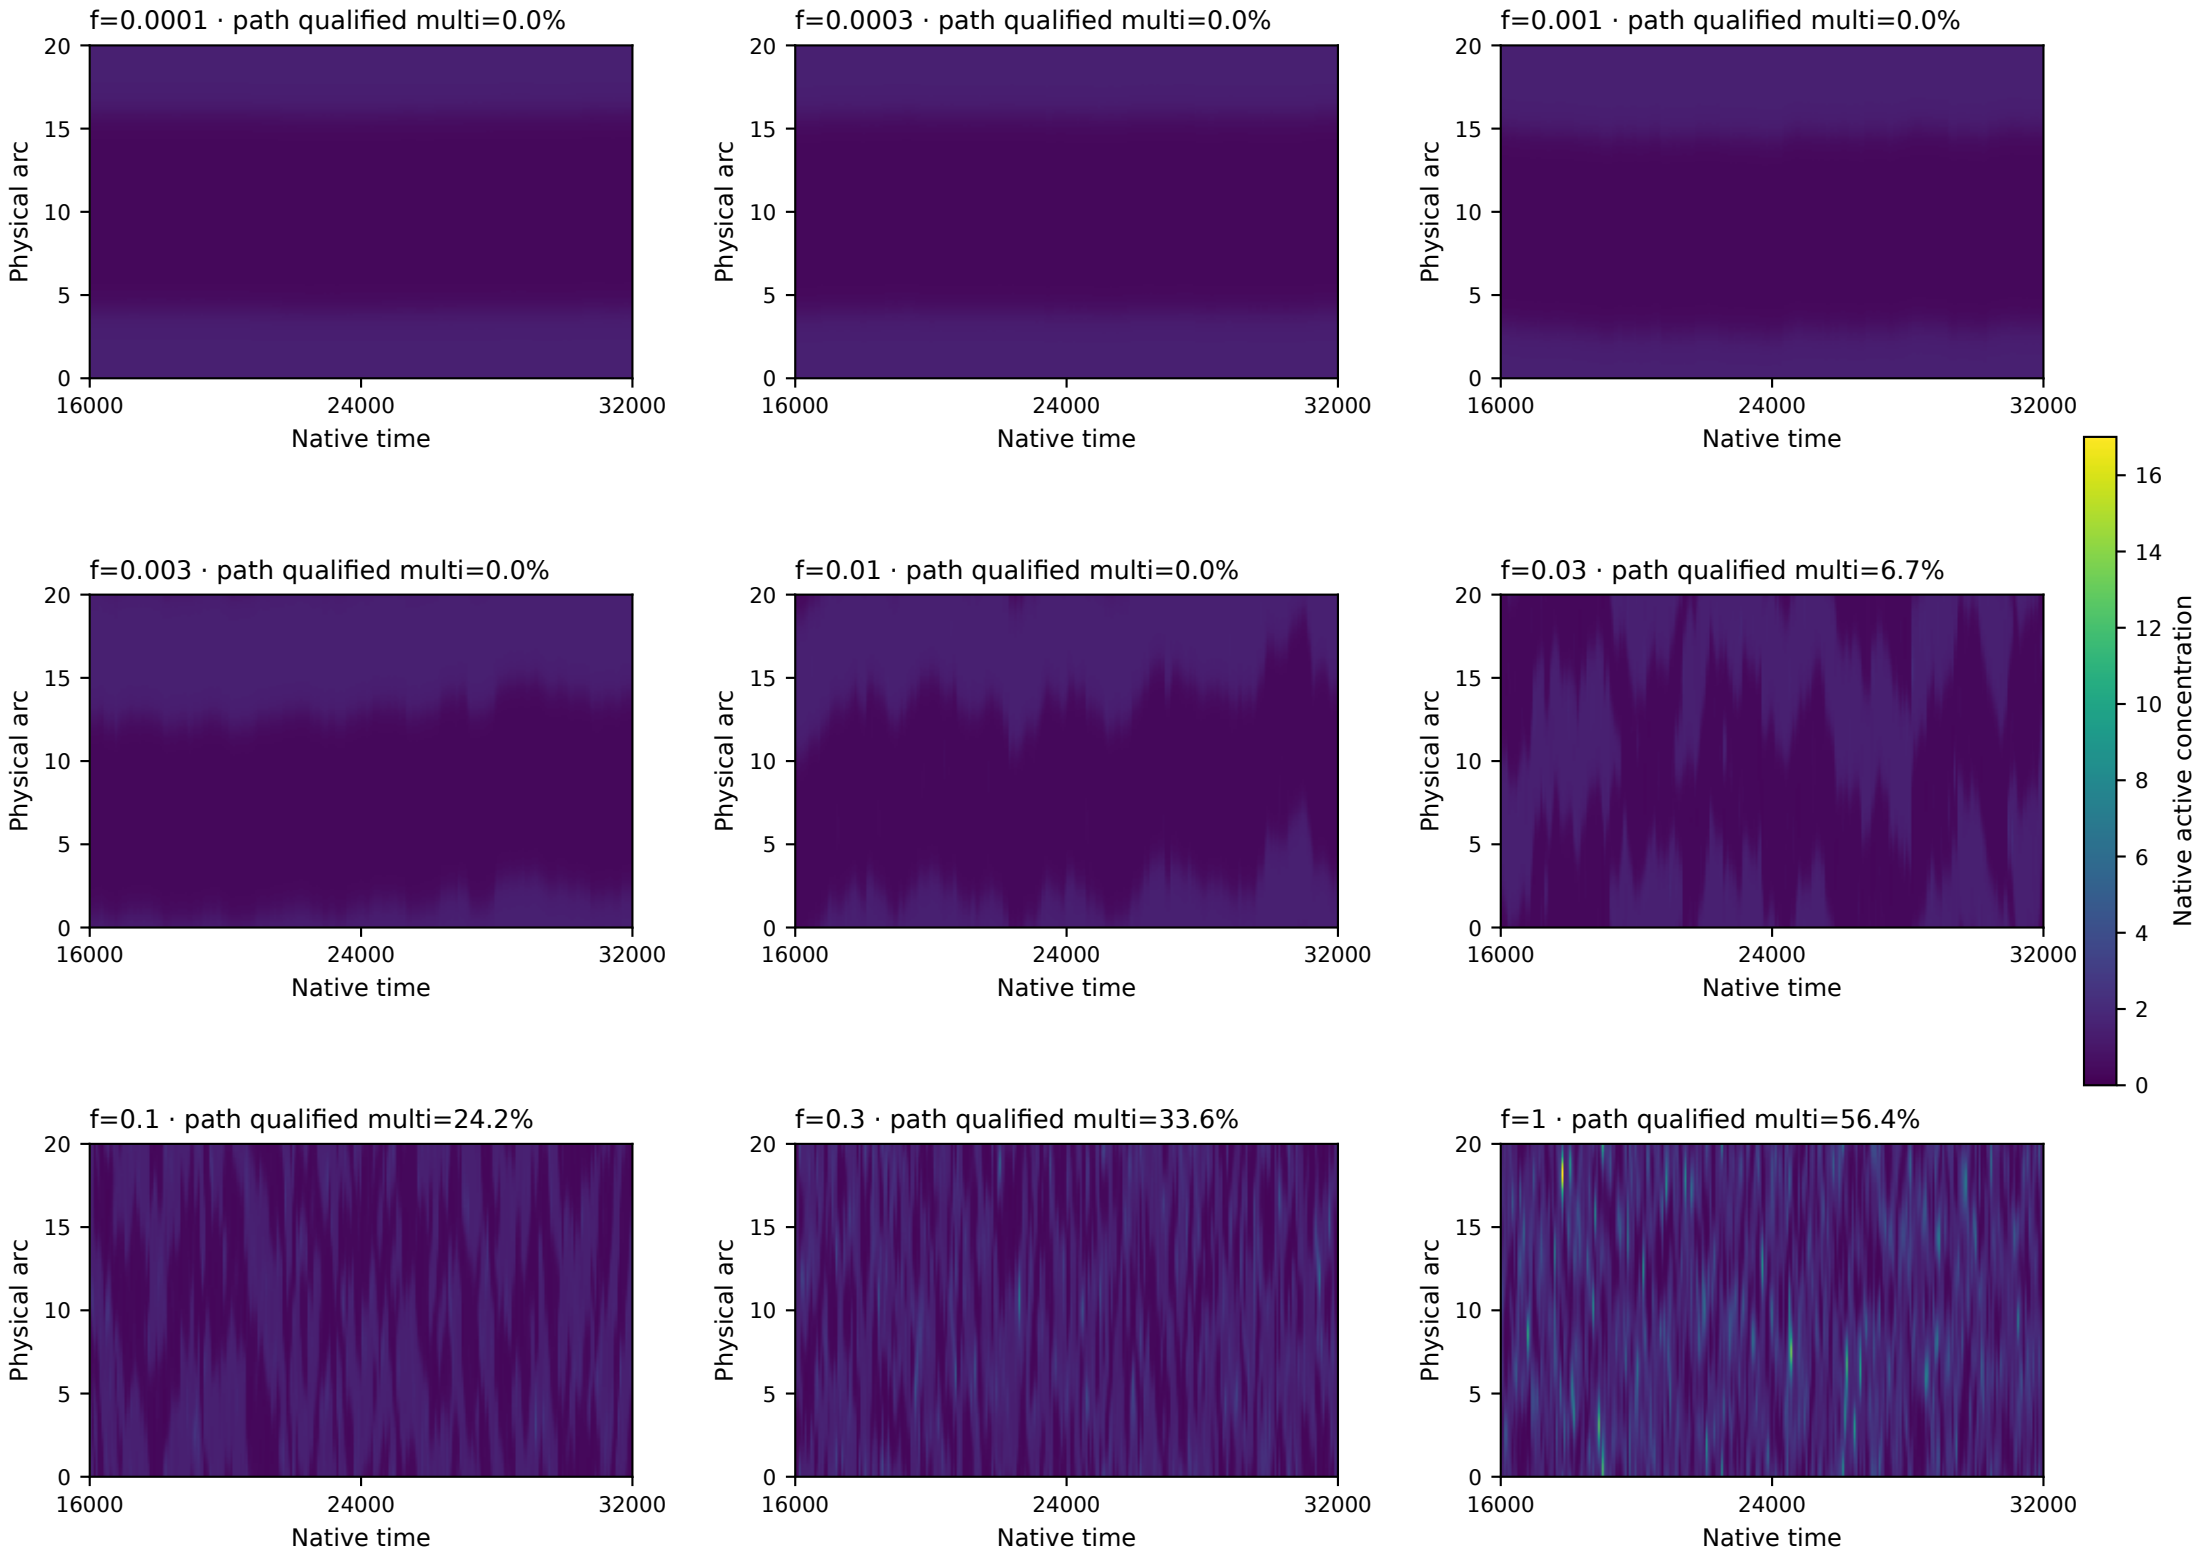


No field alignment, per-history peak normalization, birth/establishment or lifetime classifier. Multi-region counts are qualified at contrast≥10% of own basal.

The first half is discarded as an observed-window choice, without assuming stationarity. Model clocks and input laws remain native and uncalibrated.

Holmes 3, C=40: all nine input strengths

Second-half descriptor medoid per condition, with smallest-seed tie breaking. Common zero-based native activity scale across this page.

f=0.001/0.003/0.01/0.03/0.1: n=12. Other four levels: n=2 (both tie). These examples do not estimate frequency.

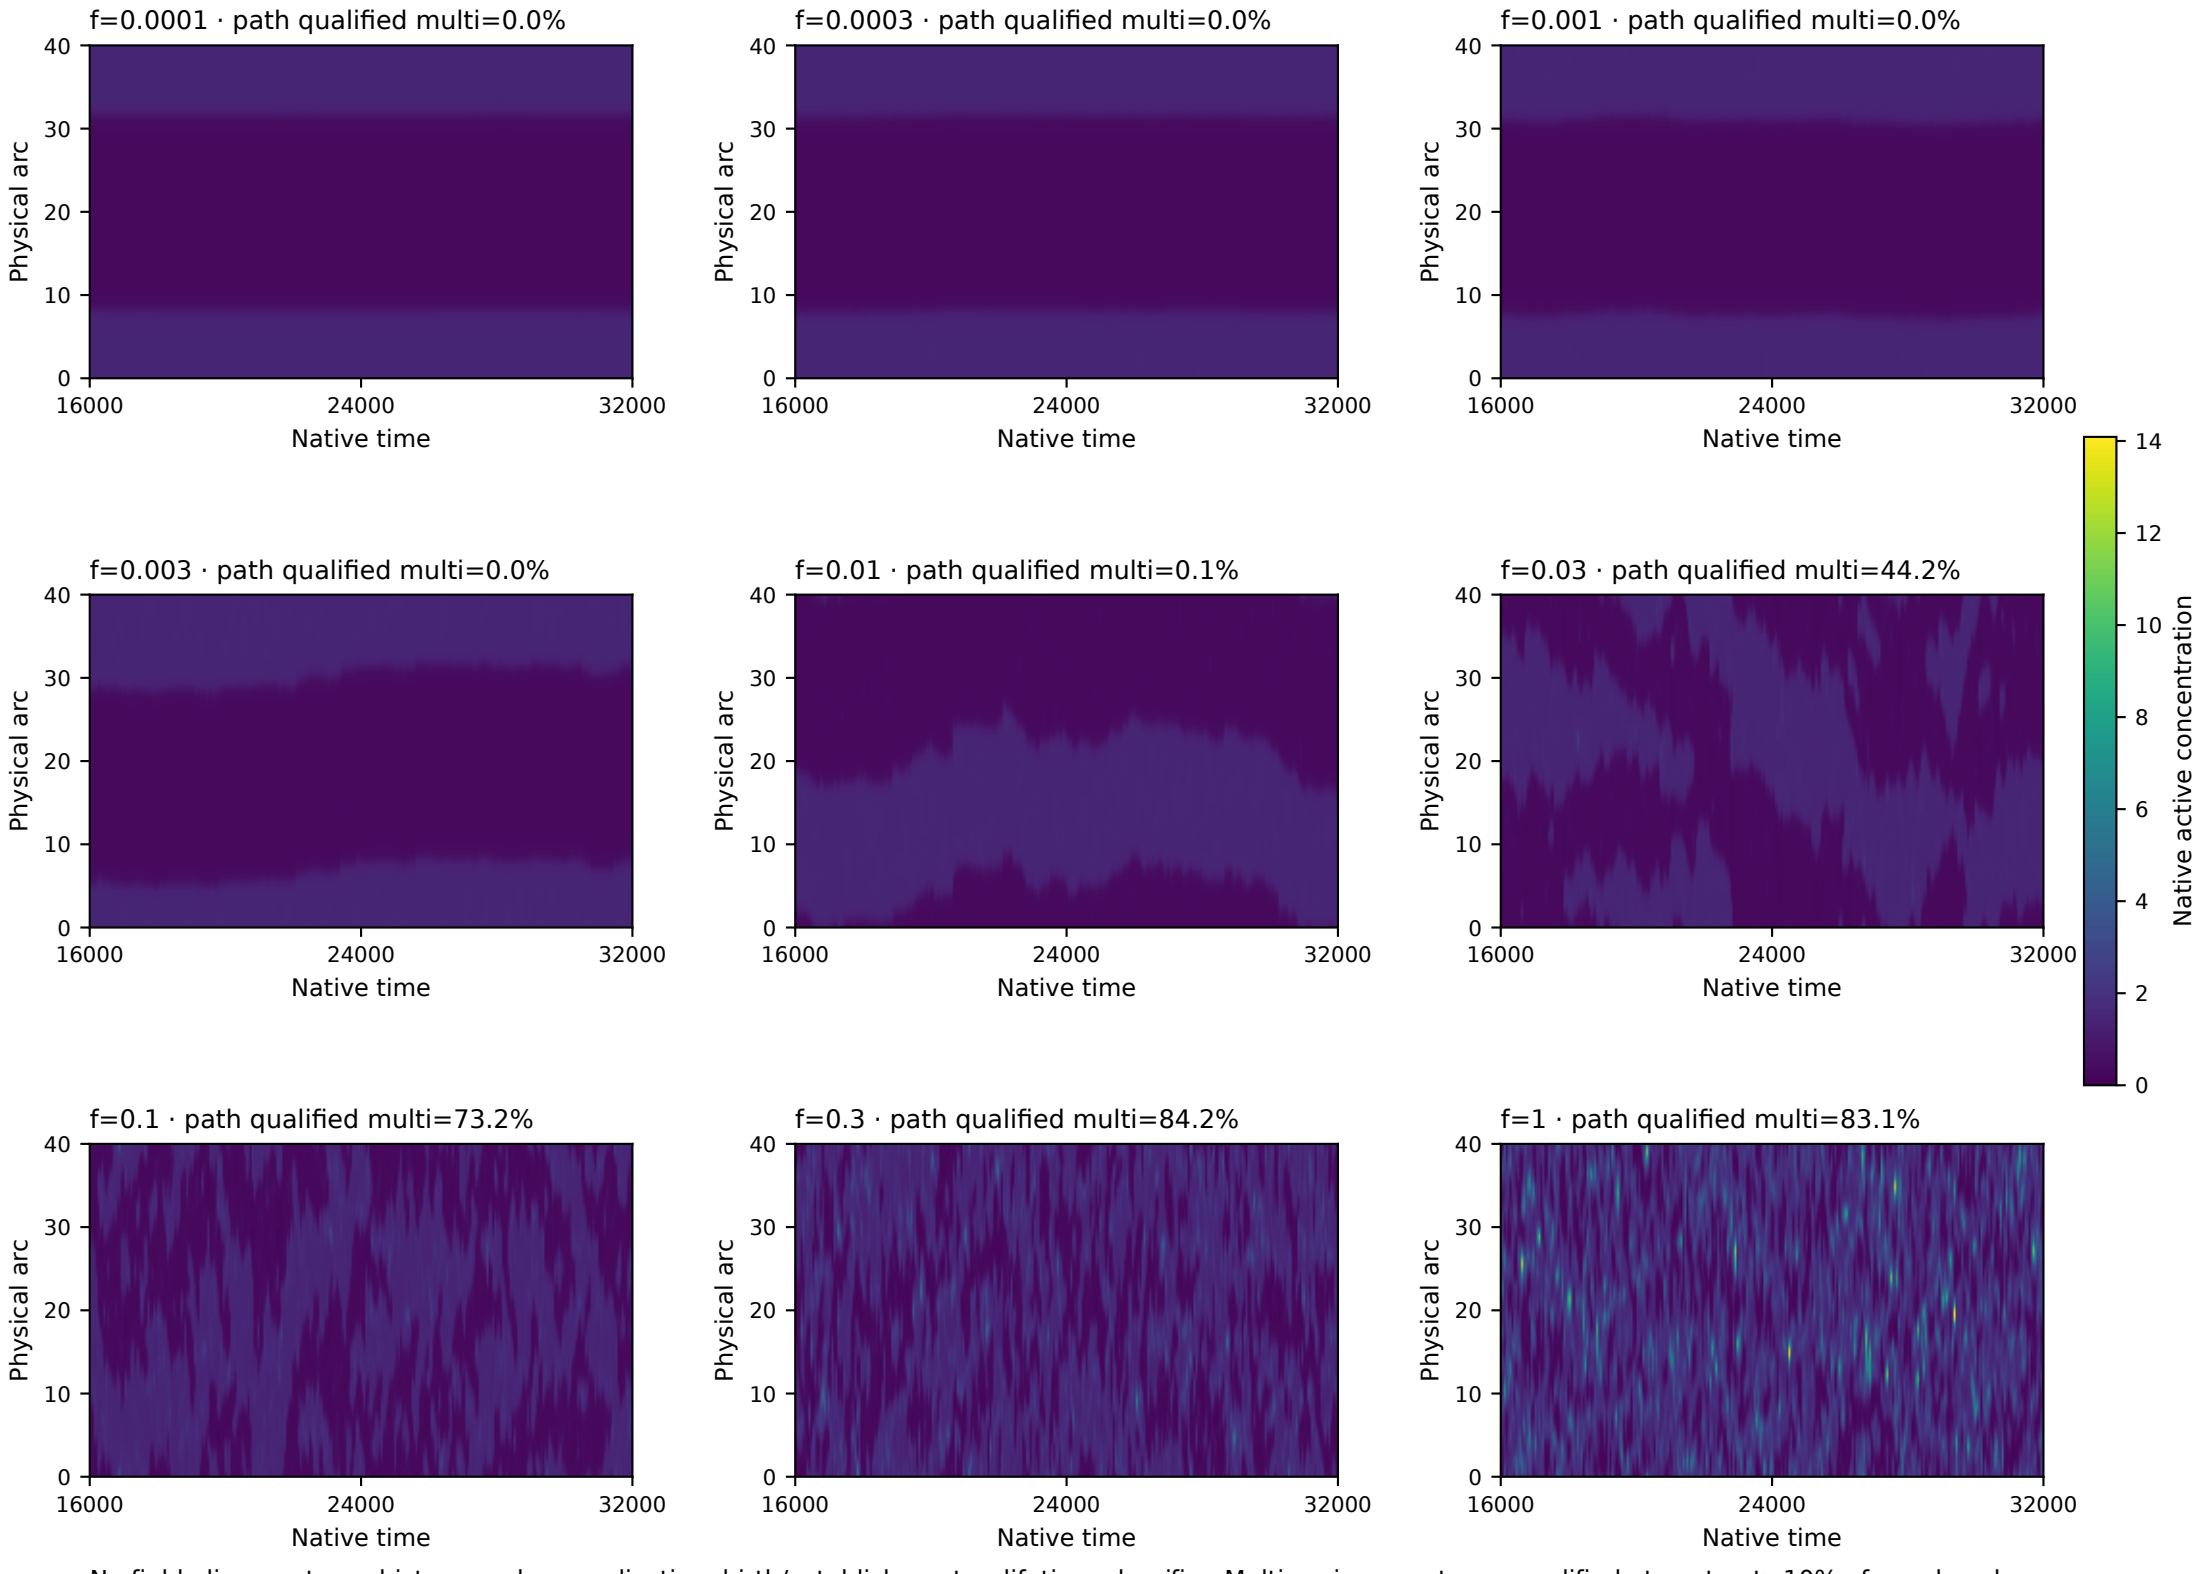


No field alignment, per-history peak normalization, birth/establishment or lifetime classifier. Multi-region counts are qualified at contrast≥10% of own basal.

The first half is discarded as an observed-window choice, without assuming stationarity. Model clocks and input laws remain native and uncalibrated.

Holmes 3, C=60: all nine input strengths

Second-half descriptor medoid per condition, with smallest-seed tie breaking. Common zero-based native activity scale across this page.

f=0.001/0.003/0.01/0.03/0.1: n=12. Other four levels: n=2 (both tie). These examples do not estimate frequency.

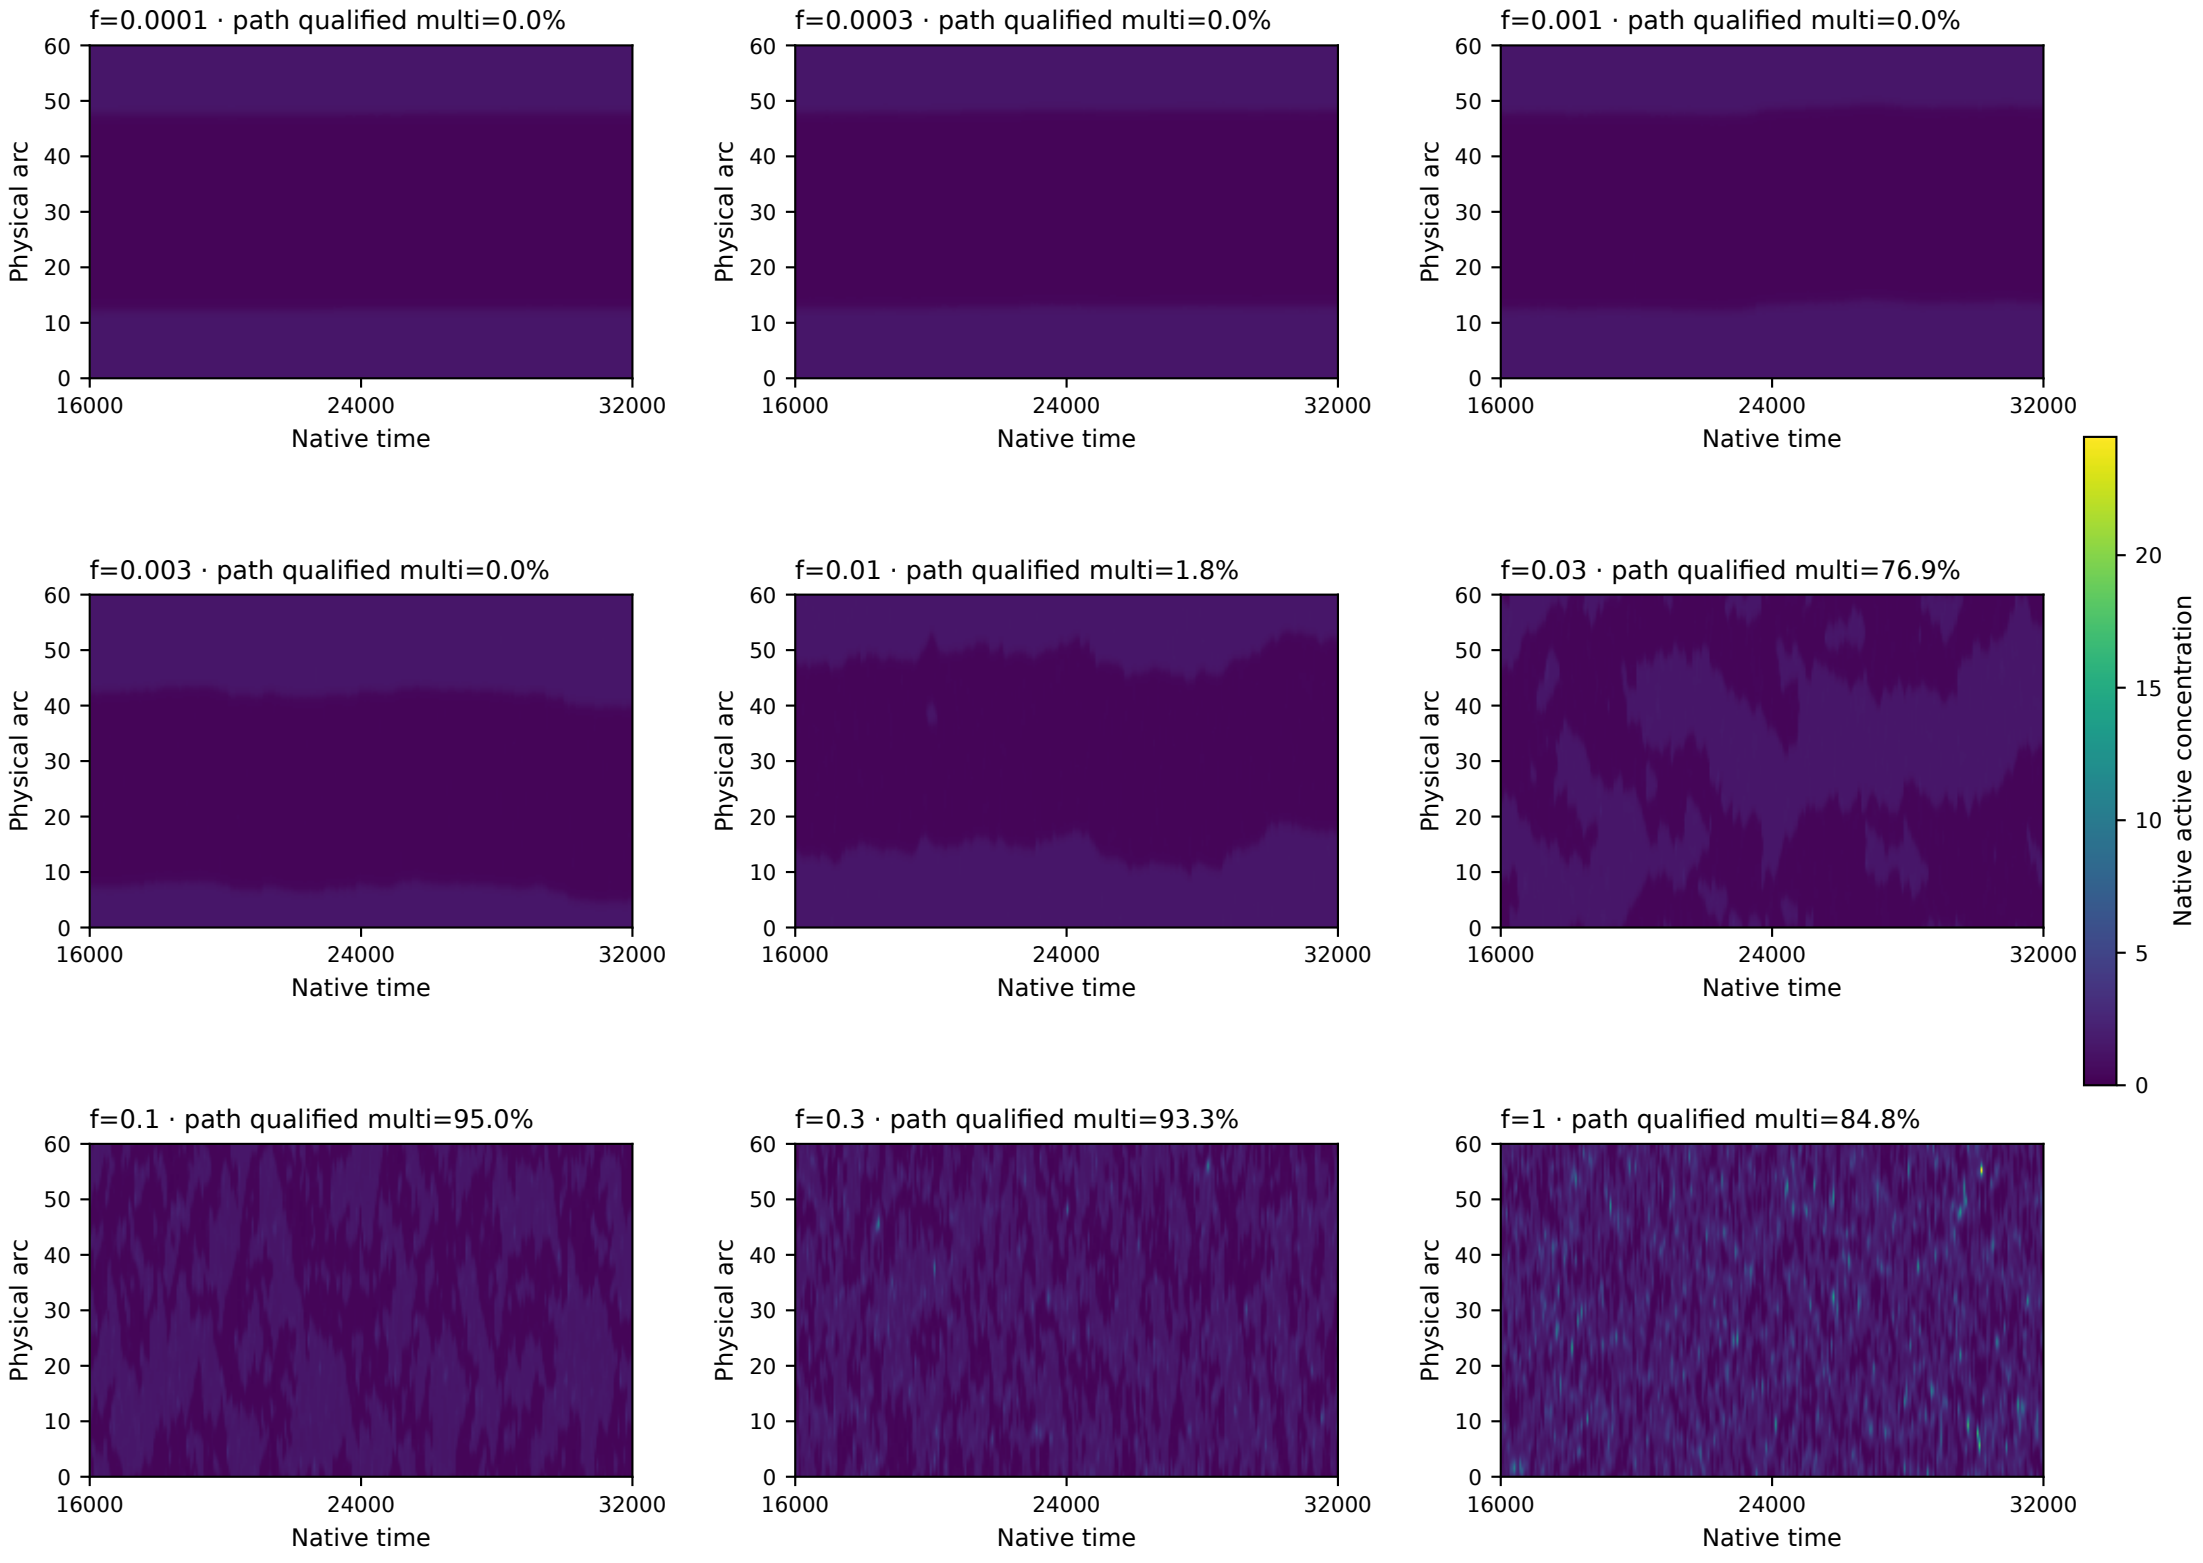


No field alignment, per-history peak normalization, birth/establishment or lifetime classifier. Multi-region counts are qualified at contrast≥10% of own basal.

The first half is discarded as an observed-window choice, without assuming stationarity. Model clocks and input laws remain native and uncalibrated.

Spring ring, C_0=1: all nine input strengths

Second-half descriptor medoid per condition, with smallest-seed tie breaking. Common zero-based native activity scale across this page.

f=0.001/0.003/0.01/0.03/0.1: n=12. Other four levels: n=2 (both tie). These examples do not estimate frequency.

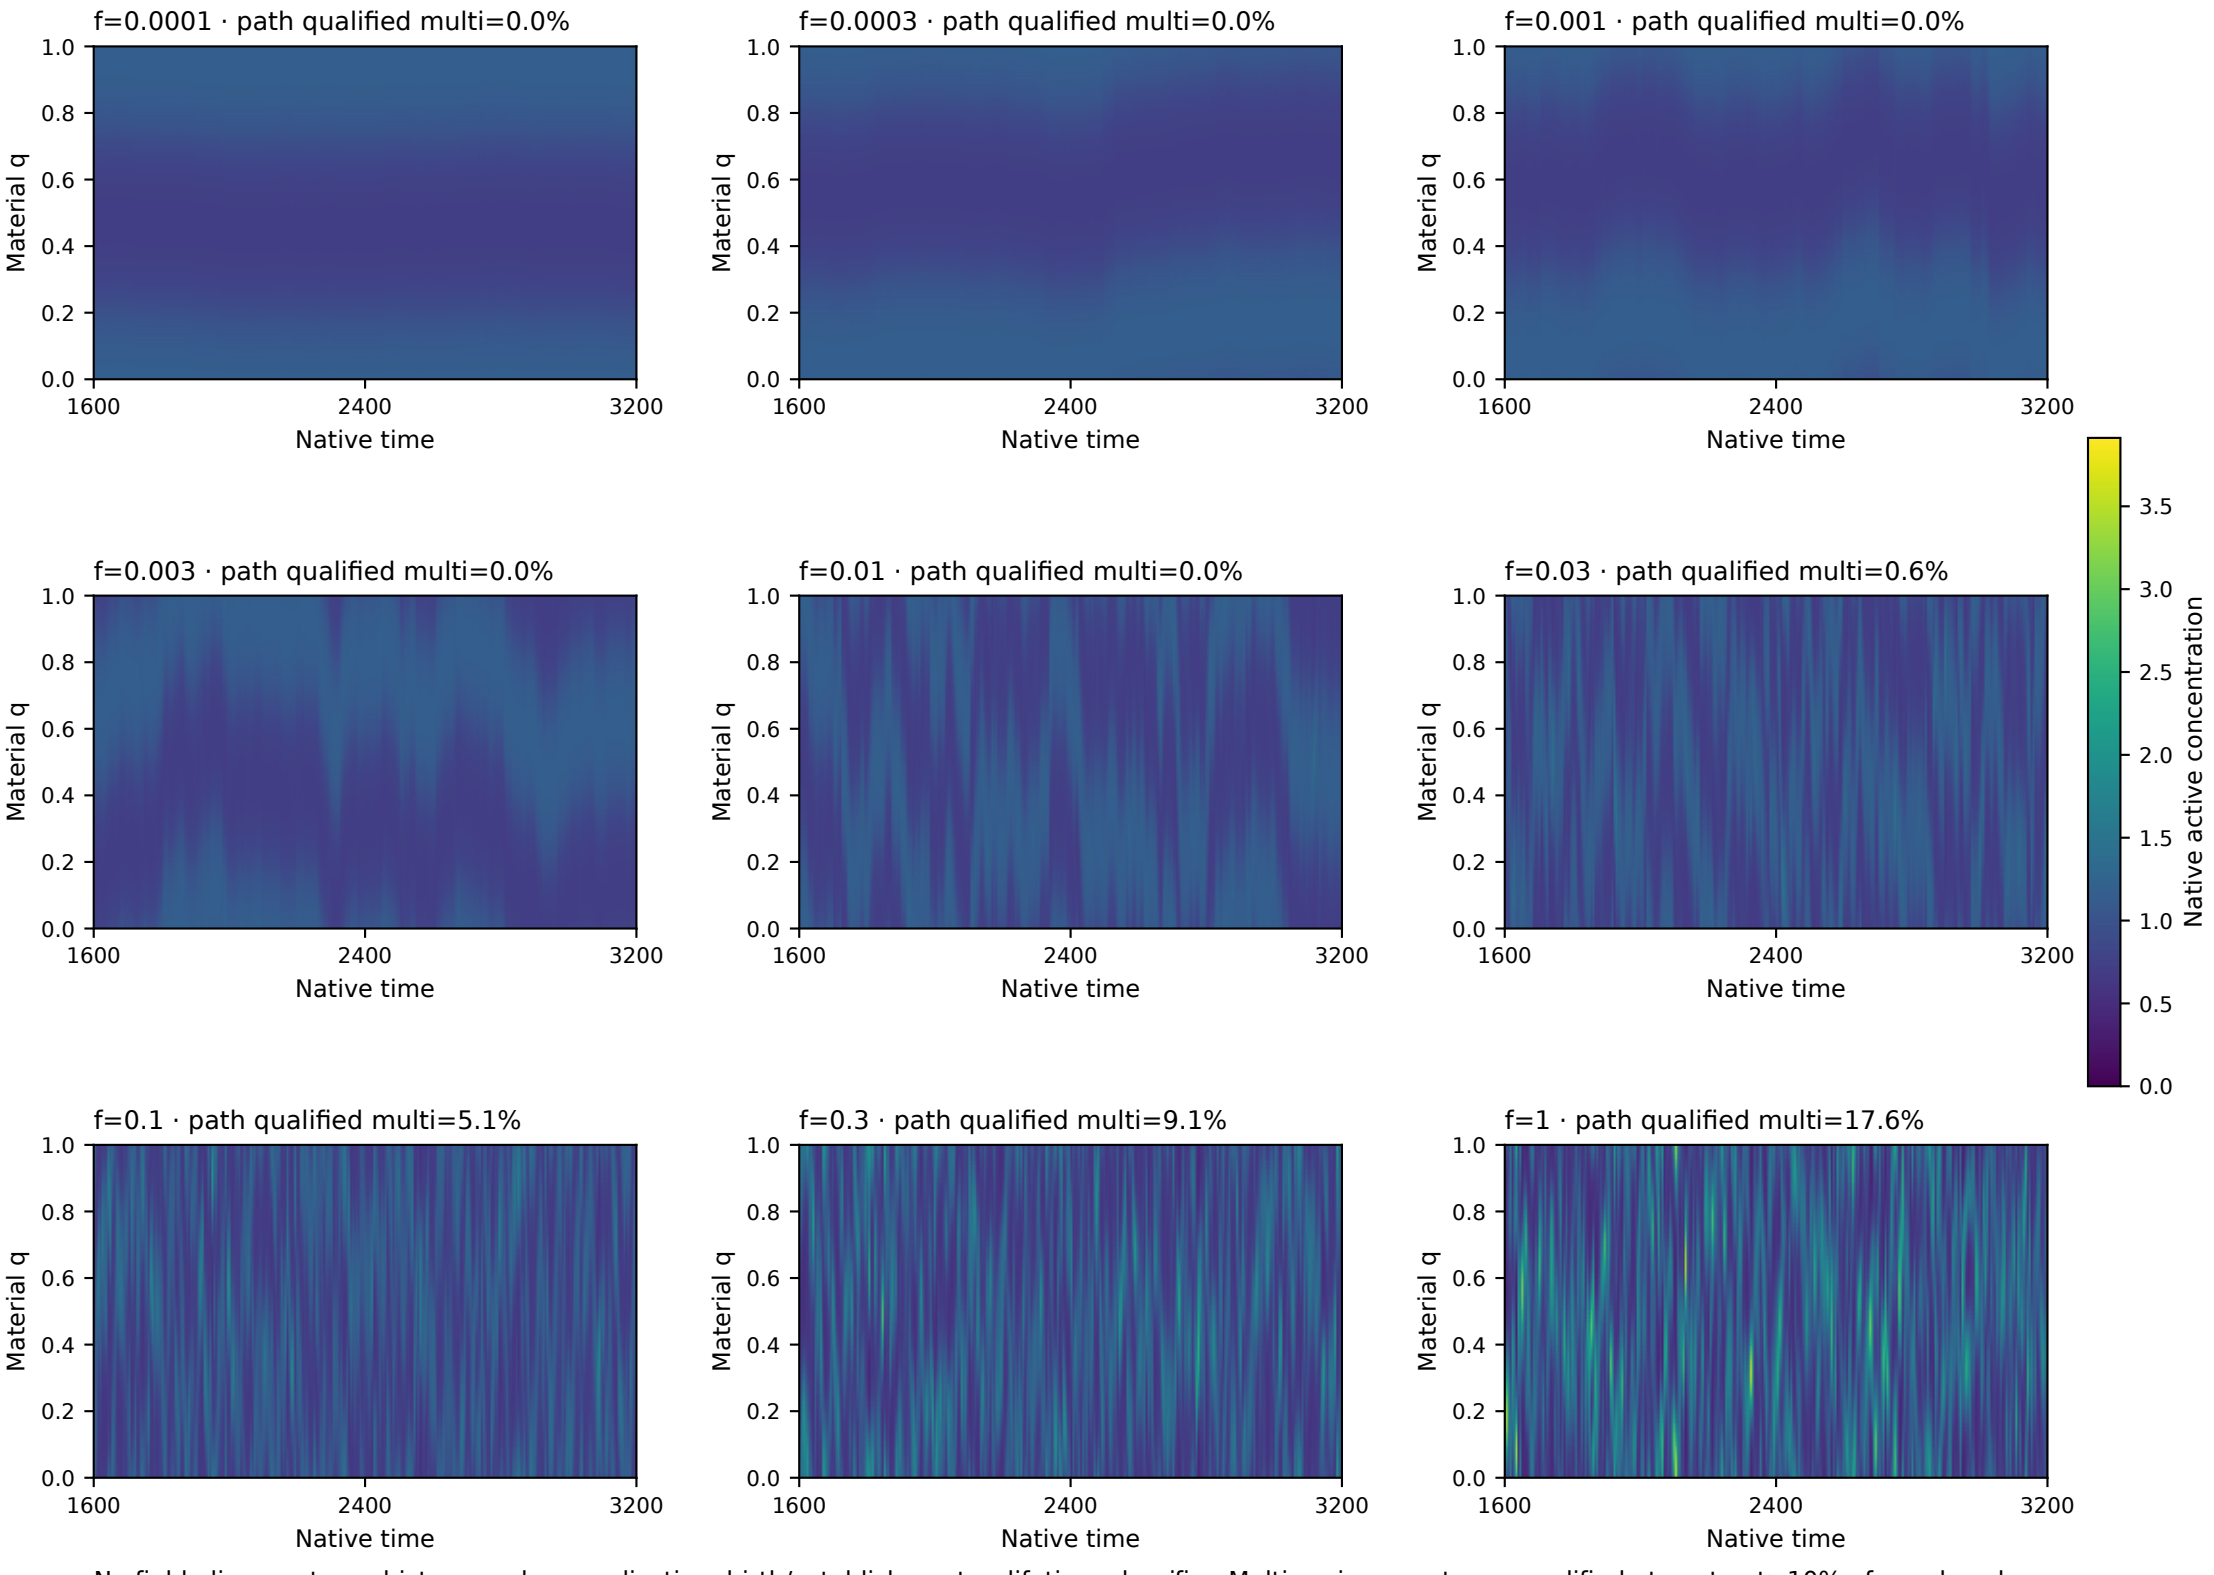


No field alignment, per-history peak normalization, birth/establishment or lifetime classifier. Multi-region counts are qualified at contrast≥10% of own basal.

The first half is discarded as an observed-window choice, without assuming stationarity. Model clocks and input laws remain native and uncalibrated.

Spring ring, C_0=2: all nine input strengths

Second-half descriptor medoid per condition, with smallest-seed tie breaking. Common zero-based native activity scale across this page.

f=0.001/0.003/0.01/0.03/0.1: n=12. Other four levels: n=2 (both tie). These examples do not estimate frequency.

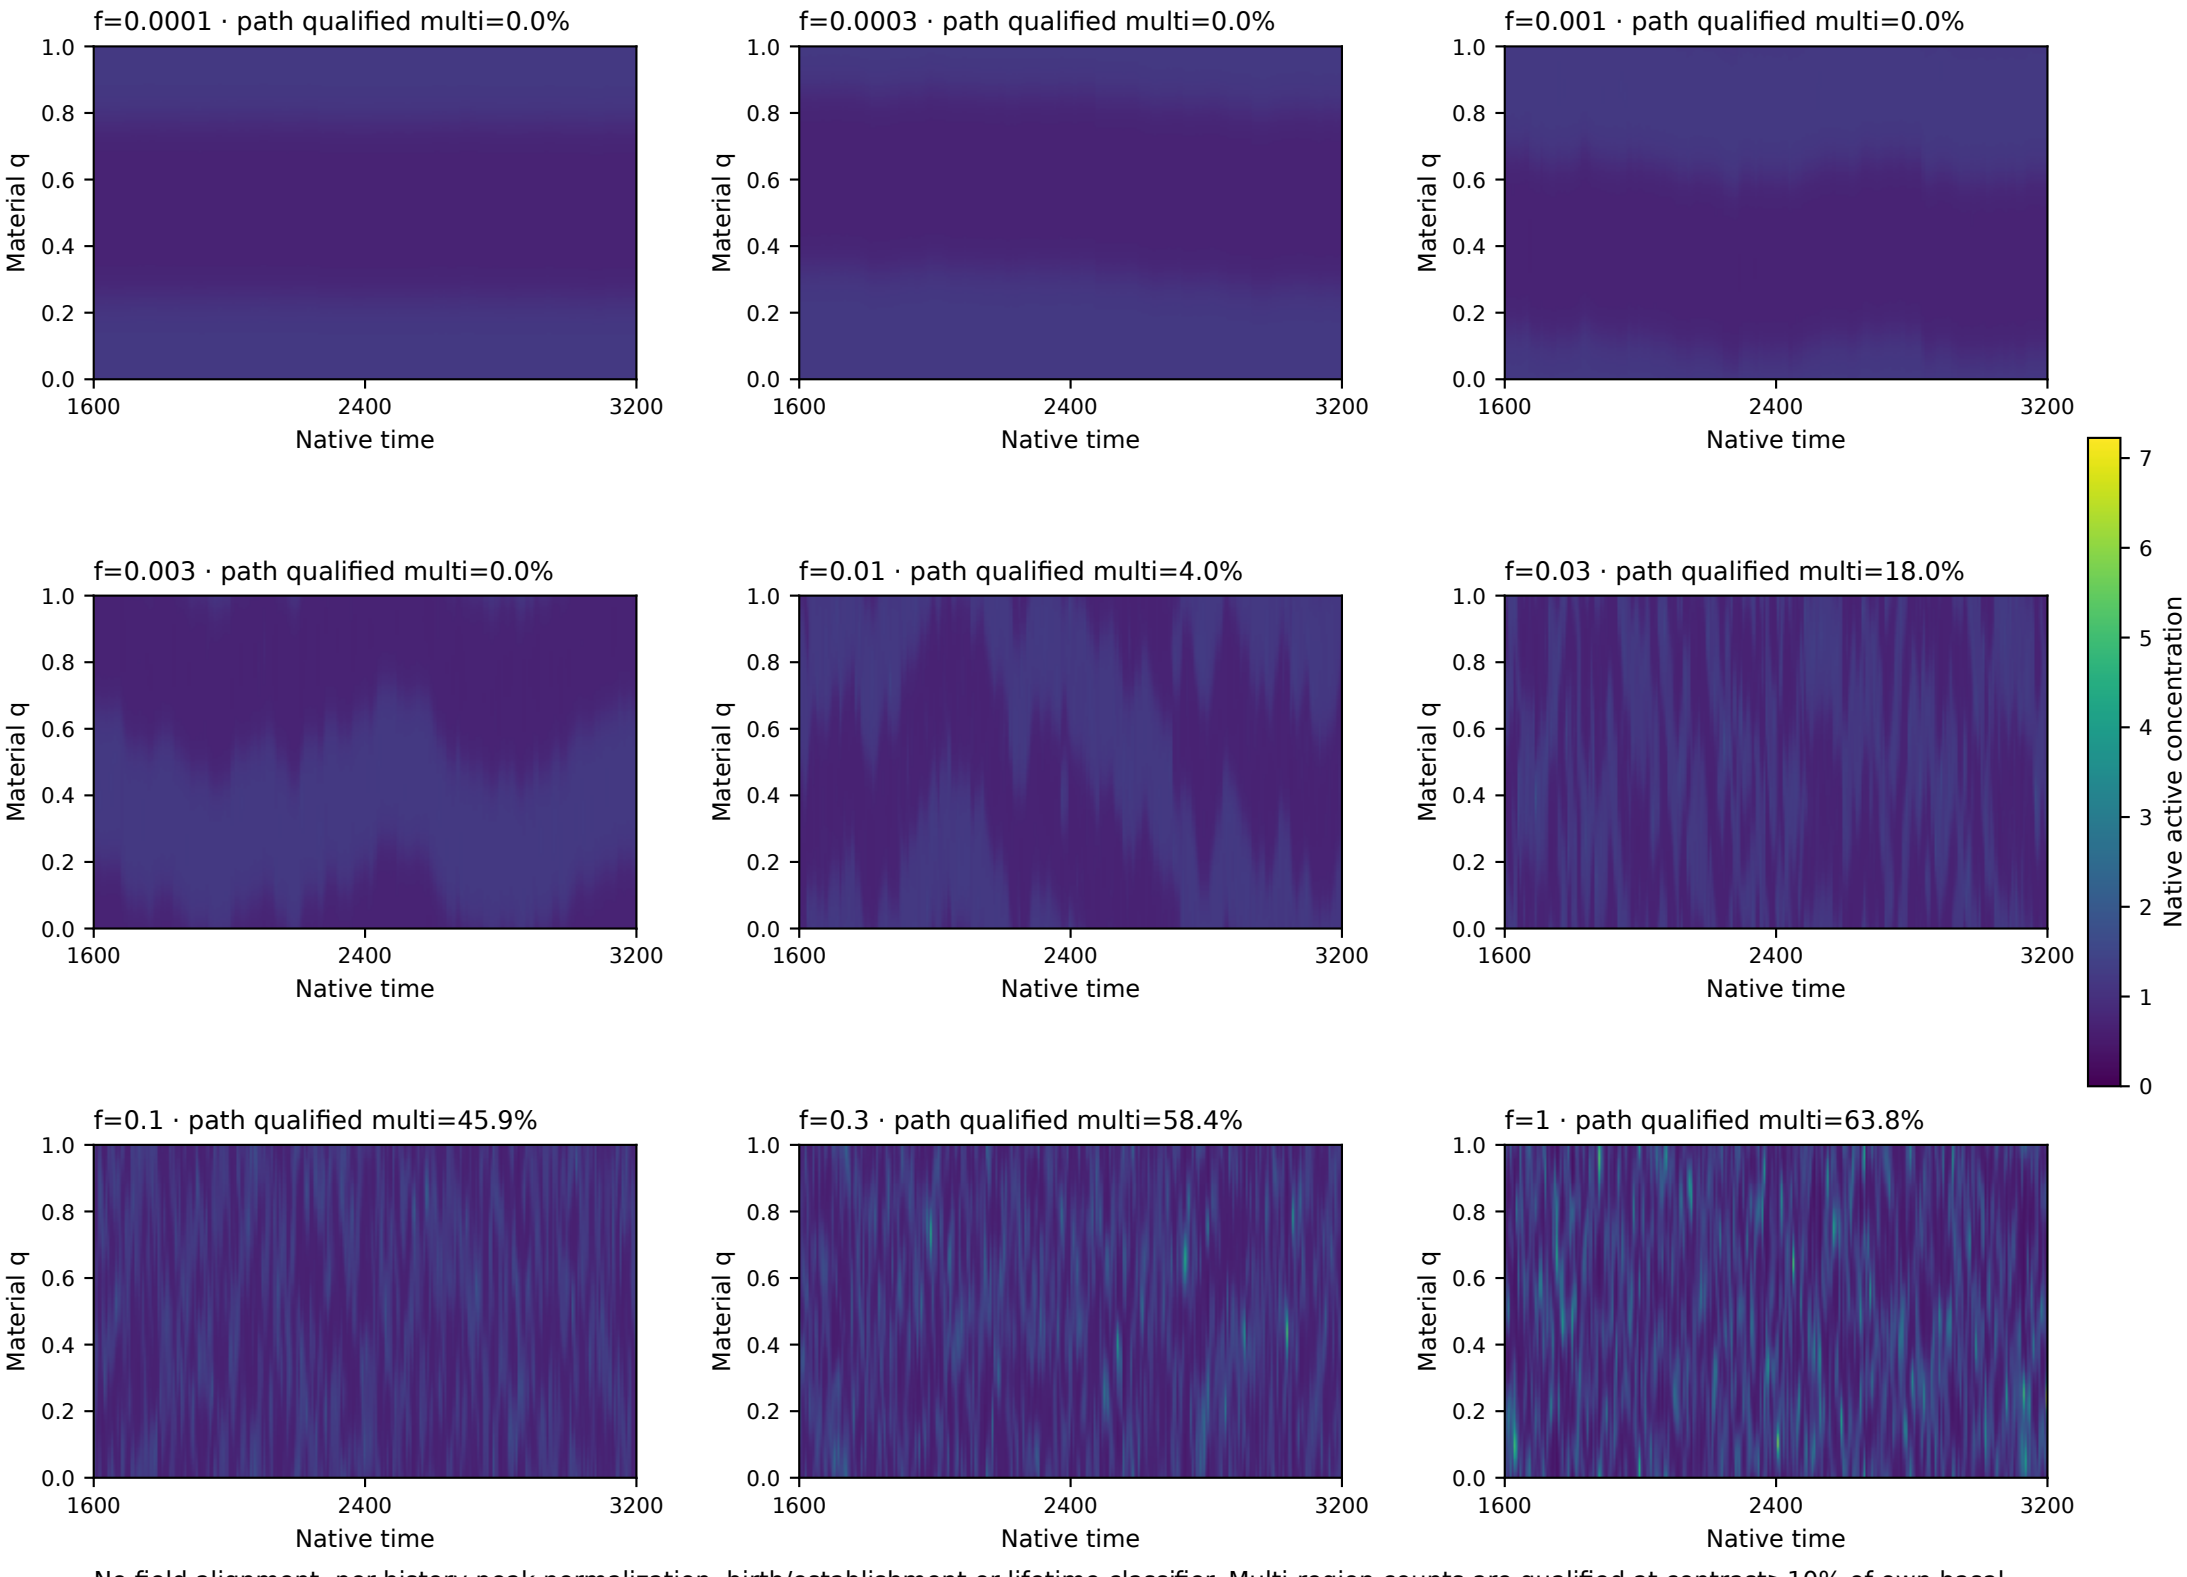


No field alignment, per-history peak normalization, birth/establishment or lifetime classifier. Multi-region counts are qualified at contrast≥10% of own basal.

The first half is discarded as an observed-window choice, without assuming stationarity. Model clocks and input laws remain native and uncalibrated.

Spring ring, C₀=3: all nine input strengths

Second-half descriptor medoid per condition, with smallest-seed tie breaking. Common zero-based native activity scale across this page.

f=0.001/0.003/0.01/0.03/0.1: n=12. Other four levels: n=2 (both tie). These examples do not estimate frequency.

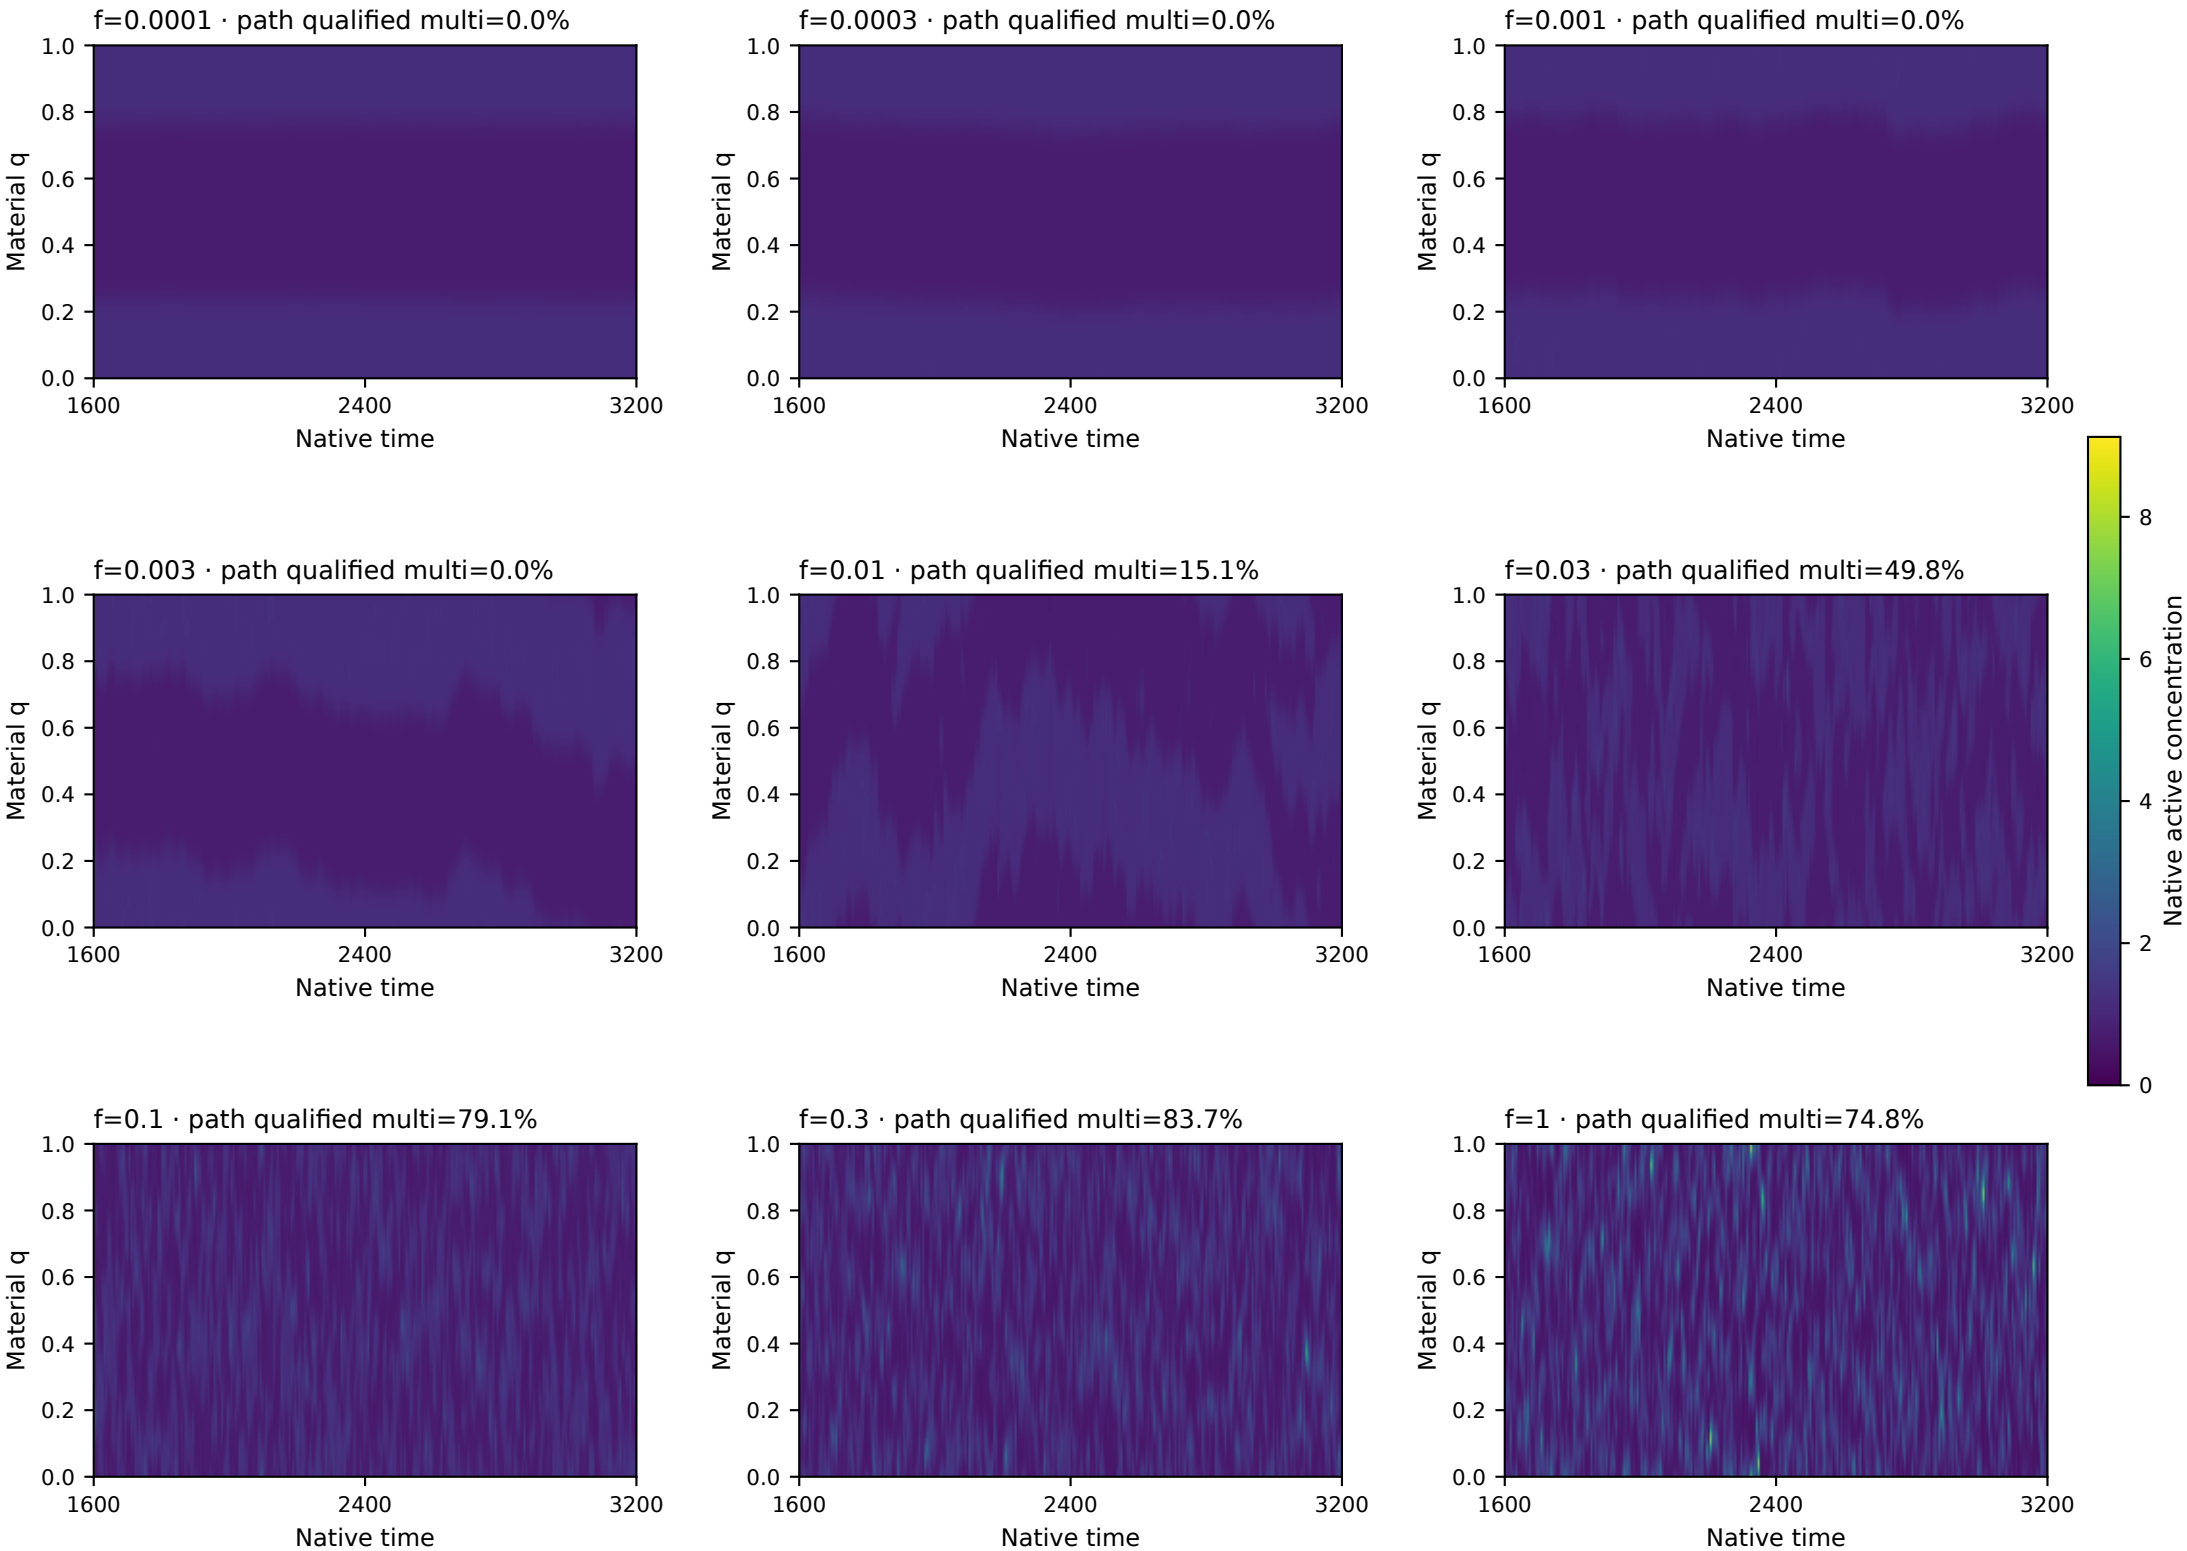

No field alignment, per-history peak normalization, birth/establishment or lifetime classifier. Multi-region counts are qualified at contrast≥10% of own basal.

The first half is discarded as an observed-window choice, without assuming stationarity. Model clocks and input laws remain native and uncalibrated.