
Figure 4 · Input regime shapes size effects on activity memory

Native local organization and second-half summaries across four ring models

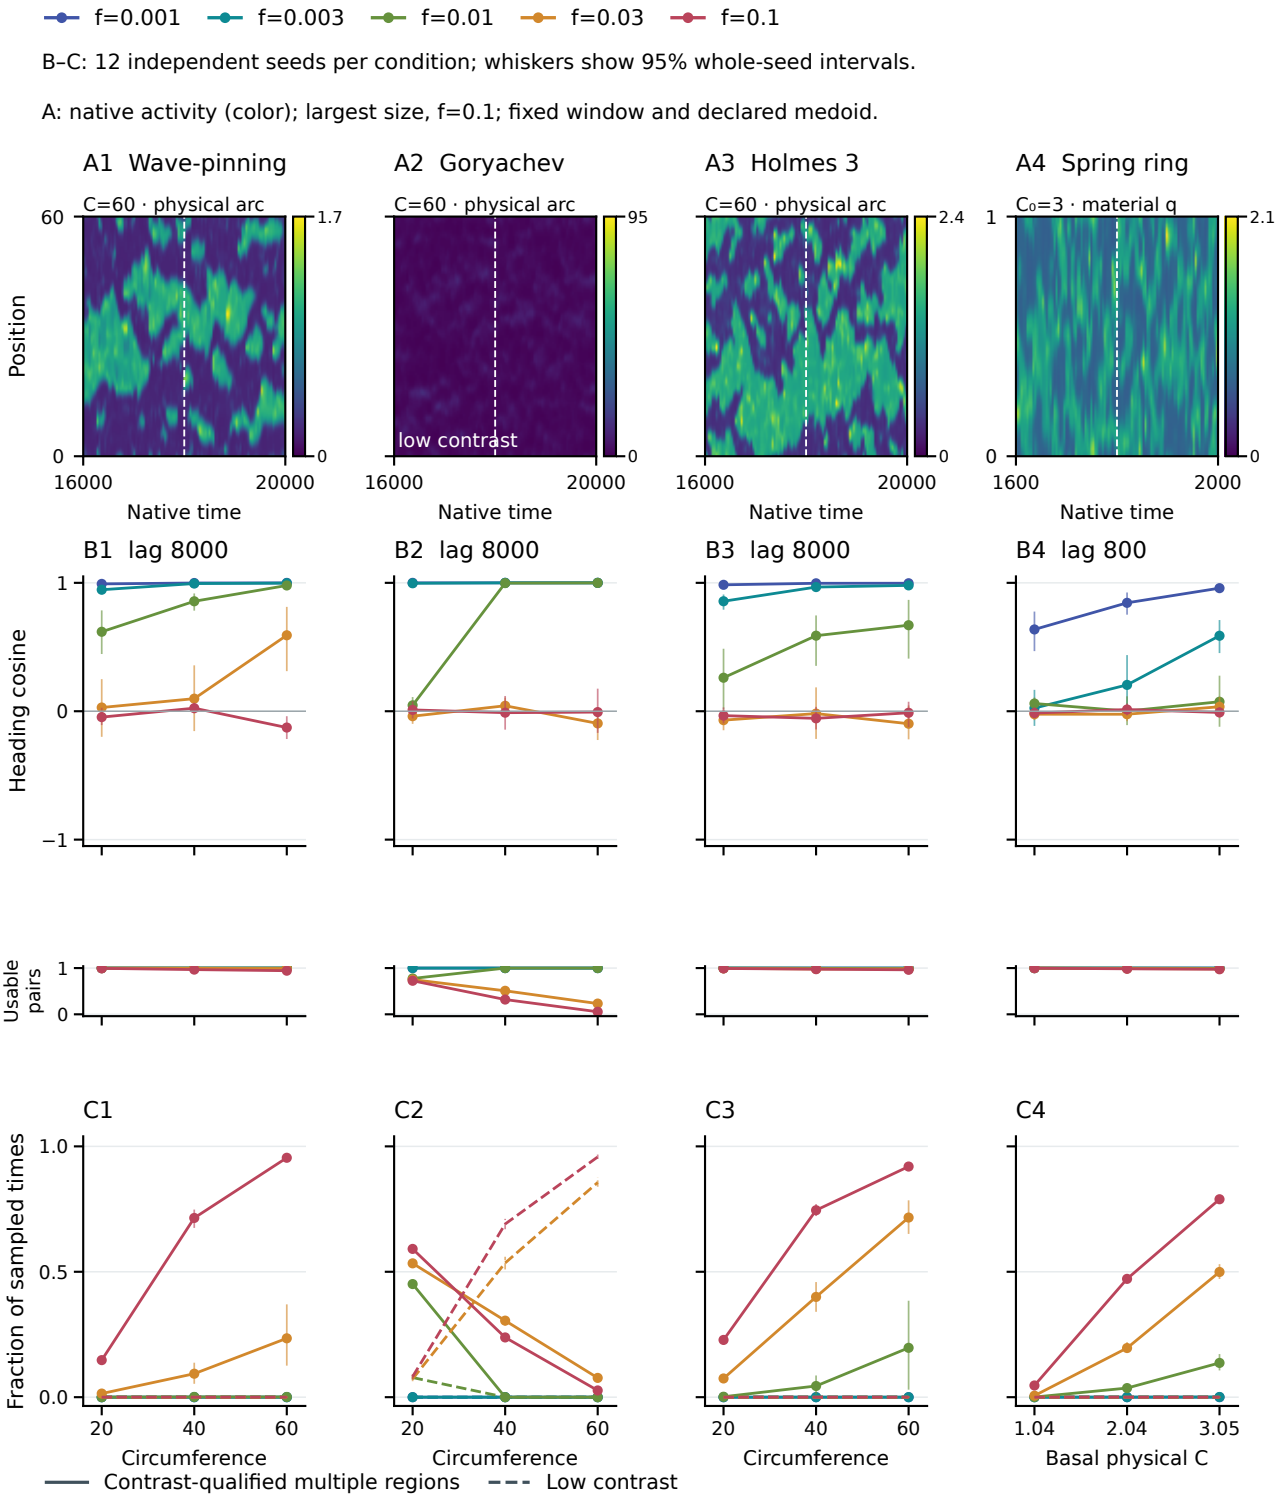

Direction requires both endpoint R≥0.1; the thin strip retains all-pair coverage.

Contrast is qualified at ≥10% of basal. Full profiles, matched mean controls and windows: supplement.

Native clocks/laws differ. Whole positive input scales with f. Activity heading is distinct from migration.

First half discarded without assuming stationarity. Spring sampled run-duration inference remains excluded.