
Second-half temporal direction memory

Six stored native lag checkpoints; discard first half. Colors/seed counts match the circumference summary.

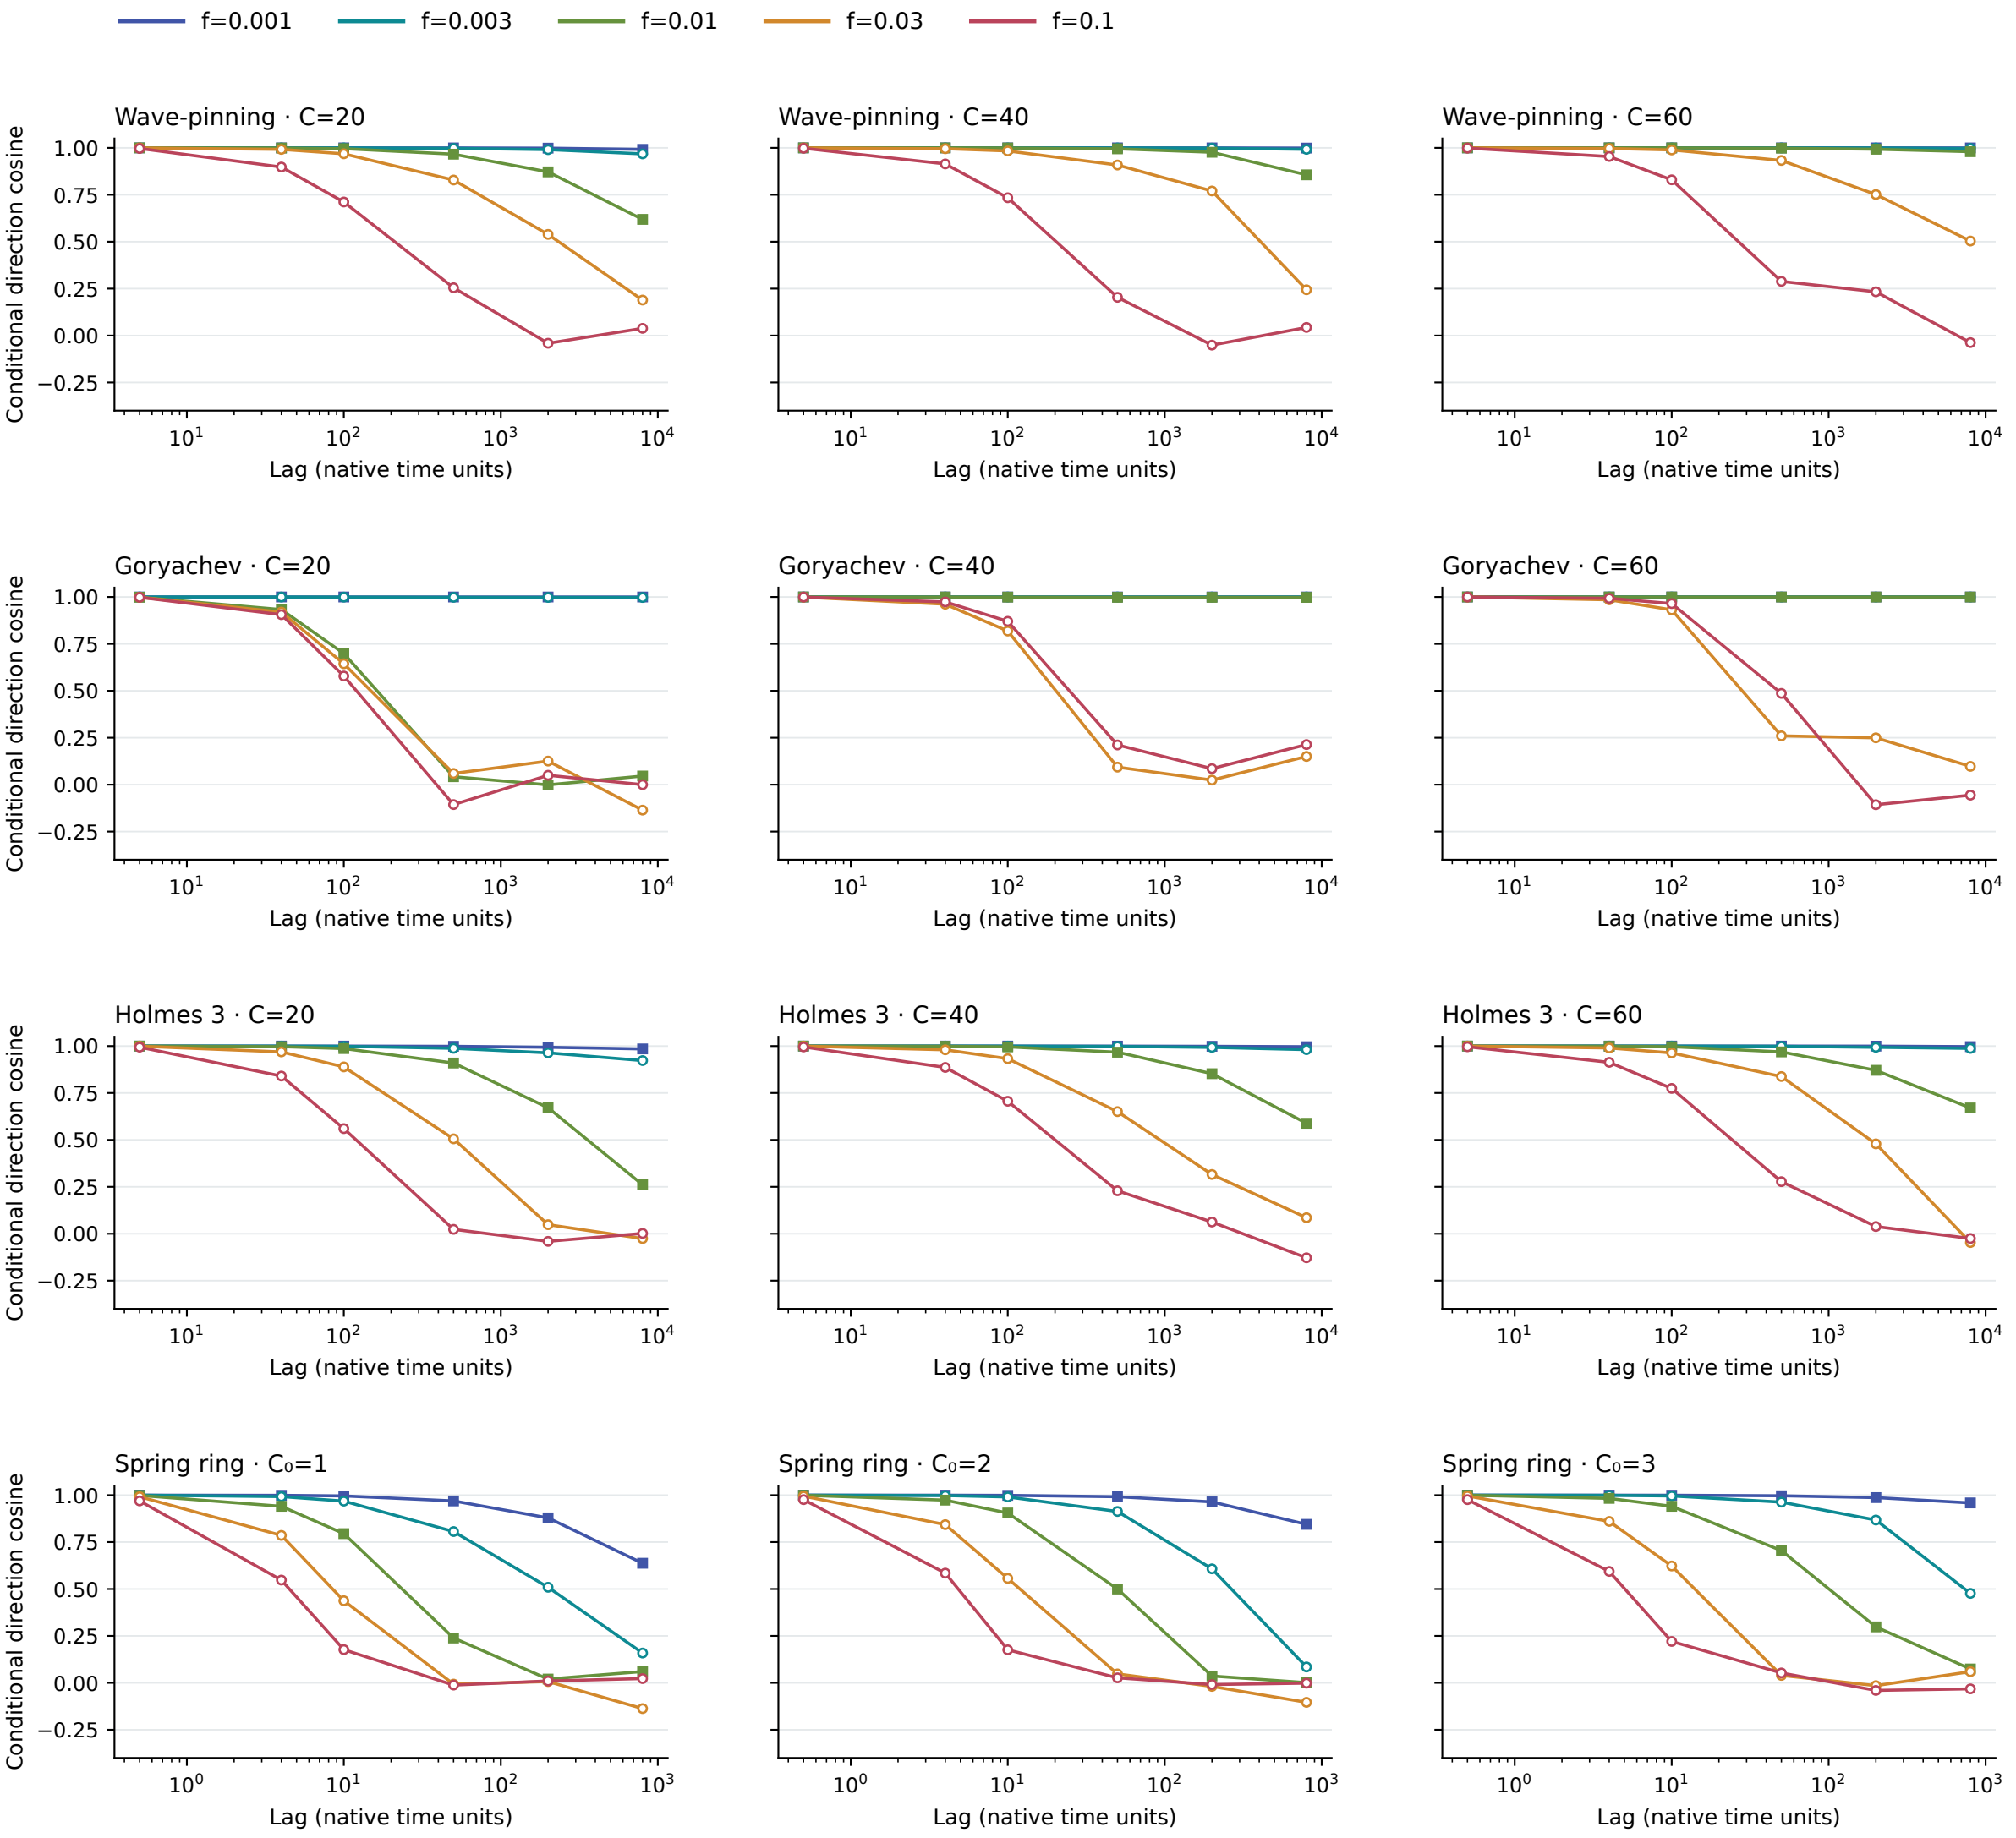


Model clocks and forcing laws differ. These finite-window curves describe the activity-vector heading, not a cell-migration autocorrelation.

Use with its paired coverage sheet: weak-resultant endpoints are excluded from direction; sparse estimates remain unavailable. Connecting segments guide the eye.

Usable-pair coverage of the same temporal memory estimates

Six stored native lag checkpoints; discard first half. Colors/seed counts match the circumference summary.

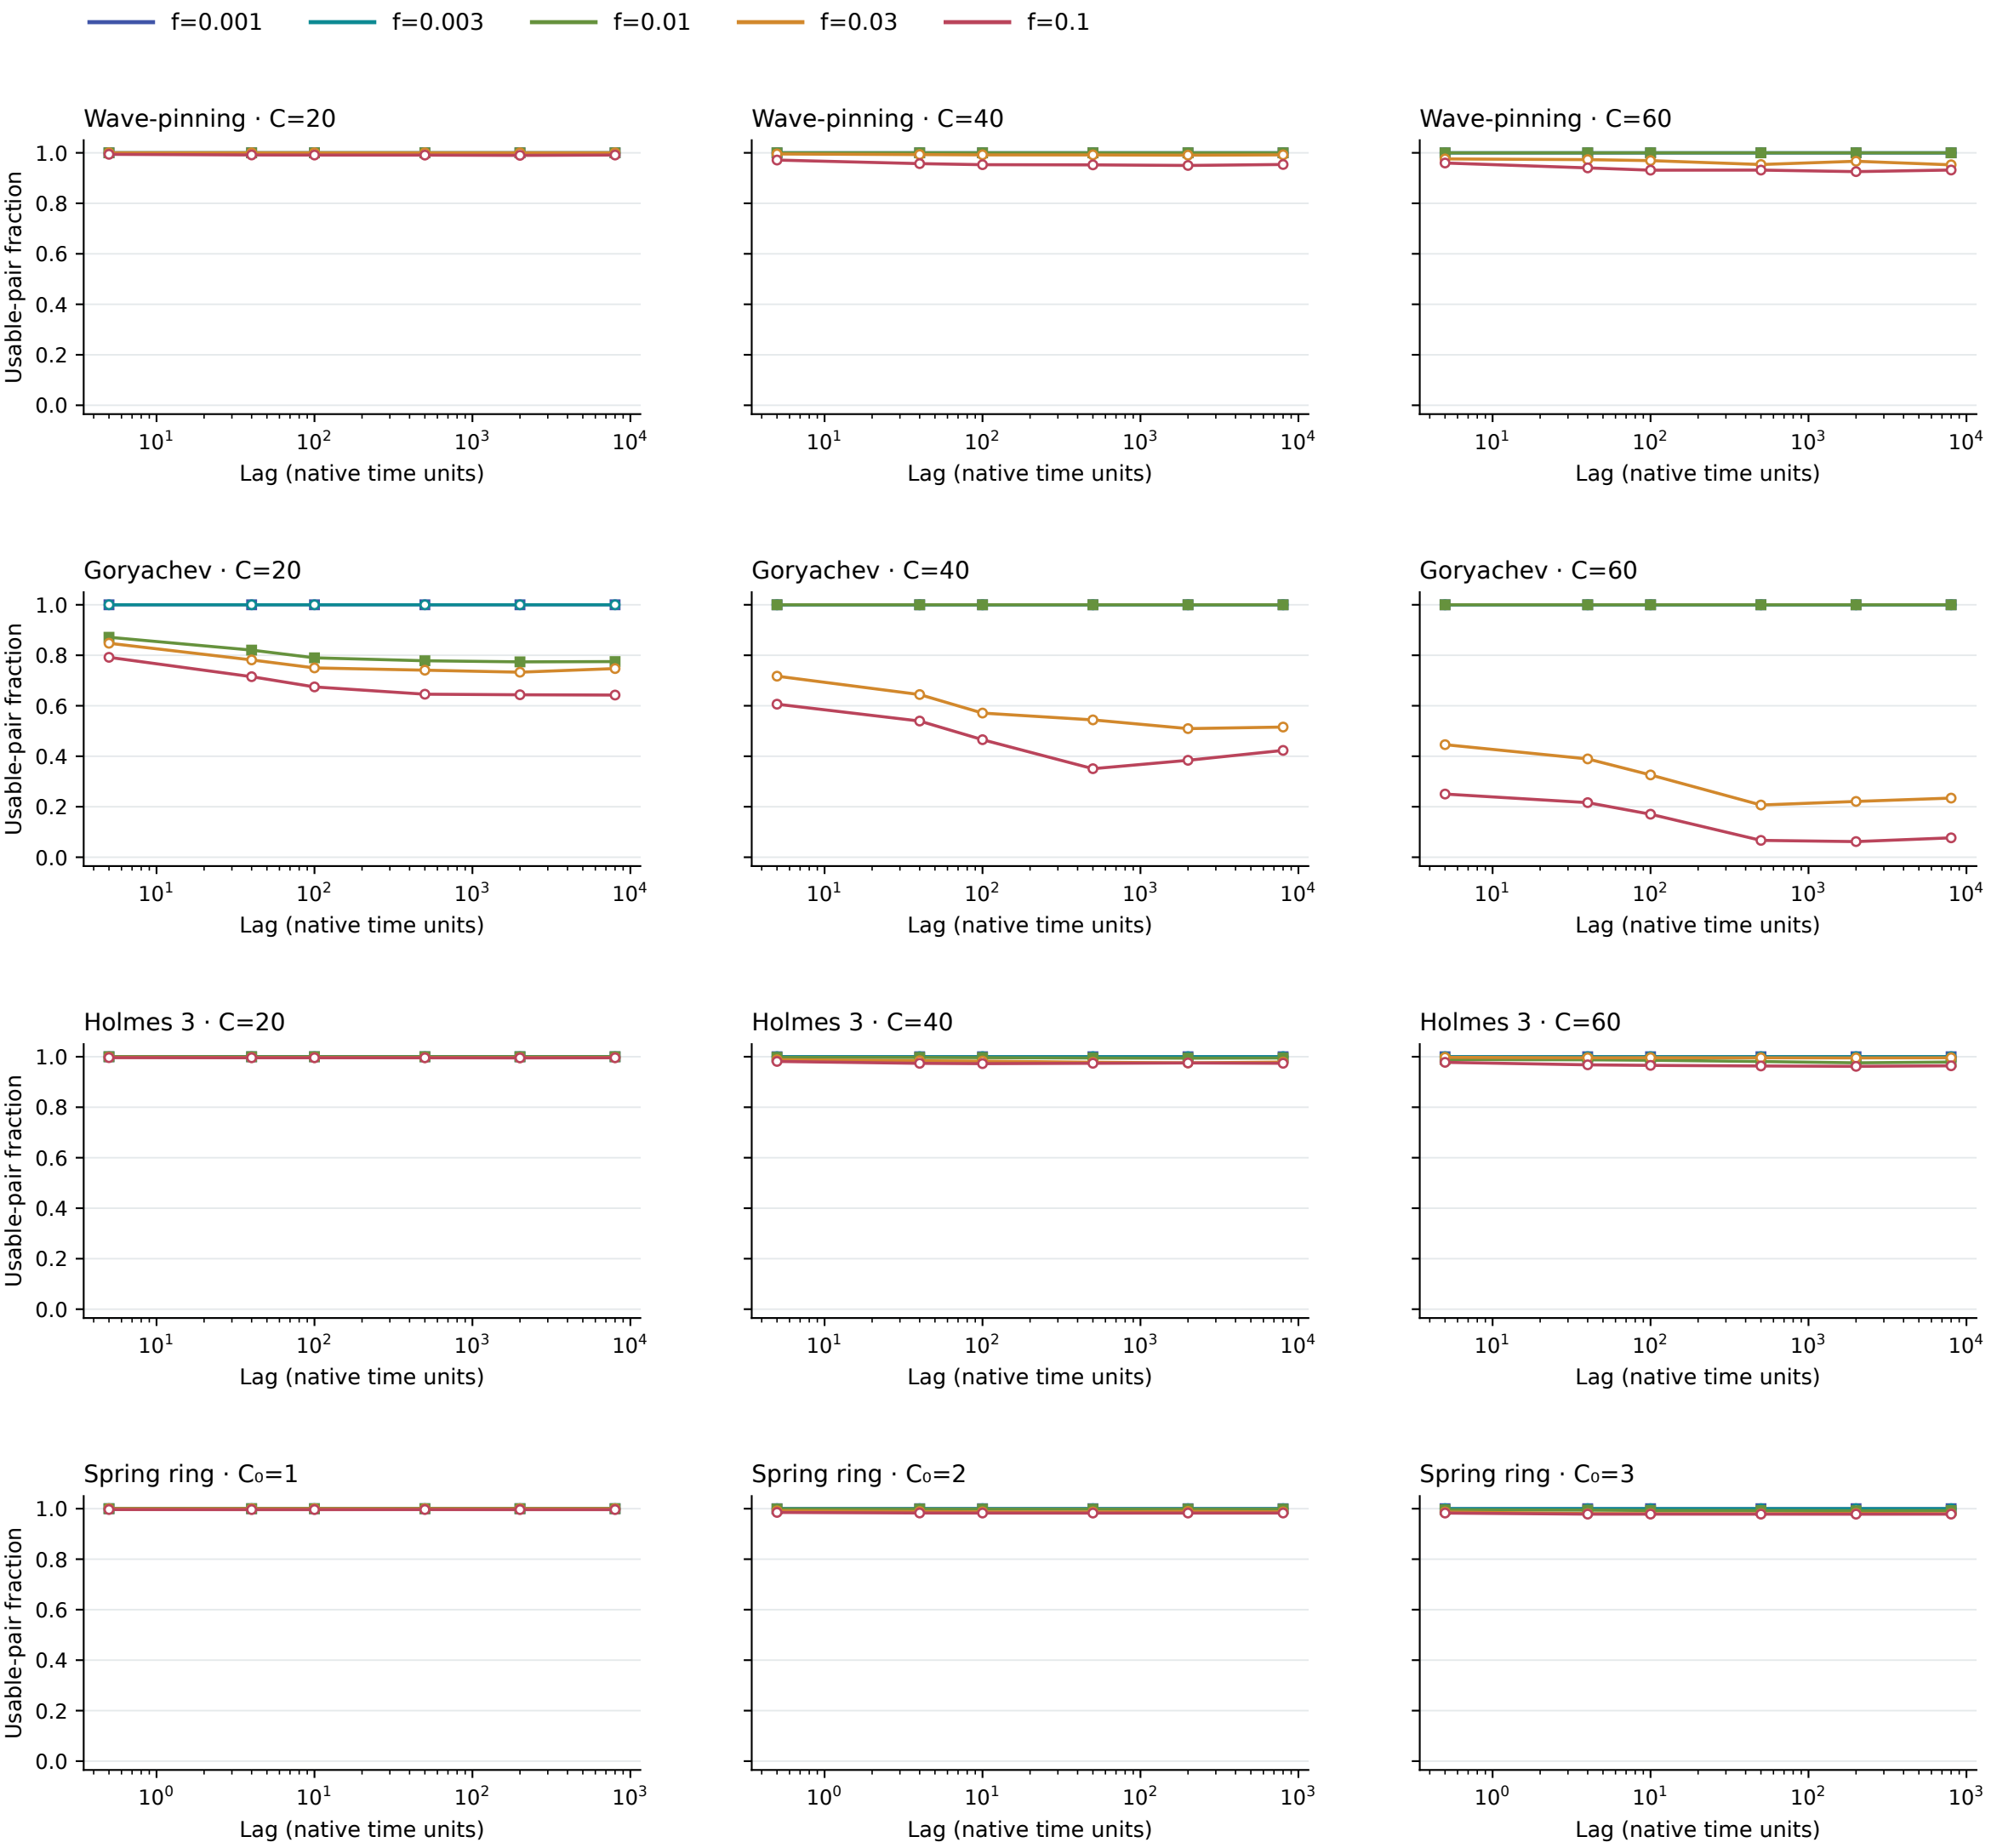

Model clocks and forcing laws differ. These finite-window curves describe the activity-vector heading, not a cell-migration autocorrelation.

Use with its paired coverage sheet: weak-resultant endpoints are excluded from direction; sparse estimates remain unavailable. Connecting segments guide the eye.