

Wave-pinning: all usable lags — common, main

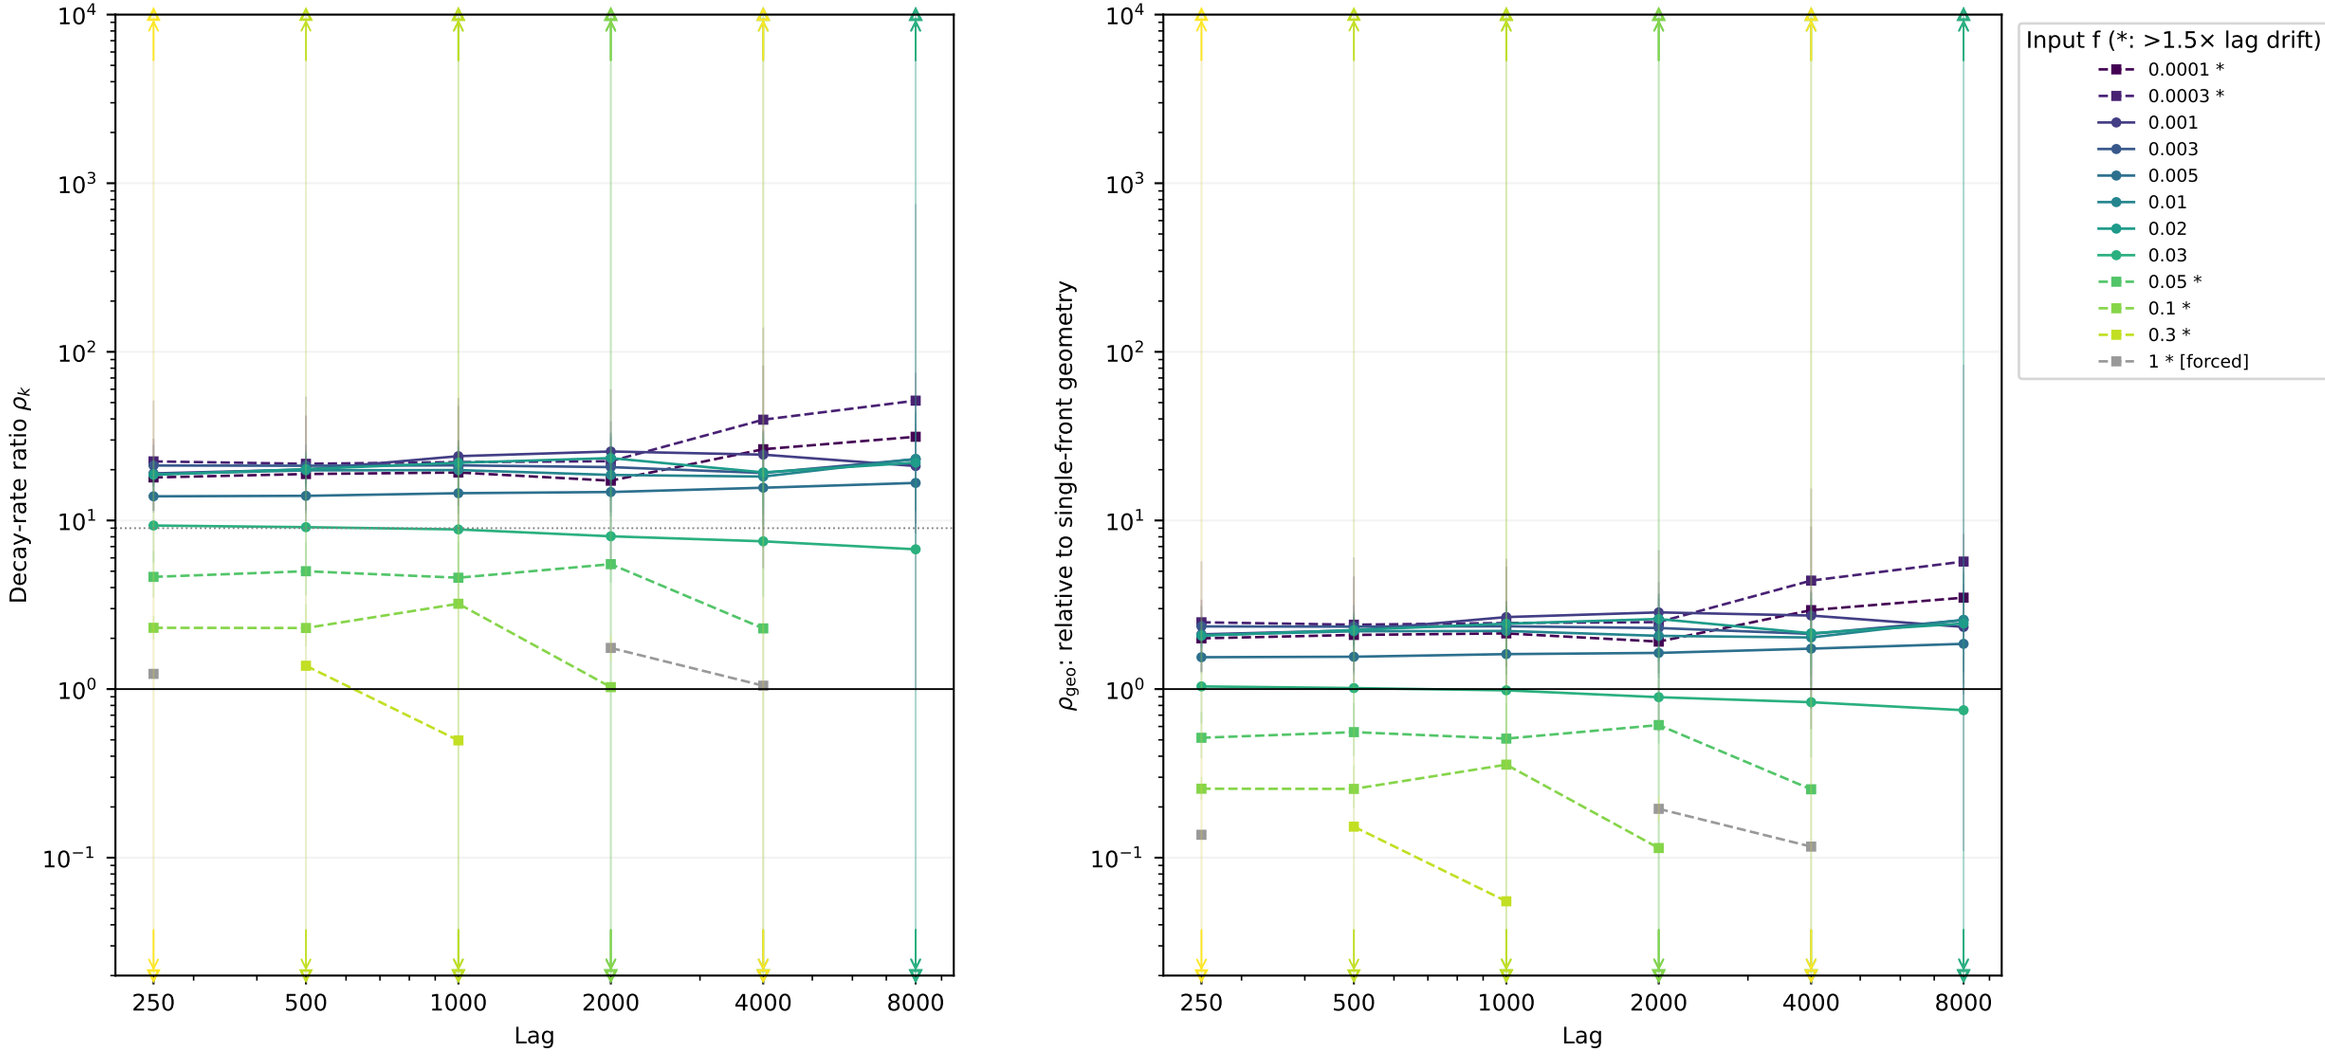

f=0.0001: 6 usable, 0 undefined; f=0.0003: 6 usable, 0 undefined; f=0.001: 6 usable, 0 undefined; f=0.003: 6 usable, 0 undefined; f=0.005: 6 usable, 0 undefined; f=0.01: 6 usable, 0 undefined; f=0.02: 6 usable, 0 undefined; f=0.03: 6 usable, 0 undefined; f=0.05: 6 usable, 1 undefined; f=0.1: 6 usable, 2 undefined; f=0.3: 6 usable, 4 undefined; f=1: 6 usable, 3 undefined

Pointwise whole-seed 95% intervals; every finite positive point is within the axes. Open edge triangles and arrows denote CI tails beyond the axes; full intervals are in CSV. A usable lag can have C ≤ 0, where −ln C and its ratio are undefined; all such counts are retained above. Asterisks/squares flag >1.5× drift. Geometry is not site diffusivity.


Goryachev: all usable lags — common, main

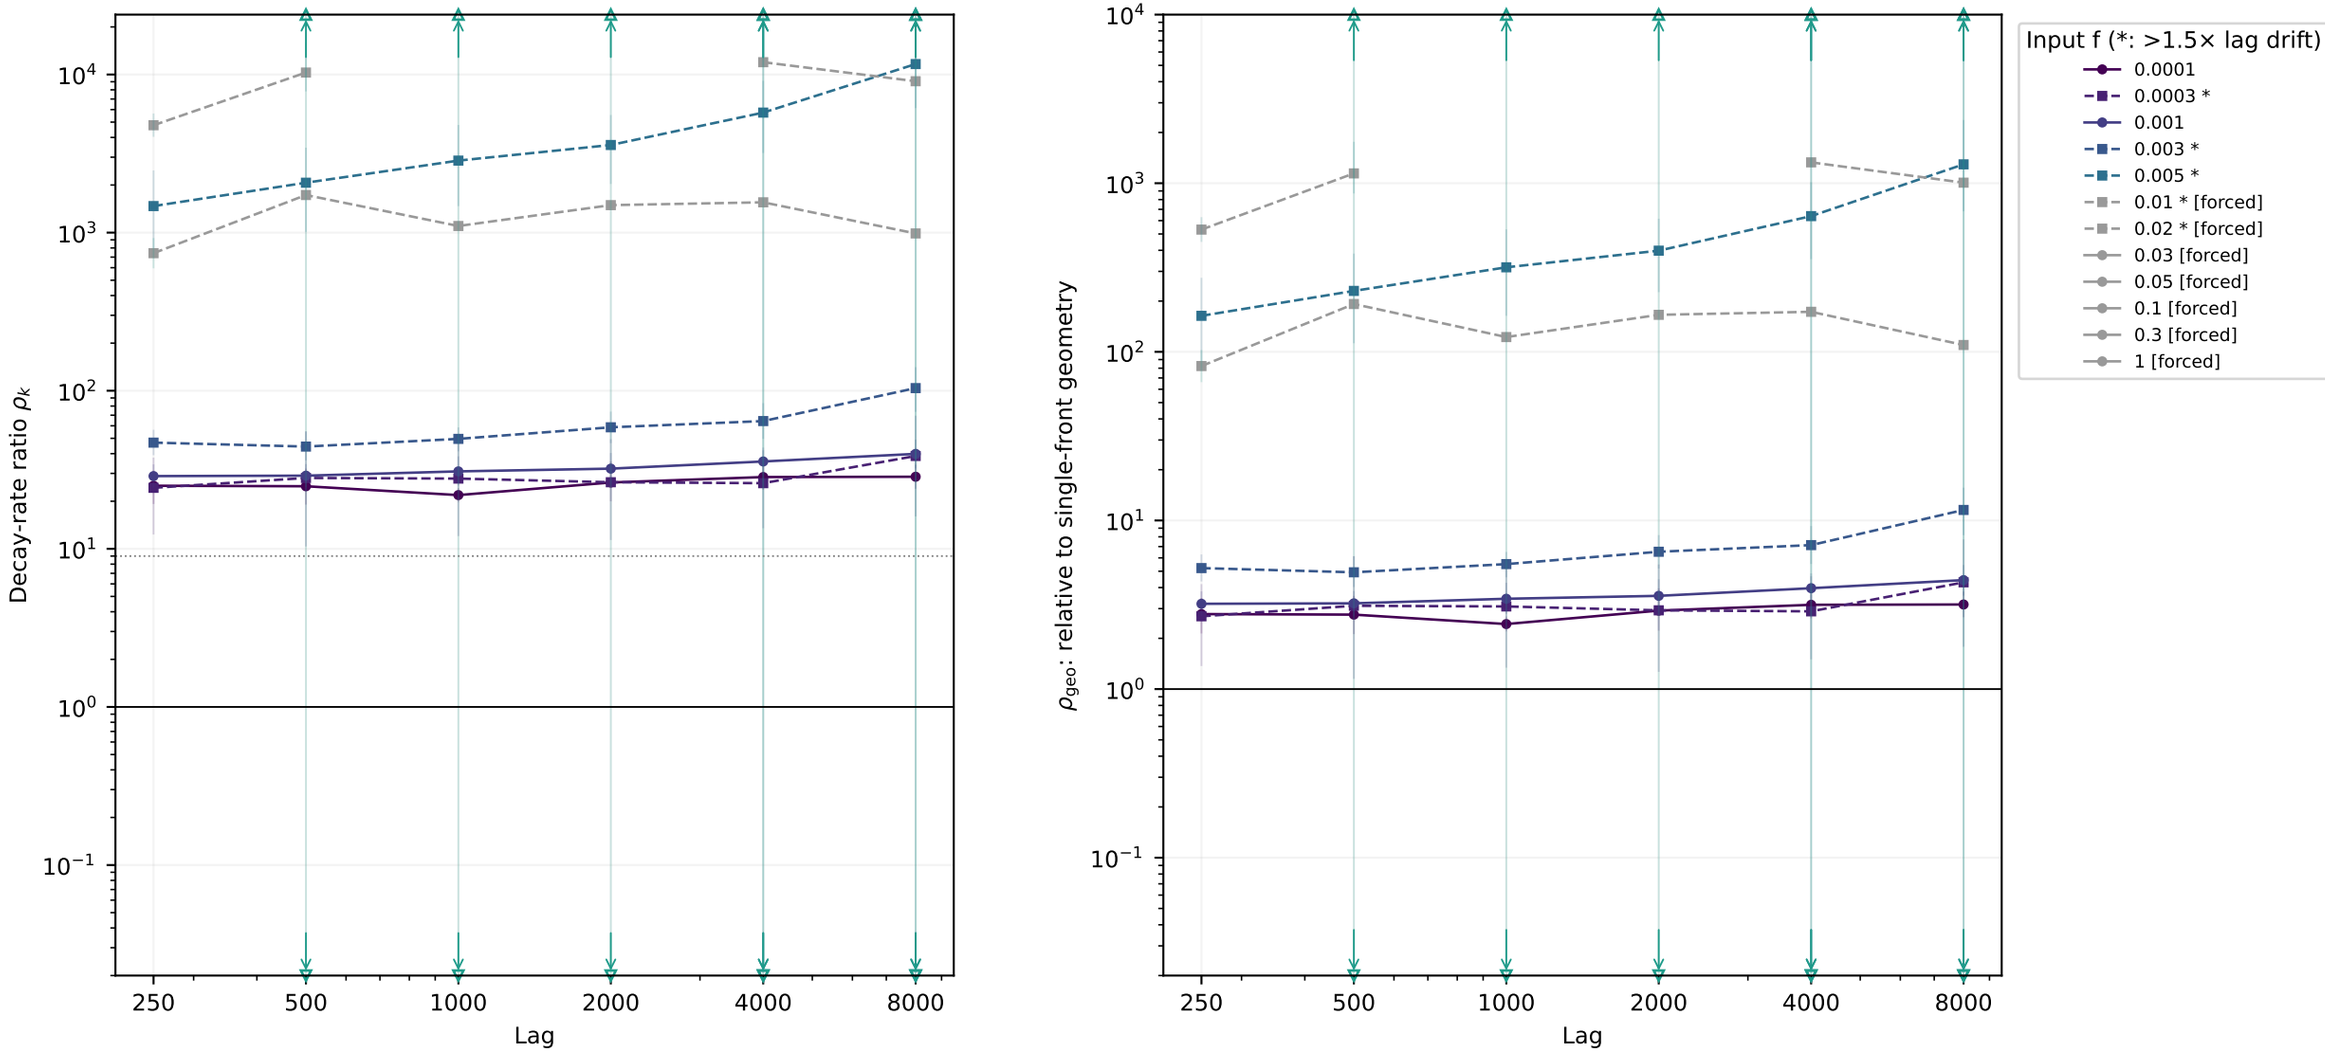

f=0.0001: 6 usable, 0 undefined; f=0.0003: 6 usable, 0 undefined; f=0.001: 6 usable, 0 undefined; f=0.003: 6 usable, 0 undefined; f=0.005: 6 usable, 0 undefined; f=0.01: 6 usable, 2 undefined; f=0.02: 6 usable, 0 undefined; f=0.03: 0 usable, 0 undefined; f=0.05: 0 usable, 0 undefined; f=0.1: 0 usable, 0 undefined; f=0.3: 0 usable, 0 undefined; f=1: 0 usable, 0 undefined

Pointwise whole-seed 95% intervals; every finite positive point is within the axes. Open edge triangles and arrows denote CI tails beyond the axes; full intervals are in CSV. A usable lag can have C ≤ 0, where −ln C and its ratio are undefined; all such counts are retained above. Asterisks/squares flag >1.5× drift. Geometry is not site diffusivity.


Holmes: all usable lags — common, main

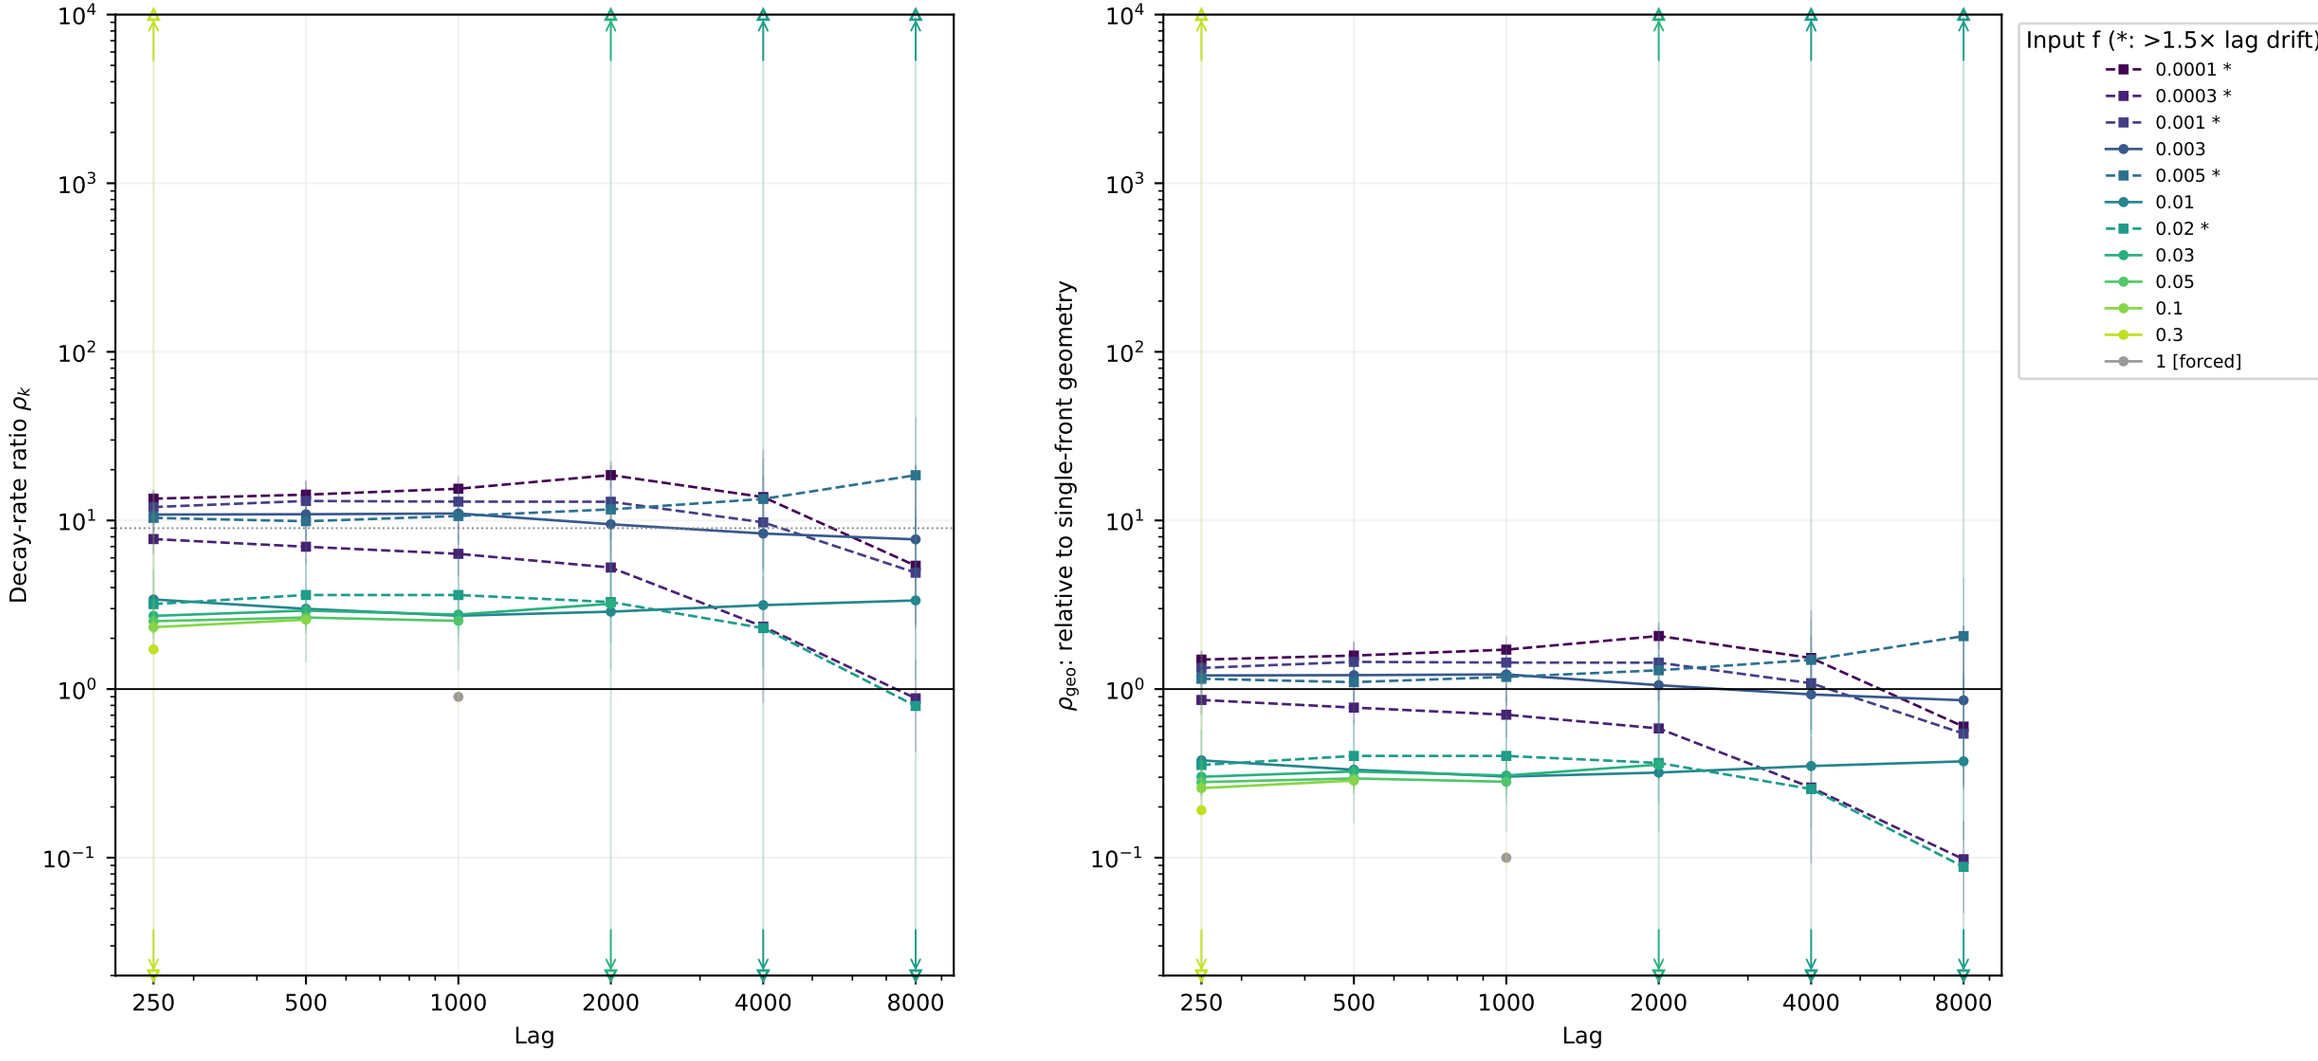

f=0.0001: 6 usable, 0 undefined; f=0.0003: 6 usable, 0 undefined; f=0.001: 6 usable, 0 undefined; f=0.003: 6 usable, 0 undefined; f=0.005: 6 usable, 0 undefined; f=0.01: 6 usable, 0 undefined; f=0.02: 6 usable, 0 undefined; f=0.03: 6 usable, 2 undefined; f=0.05: 6 usable, 3 undefined; f=0.1: 6 usable, 4 undefined; f=0.3: 6 usable, 5 undefined; f=1: 6 usable, 5 undefined

Pointwise whole-seed 95% intervals; every finite positive point is within the axes. Open edge triangles and arrows denote CI tails beyond the axes; full intervals are in CSV.
A usable lag can have C ≤ 0, where −ln C and its ratio are undefined; all such counts are retained above. Asterisks/squares flag >1.5× drift. Geometry is not site diffusivity.


Spring: all usable lags — common, main

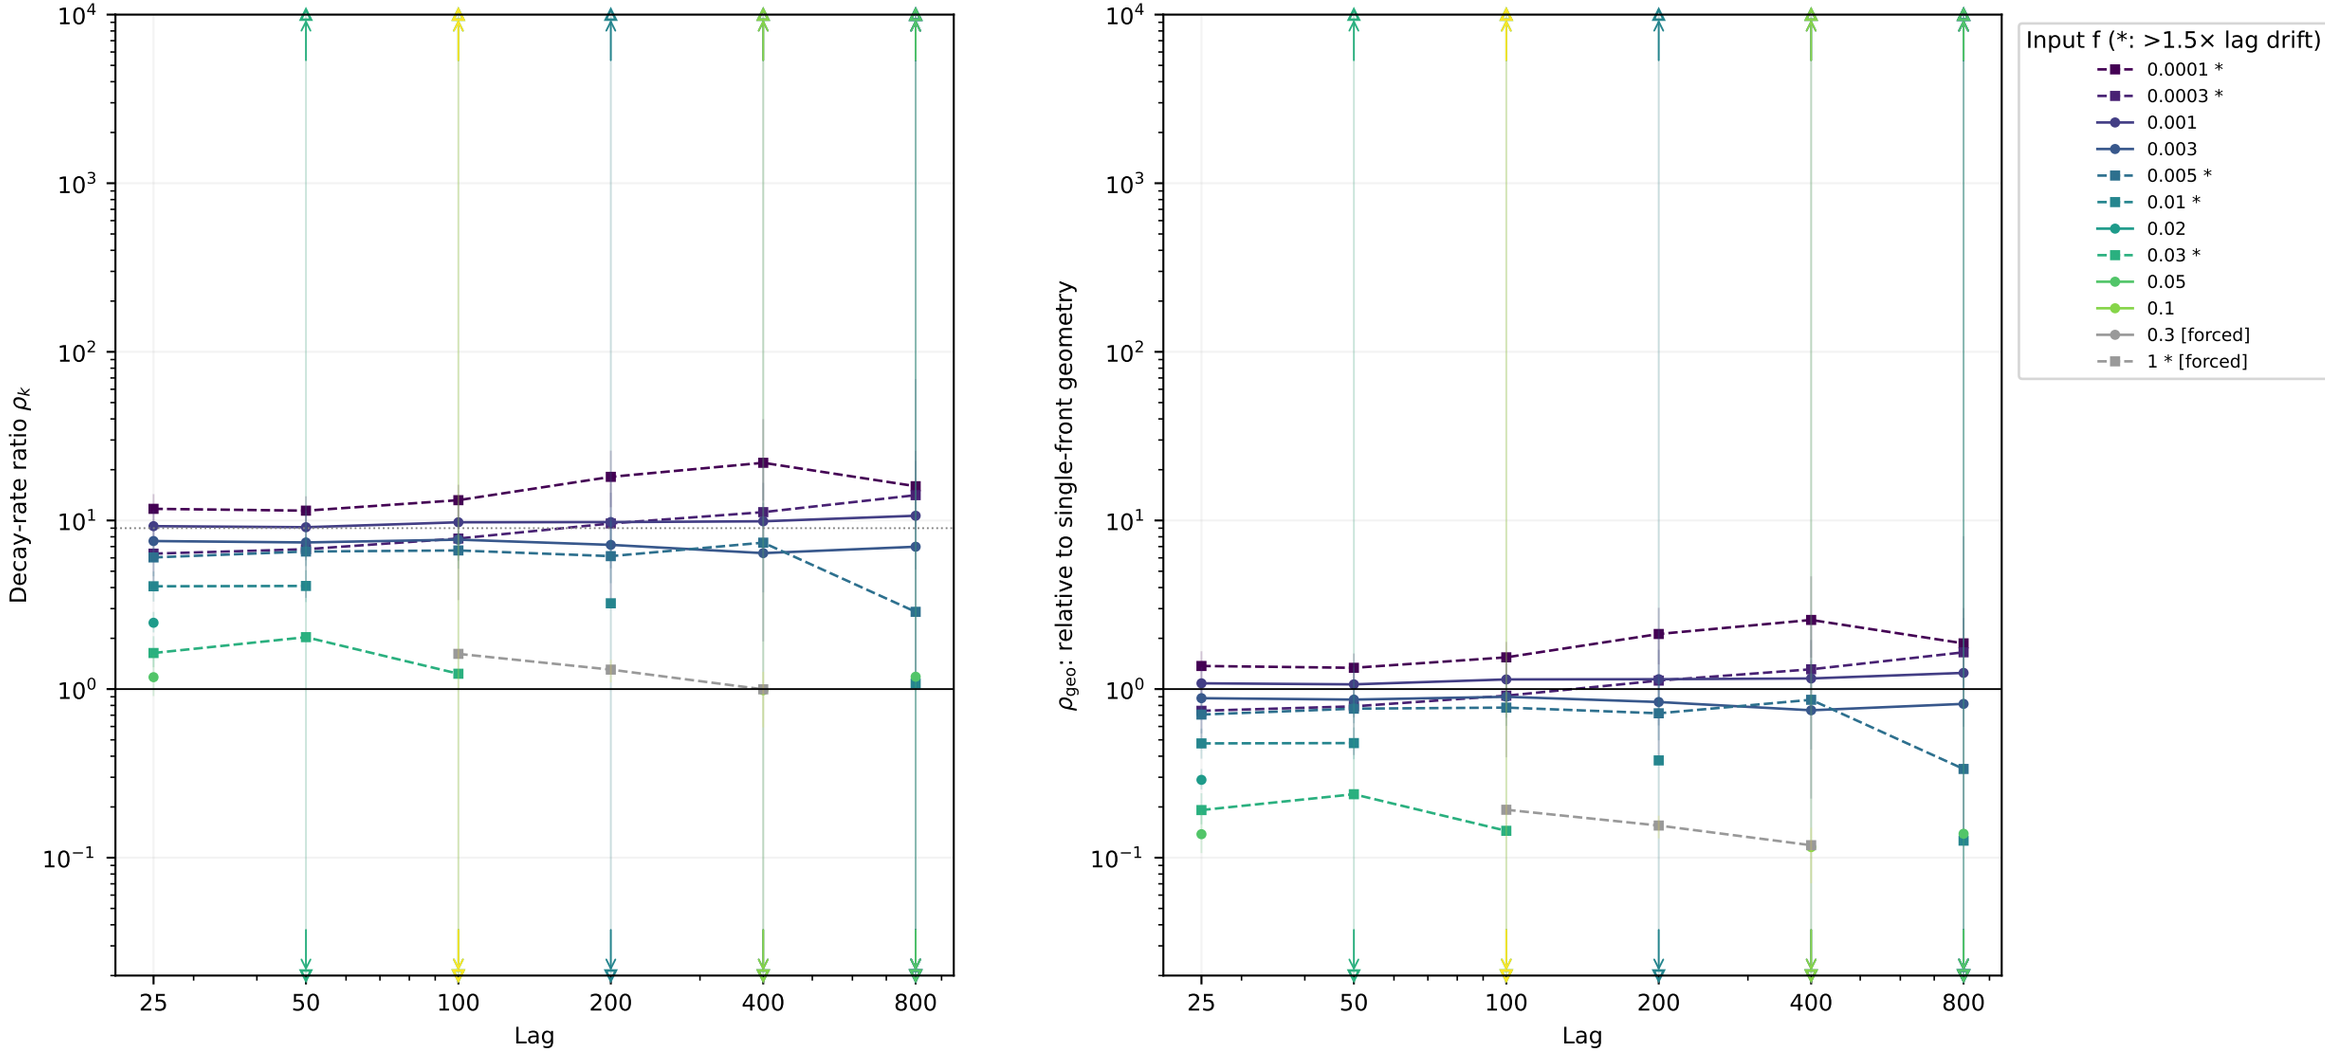

f=0.0001: 6 usable, 0 undefined; f=0.0003: 6 usable, 0 undefined; f=0.001: 6 usable, 0 undefined; f=0.003: 6 usable, 0 undefined; f=0.005: 6 usable, 0 undefined; f=0.01: 6 usable, 2 undefined; f=0.02: 6 usable, 5 undefined; f=0.03: 6 usable, 3 undefined; f=0.05: 6 usable, 4 undefined; f=0.1: 6 usable, 5 undefined; f=0.3: 6 usable, 6 undefined; f=1: 6 usable, 3 undefined

Pointwise whole-seed 95% intervals; every finite positive point is within the axes. Open edge triangles and arrows denote CI tails beyond the axes; full intervals are in CSV. A usable lag can have C ≤ 0, where −ln C and its ratio are undefined; all such counts are retained above. Asterisks/squares flag >1.5× drift. Geometry is not site diffusivity.


Wave-pinning: all usable lags — common, analysis_first_half

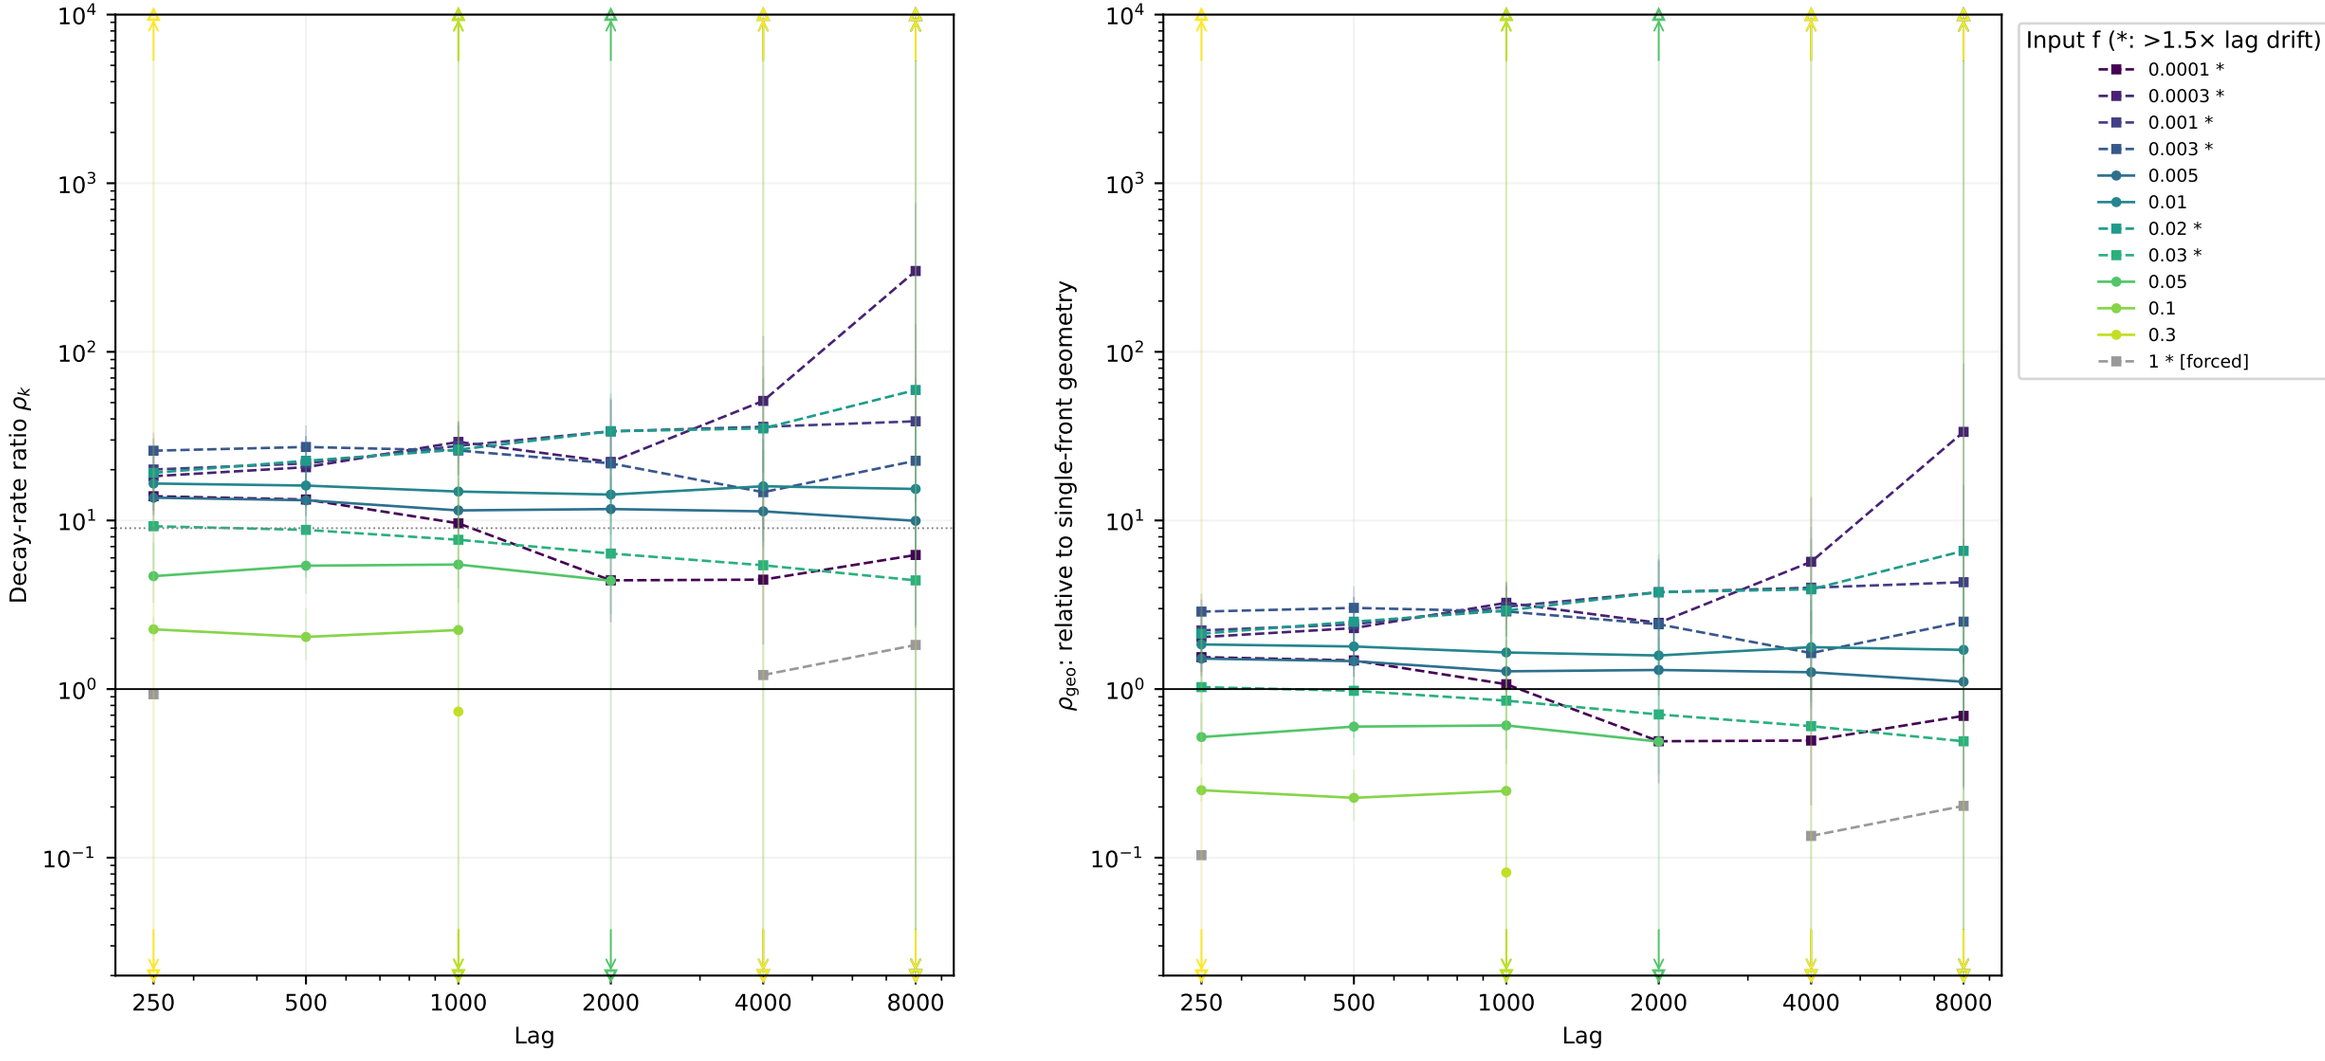

f=0.0001: 6 usable, 0 undefined; f=0.0003: 6 usable, 0 undefined; f=0.001: 6 usable, 0 undefined; f=0.003: 6 usable, 0 undefined; f=0.005: 6 usable, 0 undefined; f=0.01: 6 usable, 0 undefined; f=0.02: 6 usable, 0 undefined; f=0.03: 6 usable, 0 undefined; f=0.05: 6 usable, 2 undefined; f=0.1: 6 usable, 3 undefined; f=0.3: 6 usable, 5 undefined; f=1: 6 usable, 3 undefined

Pointwise whole-seed 95% intervals; every finite positive point is within the axes. Open edge triangles and arrows denote CI tails beyond the axes; full intervals are in CSV.
A usable lag can have $C \leq 0$, where $-\ln C$ and its ratio are undefined; all such counts are retained above. Asterisks/squares flag >1.5× drift. Geometry is not site diffusivity.


Goryachev: all usable lags — common, analysis_first_half

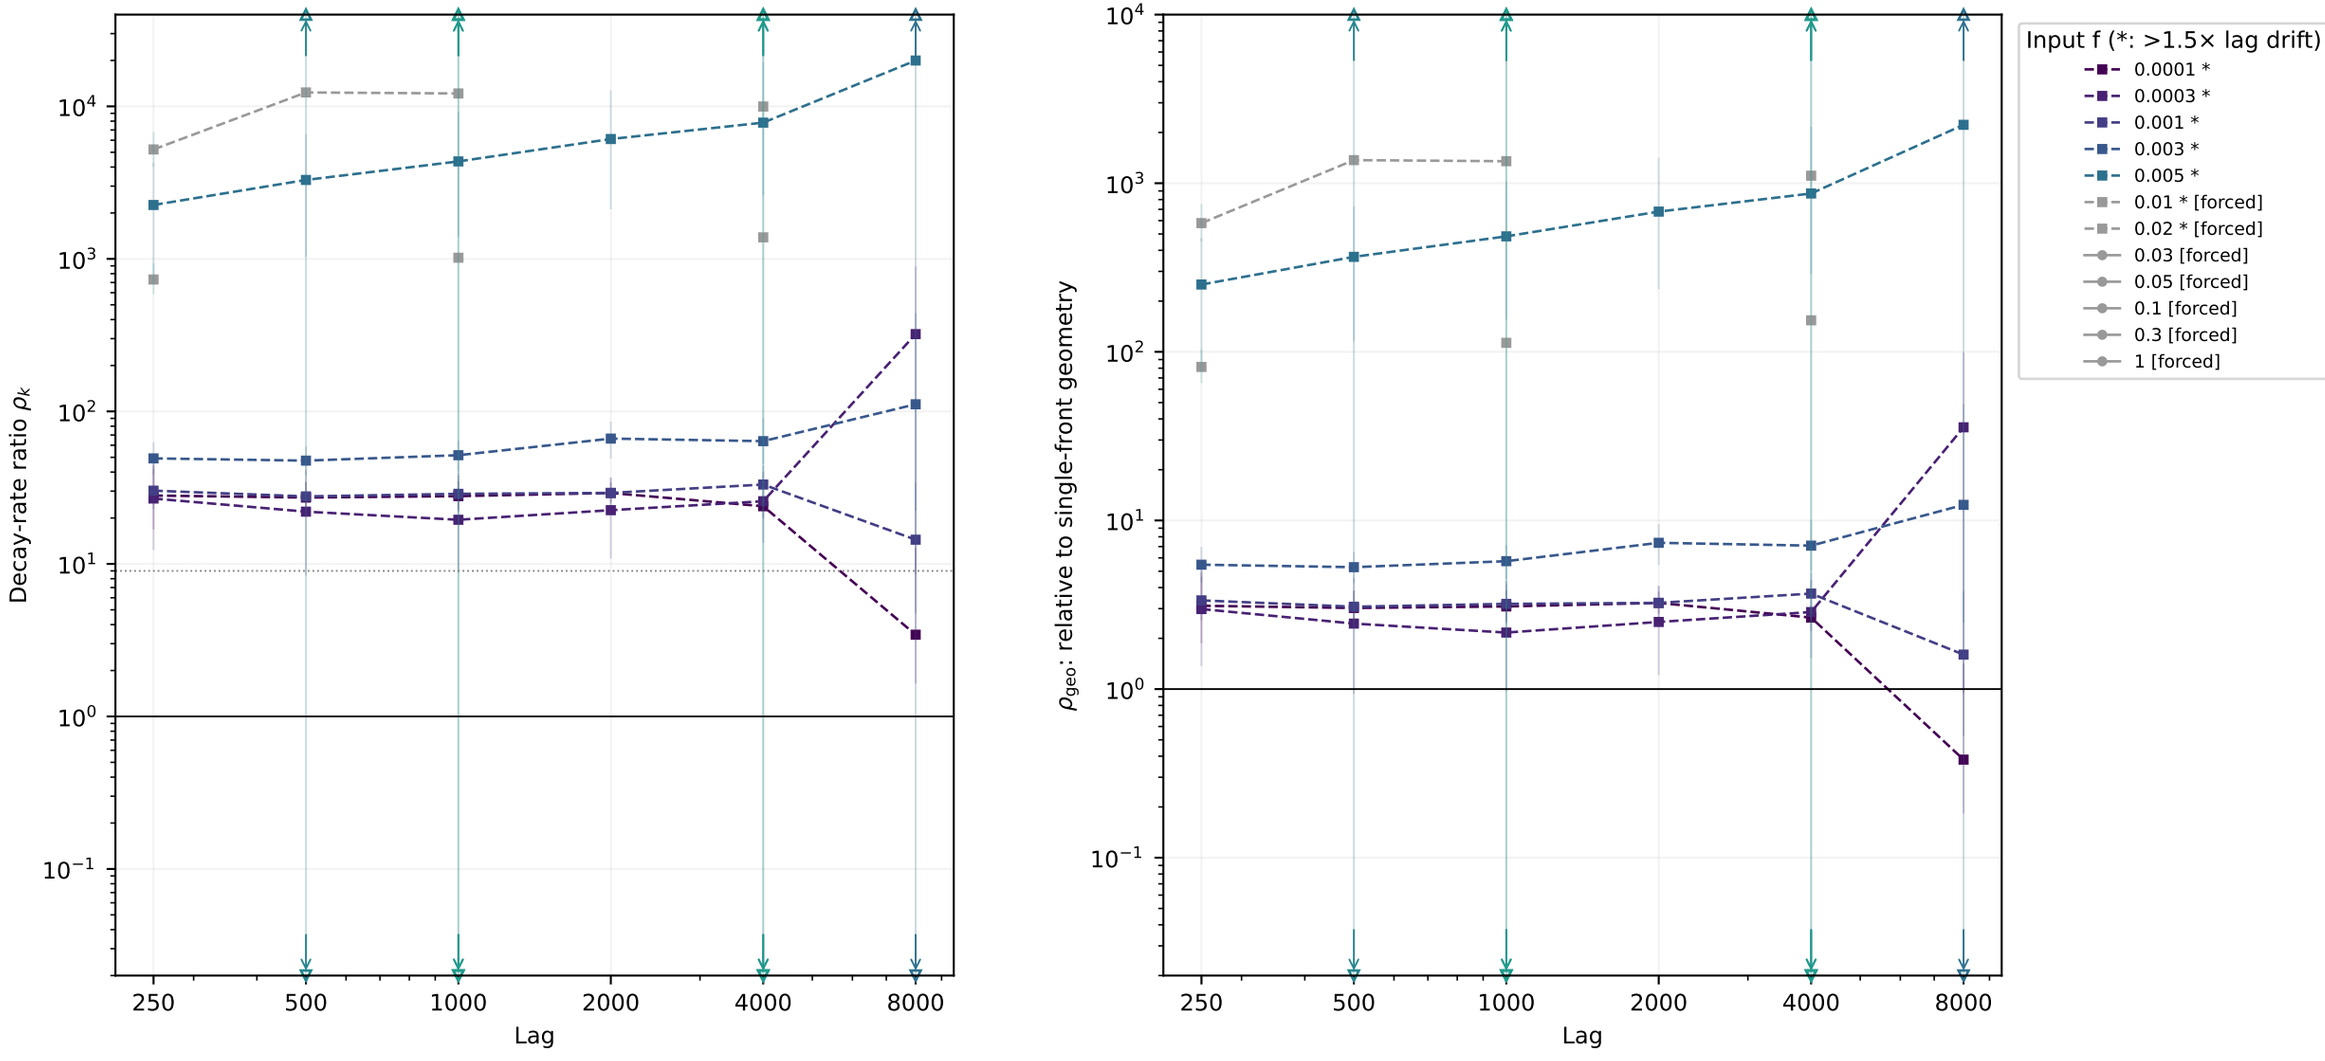

f=0.0001: 6 usable, 0 undefined; f=0.0003: 6 usable, 0 undefined; f=0.001: 6 usable, 0 undefined; f=0.003: 6 usable, 0 undefined; f=0.005: 6 usable, 0 undefined; f=0.01: 6 usable, 2 undefined; f=0.02: 5 usable, 2 undefined; f=0.03: 0 usable, 0 undefined; f=0.05: 0 usable, 0 undefined; f=0.1: 0 usable, 0 undefined; f=0.3: 0 usable, 0 undefined; f=1: 0 usable, 0 undefined

Pointwise whole-seed 95% intervals; every finite positive point is within the axes. Open edge triangles and arrows denote CI tails beyond the axes; full intervals are in CSV. A usable lag can have C ≤ 0, where −ln C and its ratio are undefined; all such counts are retained above. Asterisks/squares flag >1.5× drift. Geometry is not site diffusivity.


Holmes: all usable lags — common, analysis_first_half

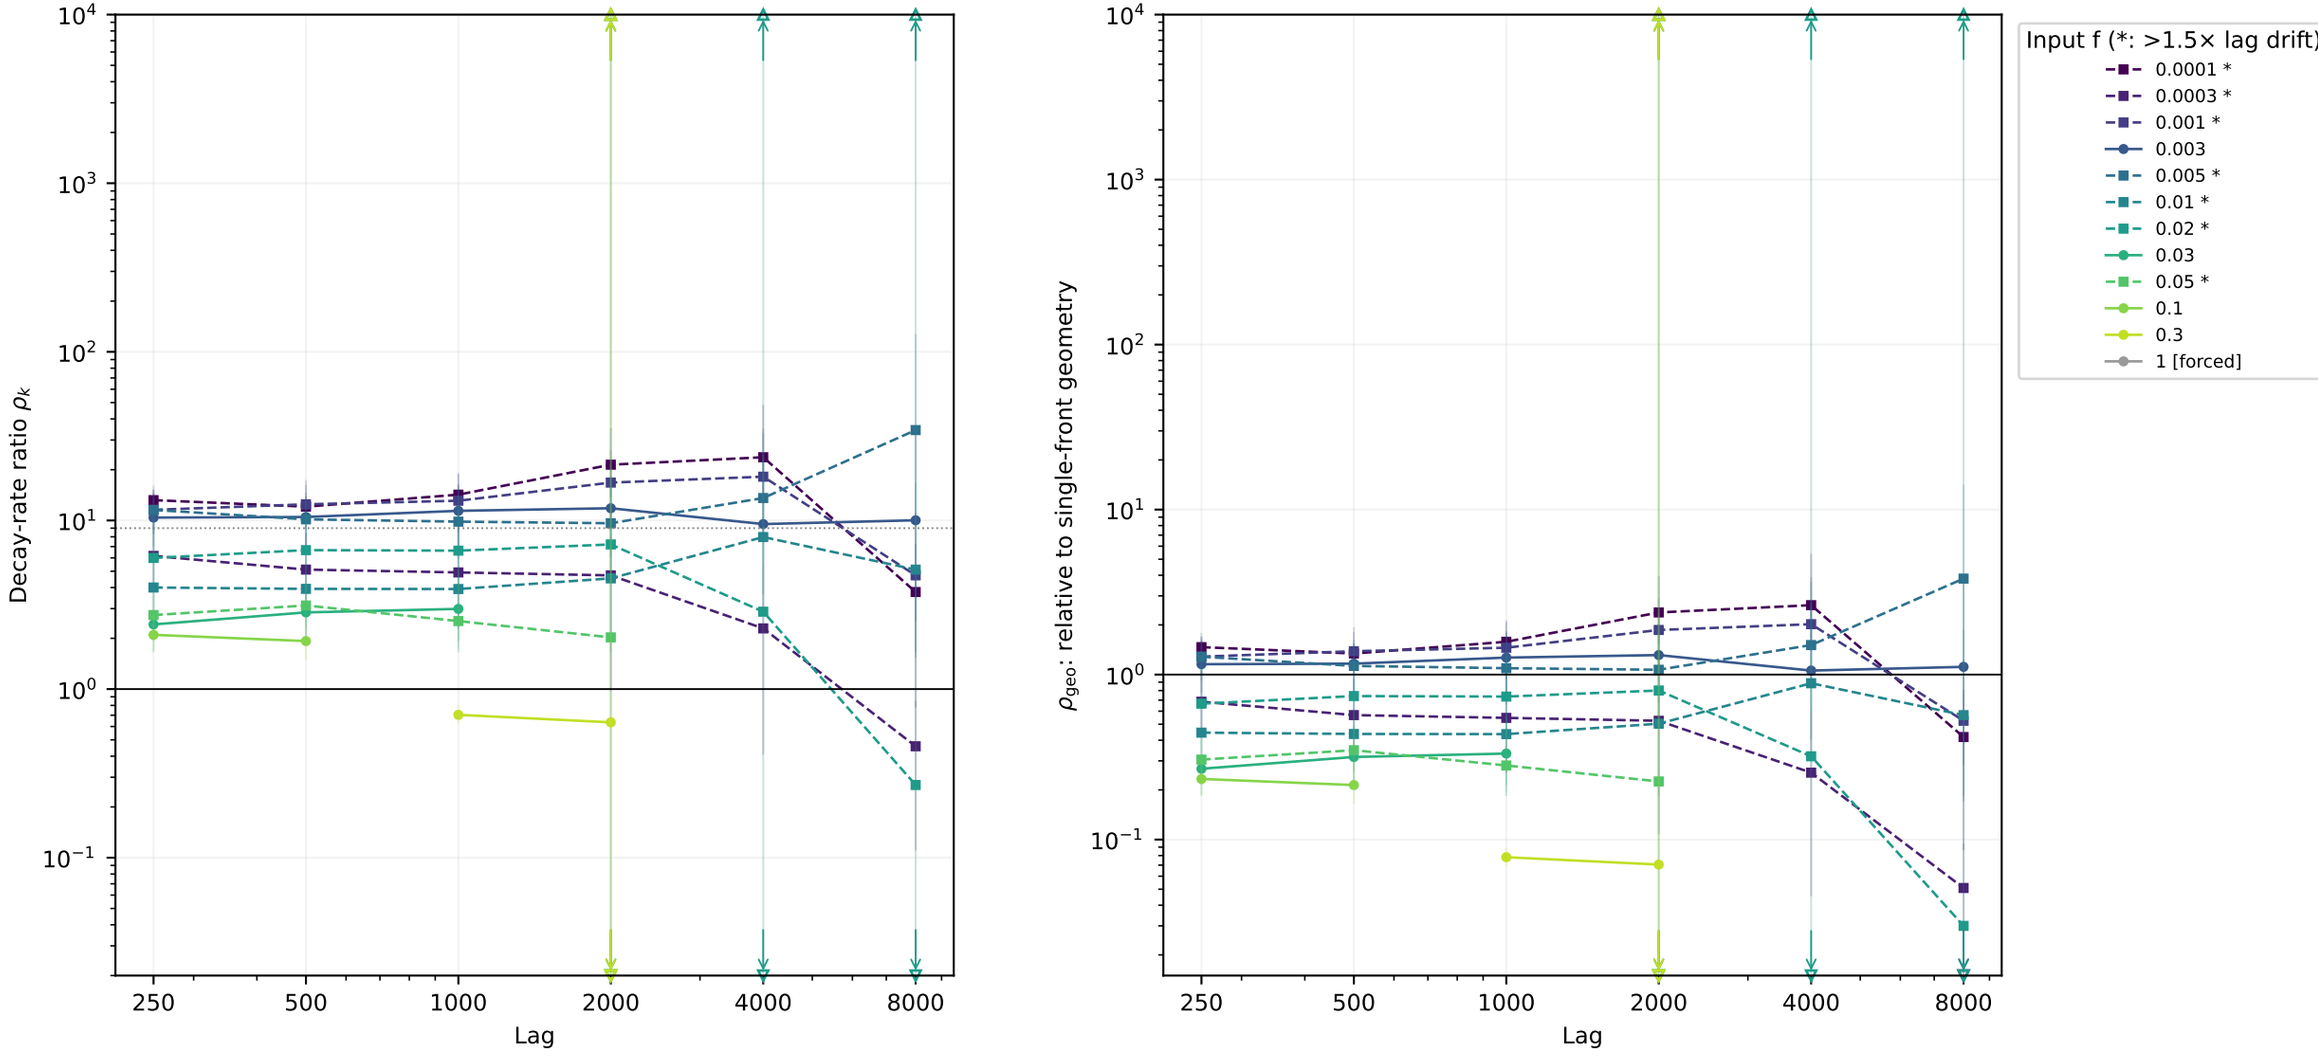

f=0.0001: 6 usable, 0 undefined; f=0.0003: 6 usable, 0 undefined; f=0.001: 6 usable, 0 undefined; f=0.003: 6 usable, 0 undefined; f=0.005: 6 usable, 0 undefined; f=0.01: 6 usable, 0 undefined; f=0.02: 6 usable, 0 undefined; f=0.03: 6 usable, 3 undefined; f=0.05: 6 usable, 2 undefined; f=0.1: 6 usable, 4 undefined; f=0.3: 6 usable, 4 undefined; f=1: 6 usable, 6 undefined

Pointwise whole-seed 95% intervals; every finite positive point is within the axes. Open edge triangles and arrows denote CI tails beyond the axes; full intervals are in CSV. A usable lag can have C ≤ 0, where −ln C and its ratio are undefined; all such counts are retained above. Asterisks/squares flag >1.5× drift. Geometry is not site diffusivity.


Spring: all usable lags — common, analysis_first_half

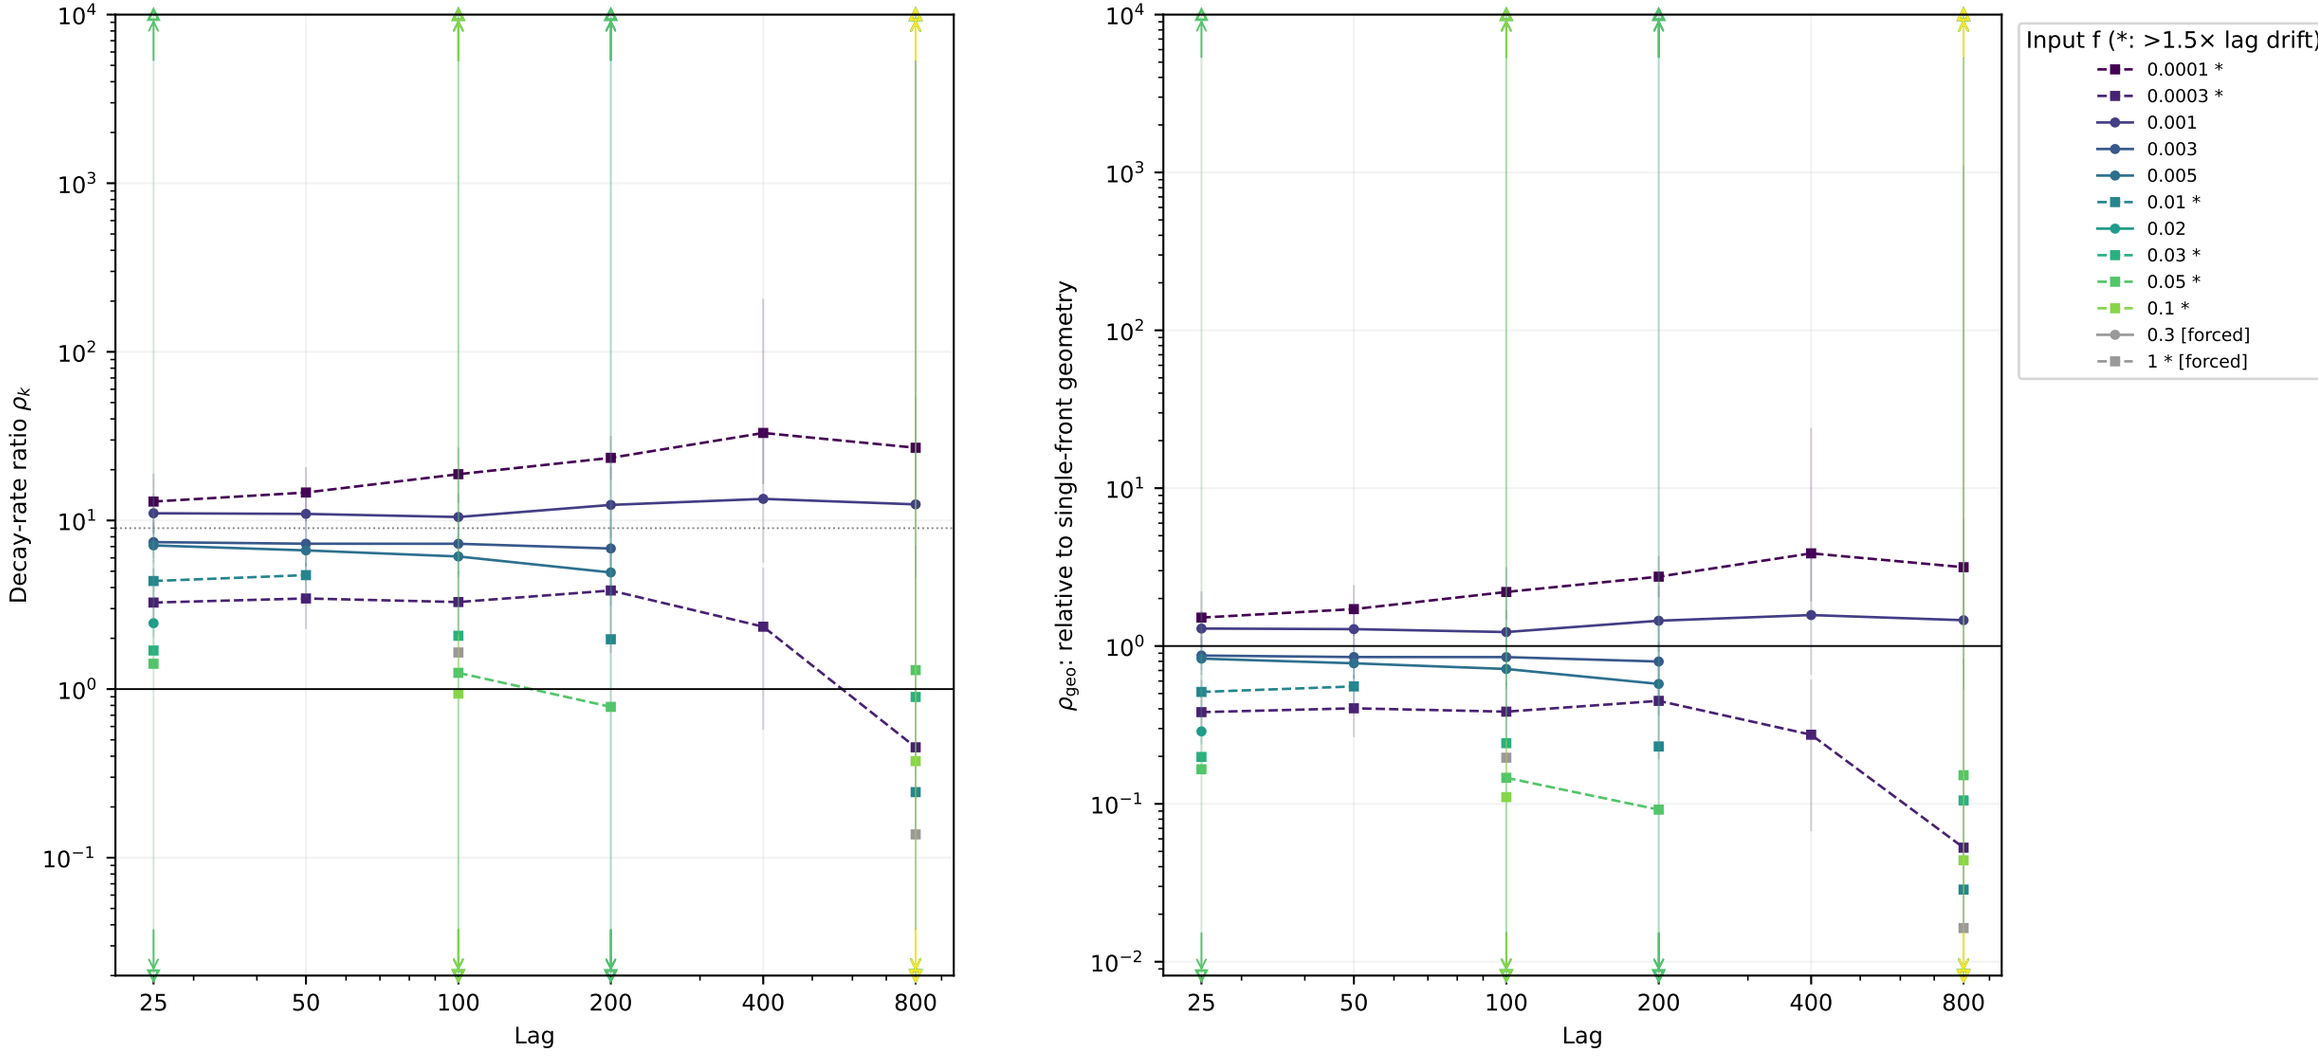

f=0.0001: 6 usable, 0 undefined; f=0.0003: 6 usable, 0 undefined; f=0.001: 6 usable, 0 undefined; f=0.003: 6 usable, 2 undefined; f=0.005: 6 usable, 2 undefined; f=0.01: 6 usable, 2 undefined; f=0.02: 6 usable, 5 undefined; f=0.03: 6 usable, 3 undefined; f=0.05: 6 usable, 2 undefined; f=0.1: 6 usable, 4 undefined; f=0.3: 6 usable, 6 undefined; f=1: 6 usable, 4 undefined

Pointwise whole-seed 95% intervals; every finite positive point is within the axes. Open edge triangles and arrows denote CI tails beyond the axes; full intervals are in CSV.
A usable lag can have C ≤ 0, where −ln C and its ratio are undefined; all such counts are retained above. Asterisks/squares flag >1.5× drift. Geometry is not site diffusivity.


Wave-pinning: all usable lags — common, analysis_second_half

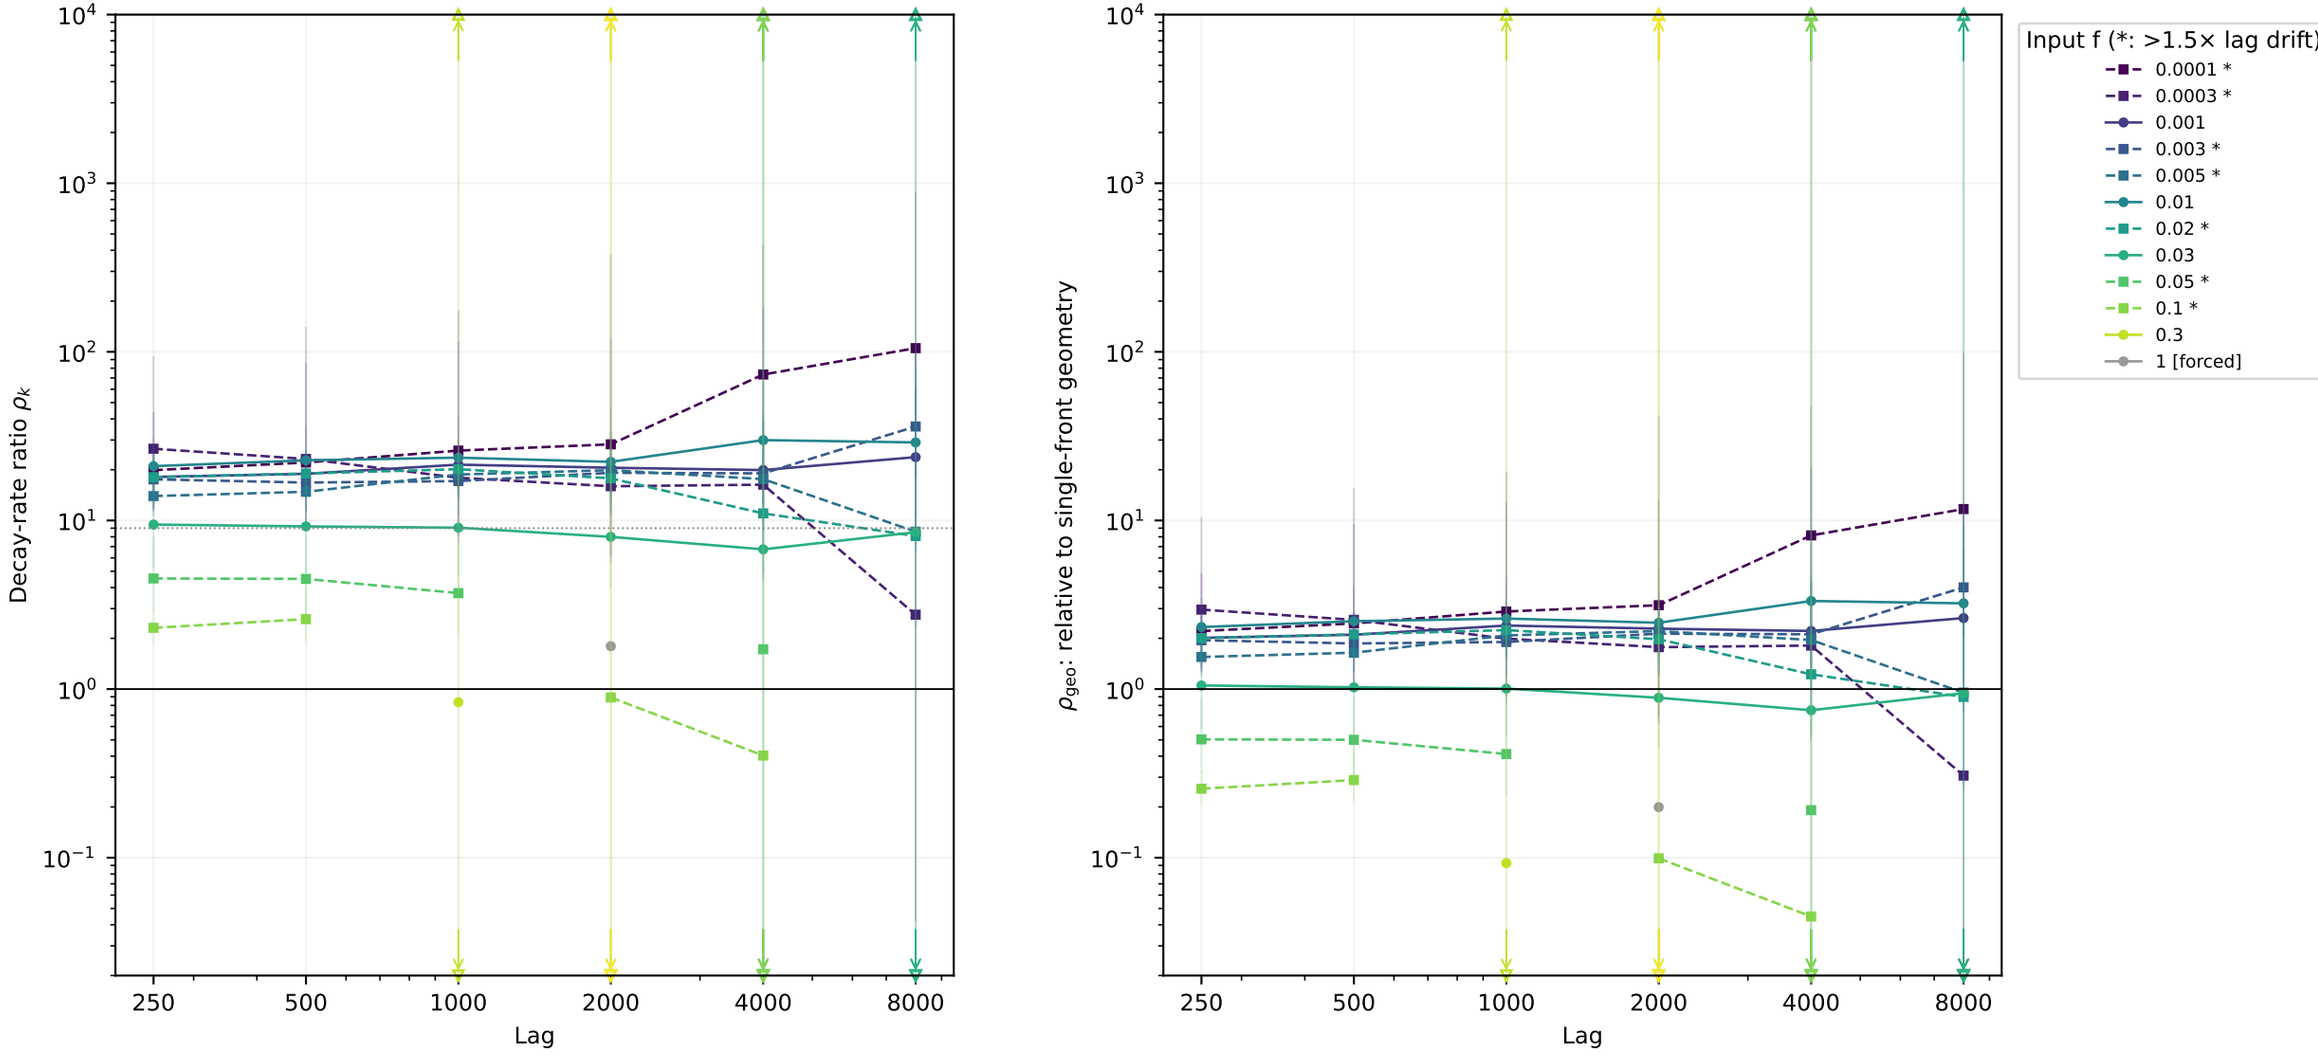

f=0.0001: 6 usable, 0 undefined; f=0.0003: 6 usable, 0 undefined; f=0.001: 6 usable, 0 undefined; f=0.003: 6 usable, 0 undefined; f=0.005: 6 usable, 0 undefined; f=0.01: 6 usable, 0 undefined; f=0.02: 6 usable, 0 undefined; f=0.03: 6 usable, 0 undefined; f=0.05: 6 usable, 2 undefined; f=0.1: 6 usable, 2 undefined; f=0.3: 6 usable, 5 undefined; f=1: 6 usable, 5 undefined

Pointwise whole-seed 95% intervals; every finite positive point is within the axes. Open edge triangles and arrows denote CI tails beyond the axes; full intervals are in CSV. A usable lag can have $C \leq 0$, where $-\ln C$ and its ratio are undefined; all such counts are retained above. Asterisks/squares flag >1.5× drift. Geometry is not site diffusivity.


Goryachev: all usable lags — common, analysis_second_half

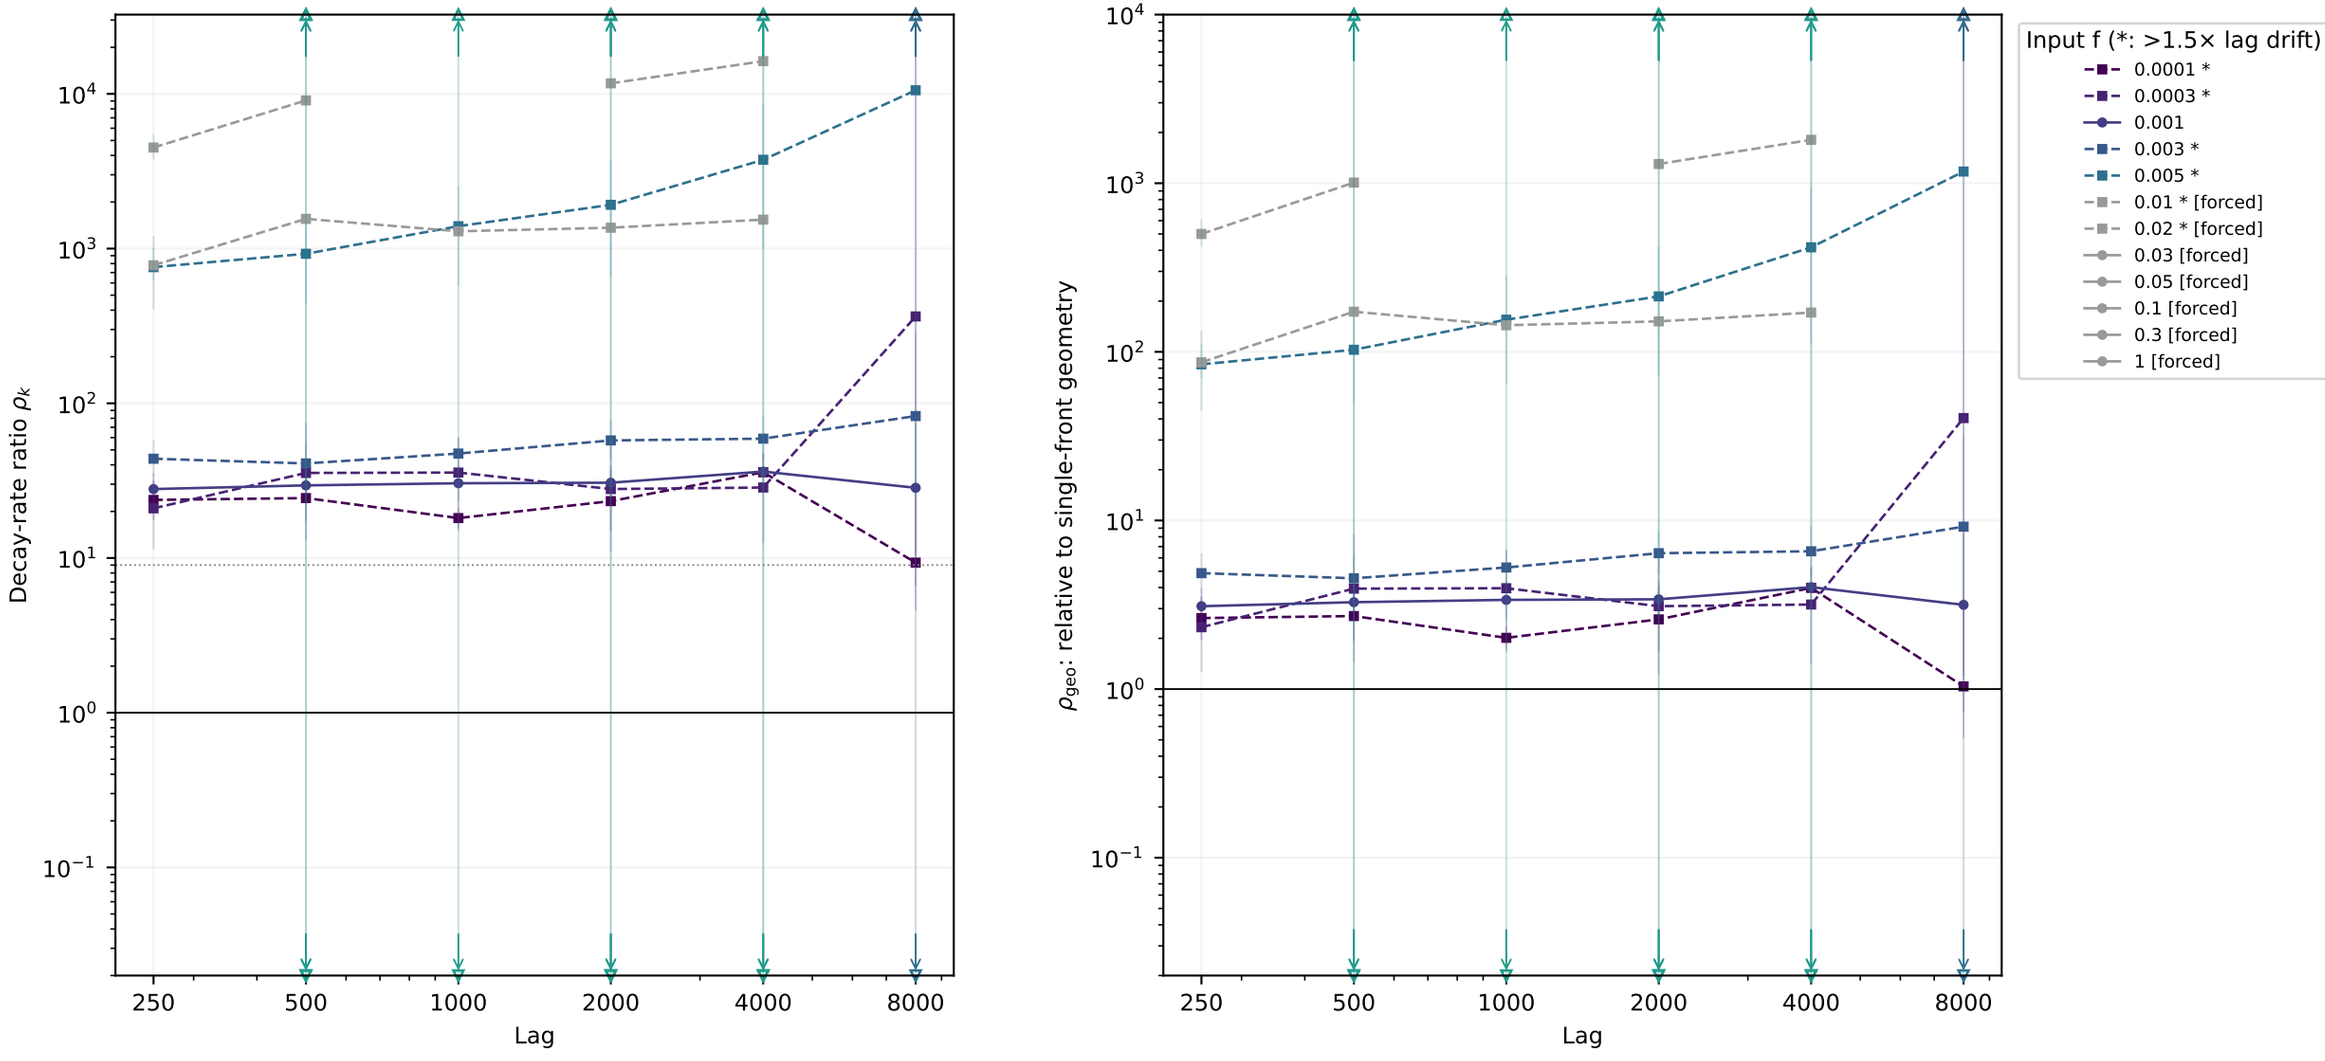

f=0.0001: 6 usable, 0 undefined; f=0.0003: 6 usable, 0 undefined; f=0.001: 6 usable, 0 undefined; f=0.003: 6 usable, 0 undefined; f=0.005: 6 usable, 0 undefined; f=0.01: 6 usable, 2 undefined; f=0.02: 6 usable, 1 undefined; f=0.03: 0 usable, 0 undefined; f=0.05: 0 usable, 0 undefined; f=0.1: 0 usable, 0 undefined; f=0.3: 0 usable, 0 undefined; f=1: 0 usable, 0 undefined

Pointwise whole-seed 95% intervals; every finite positive point is within the axes. Open edge triangles and arrows denote CI tails beyond the axes; full intervals are in CSV. A usable lag can have C ≤ 0, where −ln C and its ratio are undefined; all such counts are retained above. Asterisks/squares flag >1.5× drift. Geometry is not site diffusivity.


Holmes: all usable lags — common, analysis_second_half

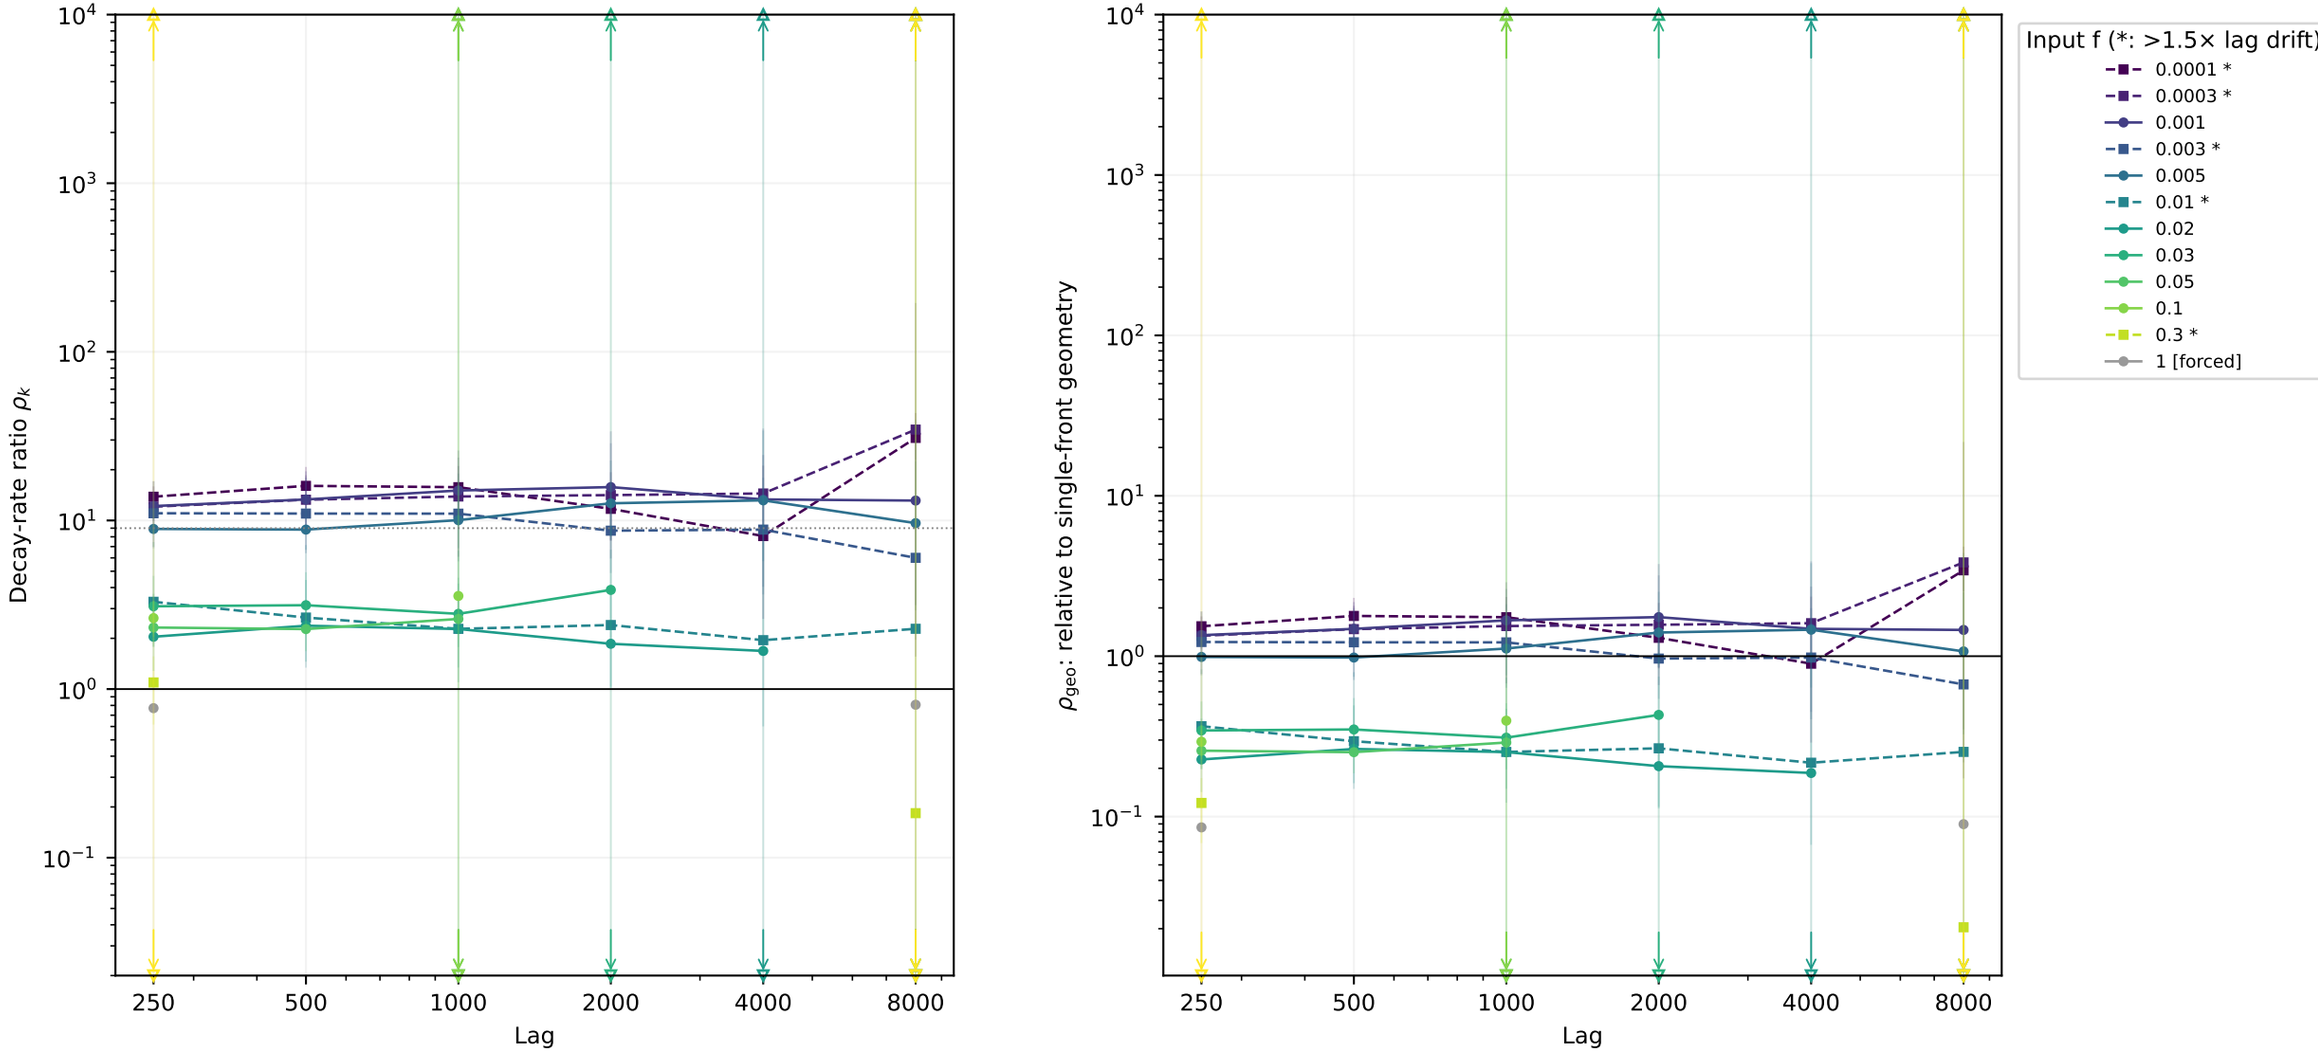

f=0.0001: 6 usable, 0 undefined; f=0.0003: 6 usable, 0 undefined; f=0.001: 6 usable, 0 undefined; f=0.003: 6 usable, 0 undefined; f=0.005: 6 usable, 0 undefined; f=0.01: 6 usable, 0 undefined; f=0.02: 6 usable, 1 undefined; f=0.03: 6 usable, 2 undefined; f=0.05: 6 usable, 3 undefined; f=0.1: 6 usable, 4 undefined; f=0.3: 6 usable, 4 undefined; f=1: 6 usable, 4 undefined

Pointwise whole-seed 95% intervals; every finite positive point is within the axes. Open edge triangles and arrows denote CI tails beyond the axes; full intervals are in CSV. A usable lag can have C ≤ 0, where −ln C and its ratio are undefined; all such counts are retained above. Asterisks/squares flag >1.5× drift. Geometry is not site diffusivity.


Spring: all usable lags — common, analysis_second_half

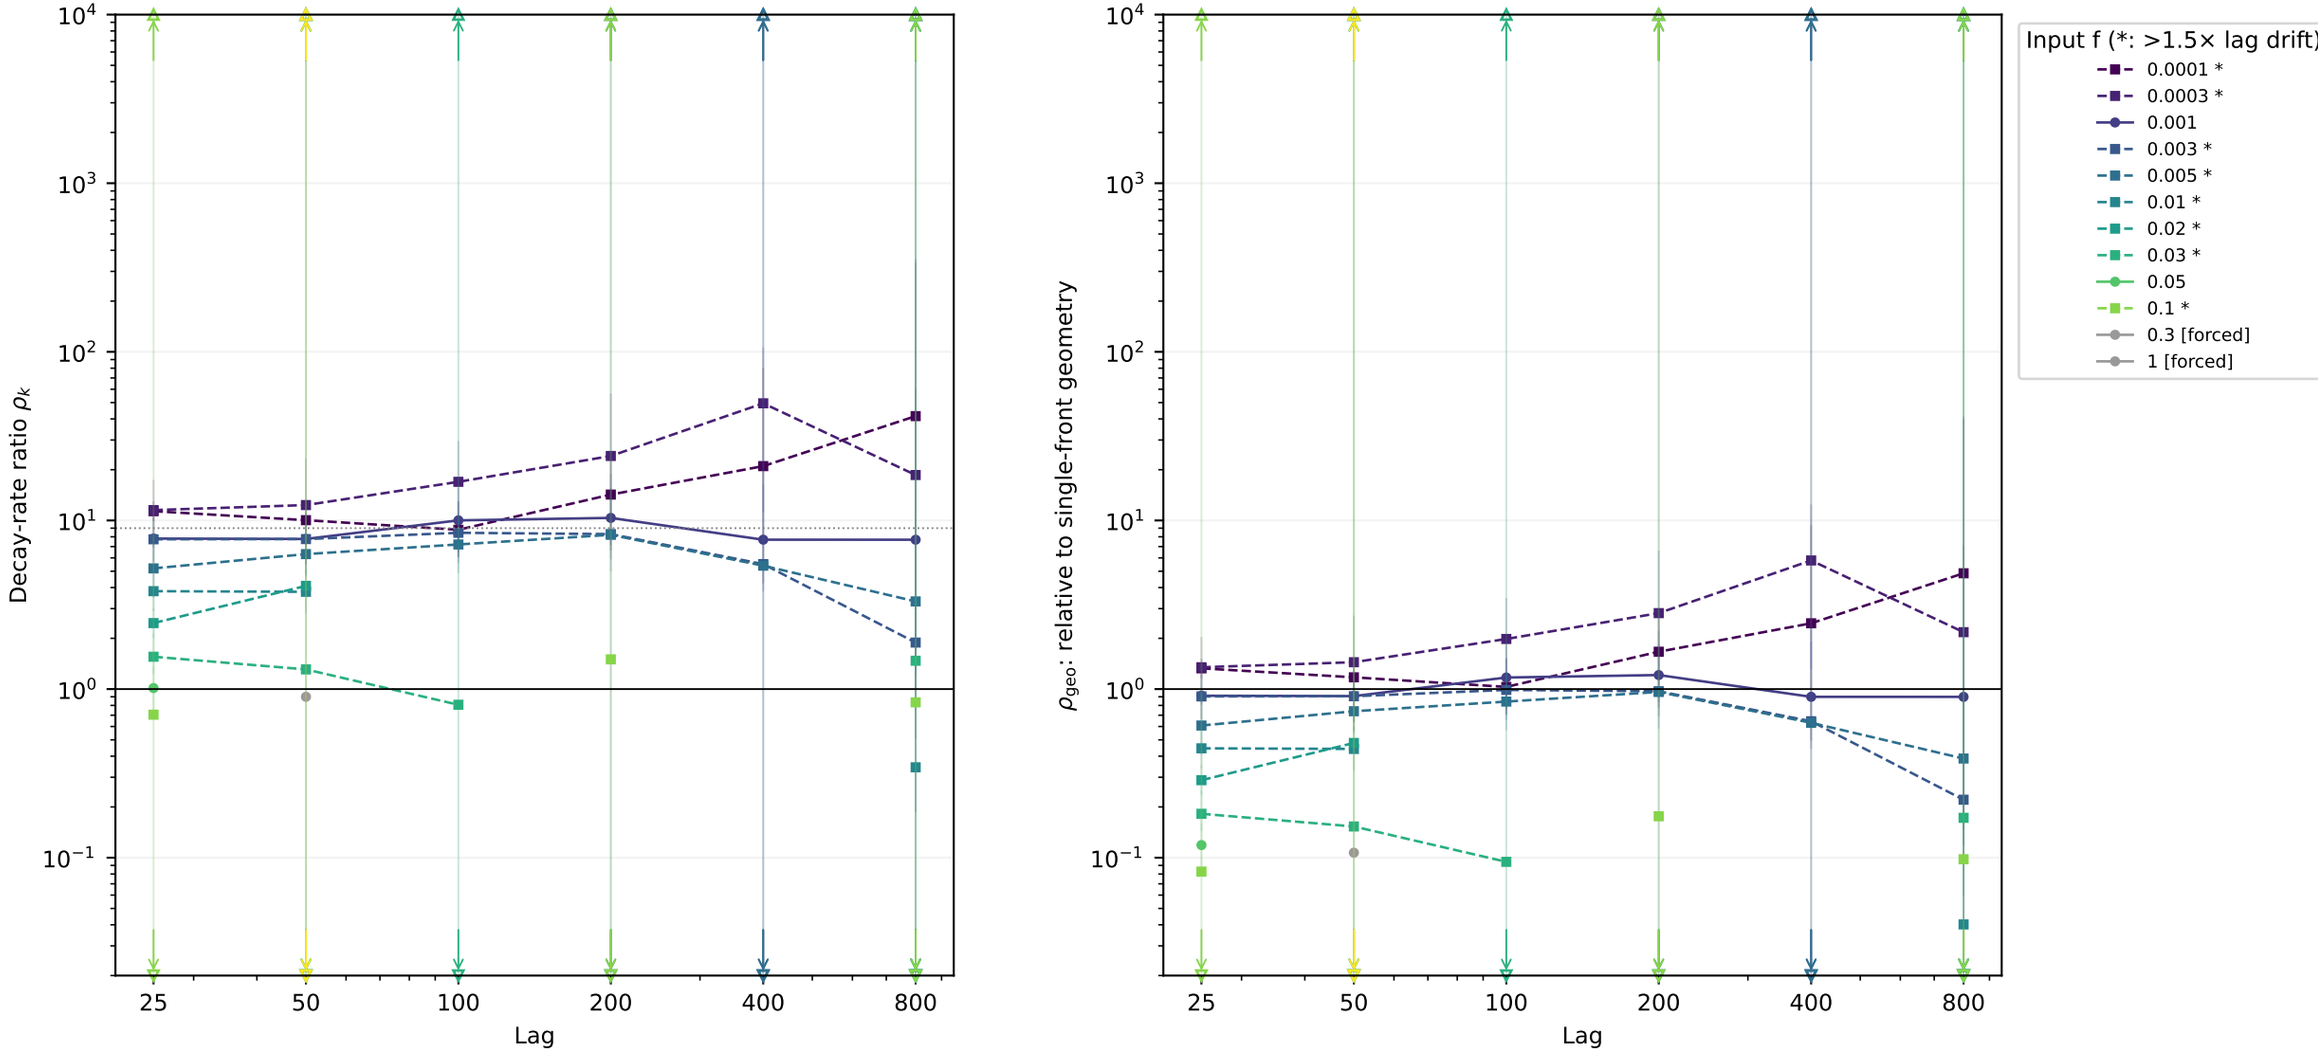

f=0.0001: 6 usable, 0 undefined; f=0.0003: 6 usable, 0 undefined; f=0.001: 6 usable, 0 undefined; f=0.003: 6 usable, 0 undefined; f=0.005: 6 usable, 0 undefined; f=0.01: 6 usable, 3 undefined; f=0.02: 6 usable, 4 undefined; f=0.03: 6 usable, 2 undefined; f=0.05: 6 usable, 5 undefined; f=0.1: 6 usable, 3 undefined; f=0.3: 6 usable, 6 undefined; f=1: 6 usable, 5 undefined

Pointwise whole-seed 95% intervals; every finite positive point is within the axes. Open edge triangles and arrows denote CI tails beyond the axes; full intervals are in CSV. A usable lag can have C ≤ 0, where −ln C and its ratio are undefined; all such counts are retained above. Asterisks/squares flag >1.5× drift. Geometry is not site diffusivity.


Wave-pinning: all usable lags — common, late_quarter

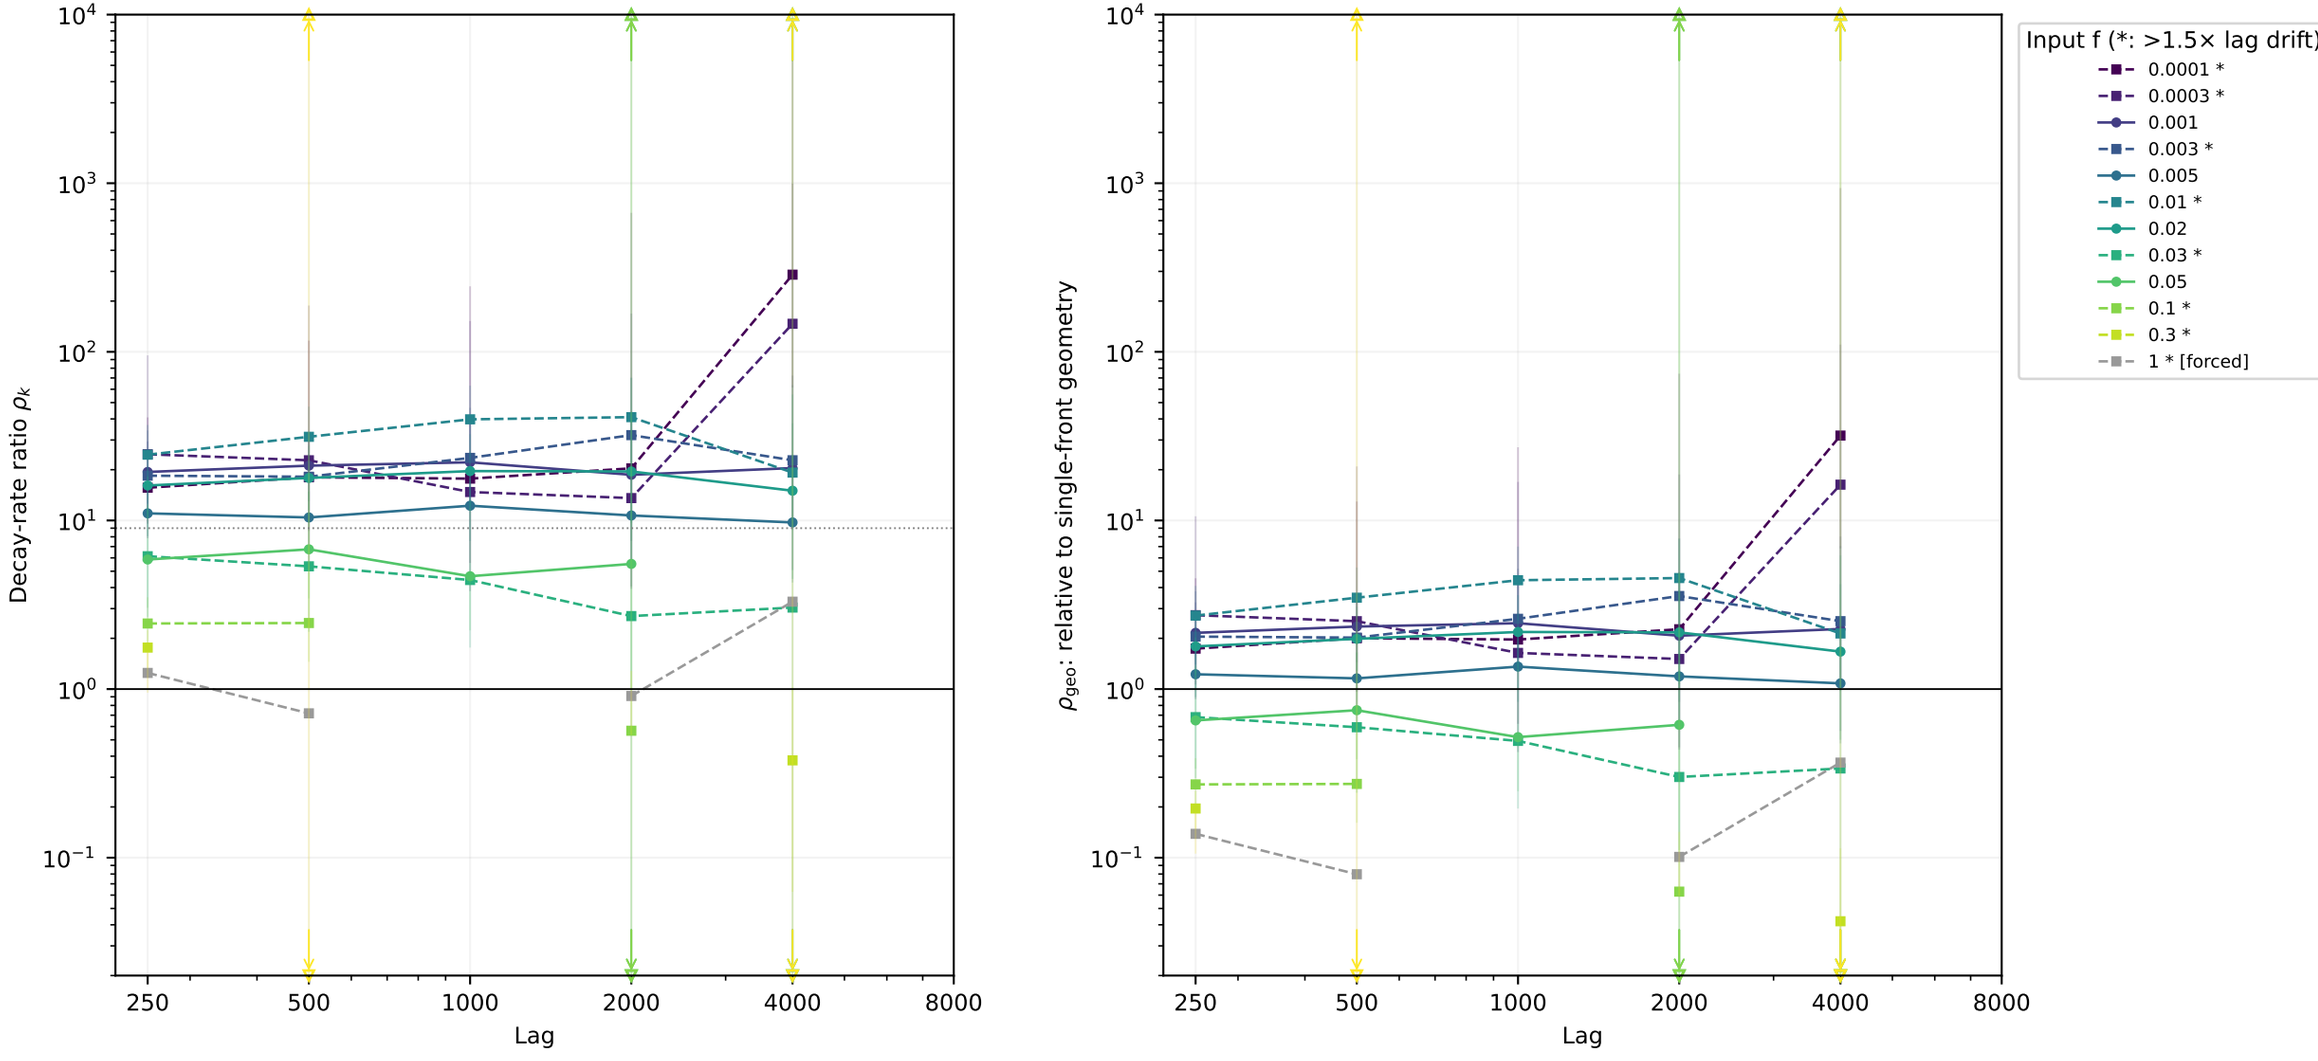

f=0.0001: 5 usable, 0 undefined; f=0.0003: 5 usable, 0 undefined; f=0.001: 5 usable, 0 undefined; f=0.003: 5 usable, 0 undefined; f=0.005: 5 usable, 0 undefined; f=0.01: 5 usable, 0 undefined; f=0.02: 5 usable, 0 undefined; f=0.03: 5 usable, 0 undefined; f=0.05: 5 usable, 1 undefined; f=0.1: 5 usable, 2 undefined; f=0.3: 5 usable, 3 undefined; f=1: 5 usable, 1 undefined

Pointwise whole-seed 95% intervals; every finite positive point is within the axes. Open edge triangles and arrows denote CI tails beyond the axes; full intervals are in CSV. A usable lag can have C ≤ 0, where −ln C and its ratio are undefined; all such counts are retained above. Asterisks/squares flag >1.5× drift. Geometry is not site diffusivity.


Goryachev: all usable lags — common, late_quarter

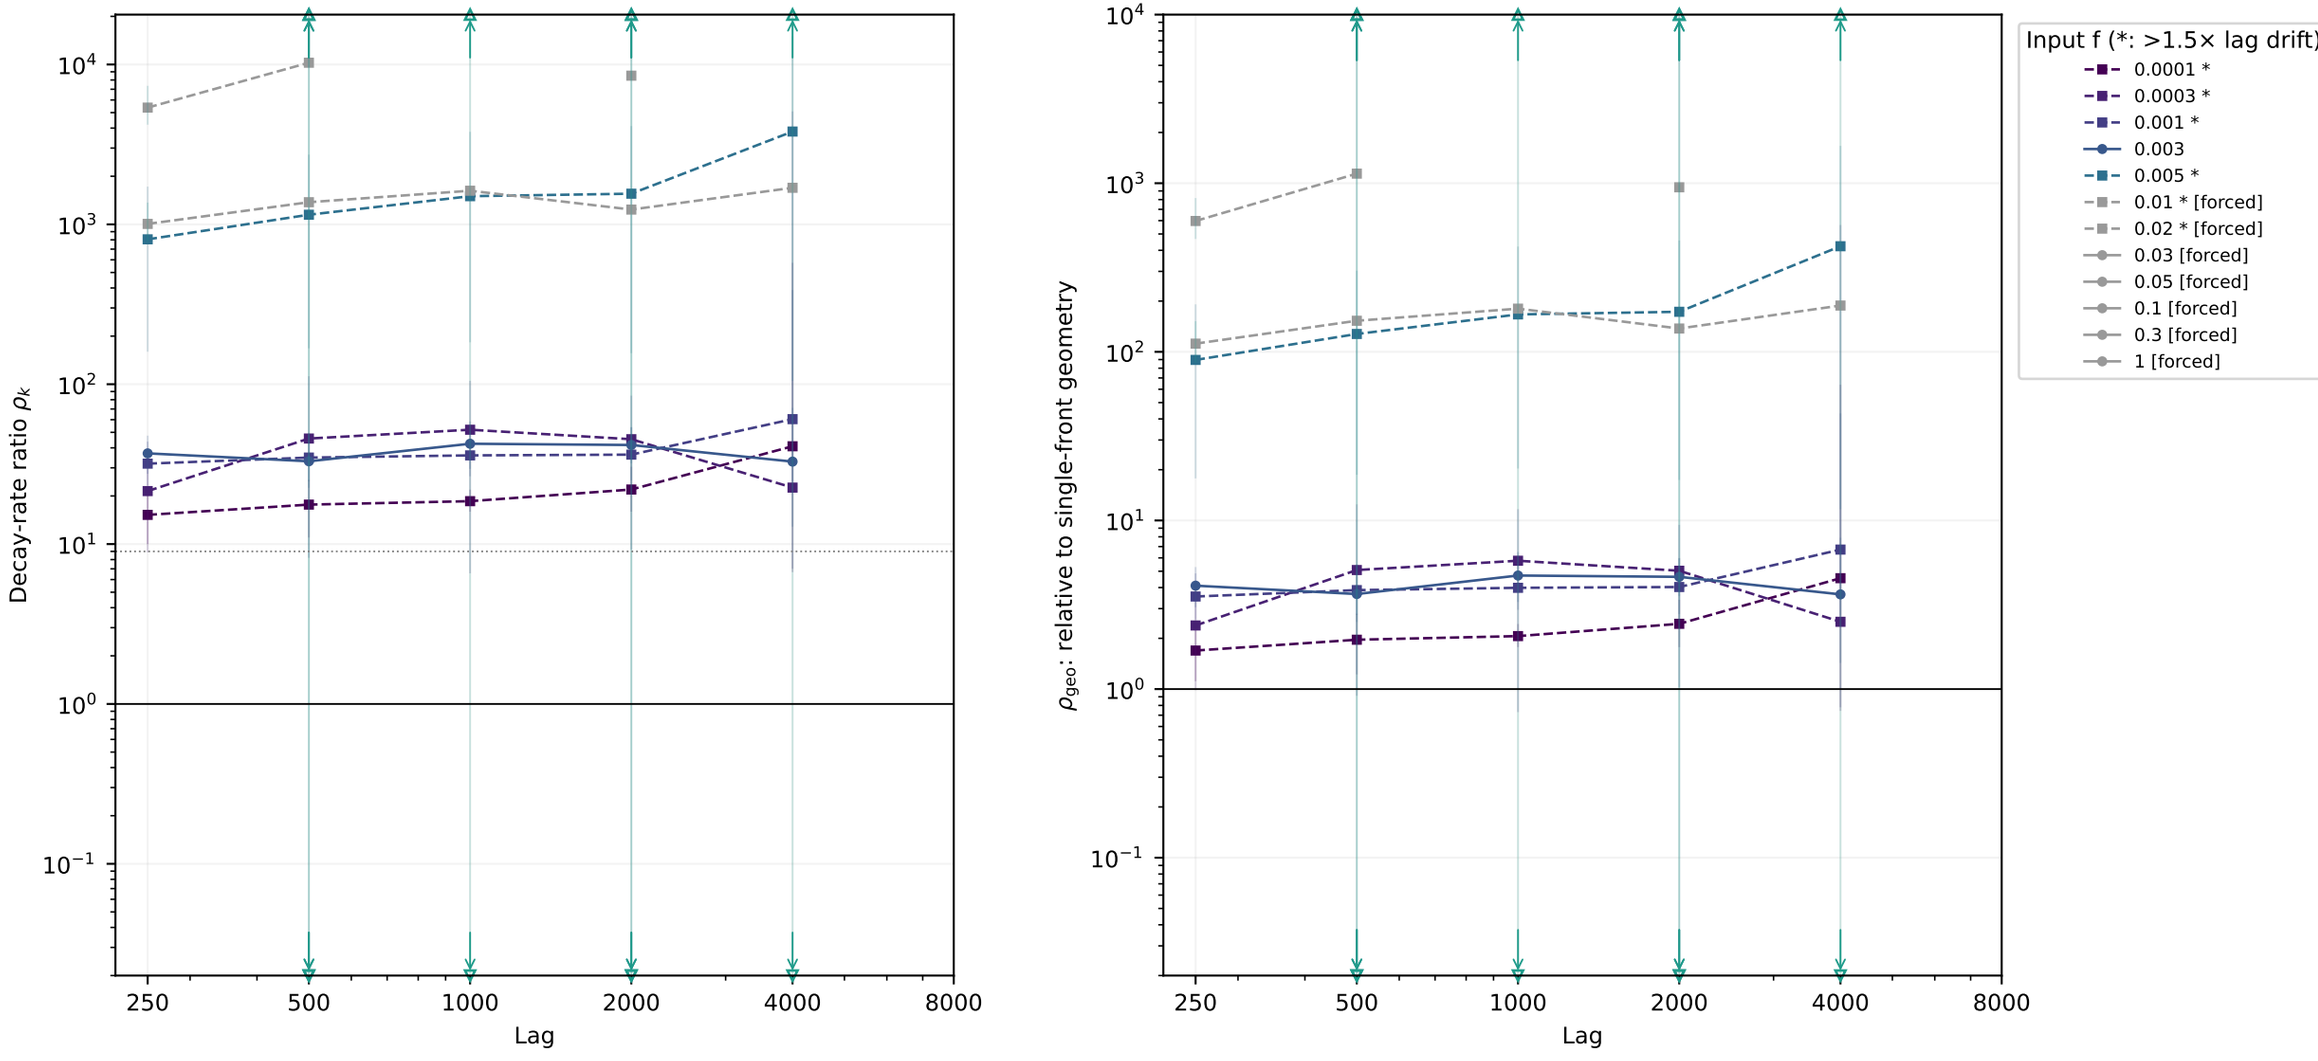

f=0.0001: 5 usable, 0 undefined; f=0.0003: 5 usable, 0 undefined; f=0.001: 5 usable, 0 undefined; f=0.003: 5 usable, 0 undefined; f=0.005: 5 usable, 0 undefined; f=0.01: 5 usable, 2 undefined; f=0.02: 5 usable, 0 undefined; f=0.03: 0 usable, 0 undefined; f=0.05: 0 usable, 0 undefined; f=0.1: 0 usable, 0 undefined; f=0.3: 0 usable, 0 undefined; f=1: 0 usable, 0 undefined

Pointwise whole-seed 95% intervals; every finite positive point is within the axes. Open edge triangles and arrows denote CI tails beyond the axes; full intervals are in CSV. A usable lag can have C ≤ 0, where −ln C and its ratio are undefined; all such counts are retained above. Asterisks/squares flag >1.5× drift. Geometry is not site diffusivity.


Holmes: all usable lags — common, late_quarter

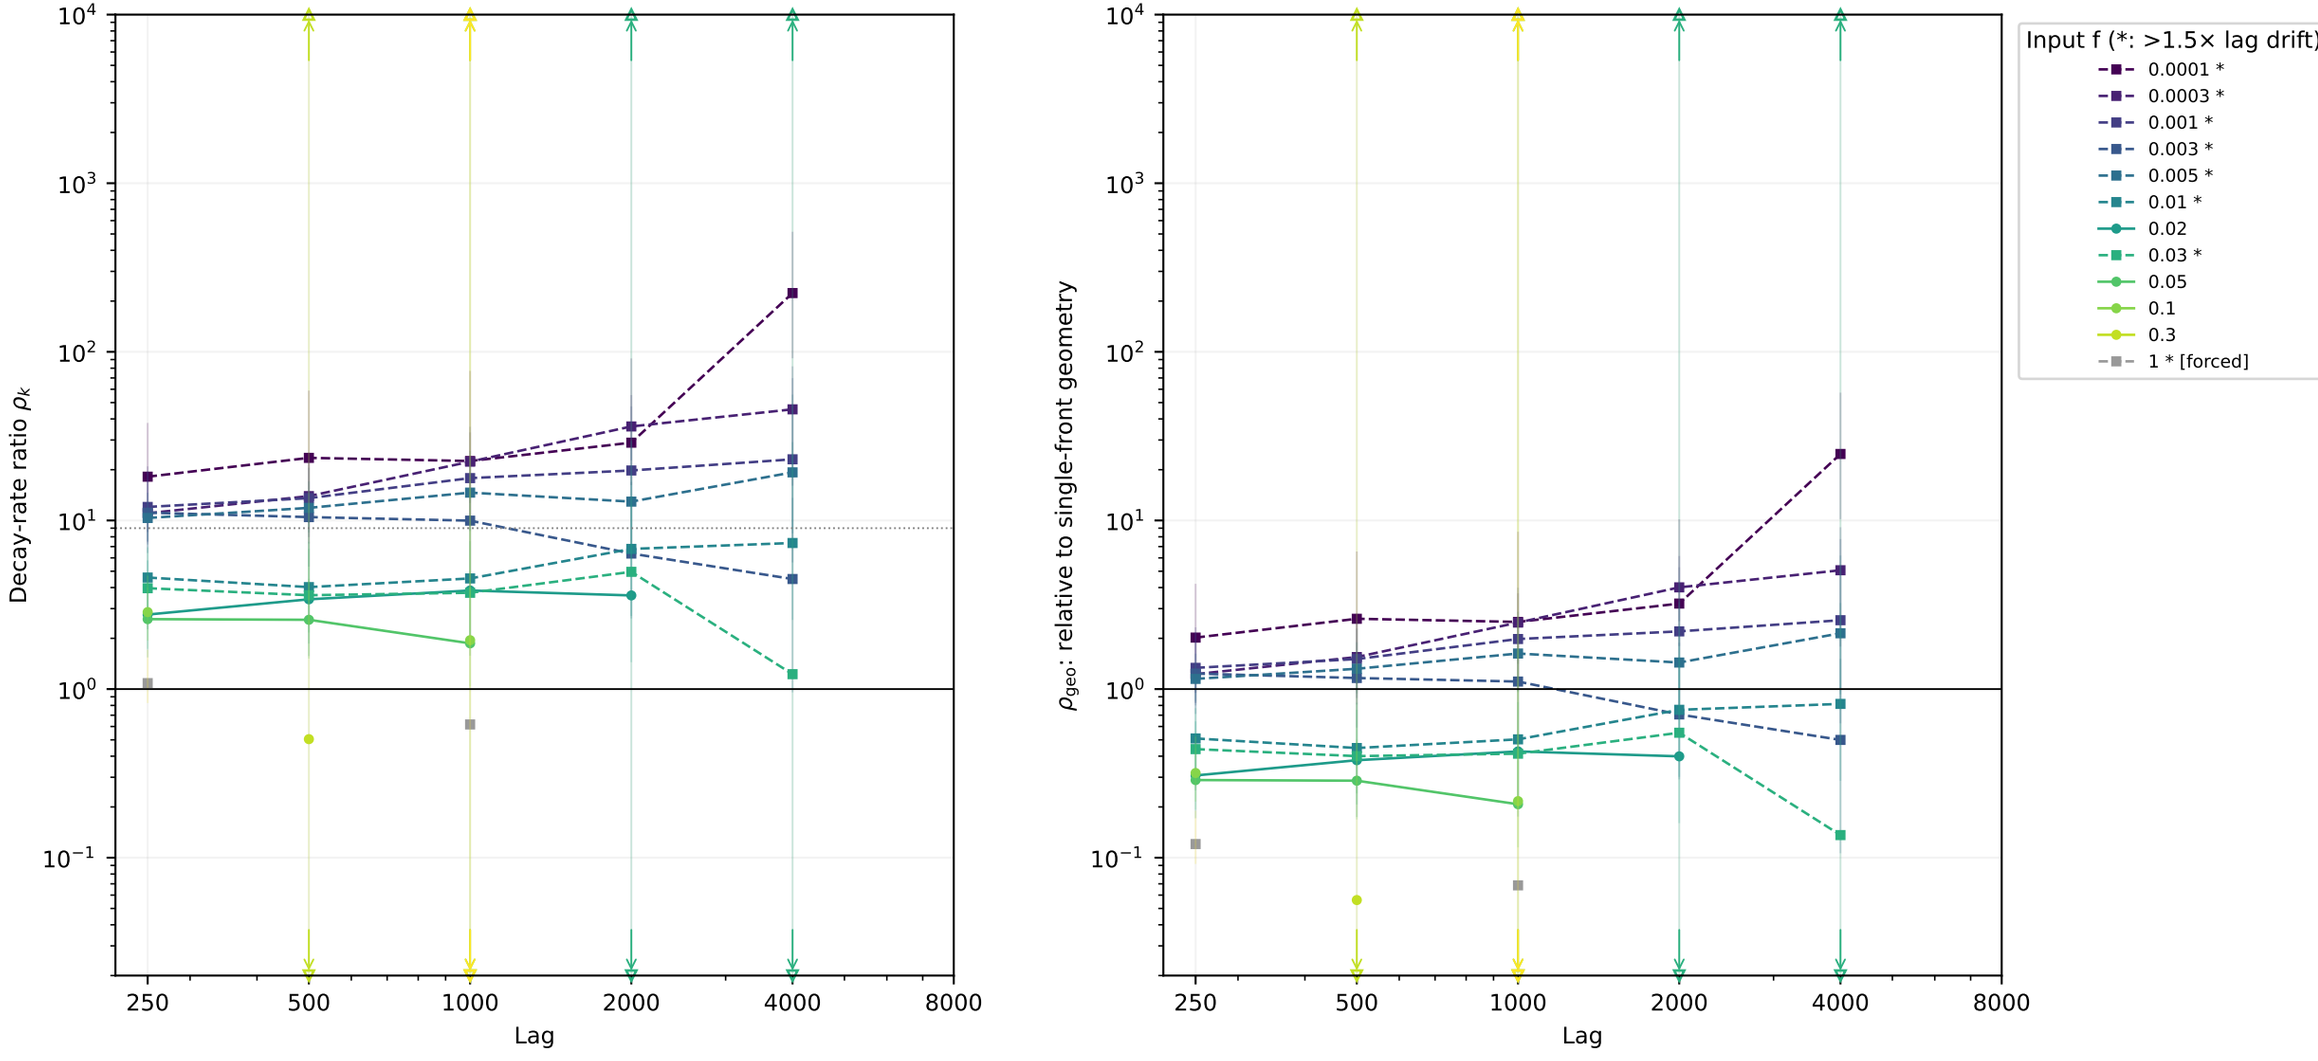

f=0.0001: 5 usable, 0 undefined; f=0.0003: 5 usable, 0 undefined; f=0.001: 5 usable, 0 undefined; f=0.003: 5 usable, 0 undefined; f=0.005: 5 usable, 0 undefined; f=0.01: 5 usable, 0 undefined; f=0.02: 5 usable, 1 undefined; f=0.03: 5 usable, 0 undefined; f=0.05: 5 usable, 2 undefined; f=0.1: 5 usable, 3 undefined; f=0.3: 5 usable, 4 undefined; f=1: 5 usable, 3 undefined

Pointwise whole-seed 95% intervals; every finite positive point is within the axes. Open edge triangles and arrows denote CI tails beyond the axes; full intervals are in CSV. A usable lag can have $C \leq 0$, where $-\ln C$ and its ratio are undefined; all such counts are retained above. Asterisks/squares flag >1.5× drift. Geometry is not site diffusivity.


Spring: all usable lags — common, late_quarter

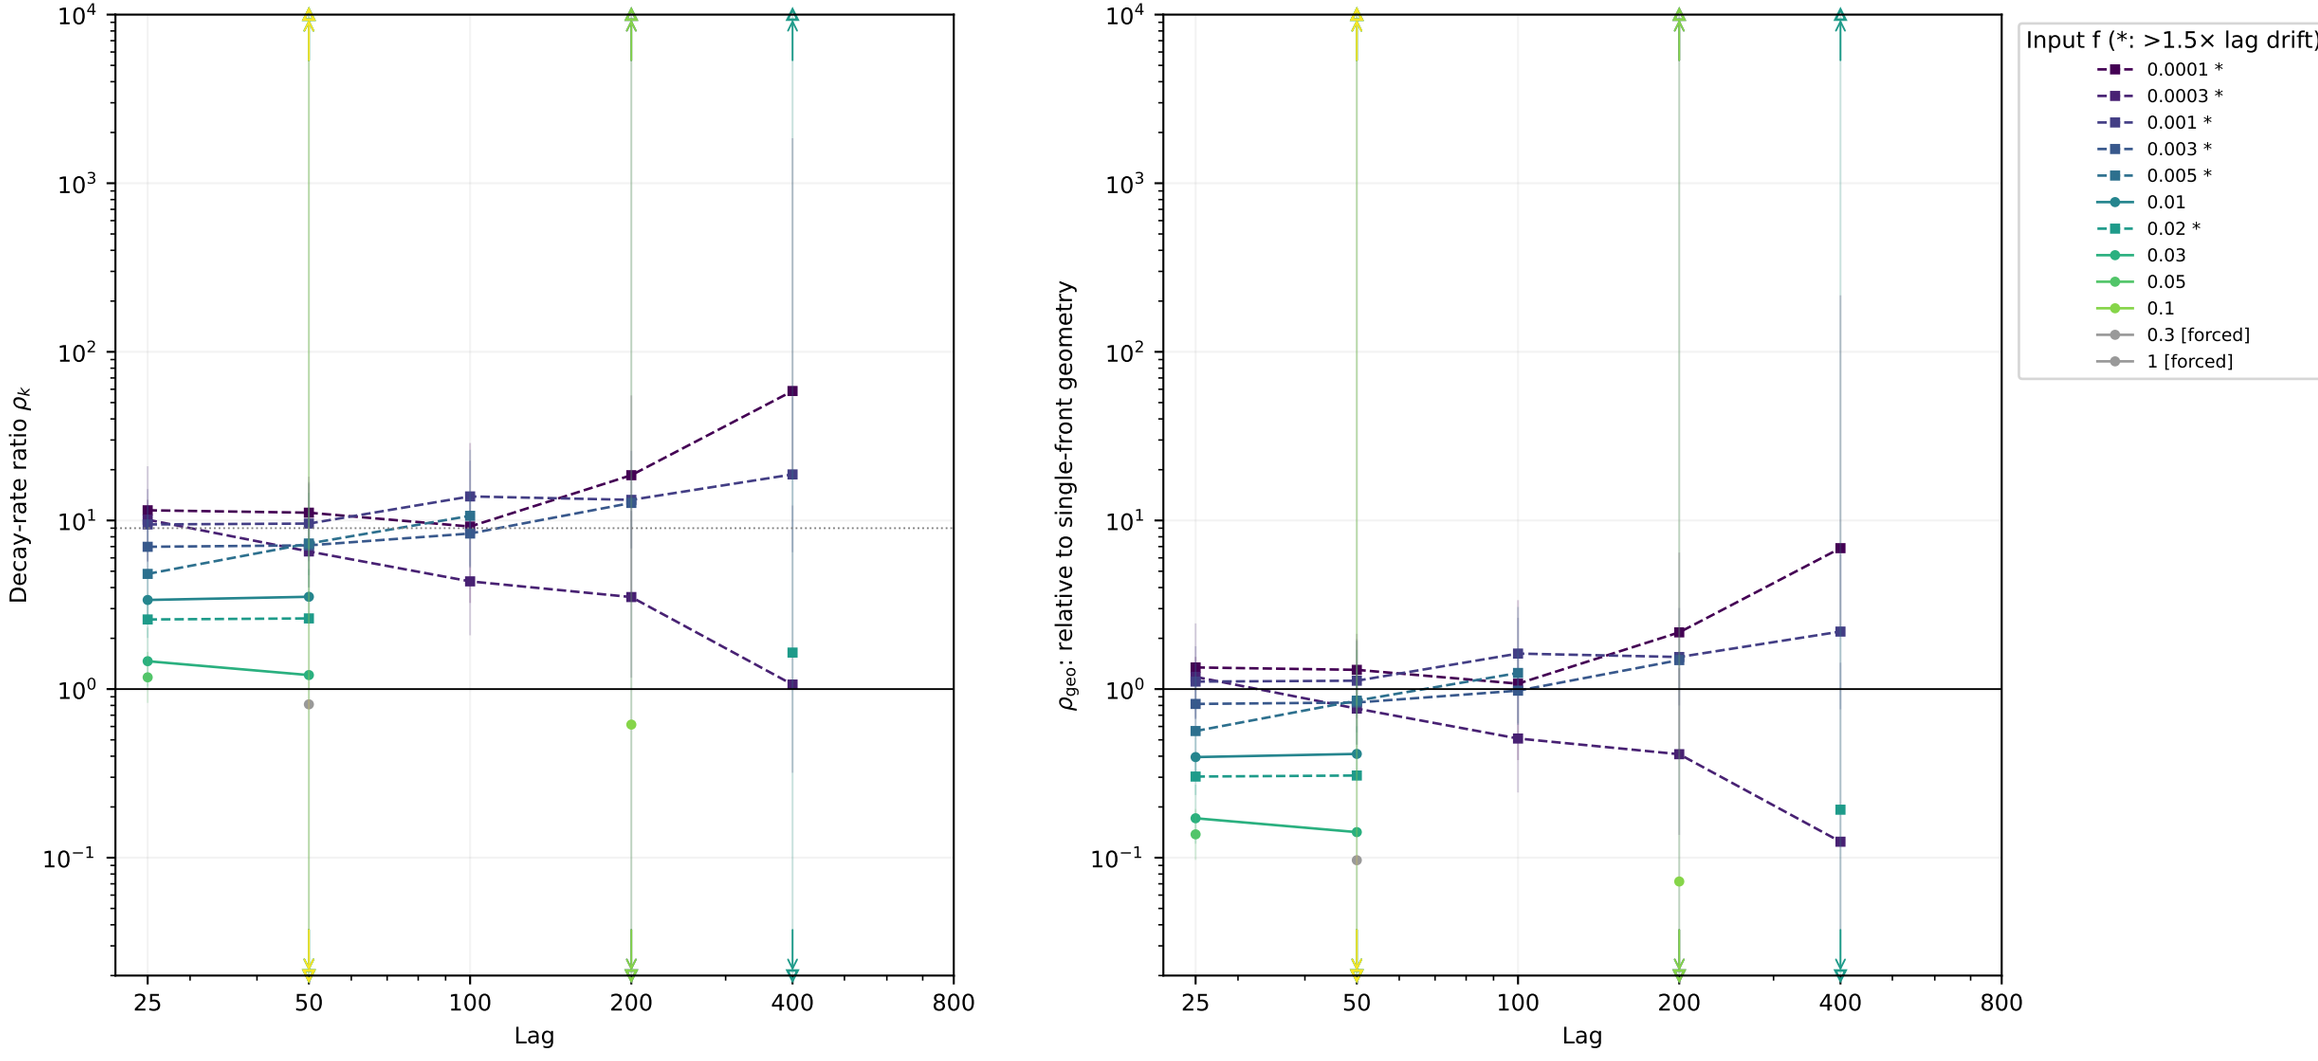

f=0.0001: 5 usable, 0 undefined; f=0.0003: 5 usable, 0 undefined; f=0.001: 5 usable, 0 undefined; f=0.003: 5 usable, 1 undefined; f=0.005: 5 usable, 2 undefined; f=0.01: 5 usable, 3 undefined; f=0.02: 5 usable, 2 undefined; f=0.03: 5 usable, 3 undefined; f=0.05: 5 usable, 4 undefined; f=0.1: 5 usable, 4 undefined; f=0.3: 5 usable, 5 undefined; f=1: 5 usable, 4 undefined

Pointwise whole-seed 95% intervals; every finite positive point is within the axes. Open edge triangles and arrows denote CI tails beyond the axes; full intervals are in CSV. A usable lag can have C ≤ 0, where −ln C and its ratio are undefined; all such counts are retained above. Asterisks/squares flag >1.5× drift. Geometry is not site diffusivity.


Wave-pinning: all usable lags — common, cadence_x2

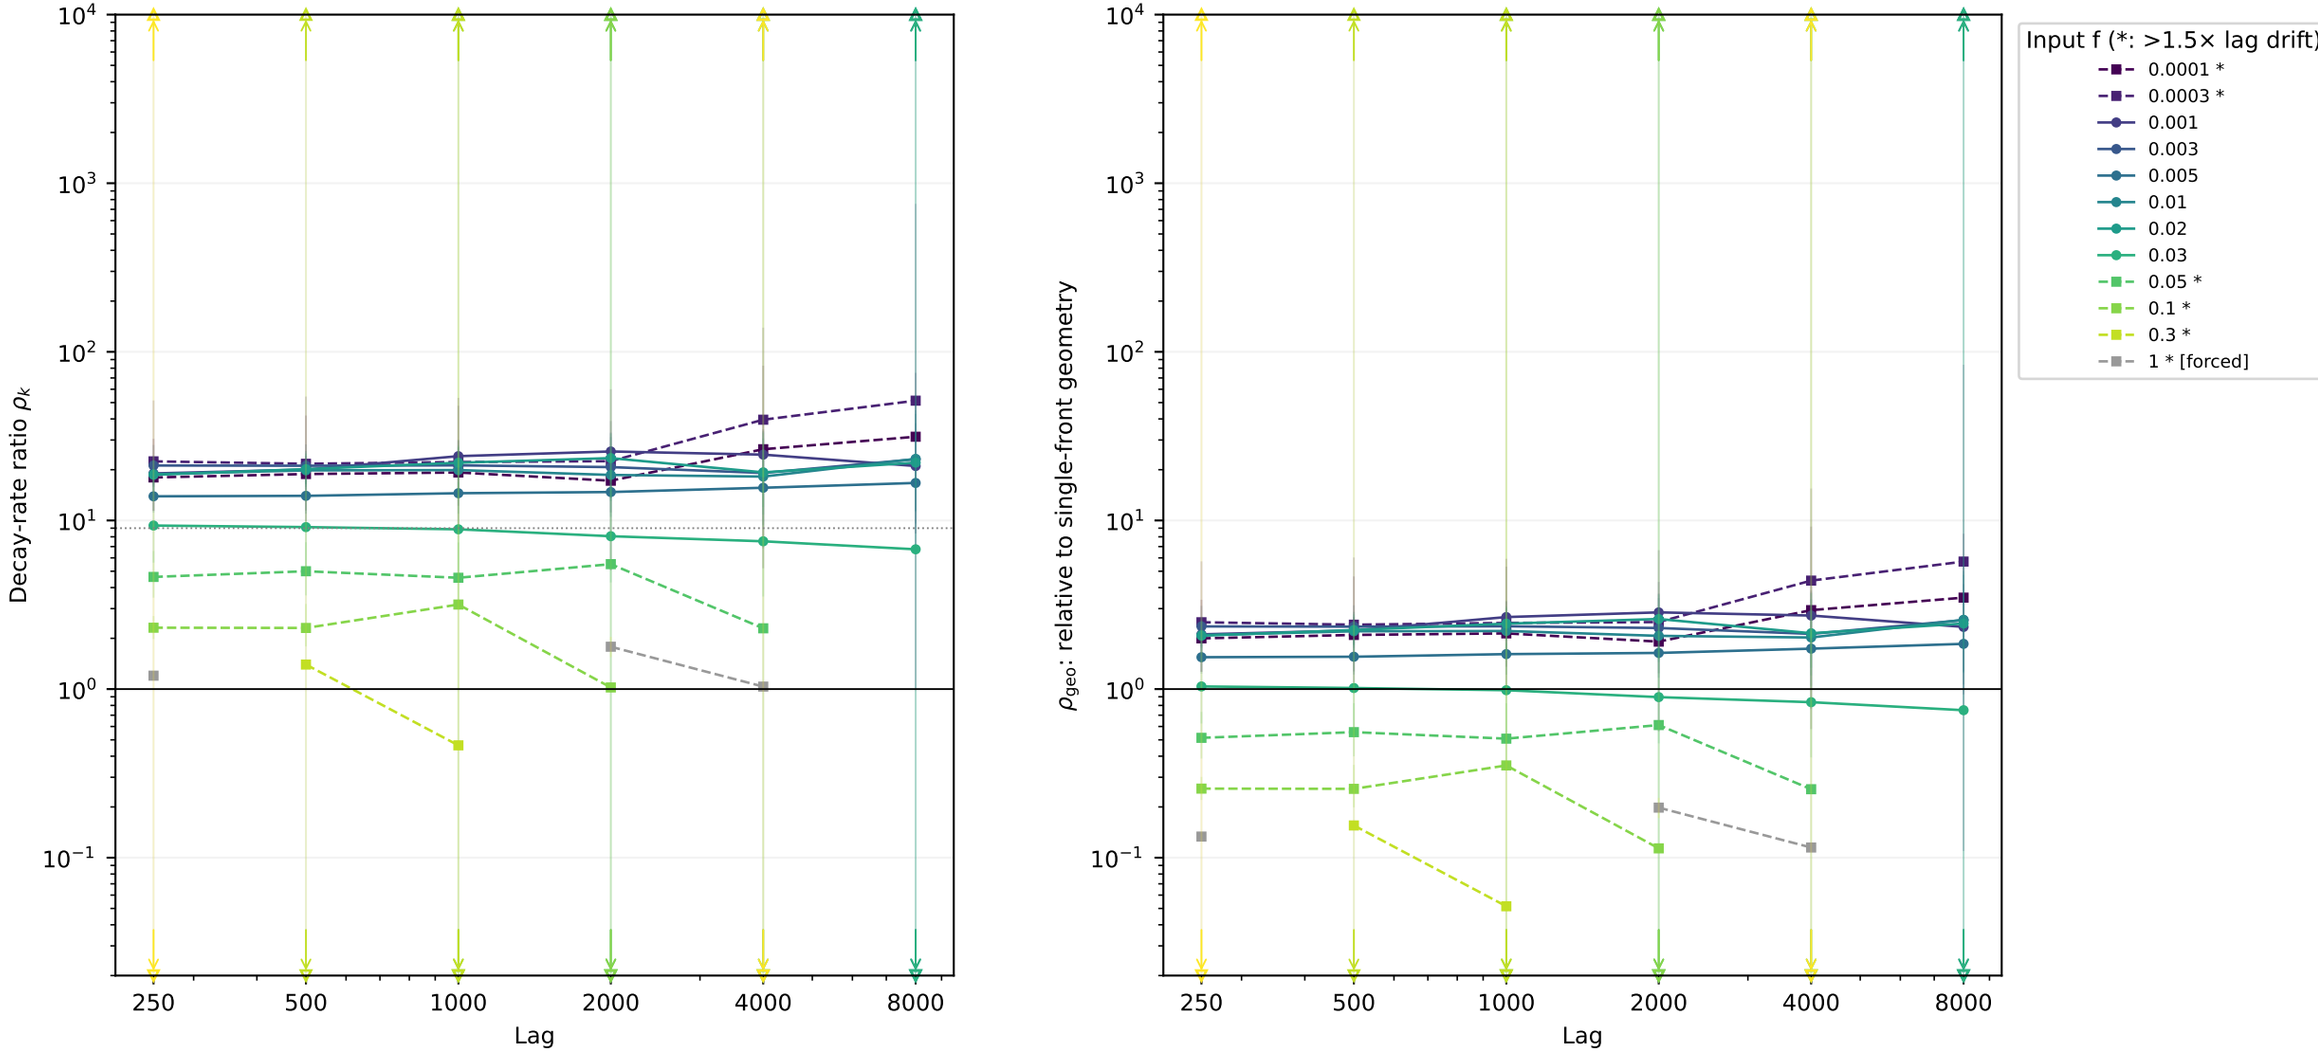

f=0.0001: 6 usable, 0 undefined; f=0.0003: 6 usable, 0 undefined; f=0.001: 6 usable, 0 undefined; f=0.003: 6 usable, 0 undefined; f=0.005: 6 usable, 0 undefined; f=0.01: 6 usable, 0 undefined; f=0.02: 6 usable, 0 undefined; f=0.03: 6 usable, 0 undefined; f=0.05: 6 usable, 1 undefined; f=0.1: 6 usable, 2 undefined; f=0.3: 6 usable, 4 undefined; f=1: 6 usable, 3 undefined

Pointwise whole-seed 95% intervals; every finite positive point is within the axes. Open edge triangles and arrows denote CI tails beyond the axes; full intervals are in CSV.
A usable lag can have C ≤ 0, where −ln C and its ratio are undefined; all such counts are retained above. Asterisks/squares flag >1.5× drift. Geometry is not site diffusivity.


Goryachev: all usable lags — common, cadence_x2

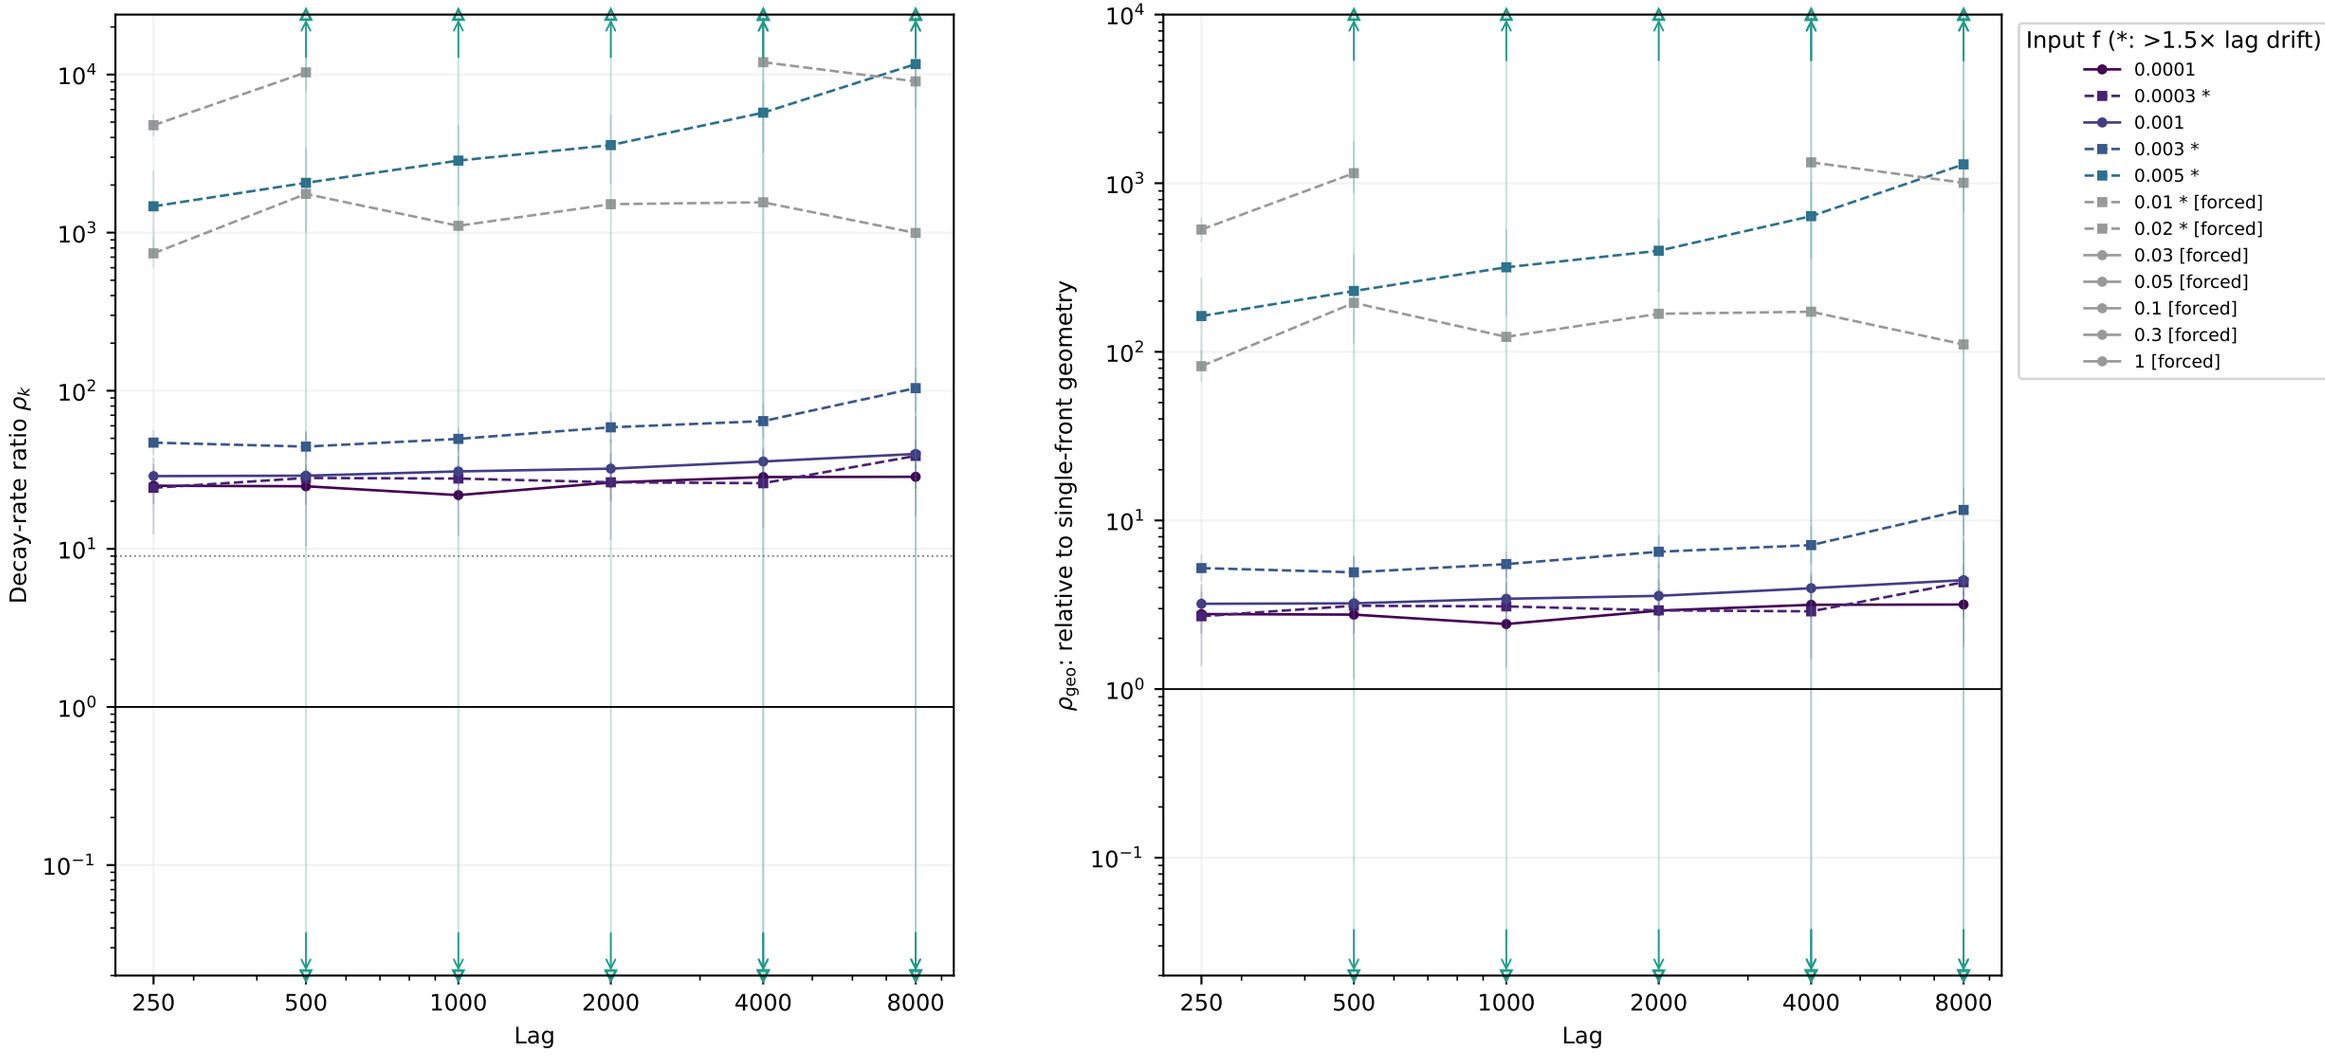

f=0.0001: 6 usable, 0 undefined; f=0.0003: 6 usable, 0 undefined; f=0.001: 6 usable, 0 undefined; f=0.003: 6 usable, 0 undefined; f=0.005: 6 usable, 0 undefined; f=0.01: 6 usable, 2 undefined; f=0.02: 6 usable, 0 undefined; f=0.03: 0 usable, 0 undefined; f=0.05: 0 usable, 0 undefined; f=0.1: 0 usable, 0 undefined; f=0.3: 0 usable, 0 undefined; f=1: 0 usable, 0 undefined

Pointwise whole-seed 95% intervals; every finite positive point is within the axes. Open edge triangles and arrows denote CI tails beyond the axes; full intervals are in CSV. A usable lag can have C ≤ 0, where −ln C and its ratio are undefined; all such counts are retained above. Asterisks/squares flag >1.5× drift. Geometry is not site diffusivity.


Holmes: all usable lags — common, cadence_x2

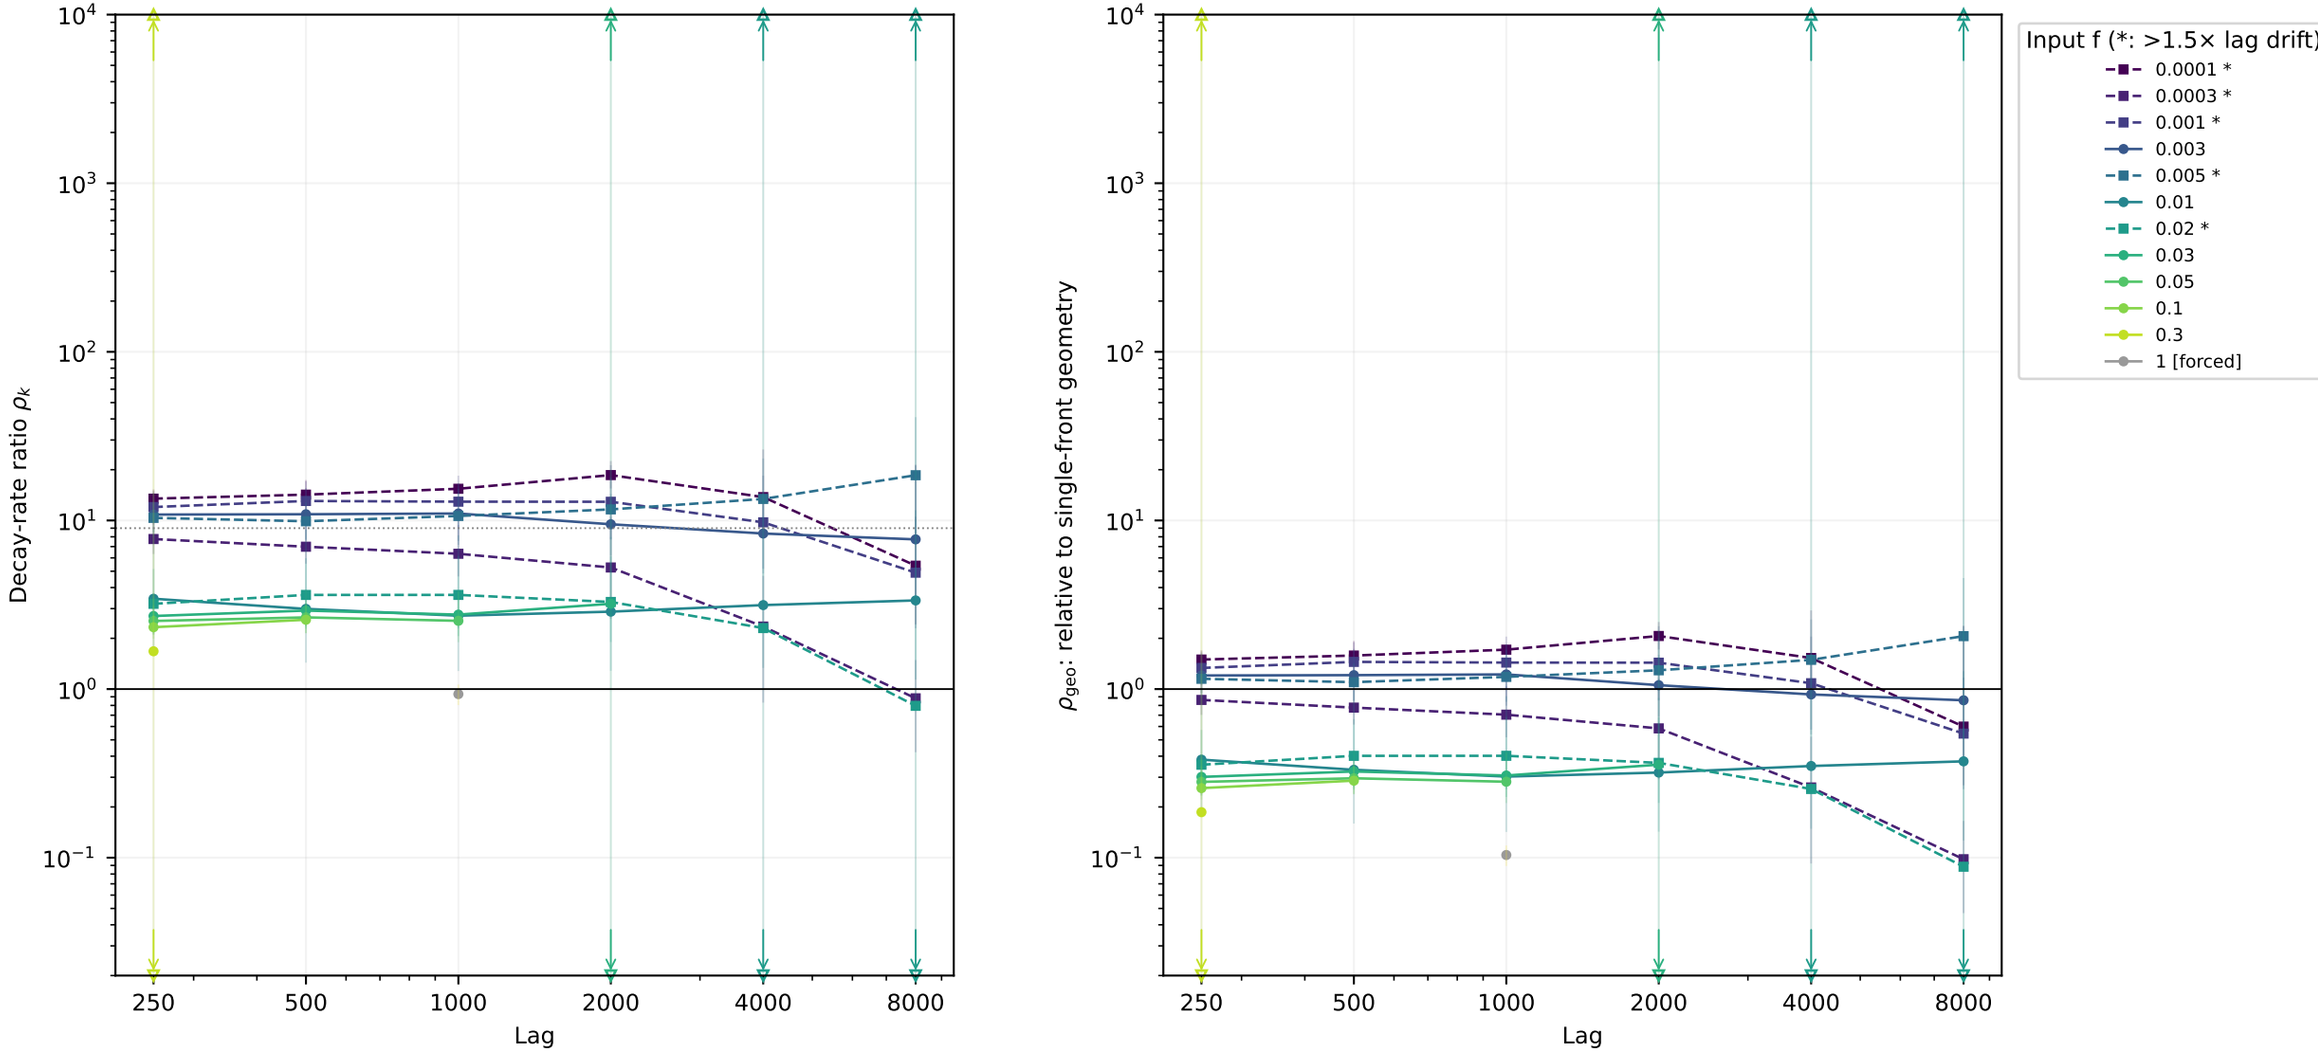

f=0.0001: 6 usable, 0 undefined; f=0.0003: 6 usable, 0 undefined; f=0.001: 6 usable, 0 undefined; f=0.003: 6 usable, 0 undefined; f=0.005: 6 usable, 0 undefined; f=0.01: 6 usable, 0 undefined; f=0.02: 6 usable, 0 undefined; f=0.03: 6 usable, 2 undefined; f=0.05: 6 usable, 3 undefined; f=0.1: 6 usable, 4 undefined; f=0.3: 6 usable, 5 undefined; f=1: 6 usable, 5 undefined

Pointwise whole-seed 95% intervals; every finite positive point is within the axes. Open edge triangles and arrows denote CI tails beyond the axes; full intervals are in CSV.
A usable lag can have C ≤ 0, where −ln C and its ratio are undefined; all such counts are retained above. Asterisks/squares flag >1.5× drift. Geometry is not site diffusivity.


Spring: all usable lags — common, cadence_x2

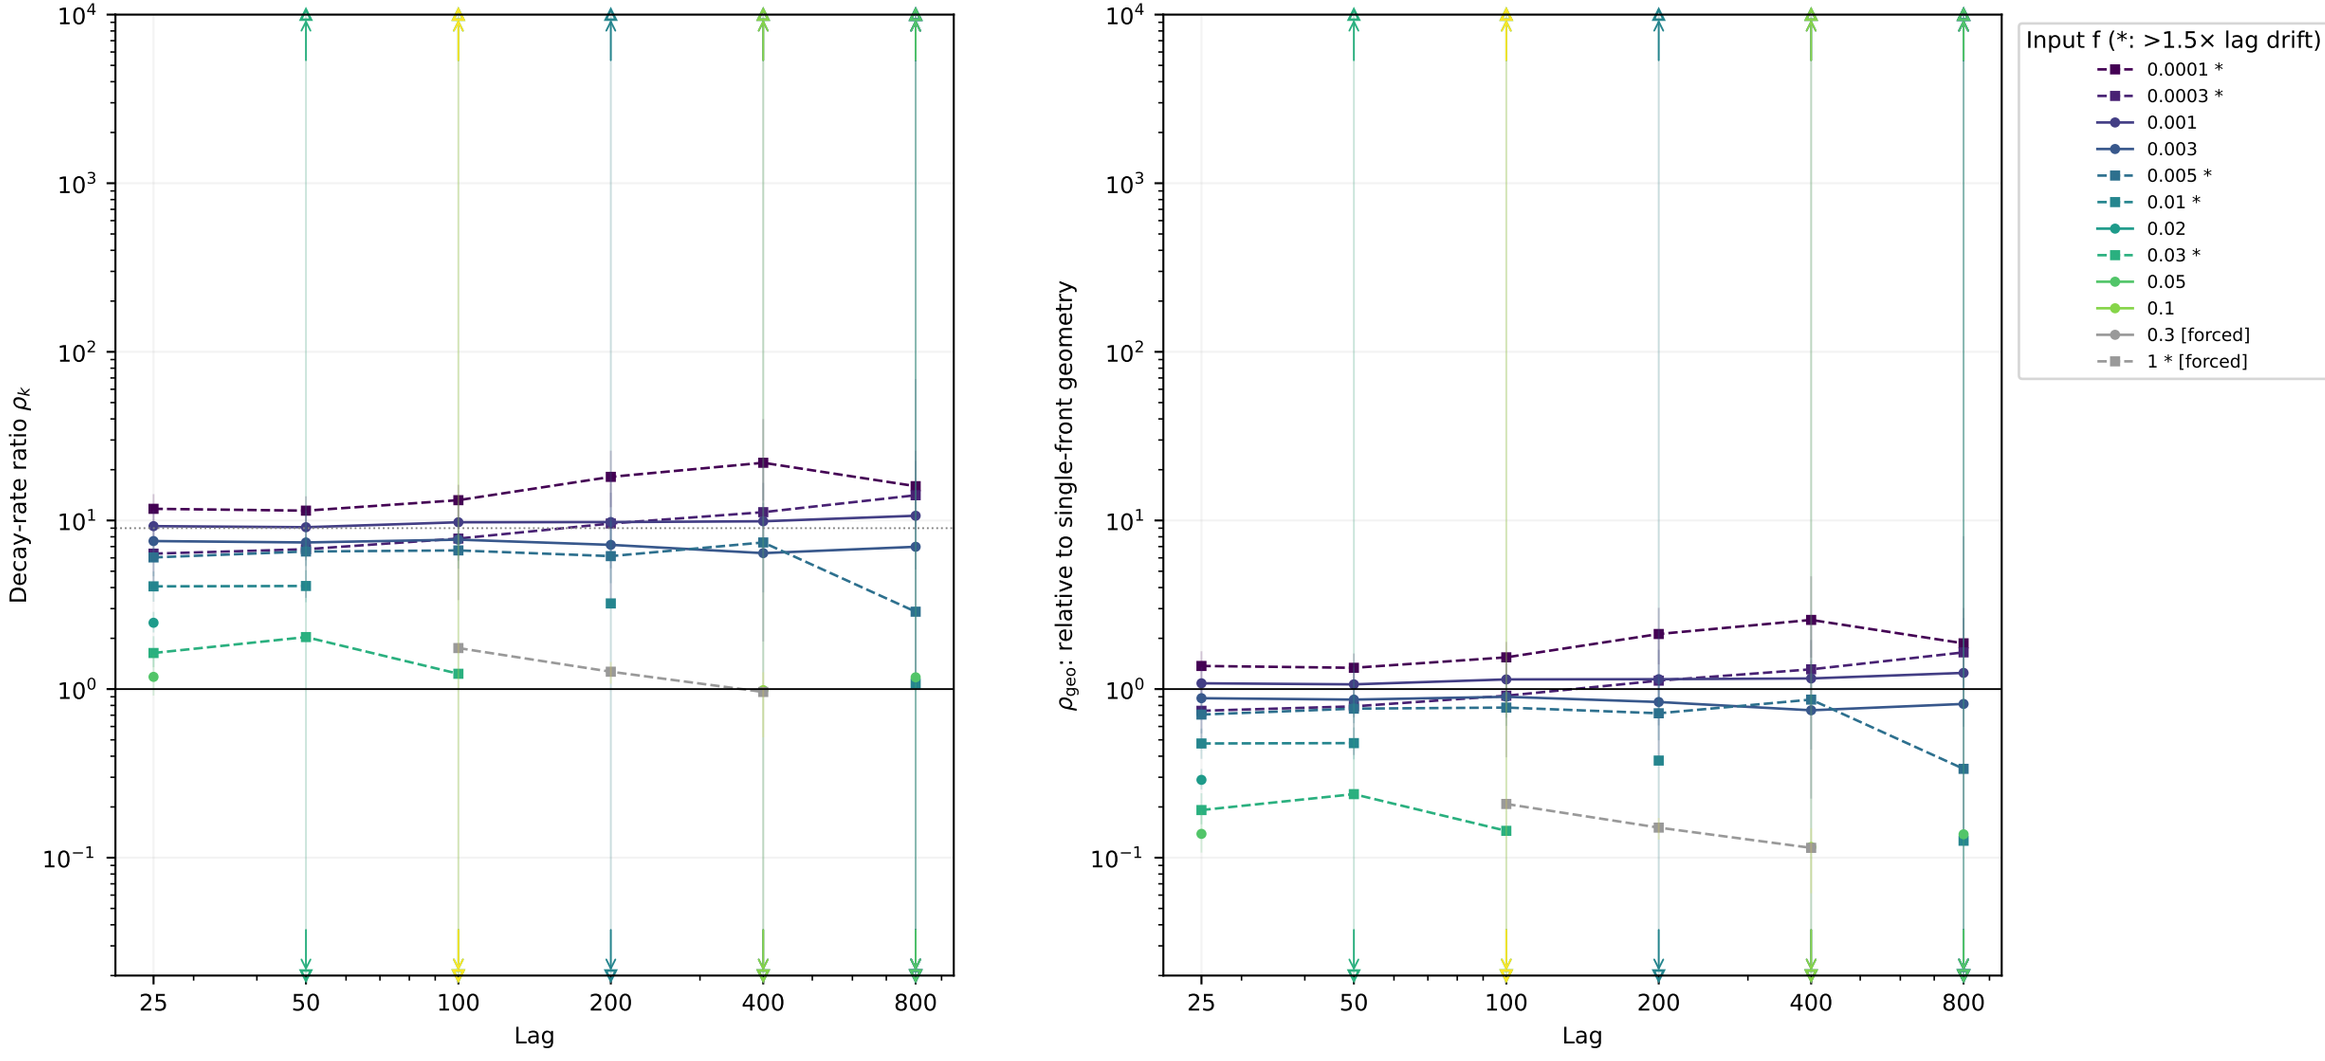

f=0.0001: 6 usable, 0 undefined; f=0.0003: 6 usable, 0 undefined; f=0.001: 6 usable, 0 undefined; f=0.003: 6 usable, 0 undefined; f=0.005: 6 usable, 0 undefined; f=0.01: 6 usable, 2 undefined; f=0.02: 6 usable, 5 undefined; f=0.03: 6 usable, 3 undefined; f=0.05: 6 usable, 4 undefined; f=0.1: 6 usable, 5 undefined; f=0.3: 6 usable, 6 undefined; f=1: 6 usable, 3 undefined

Pointwise whole-seed 95% intervals; every finite positive point is within the axes. Open edge triangles and arrows denote CI tails beyond the axes; full intervals are in CSV. A usable lag can have C ≤ 0, where −ln C and its ratio are undefined; all such counts are retained above. Asterisks/squares flag >1.5× drift. Geometry is not site diffusivity.


Wave-pinning: all usable lags — common, cadence_x4

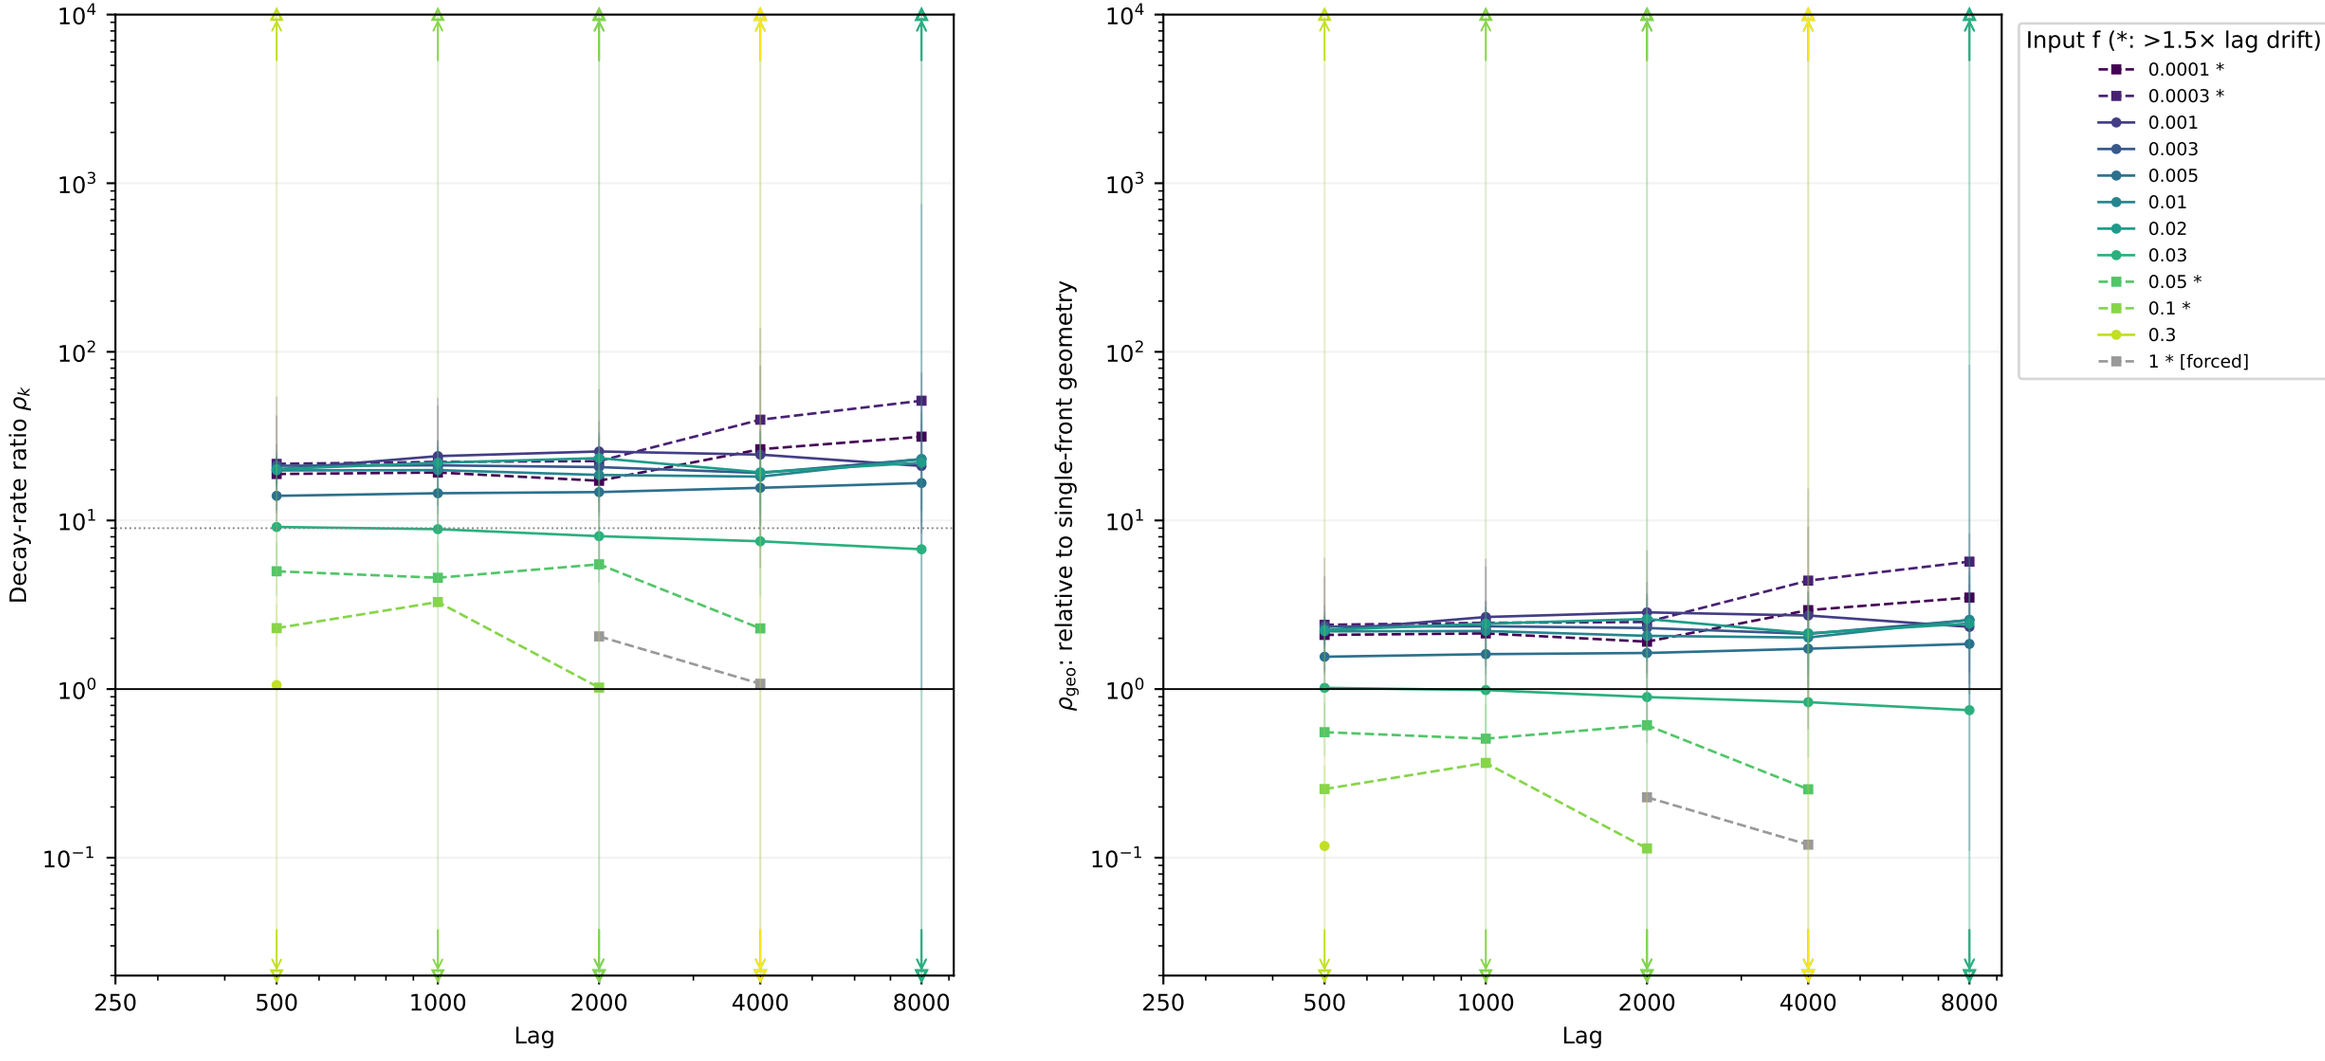

f=0.0001: 5 usable, 0 undefined; f=0.0003: 5 usable, 0 undefined; f=0.001: 5 usable, 0 undefined; f=0.003: 5 usable, 0 undefined; f=0.005: 5 usable, 0 undefined; f=0.01: 5 usable, 0 undefined; f=0.02: 5 usable, 0 undefined; f=0.03: 5 usable, 0 undefined; f=0.05: 5 usable, 1 undefined; f=0.1: 5 usable, 2 undefined; f=0.3: 5 usable, 4 undefined; f=1: 5 usable, 3 undefined

Pointwise whole-seed 95% intervals; every finite positive point is within the axes. Open edge triangles and arrows denote CI tails beyond the axes; full intervals are in CSV.
A usable lag can have C ≤ 0, where −ln C and its ratio are undefined; all such counts are retained above. Asterisks/squares flag >1.5× drift. Geometry is not site diffusivity.


Goryachev: all usable lags — common, cadence_x4

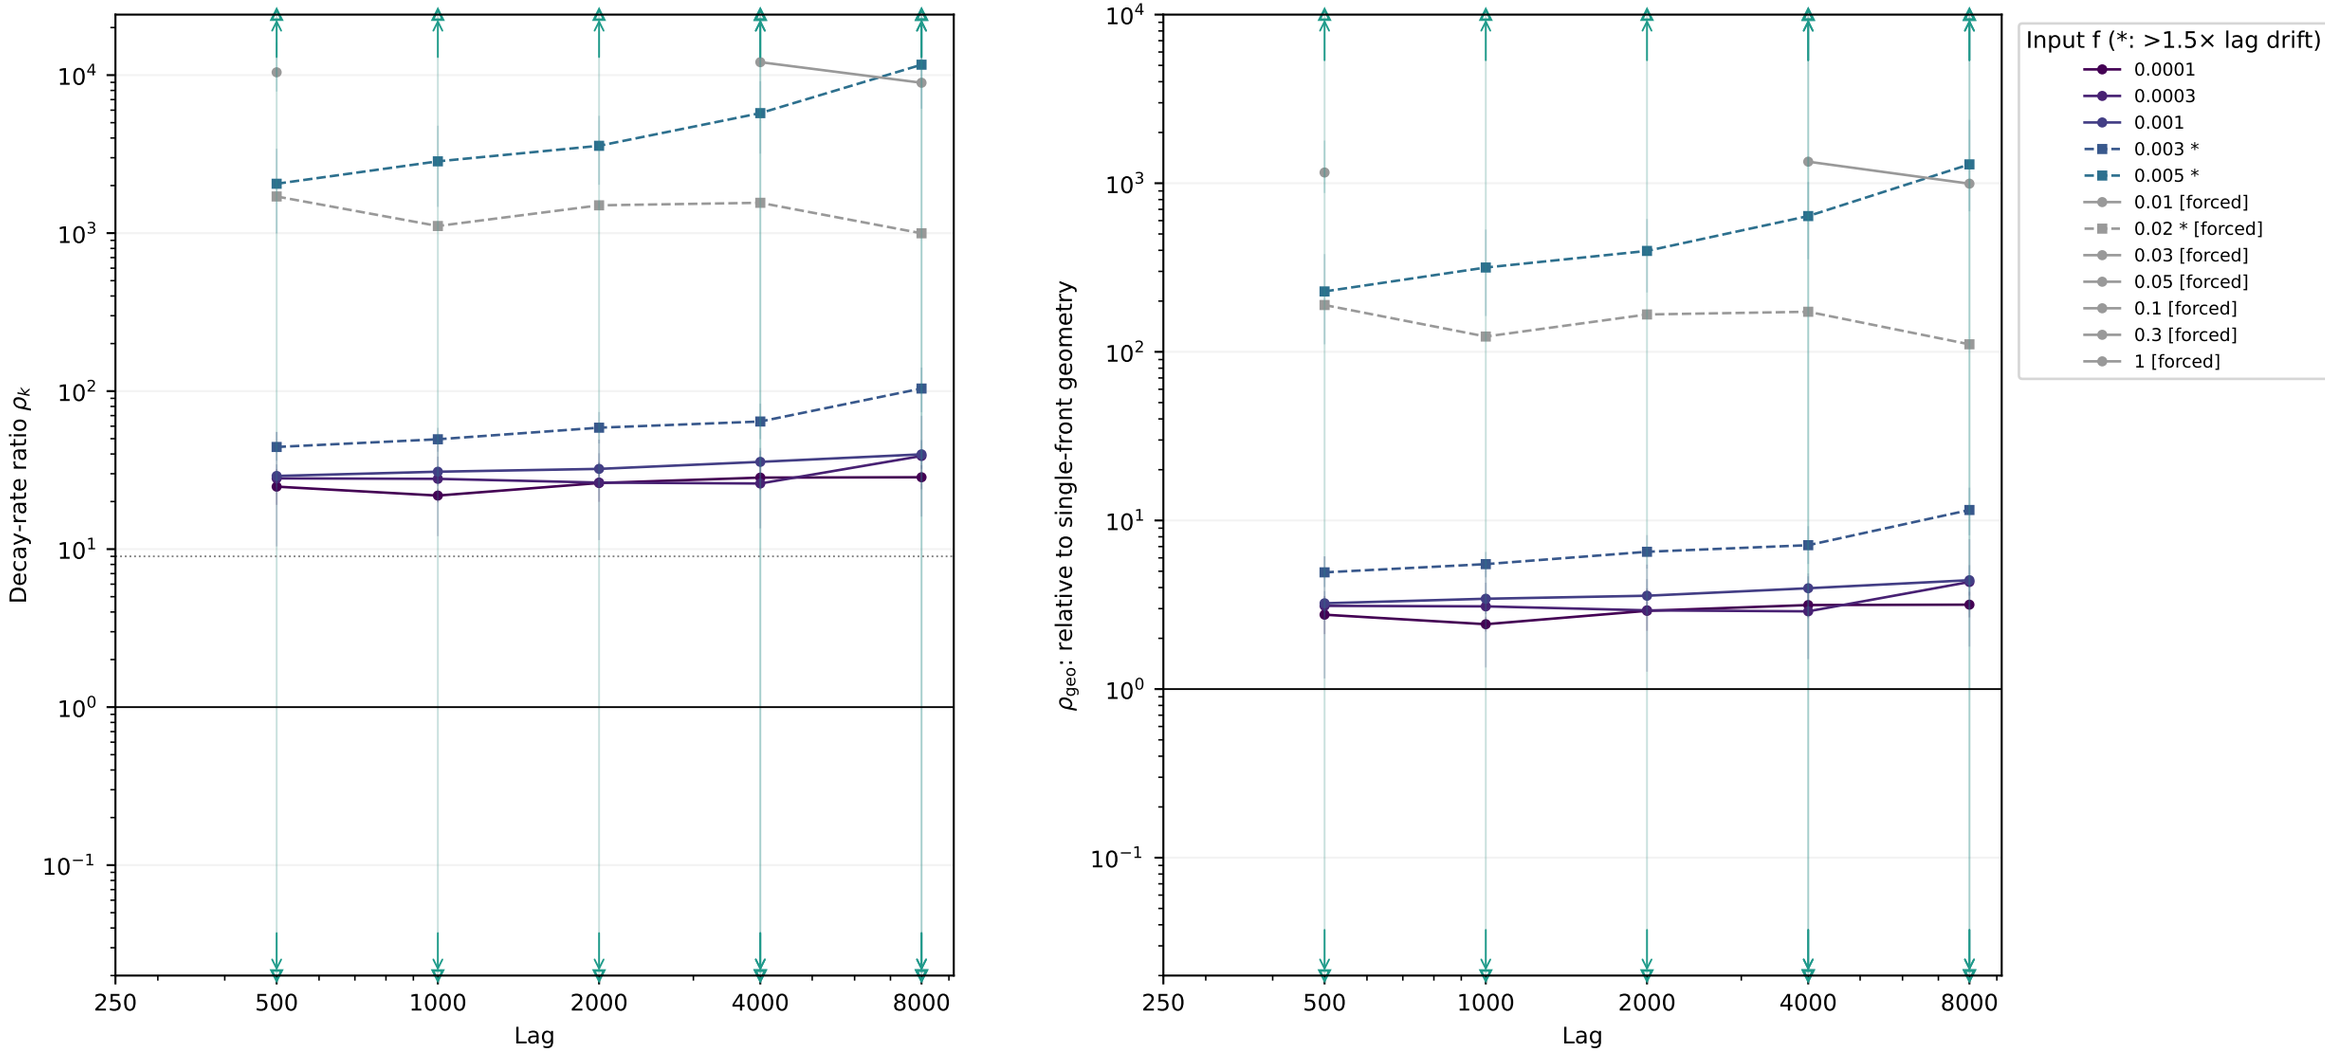

f=0.0001: 5 usable, 0 undefined; f=0.0003: 5 usable, 0 undefined; f=0.001: 5 usable, 0 undefined; f=0.003: 5 usable, 0 undefined; f=0.005: 5 usable, 0 undefined; f=0.01: 5 usable, 2 undefined; f=0.02: 5 usable, 0 undefined; f=0.03: 0 usable, 0 undefined; f=0.05: 0 usable, 0 undefined; f=0.1: 0 usable, 0 undefined; f=0.3: 0 usable, 0 undefined; f=1: 0 usable, 0 undefined

Pointwise whole-seed 95% intervals; every finite positive point is within the axes. Open edge triangles and arrows denote CI tails beyond the axes; full intervals are in CSV.
A usable lag can have C ≤ 0, where −ln C and its ratio are undefined; all such counts are retained above. Asterisks/squares flag >1.5× drift. Geometry is not site diffusivity.


Holmes: all usable lags — common, cadence_x4

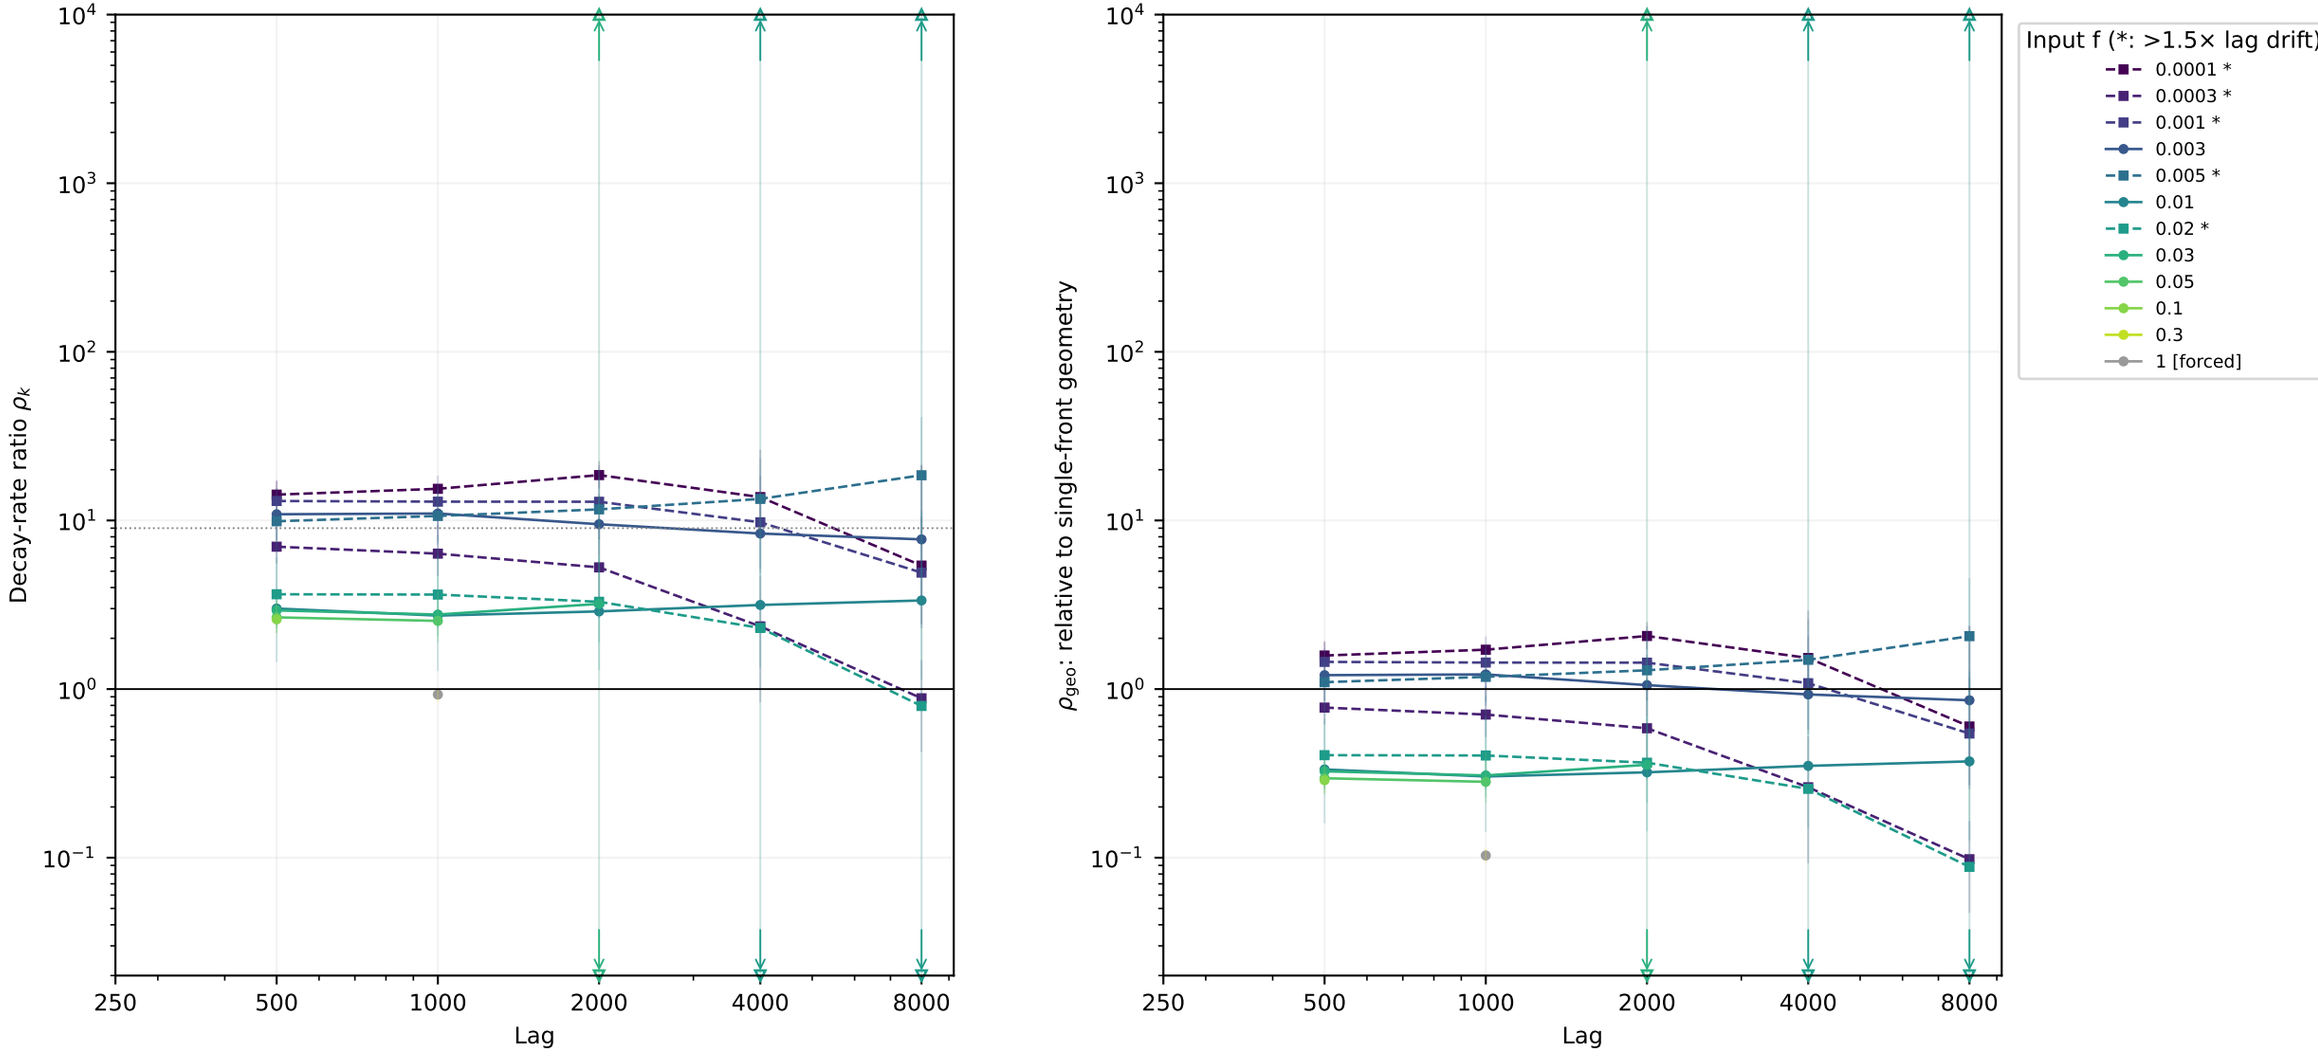

f=0.0001: 5 usable, 0 undefined; f=0.0003: 5 usable, 0 undefined; f=0.001: 5 usable, 0 undefined; f=0.003: 5 usable, 0 undefined; f=0.005: 5 usable, 0 undefined; f=0.01: 5 usable, 0 undefined; f=0.02: 5 usable, 0 undefined; f=0.03: 5 usable, 2 undefined; f=0.05: 5 usable, 3 undefined; f=0.1: 5 usable, 4 undefined; f=0.3: 5 usable, 5 undefined; f=1: 5 usable, 4 undefined

Pointwise whole-seed 95% intervals; every finite positive point is within the axes. Open edge triangles and arrows denote CI tails beyond the axes; full intervals are in CSV. A usable lag can have C ≤ 0, where −ln C and its ratio are undefined; all such counts are retained above. Asterisks/squares flag >1.5× drift. Geometry is not site diffusivity.


Spring: all usable lags — common, cadence_x4

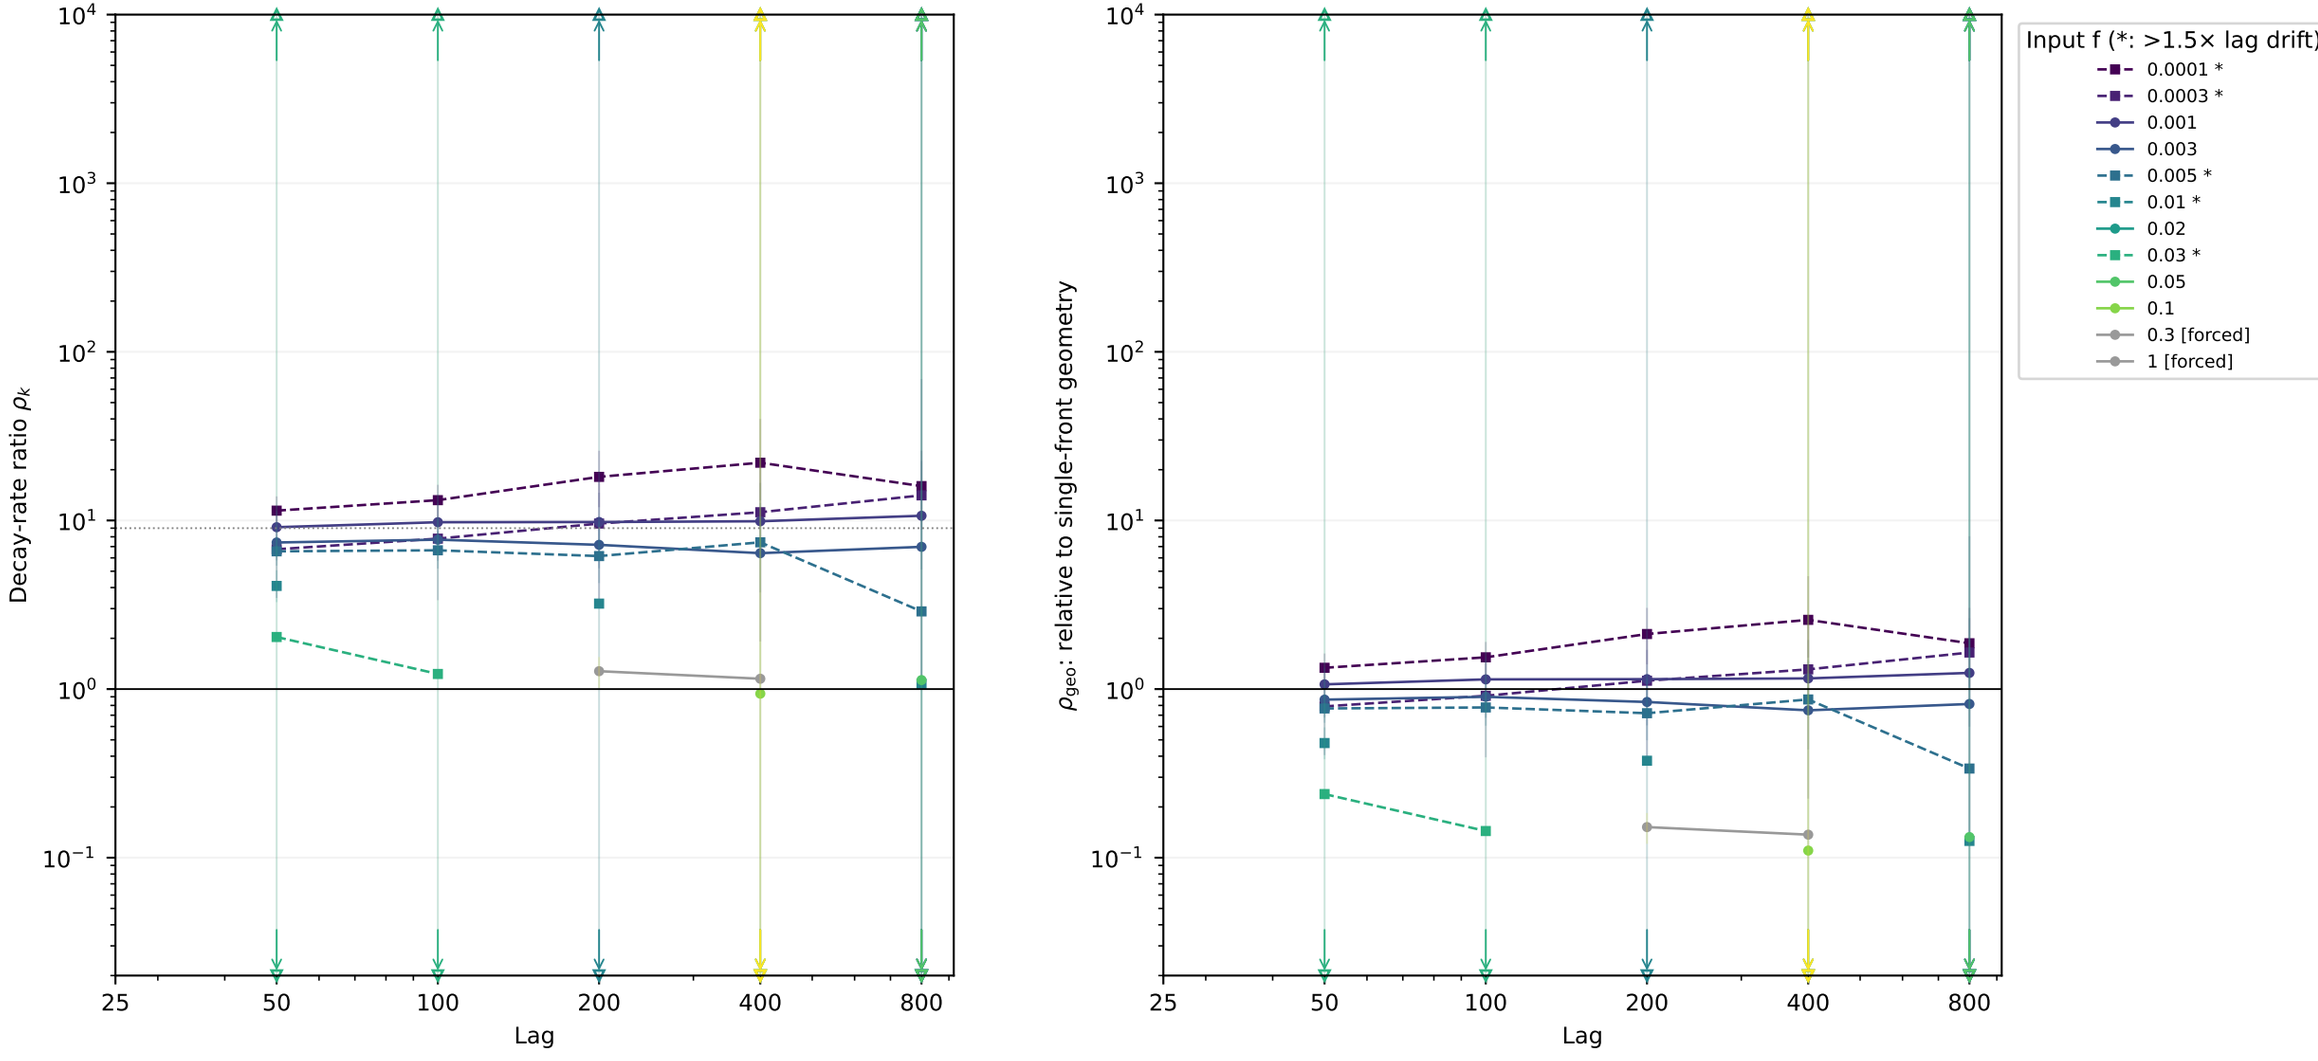

f=0.0001: 5 usable, 0 undefined; f=0.0003: 5 usable, 0 undefined; f=0.001: 5 usable, 0 undefined; f=0.003: 5 usable, 0 undefined; f=0.005: 5 usable, 0 undefined; f=0.01: 5 usable, 2 undefined; f=0.02: 5 usable, 5 undefined; f=0.03: 5 usable, 3 undefined; f=0.05: 5 usable, 4 undefined; f=0.1: 5 usable, 4 undefined; f=0.3: 5 usable, 5 undefined; f=1: 5 usable, 3 undefined

Pointwise whole-seed 95% intervals; every finite positive point is within the axes. Open edge triangles and arrows denote CI tails beyond the axes; full intervals are in CSV.
A usable lag can have C ≤ 0, where −ln C and its ratio are undefined; all such counts are retained above. Asterisks/squares flag >1.5× drift. Geometry is not site diffusivity.


Wave-pinning: all usable lags — common, cadence_x8

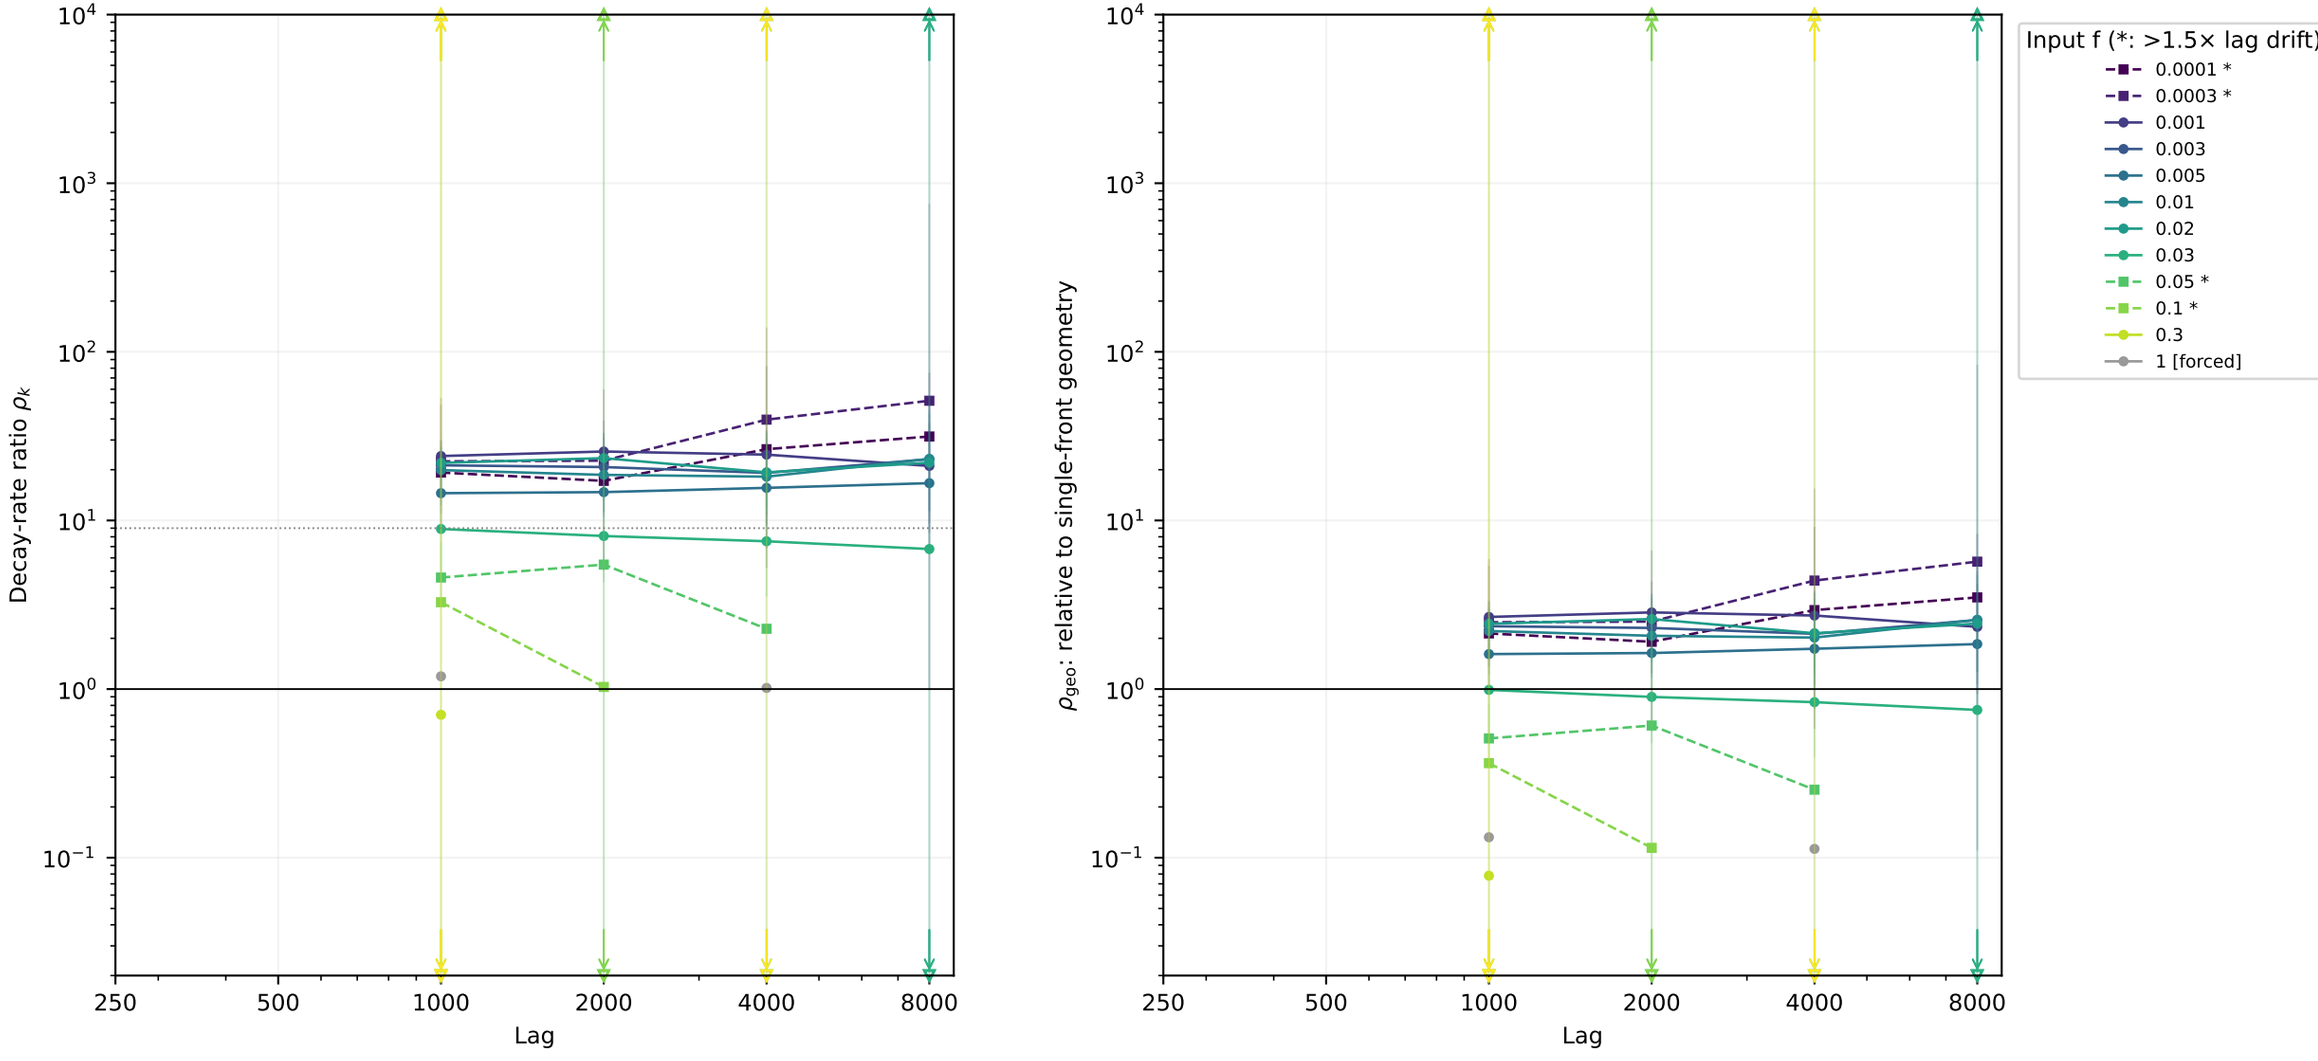


f=0.0001: 4 usable, 0 undefined; f=0.0003: 4 usable, 0 undefined; f=0.001: 4 usable, 0 undefined; f=0.003: 4 usable, 0 undefined; f=0.005: 4 usable, 0 undefined; f=0.01: 4 usable, 0 undefined; f=0.02: 4 usable, 0 undefined; f=0.03: 4 usable, 0 undefined; f=0.05: 4 usable, 1 undefined; f=0.1: 4 usable, 2 undefined; f=0.3: 4 usable, 3 undefined; f=1: 4 usable, 2 undefined

Pointwise whole-seed 95% intervals; every finite positive point is within the axes. Open edge triangles and arrows denote CI tails beyond the axes; full intervals are in CSV.
A usable lag can have C ≤ 0, where −ln C and its ratio are undefined; all such counts are retained above. Asterisks/squares flag >1.5× drift. Geometry is not site diffusivity.

Goryachev: all usable lags — common, cadence_x8

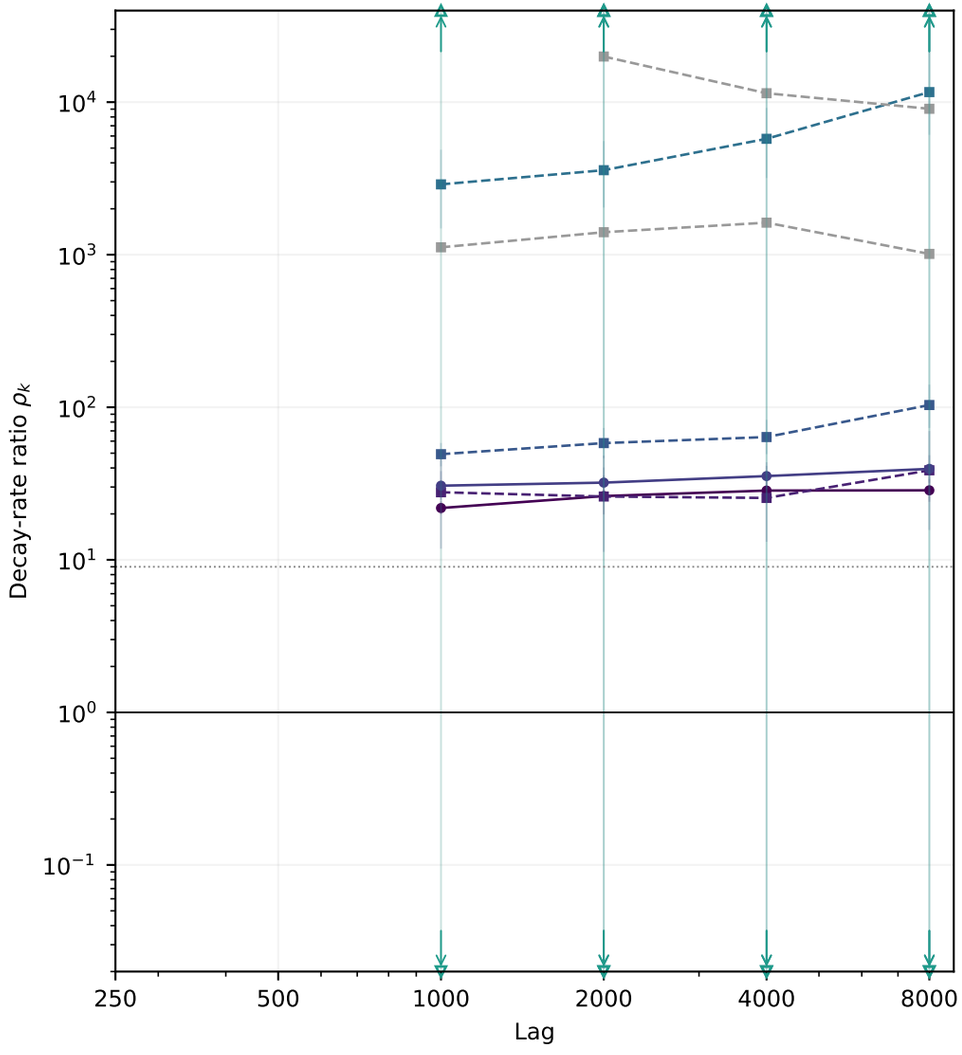


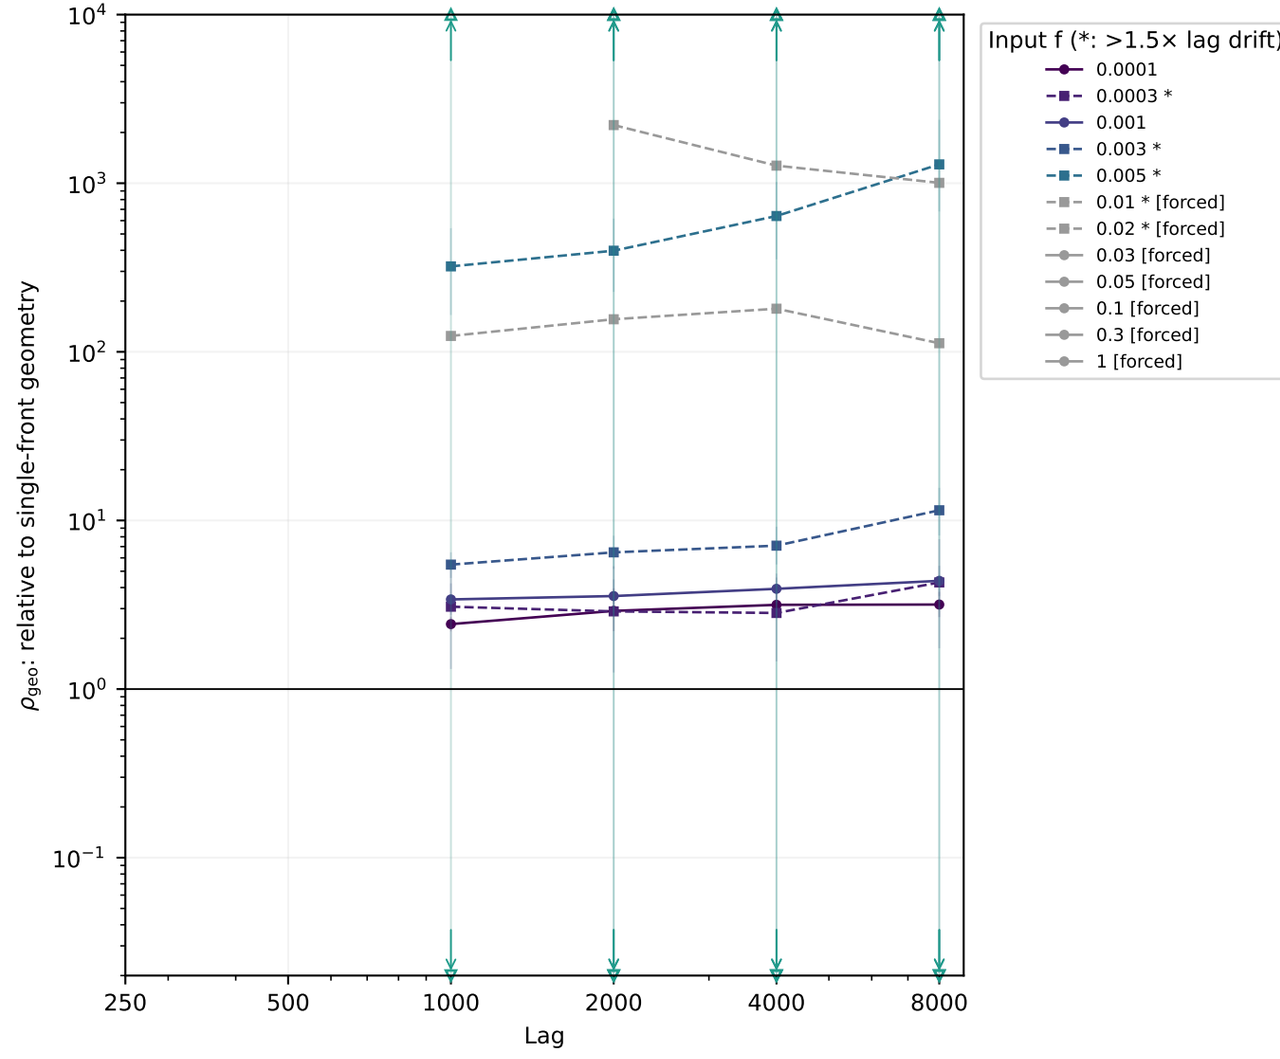

f=0.0001: 4 usable, 0 undefined; f=0.0003: 4 usable, 0 undefined; f=0.001: 4 usable, 0 undefined; f=0.003: 4 usable, 0 undefined; f=0.005: 4 usable, 0 undefined; f=0.01: 4 usable, 1 undefined; f=0.02: 4 usable, 0 undefined; f=0.03: 0 usable, 0 undefined; f=0.05: 0 usable, 0 undefined; f=0.1: 0 usable, 0 undefined; f=0.3: 0 usable, 0 undefined; f=1: 0 usable, 0 undefined

Pointwise whole-seed 95% intervals; every finite positive point is within the axes. Open edge triangles and arrows denote CI tails beyond the axes; full intervals are in CSV.
A usable lag can have $C \leq 0$, where $-\ln C$ and its ratio are undefined; all such counts are retained above. Asterisks/squares flag >1.5× drift. Geometry is not site diffusivity.


Holmes: all usable lags — common, cadence_x8

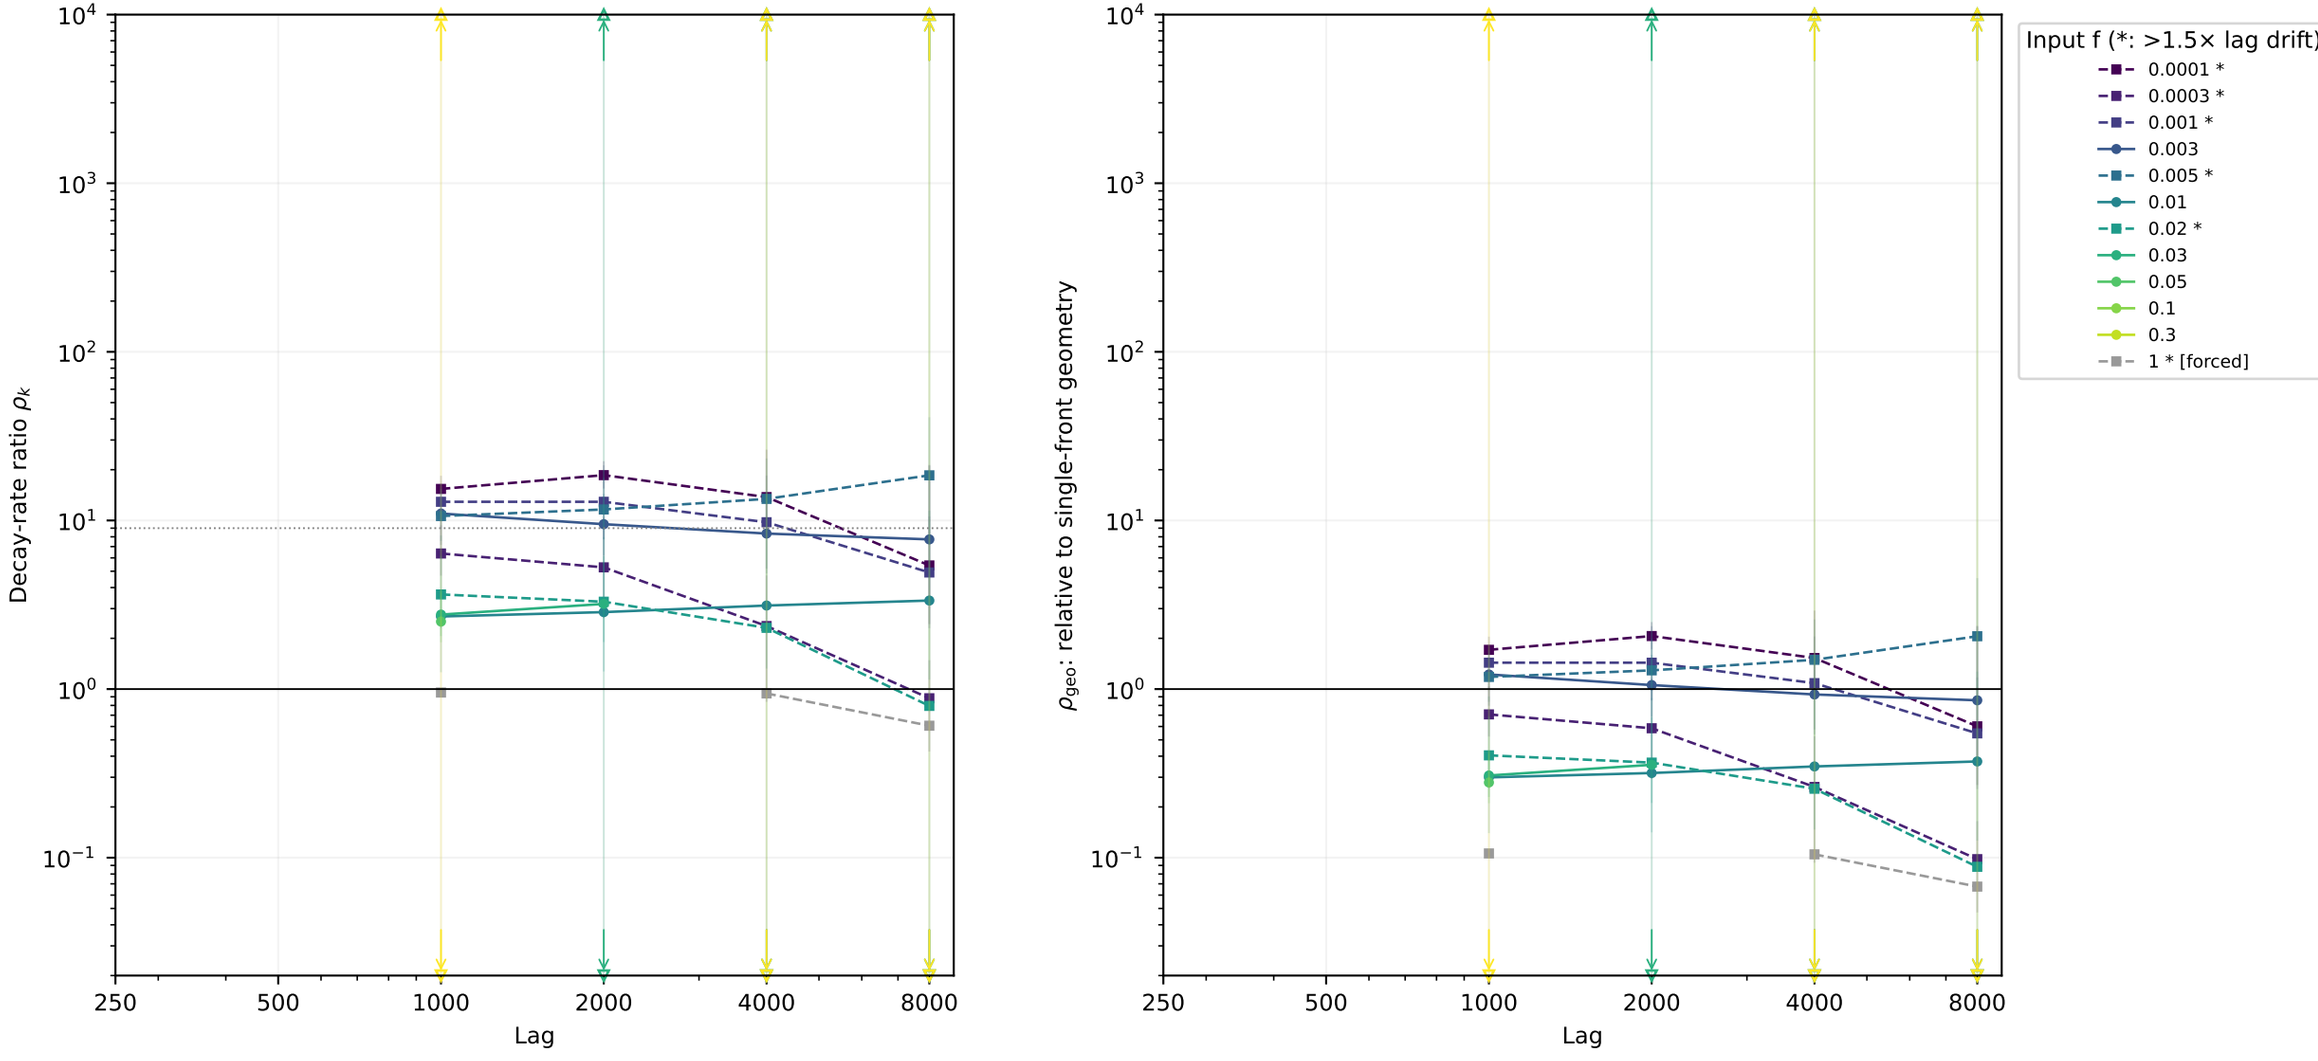

f=0.0001: 4 usable, 0 undefined; f=0.0003: 4 usable, 0 undefined; f=0.001: 4 usable, 0 undefined; f=0.003: 4 usable, 0 undefined; f=0.005: 4 usable, 0 undefined; f=0.01: 4 usable, 0 undefined; f=0.02: 4 usable, 0 undefined; f=0.03: 4 usable, 2 undefined; f=0.05: 4 usable, 3 undefined; f=0.1: 4 usable, 4 undefined; f=0.3: 4 usable, 4 undefined; f=1: 4 usable, 1 undefined

Pointwise whole-seed 95% intervals; every finite positive point is within the axes. Open edge triangles and arrows denote CI tails beyond the axes; full intervals are in CSV.
A usable lag can have $C \leq 0$, where $-\ln C$ and its ratio are undefined; all such counts are retained above. Asterisks/squares flag >1.5× drift. Geometry is not site diffusivity.


Spring: all usable lags — common, cadence_x8

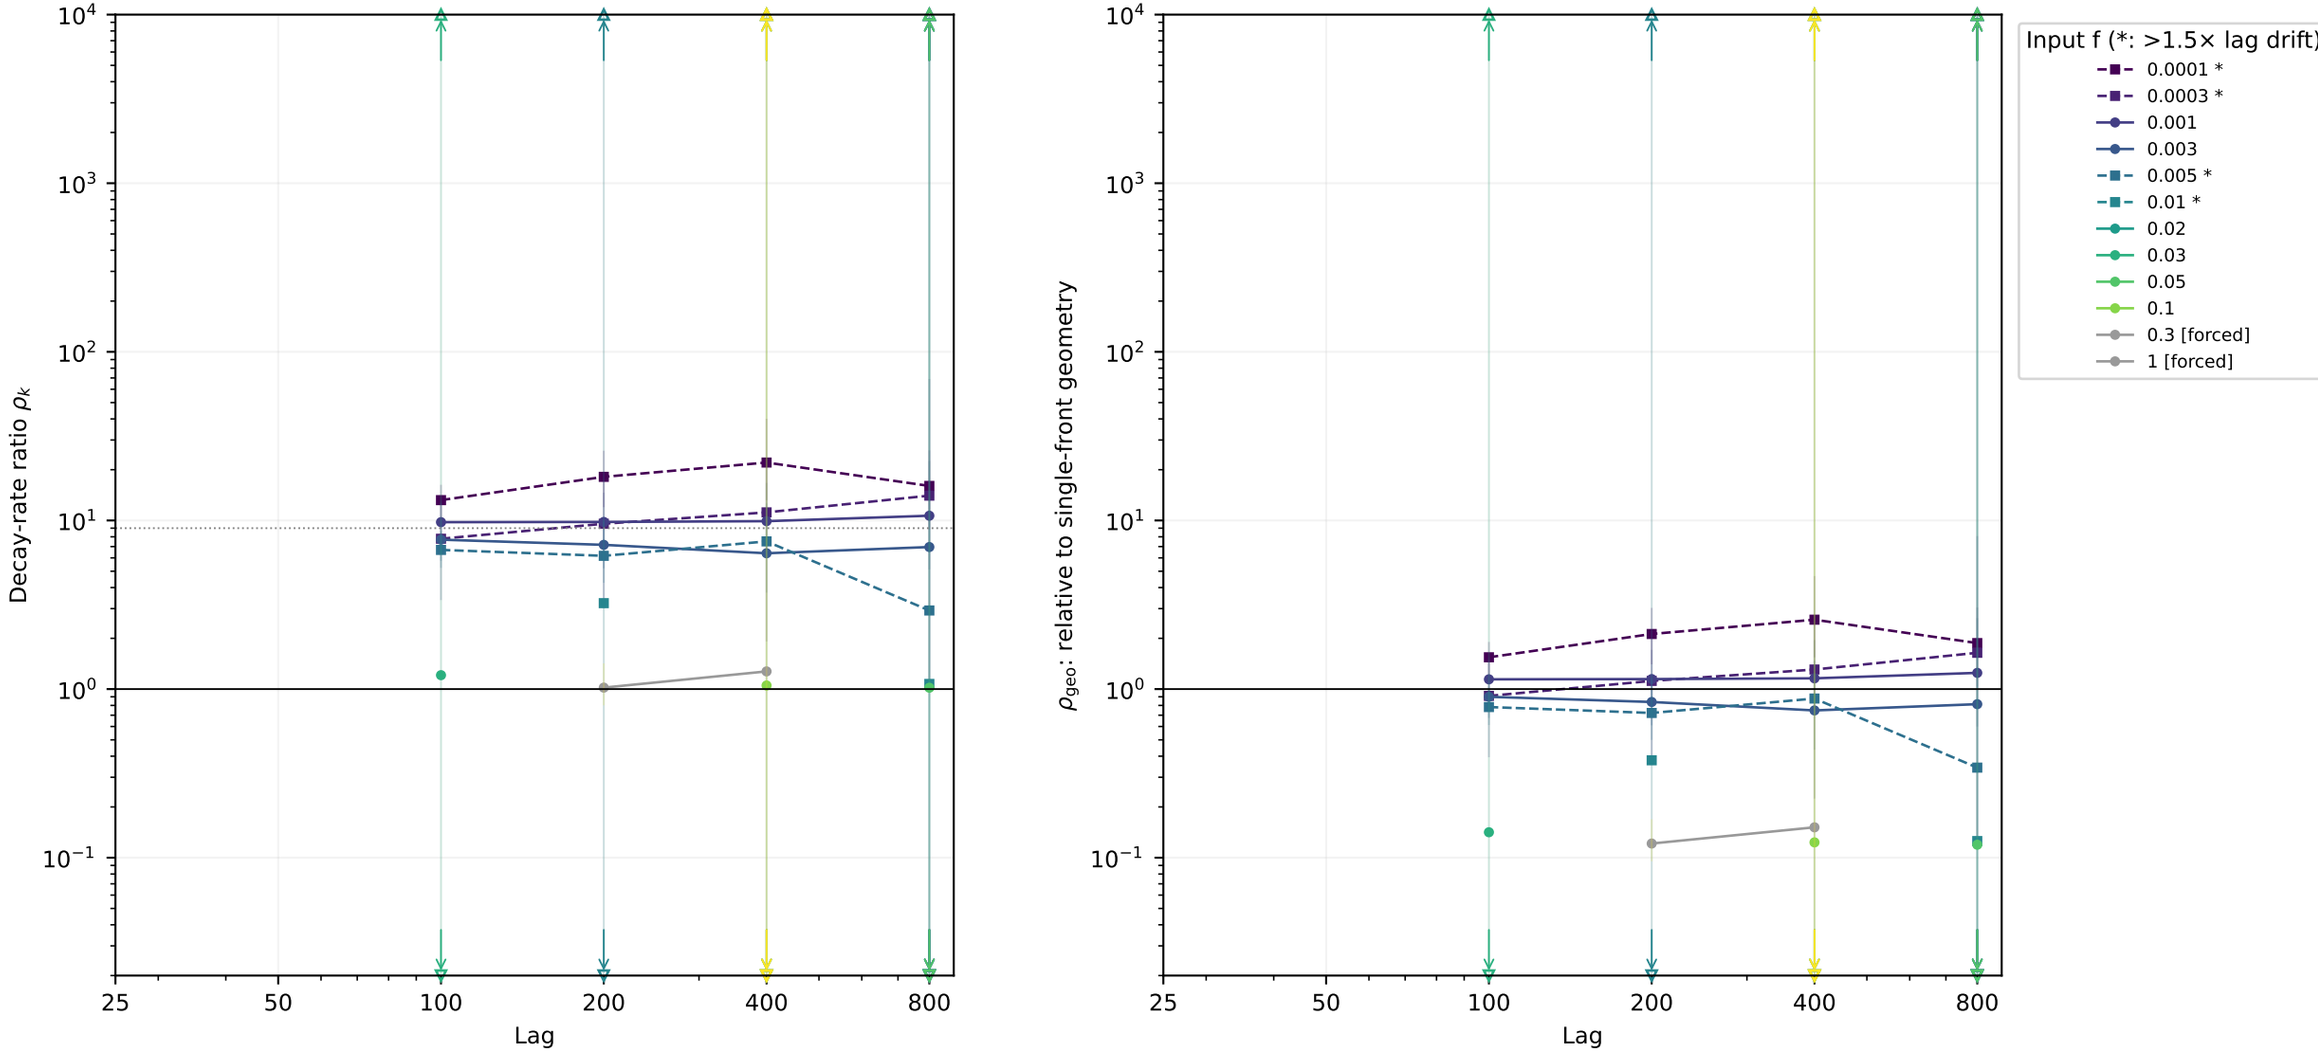

f=0.0001: 4 usable, 0 undefined; f=0.0003: 4 usable, 0 undefined; f=0.001: 4 usable, 0 undefined; f=0.003: 4 usable, 0 undefined; f=0.005: 4 usable, 0 undefined; f=0.01: 4 usable, 2 undefined; f=0.02: 4 usable, 4 undefined; f=0.03: 4 usable, 3 undefined; f=0.05: 4 usable, 3 undefined; f=0.1: 4 usable, 3 undefined; f=0.3: 4 usable, 4 undefined; f=1: 4 usable, 2 undefined

Pointwise whole-seed 95% intervals; every finite positive point is within the axes. Open edge triangles and arrows denote CI tails beyond the axes; full intervals are in CSV. A usable lag can have C ≤ 0, where −ln C and its ratio are undefined; all such counts are retained above. Asterisks/squares flag >1.5× drift. Geometry is not site diffusivity.


Wave-pinning: all usable lags — longest, main

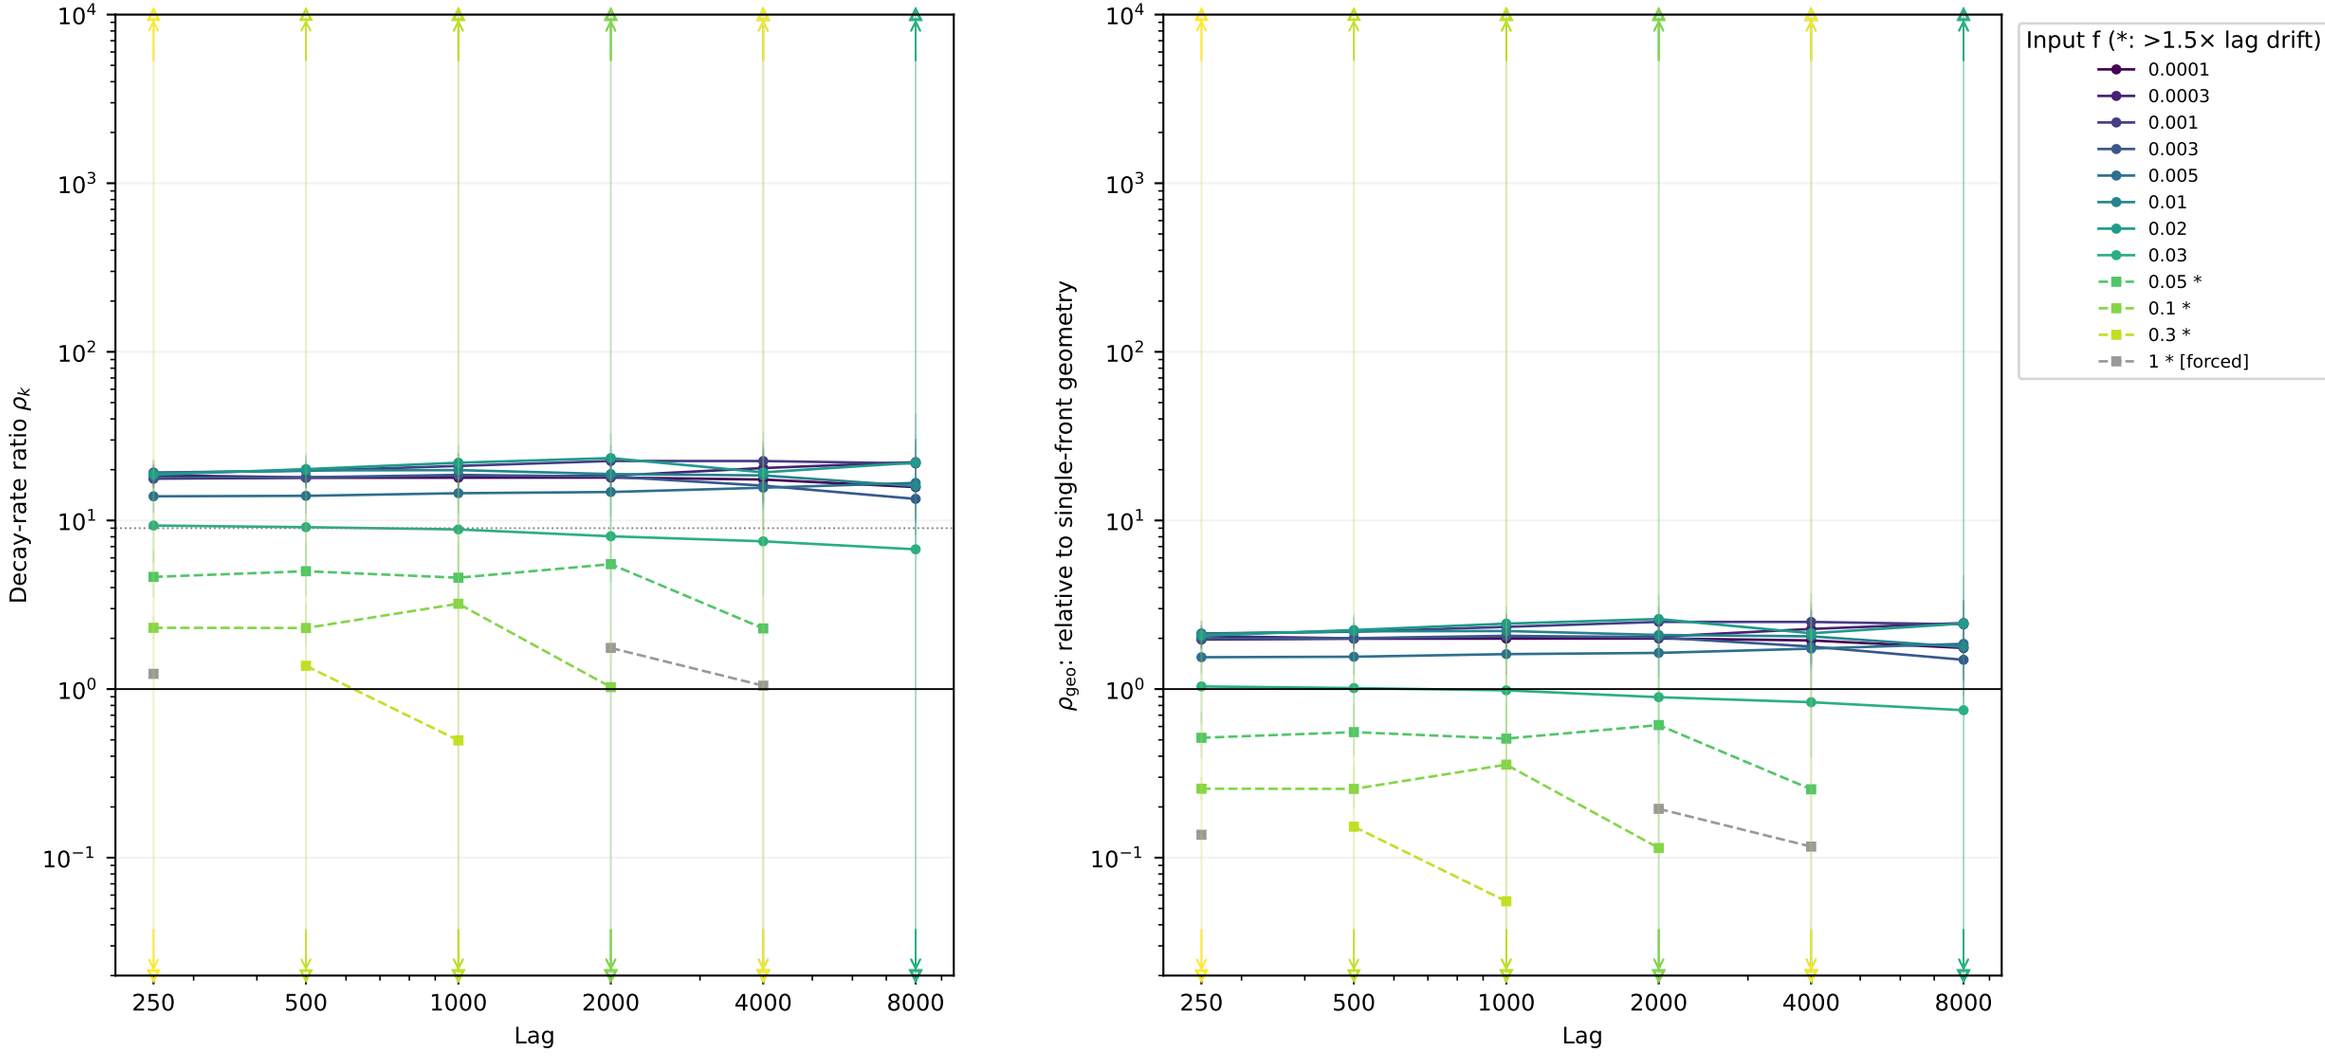

f=0.0001: 6 usable, 0 undefined; f=0.0003: 6 usable, 0 undefined; f=0.001: 6 usable, 0 undefined; f=0.003: 6 usable, 0 undefined; f=0.005: 6 usable, 0 undefined; f=0.01: 6 usable, 0 undefined; f=0.02: 6 usable, 0 undefined; f=0.03: 6 usable, 0 undefined; f=0.05: 6 usable, 1 undefined; f=0.1: 6 usable, 2 undefined; f=0.3: 6 usable, 4 undefined; f=1: 6 usable, 3 undefined

Pointwise whole-seed 95% intervals; every finite positive point is within the axes. Open edge triangles and arrows denote CI tails beyond the axes; full intervals are in CSV. A usable lag can have $C \leq 0$, where $-\ln C$ and its ratio are undefined; all such counts are retained above. Asterisks/squares flag >1.5× drift. Geometry is not site diffusivity.


Goryachev: all usable lags — longest, main

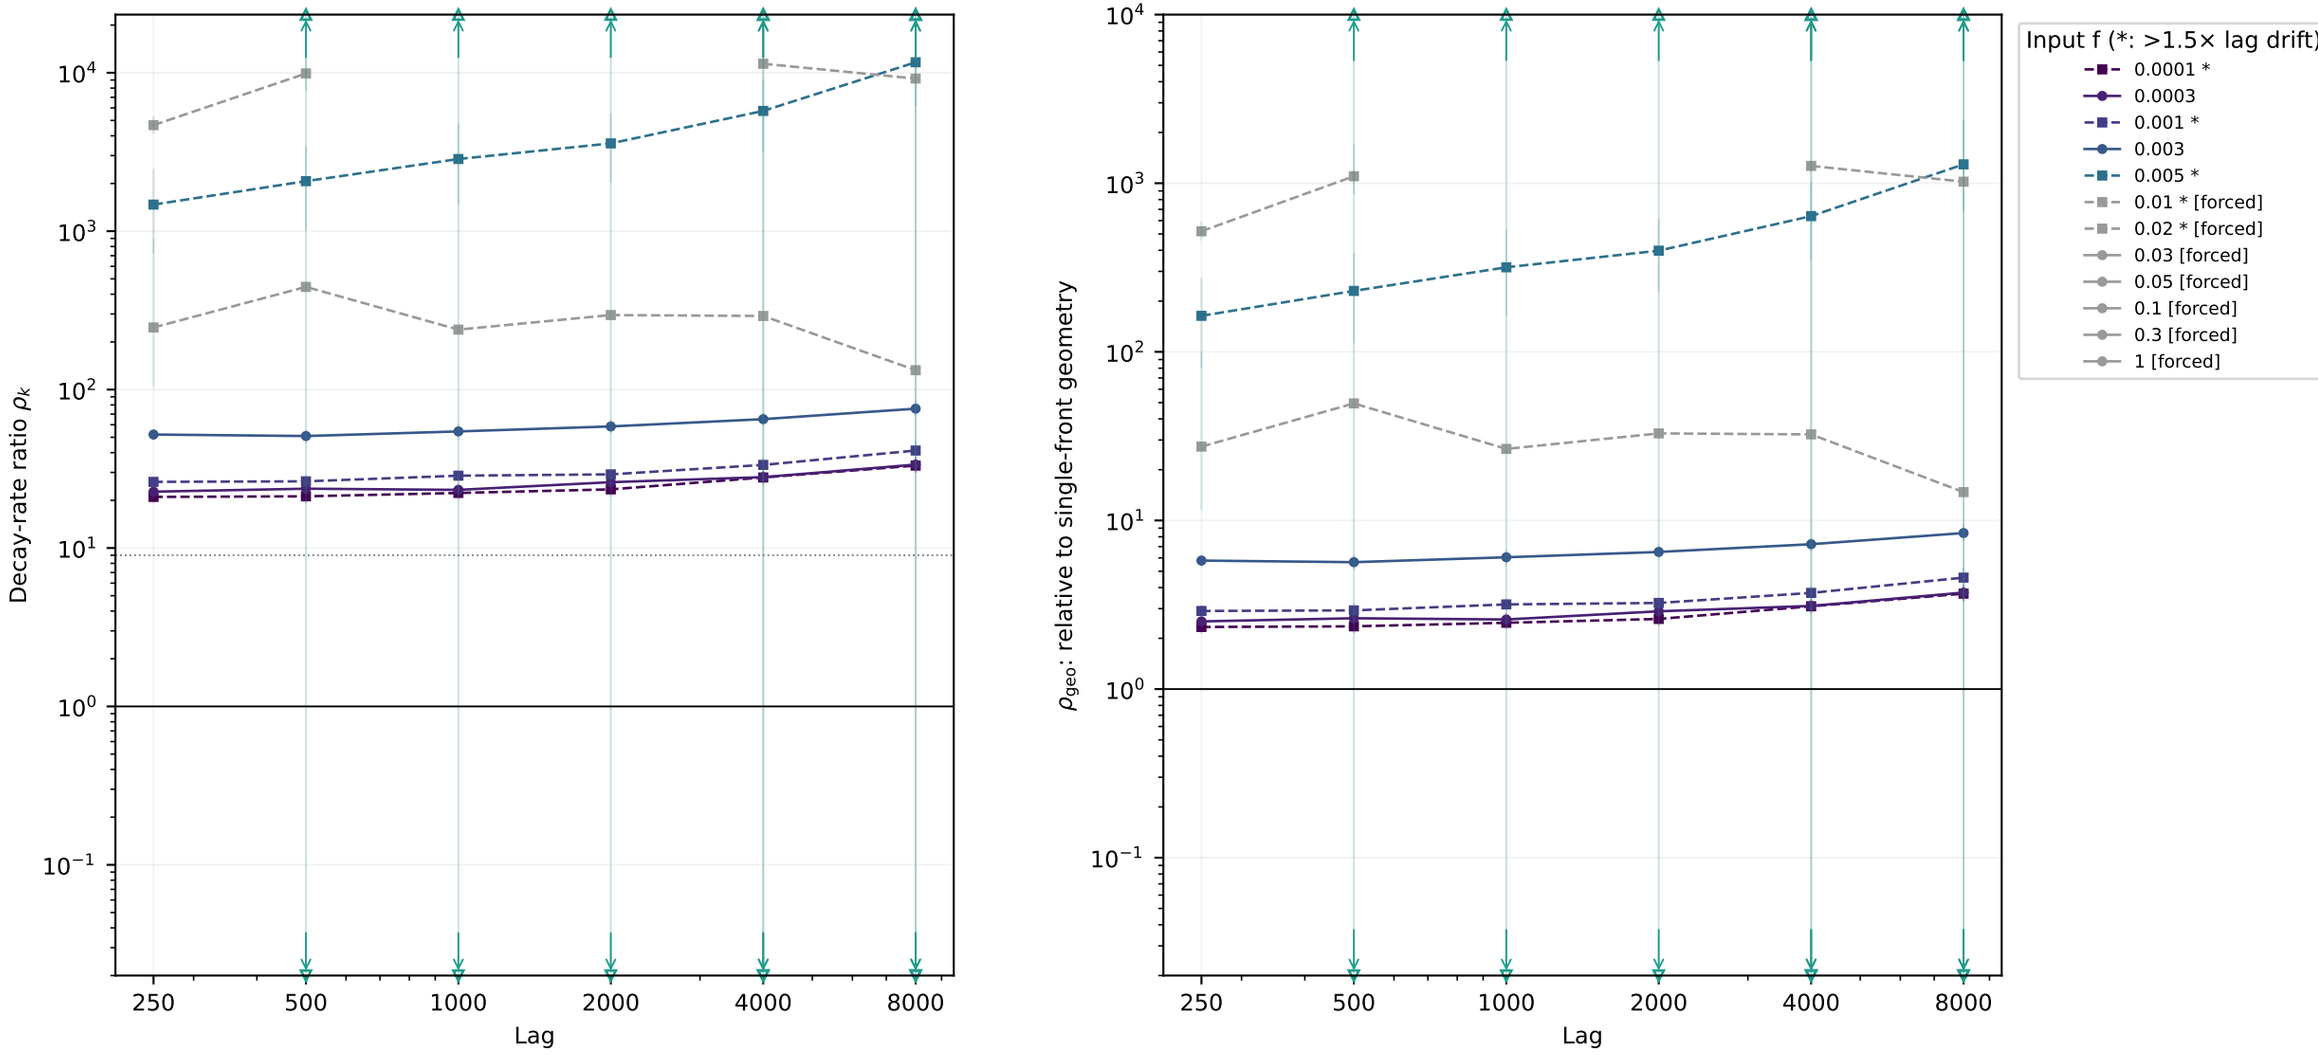

f=0.0001: 6 usable, 0 undefined; f=0.0003: 6 usable, 0 undefined; f=0.001: 6 usable, 0 undefined; f=0.003: 6 usable, 0 undefined; f=0.005: 6 usable, 0 undefined; f=0.01: 6 usable, 2 undefined; f=0.02: 6 usable, 0 undefined; f=0.03: 0 usable, 0 undefined; f=0.05: 0 usable, 0 undefined; f=0.1: 0 usable, 0 undefined; f=0.3: 0 usable, 0 undefined; f=1: 0 usable, 0 undefined

Pointwise whole-seed 95% intervals; every finite positive point is within the axes. Open edge triangles and arrows denote CI tails beyond the axes; full intervals are in CSV.
A usable lag can have C ≤ 0, where −ln C and its ratio are undefined; all such counts are retained above. Asterisks/squares flag >1.5× drift. Geometry is not site diffusivity.


Holmes: all usable lags — longest, main

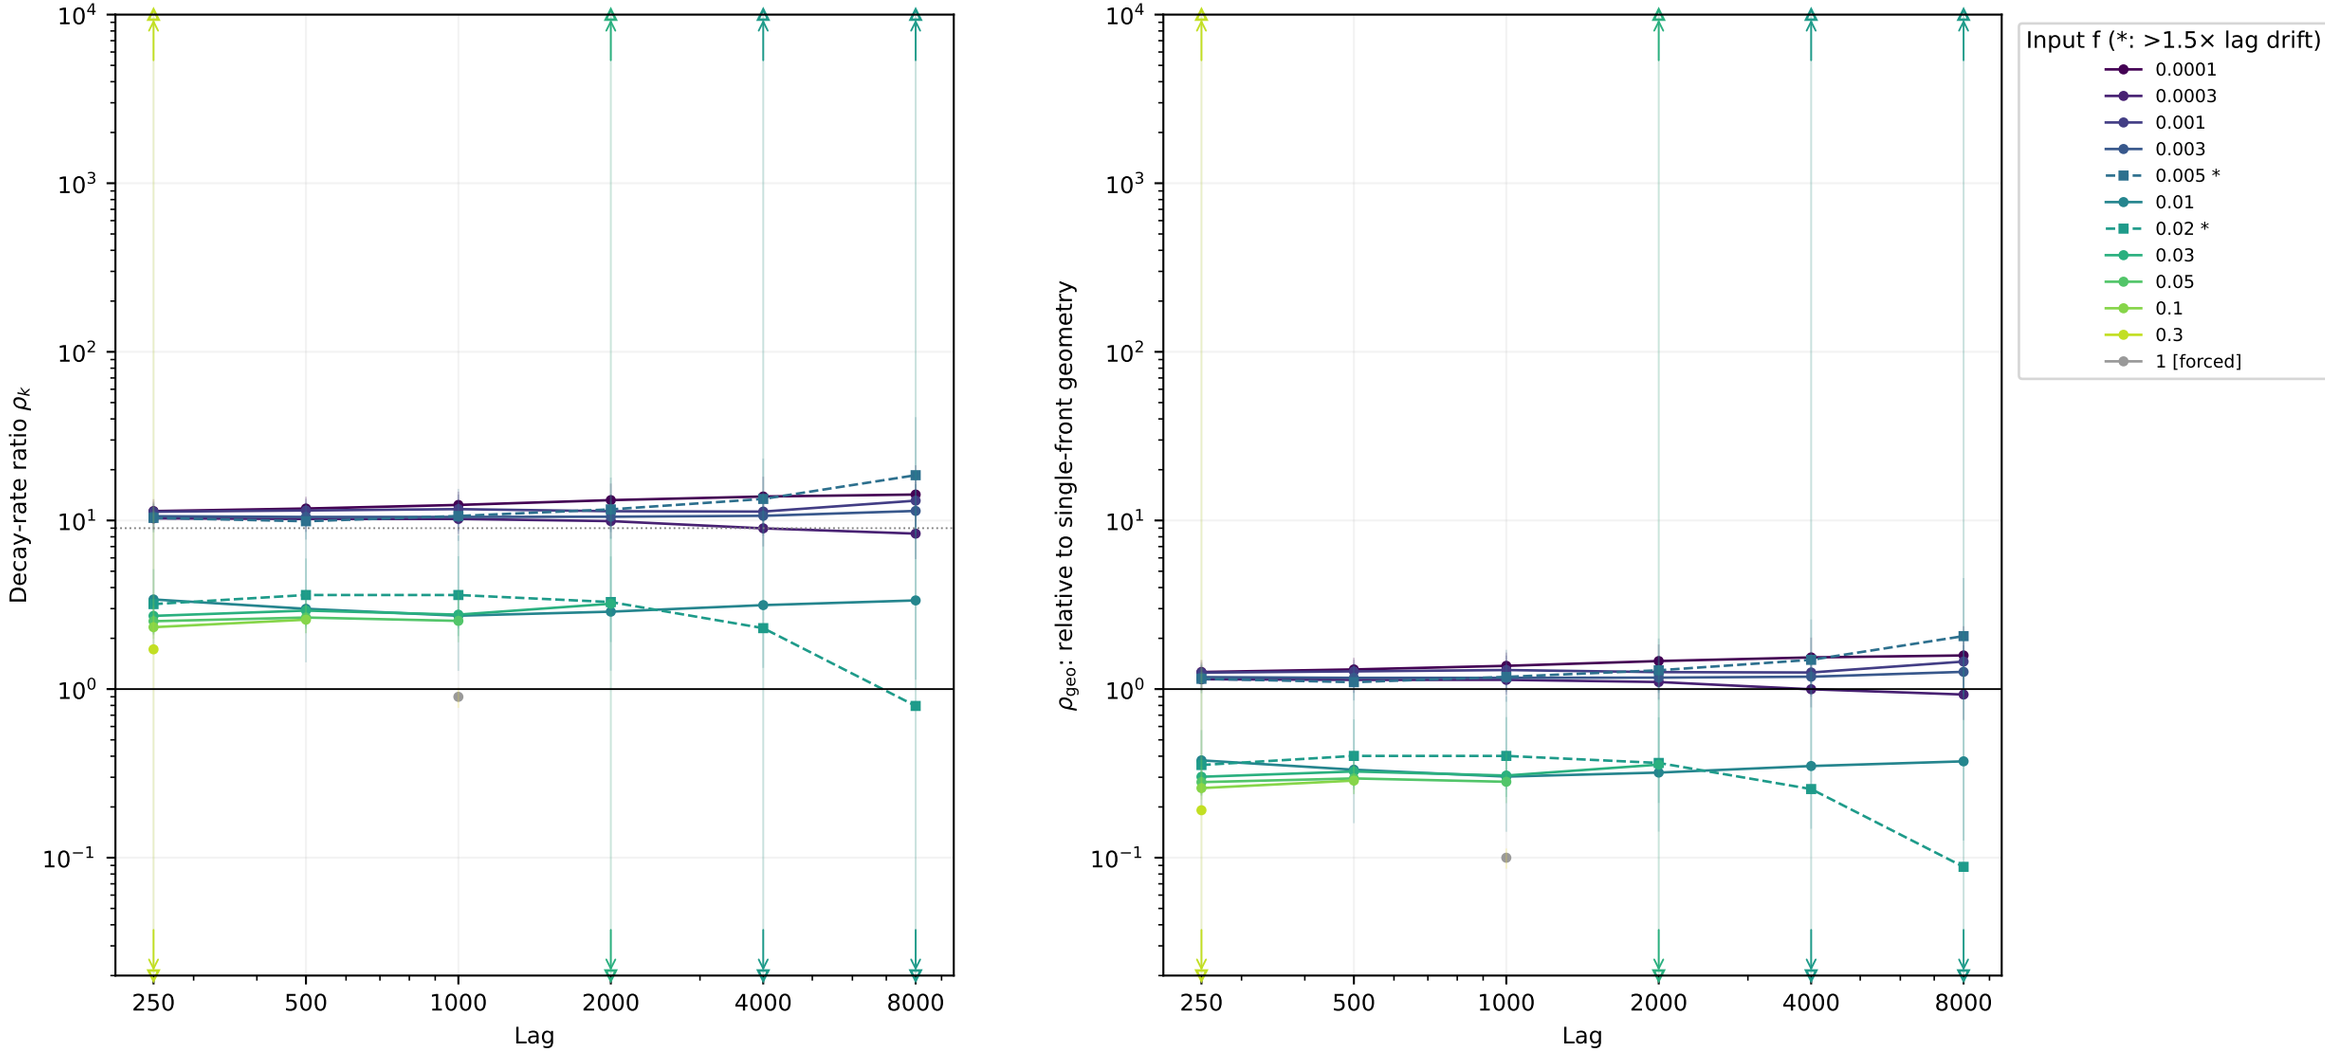

f=0.0001: 6 usable, 0 undefined; f=0.0003: 6 usable, 0 undefined; f=0.001: 6 usable, 0 undefined; f=0.003: 6 usable, 0 undefined; f=0.005: 6 usable, 0 undefined; f=0.01: 6 usable, 0 undefined; f=0.02: 6 usable, 0 undefined; f=0.03: 6 usable, 2 undefined; f=0.05: 6 usable, 3 undefined; f=0.1: 6 usable, 4 undefined; f=0.3: 6 usable, 5 undefined; f=1: 6 usable, 5 undefined

Pointwise whole-seed 95% intervals; every finite positive point is within the axes. Open edge triangles and arrows denote CI tails beyond the axes; full intervals are in CSV. A usable lag can have C ≤ 0, where −ln C and its ratio are undefined; all such counts are retained above. Asterisks/squares flag >1.5× drift. Geometry is not site diffusivity.


Spring: all usable lags — longest, main

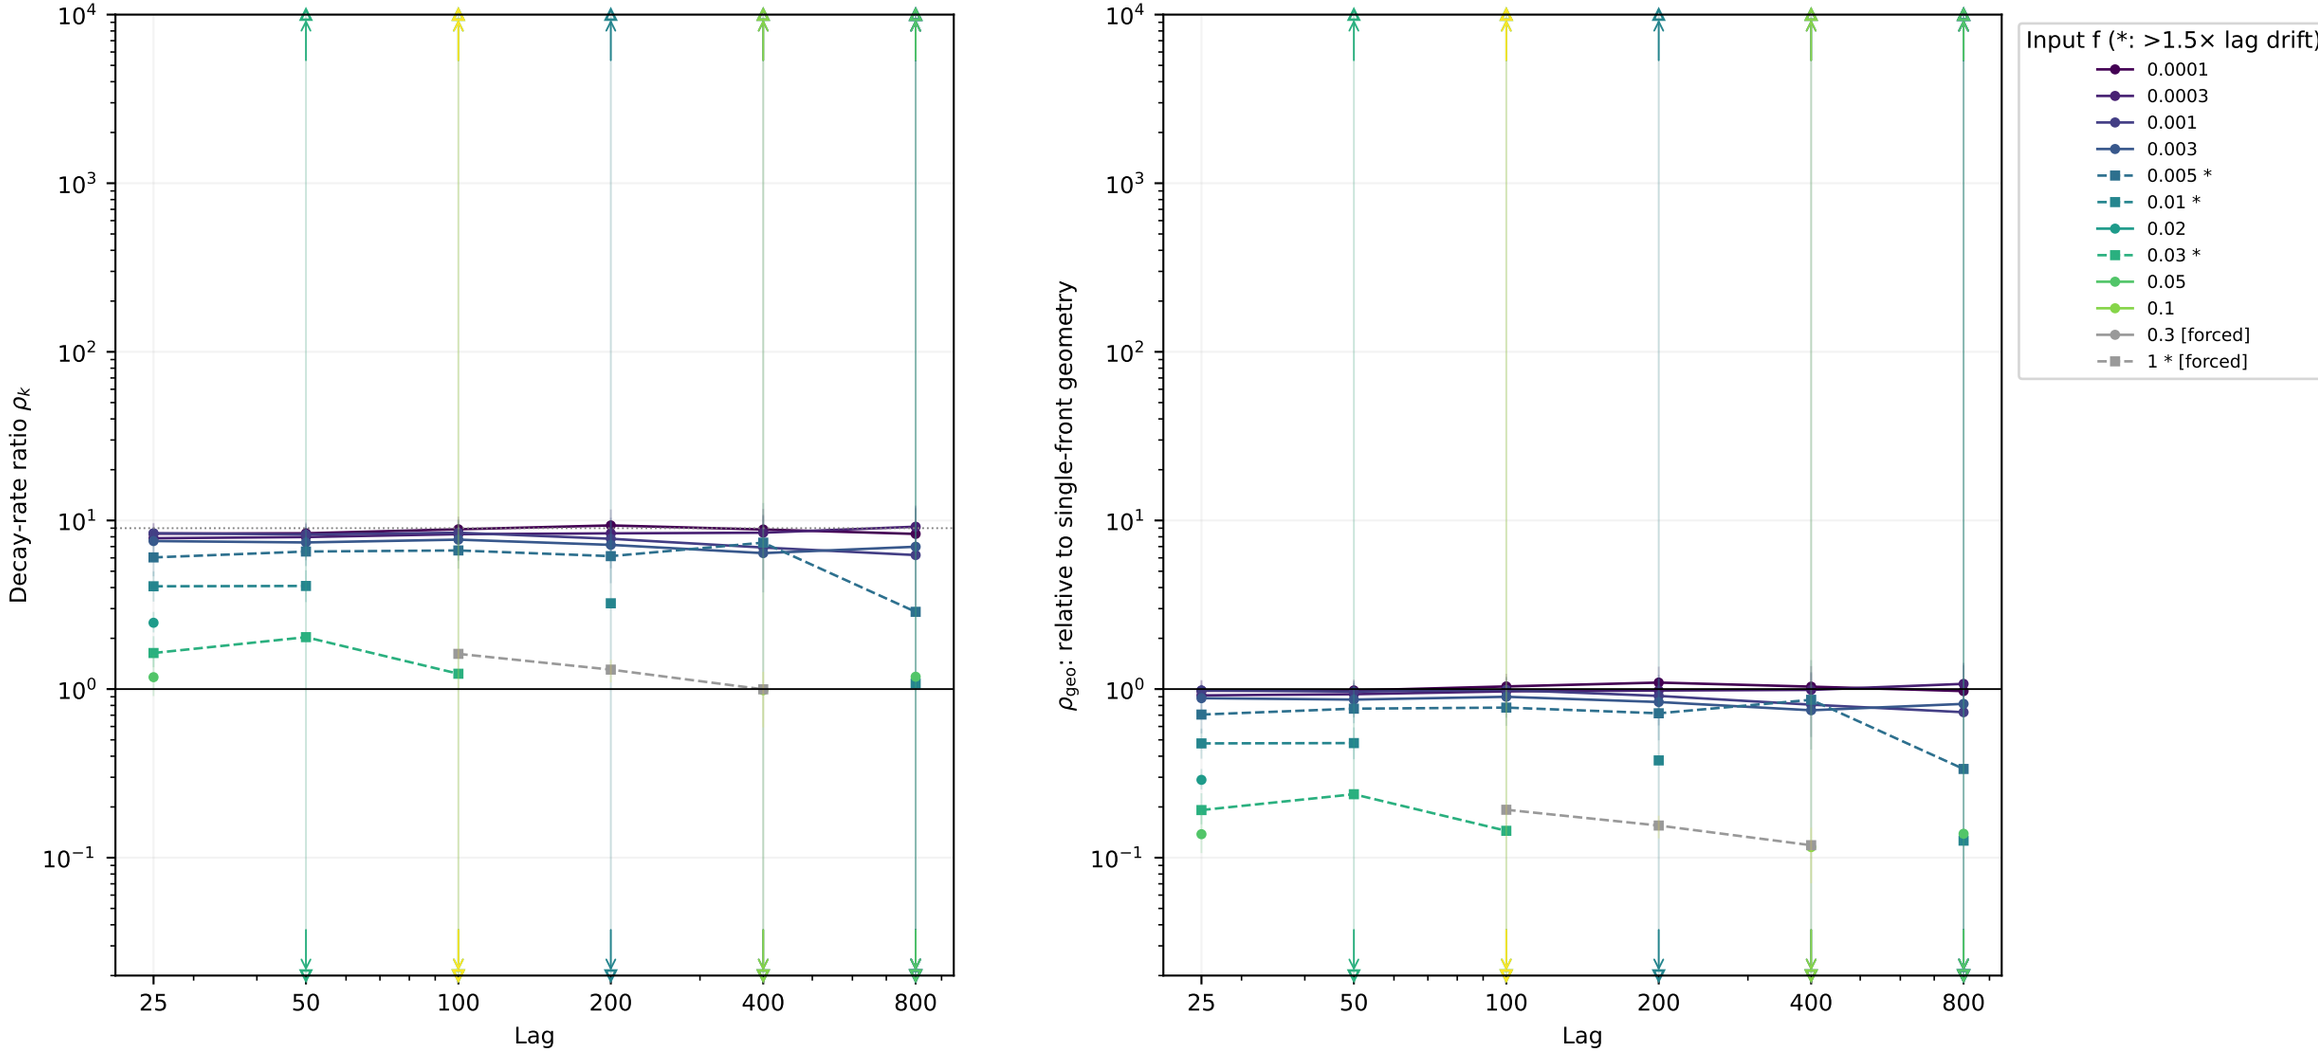

f=0.0001: 6 usable, 0 undefined; f=0.0003: 6 usable, 0 undefined; f=0.001: 6 usable, 0 undefined; f=0.003: 6 usable, 0 undefined; f=0.005: 6 usable, 0 undefined; f=0.01: 6 usable, 2 undefined; f=0.02: 6 usable, 5 undefined; f=0.03: 6 usable, 3 undefined; f=0.05: 6 usable, 4 undefined; f=0.1: 6 usable, 5 undefined; f=0.3: 6 usable, 6 undefined; f=1: 6 usable, 3 undefined

Pointwise whole-seed 95% intervals; every finite positive point is within the axes. Open edge triangles and arrows denote CI tails beyond the axes; full intervals are in CSV. A usable lag can have C ≤ 0, where −ln C and its ratio are undefined; all such counts are retained above. Asterisks/squares flag >1.5× drift. Geometry is not site diffusivity.


Wave-pinning: all usable lags — longest, analysis_first_half

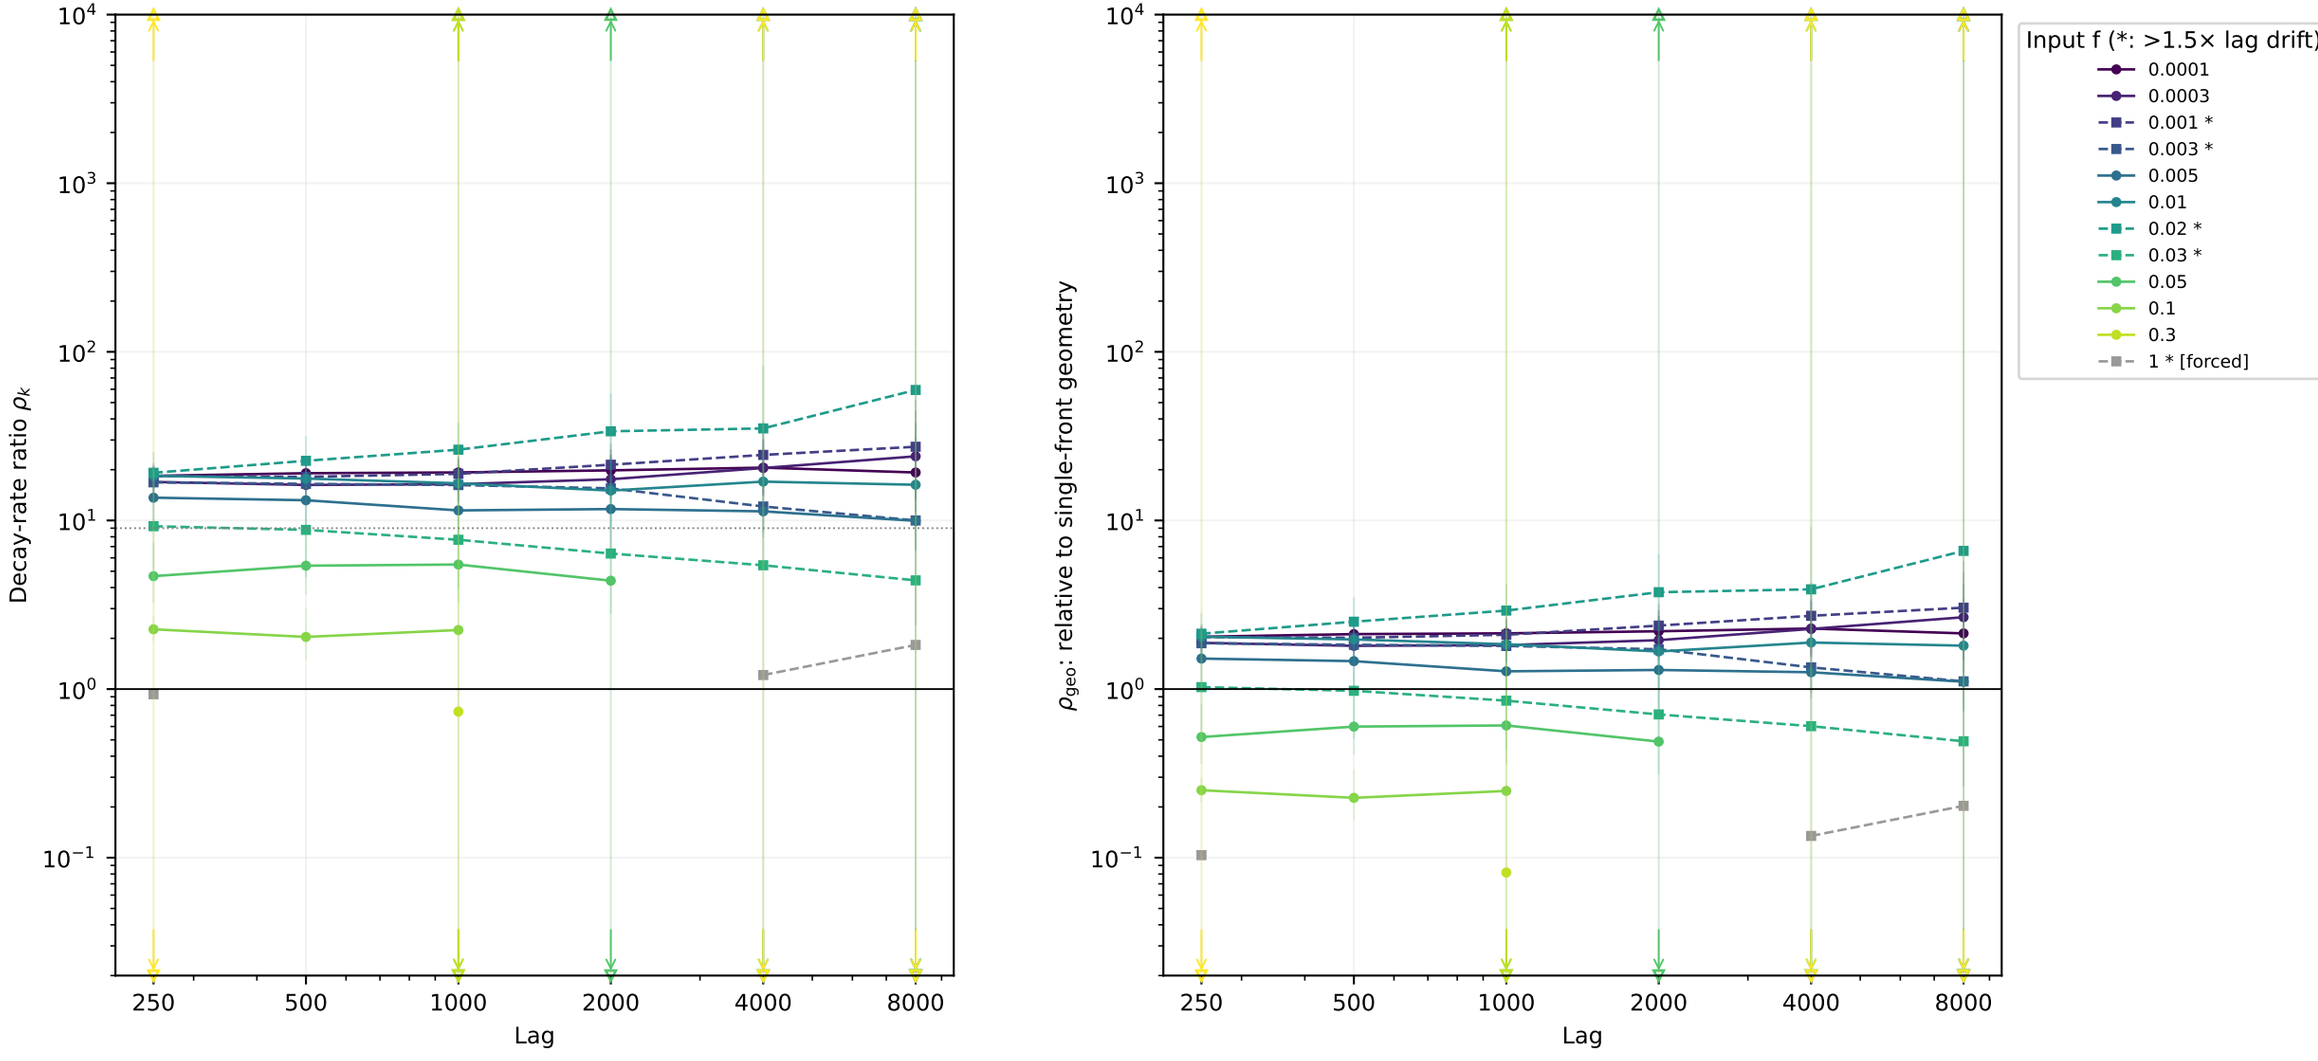


f=0.0001: 6 usable, 0 undefined; f=0.0003: 6 usable, 0 undefined; f=0.001: 6 usable, 0 undefined; f=0.003: 6 usable, 0 undefined; f=0.005: 6 usable, 0 undefined; f=0.01: 6 usable, 0 undefined; f=0.02: 6 usable, 0 undefined; f=0.03: 6 usable, 0 undefined; f=0.05: 6 usable, 2 undefined; f=0.1: 6 usable, 3 undefined; f=0.3: 6 usable, 5 undefined; f=1: 6 usable, 3 undefined

Pointwise whole-seed 95% intervals; every finite positive point is within the axes. Open edge triangles and arrows denote CI tails beyond the axes; full intervals are in CSV. A usable lag can have $C \leq 0$, where $-\ln C$ and its ratio are undefined; all such counts are retained above. Asterisks/squares flag >1.5× drift. Geometry is not site diffusivity.

Goryachev: all usable lags — longest, analysis_first_half

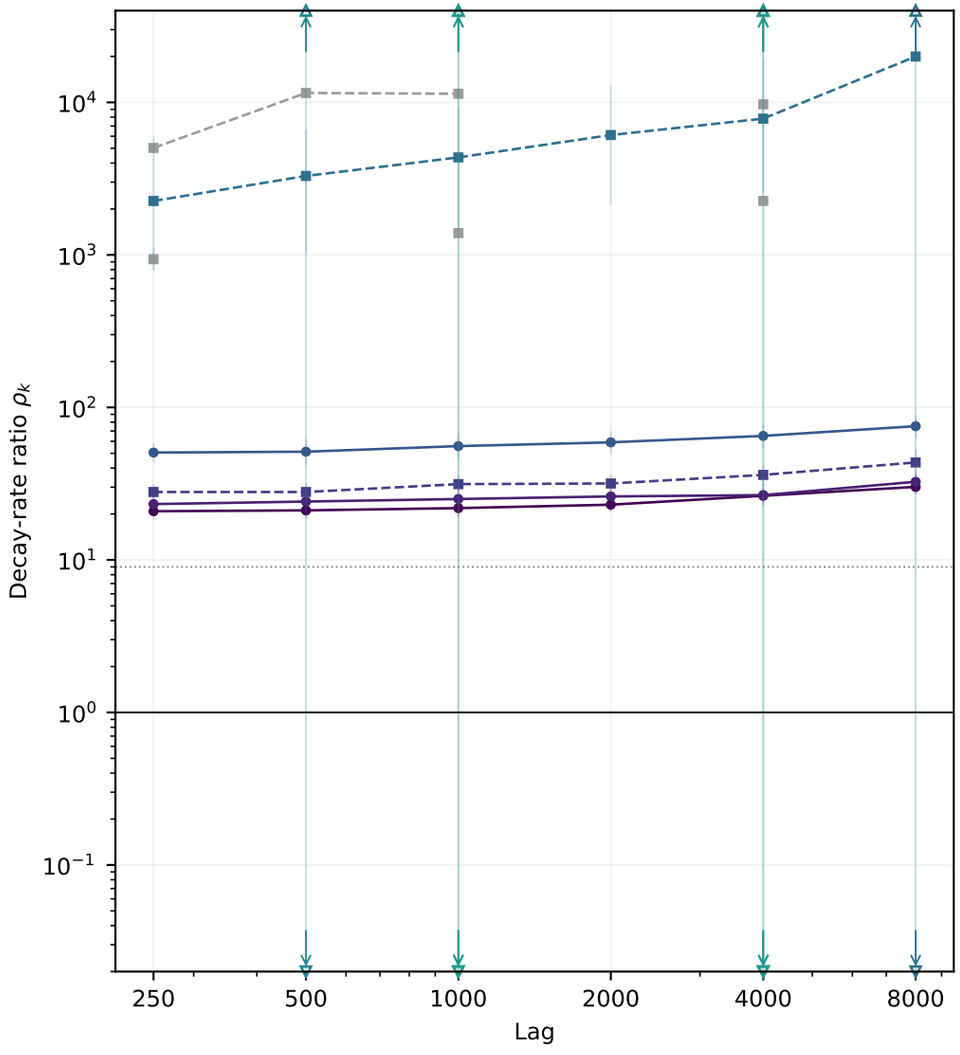


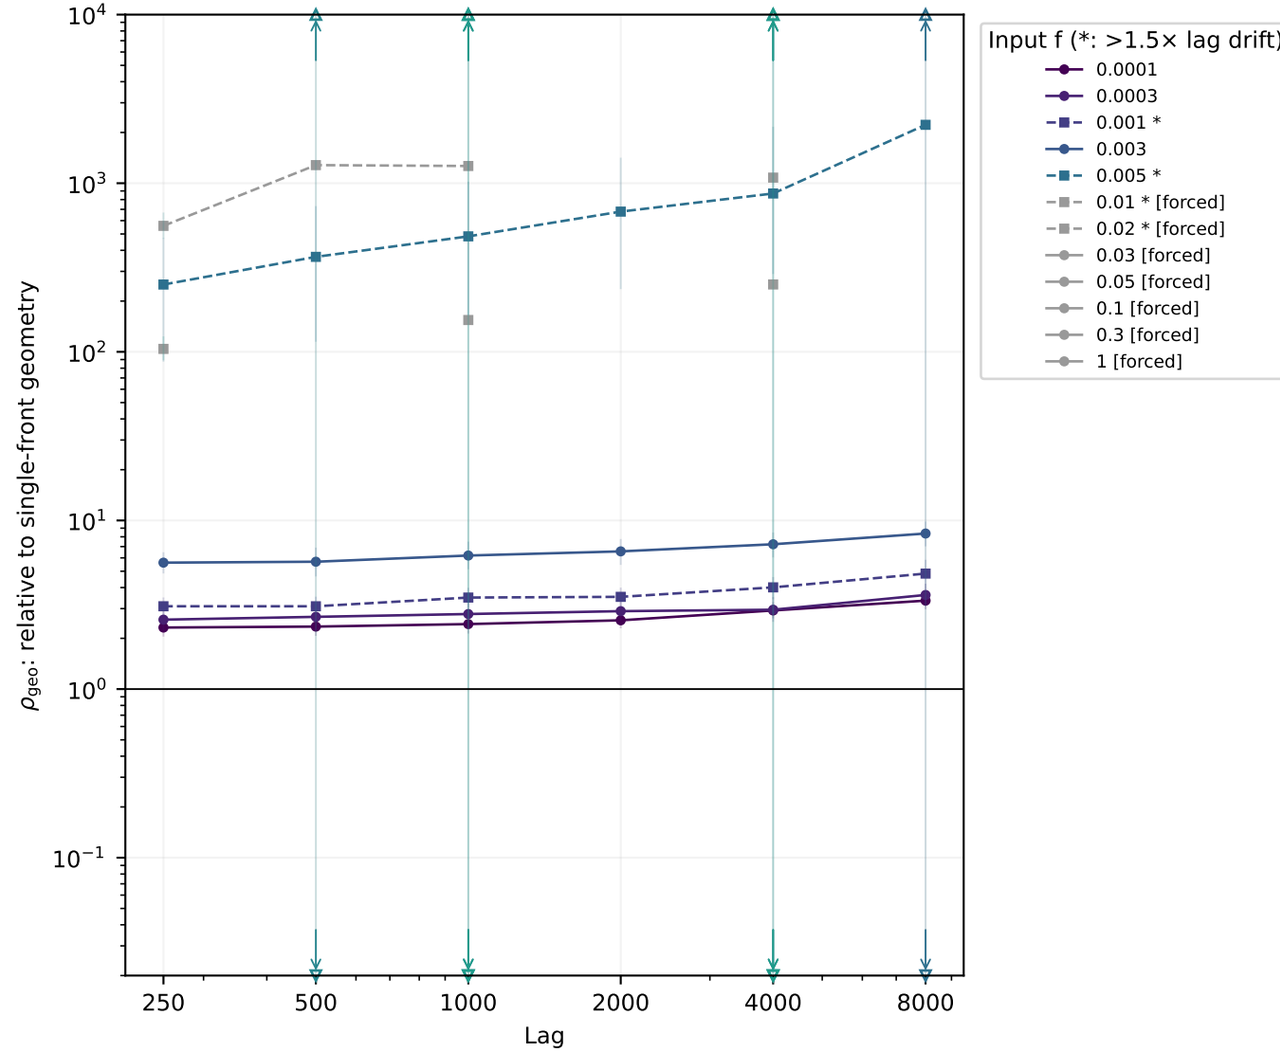

f=0.0001: 6 usable, 0 undefined; f=0.0003: 6 usable, 0 undefined; f=0.001: 6 usable, 0 undefined; f=0.003: 6 usable, 0 undefined; f=0.005: 6 usable, 0 undefined; f=0.01: 6 usable, 2 undefined; f=0.02: 5 usable, 2 undefined; f=0.03: 0 usable, 0 undefined; f=0.05: 0 usable, 0 undefined; f=0.1: 0 usable, 0 undefined; f=0.3: 0 usable, 0 undefined; f=1: 0 usable, 0 undefined

Pointwise whole-seed 95% intervals; every finite positive point is within the axes. Open edge triangles and arrows denote CI tails beyond the axes; full intervals are in CSV. A usable lag can have C ≤ 0, where −ln C and its ratio are undefined; all such counts are retained above. Asterisks/squares flag >1.5× drift. Geometry is not site diffusivity.


Holmes: all usable lags — longest, analysis_first_half

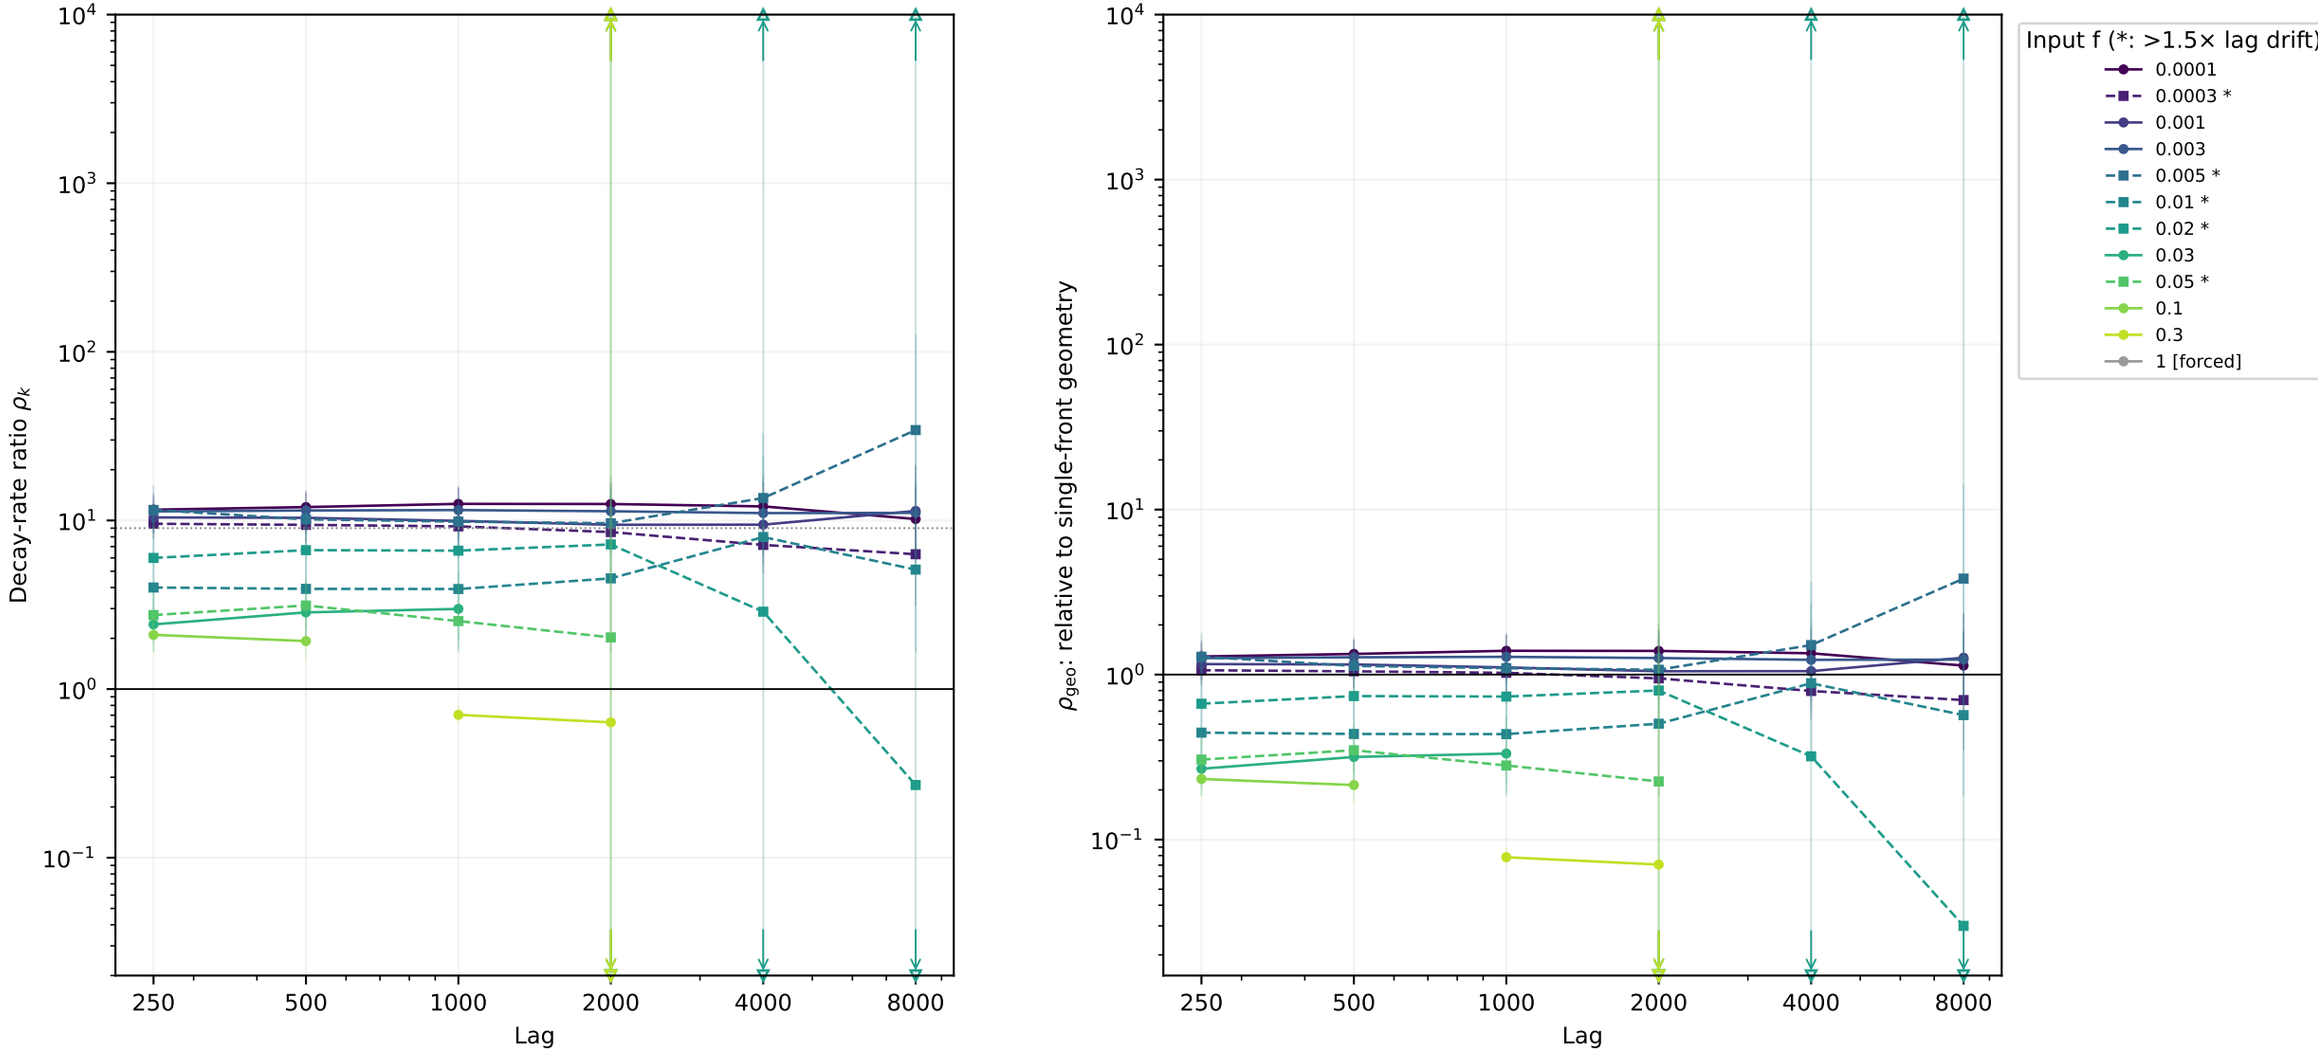

f=0.0001: 6 usable, 0 undefined; f=0.0003: 6 usable, 0 undefined; f=0.001: 6 usable, 0 undefined; f=0.003: 6 usable, 0 undefined; f=0.005: 6 usable, 0 undefined; f=0.01: 6 usable, 0 undefined; f=0.02: 6 usable, 0 undefined; f=0.03: 6 usable, 3 undefined; f=0.05: 6 usable, 2 undefined; f=0.1: 6 usable, 4 undefined; f=0.3: 6 usable, 4 undefined; f=1: 6 usable, 6 undefined

Pointwise whole-seed 95% intervals; every finite positive point is within the axes. Open edge triangles and arrows denote CI tails beyond the axes; full intervals are in CSV. A usable lag can have C ≤ 0, where −ln C and its ratio are undefined; all such counts are retained above. Asterisks/squares flag >1.5× drift. Geometry is not site diffusivity.


Spring: all usable lags — longest, analysis_first_half

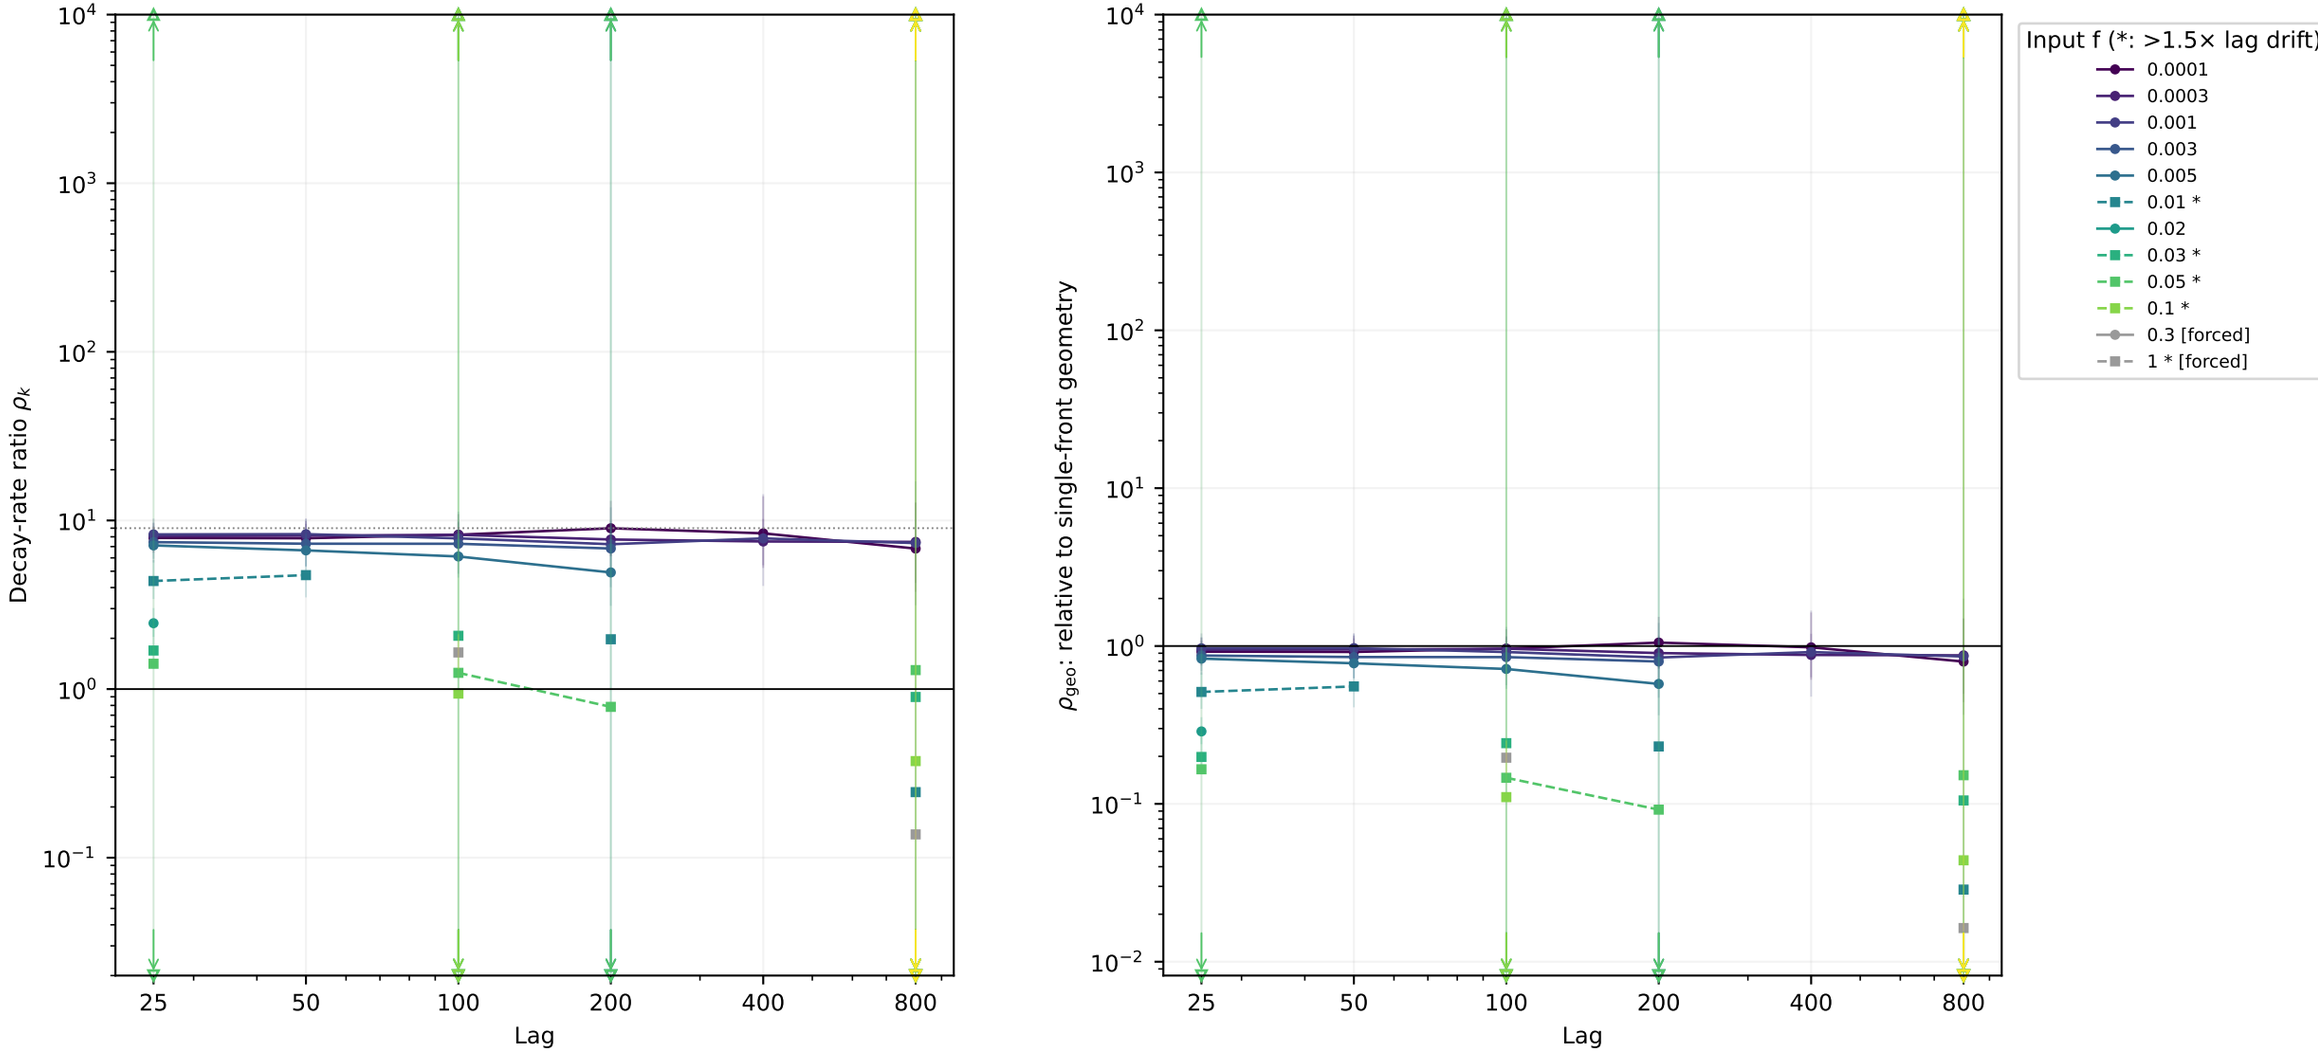

f=0.0001: 6 usable, 0 undefined; f=0.0003: 6 usable, 0 undefined; f=0.001: 6 usable, 0 undefined; f=0.003: 6 usable, 2 undefined; f=0.005: 6 usable, 2 undefined; f=0.01: 6 usable, 2 undefined; f=0.02: 6 usable, 5 undefined; f=0.03: 6 usable, 3 undefined; f=0.05: 6 usable, 2 undefined; f=0.1: 6 usable, 4 undefined; f=0.3: 6 usable, 6 undefined; f=1: 6 usable, 4 undefined

Pointwise whole-seed 95% intervals; every finite positive point is within the axes. Open edge triangles and arrows denote CI tails beyond the axes; full intervals are in CSV.
A usable lag can have C ≤ 0, where −ln C and its ratio are undefined; all such counts are retained above. Asterisks/squares flag >1.5× drift. Geometry is not site diffusivity.


Wave-pinning: all usable lags — longest, analysis_second_half

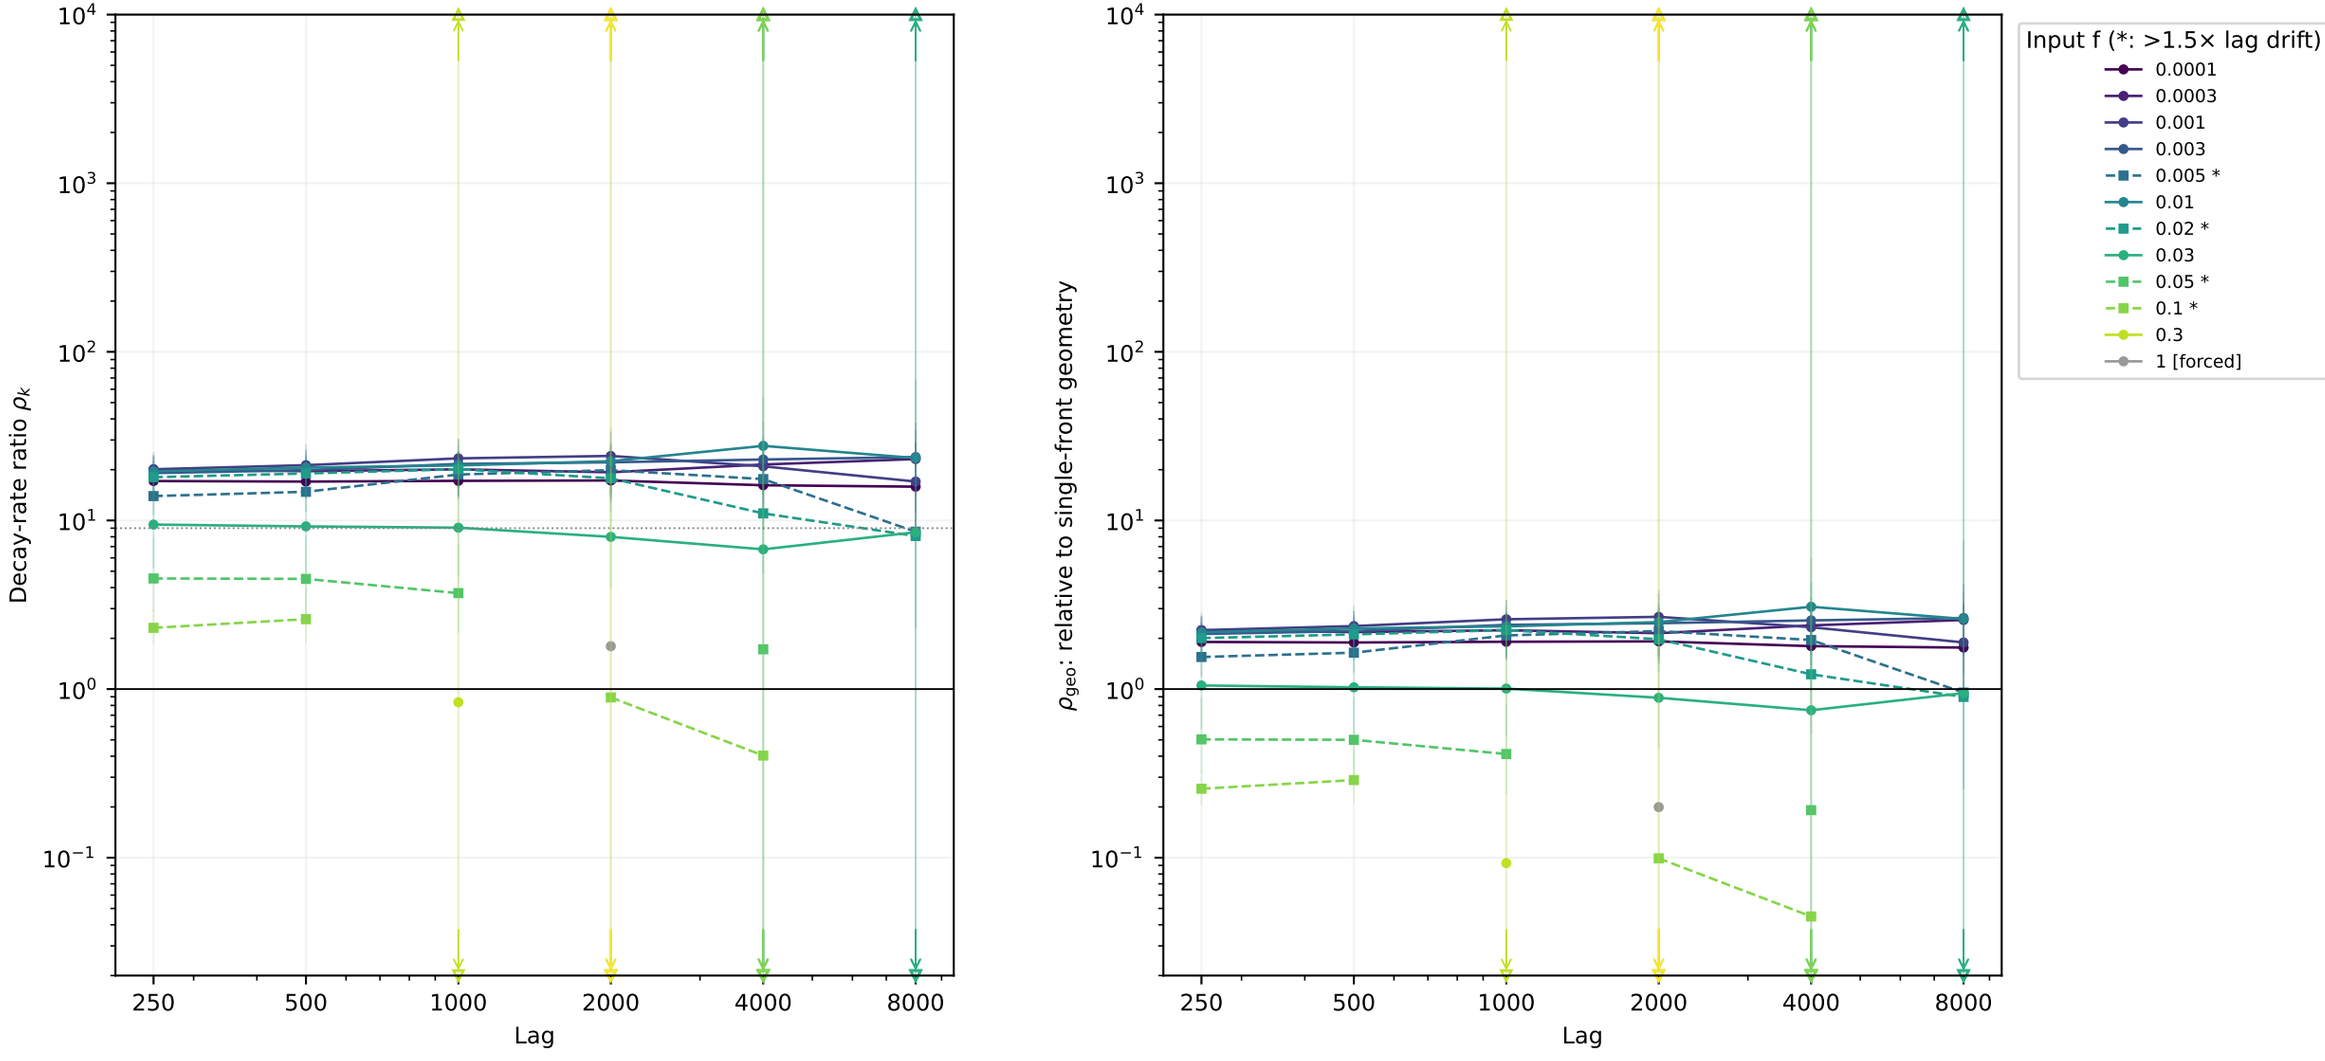

f=0.0001: 6 usable, 0 undefined; f=0.0003: 6 usable, 0 undefined; f=0.001: 6 usable, 0 undefined; f=0.003: 6 usable, 0 undefined; f=0.005: 6 usable, 0 undefined; f=0.01: 6 usable, 0 undefined; f=0.02: 6 usable, 0 undefined; f=0.03: 6 usable, 0 undefined; f=0.05: 6 usable, 2 undefined; f=0.1: 6 usable, 2 undefined; f=0.3: 6 usable, 5 undefined; f=1: 6 usable, 5 undefined

Pointwise whole-seed 95% intervals; every finite positive point is within the axes. Open edge triangles and arrows denote CI tails beyond the axes; full intervals are in CSV. A usable lag can have C ≤ 0, where −ln C and its ratio are undefined; all such counts are retained above. Asterisks/squares flag >1.5× drift. Geometry is not site diffusivity.


Goryachev: all usable lags — longest, analysis_second_half

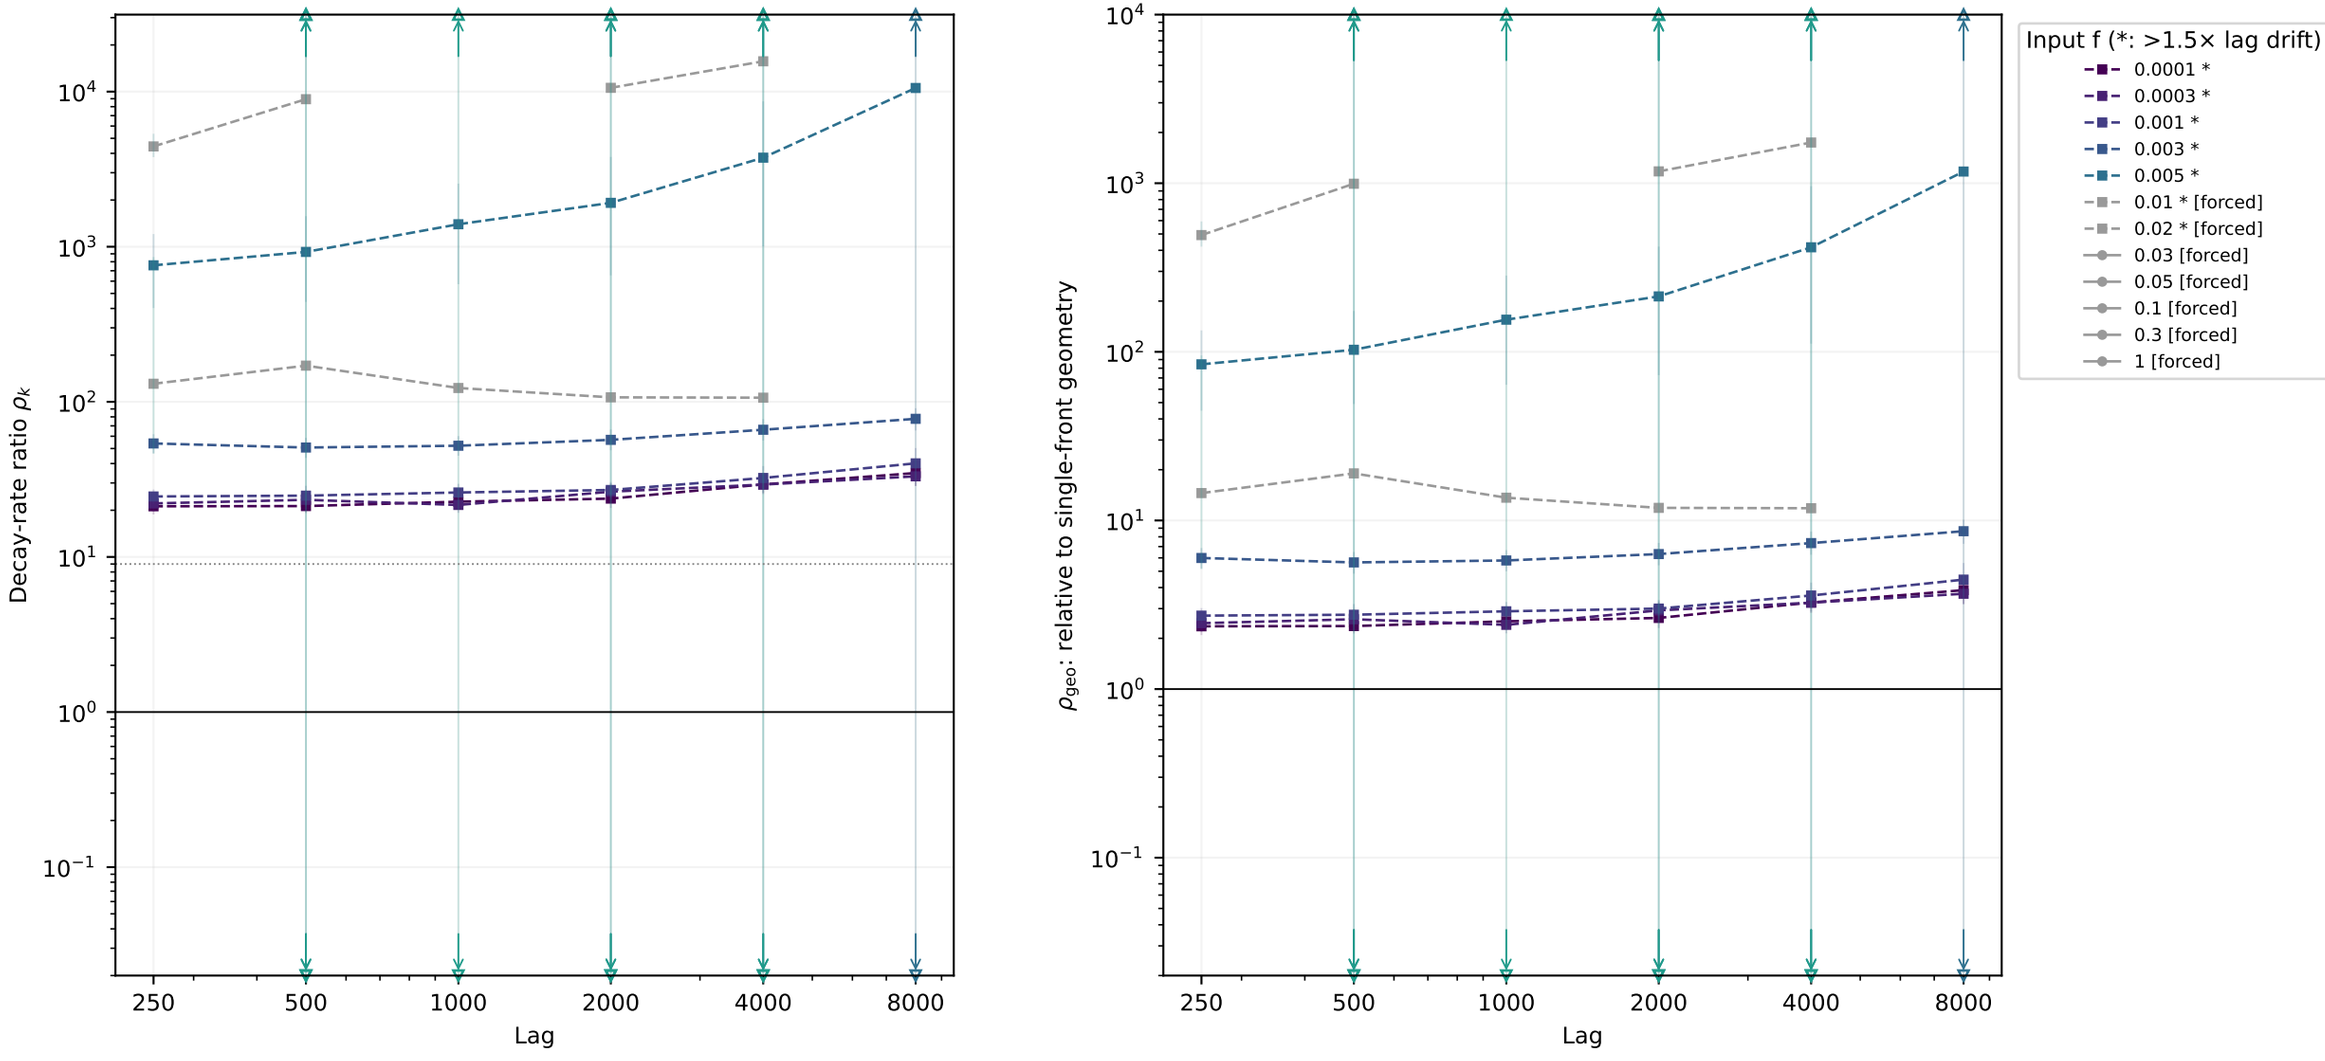

f=0.0001: 6 usable, 0 undefined; f=0.0003: 6 usable, 0 undefined; f=0.001: 6 usable, 0 undefined; f=0.003: 6 usable, 0 undefined; f=0.005: 6 usable, 0 undefined; f=0.01: 6 usable, 2 undefined; f=0.02: 6 usable, 1 undefined; f=0.03: 0 usable, 0 undefined; f=0.05: 0 usable, 0 undefined; f=0.1: 0 usable, 0 undefined; f=0.3: 0 usable, 0 undefined; f=1: 0 usable, 0 undefined

Pointwise whole-seed 95% intervals; every finite positive point is within the axes. Open edge triangles and arrows denote CI tails beyond the axes; full intervals are in CSV. A usable lag can have C ≤ 0, where −ln C and its ratio are undefined; all such counts are retained above. Asterisks/squares flag >1.5× drift. Geometry is not site diffusivity.


Holmes: all usable lags — longest, analysis_second_half

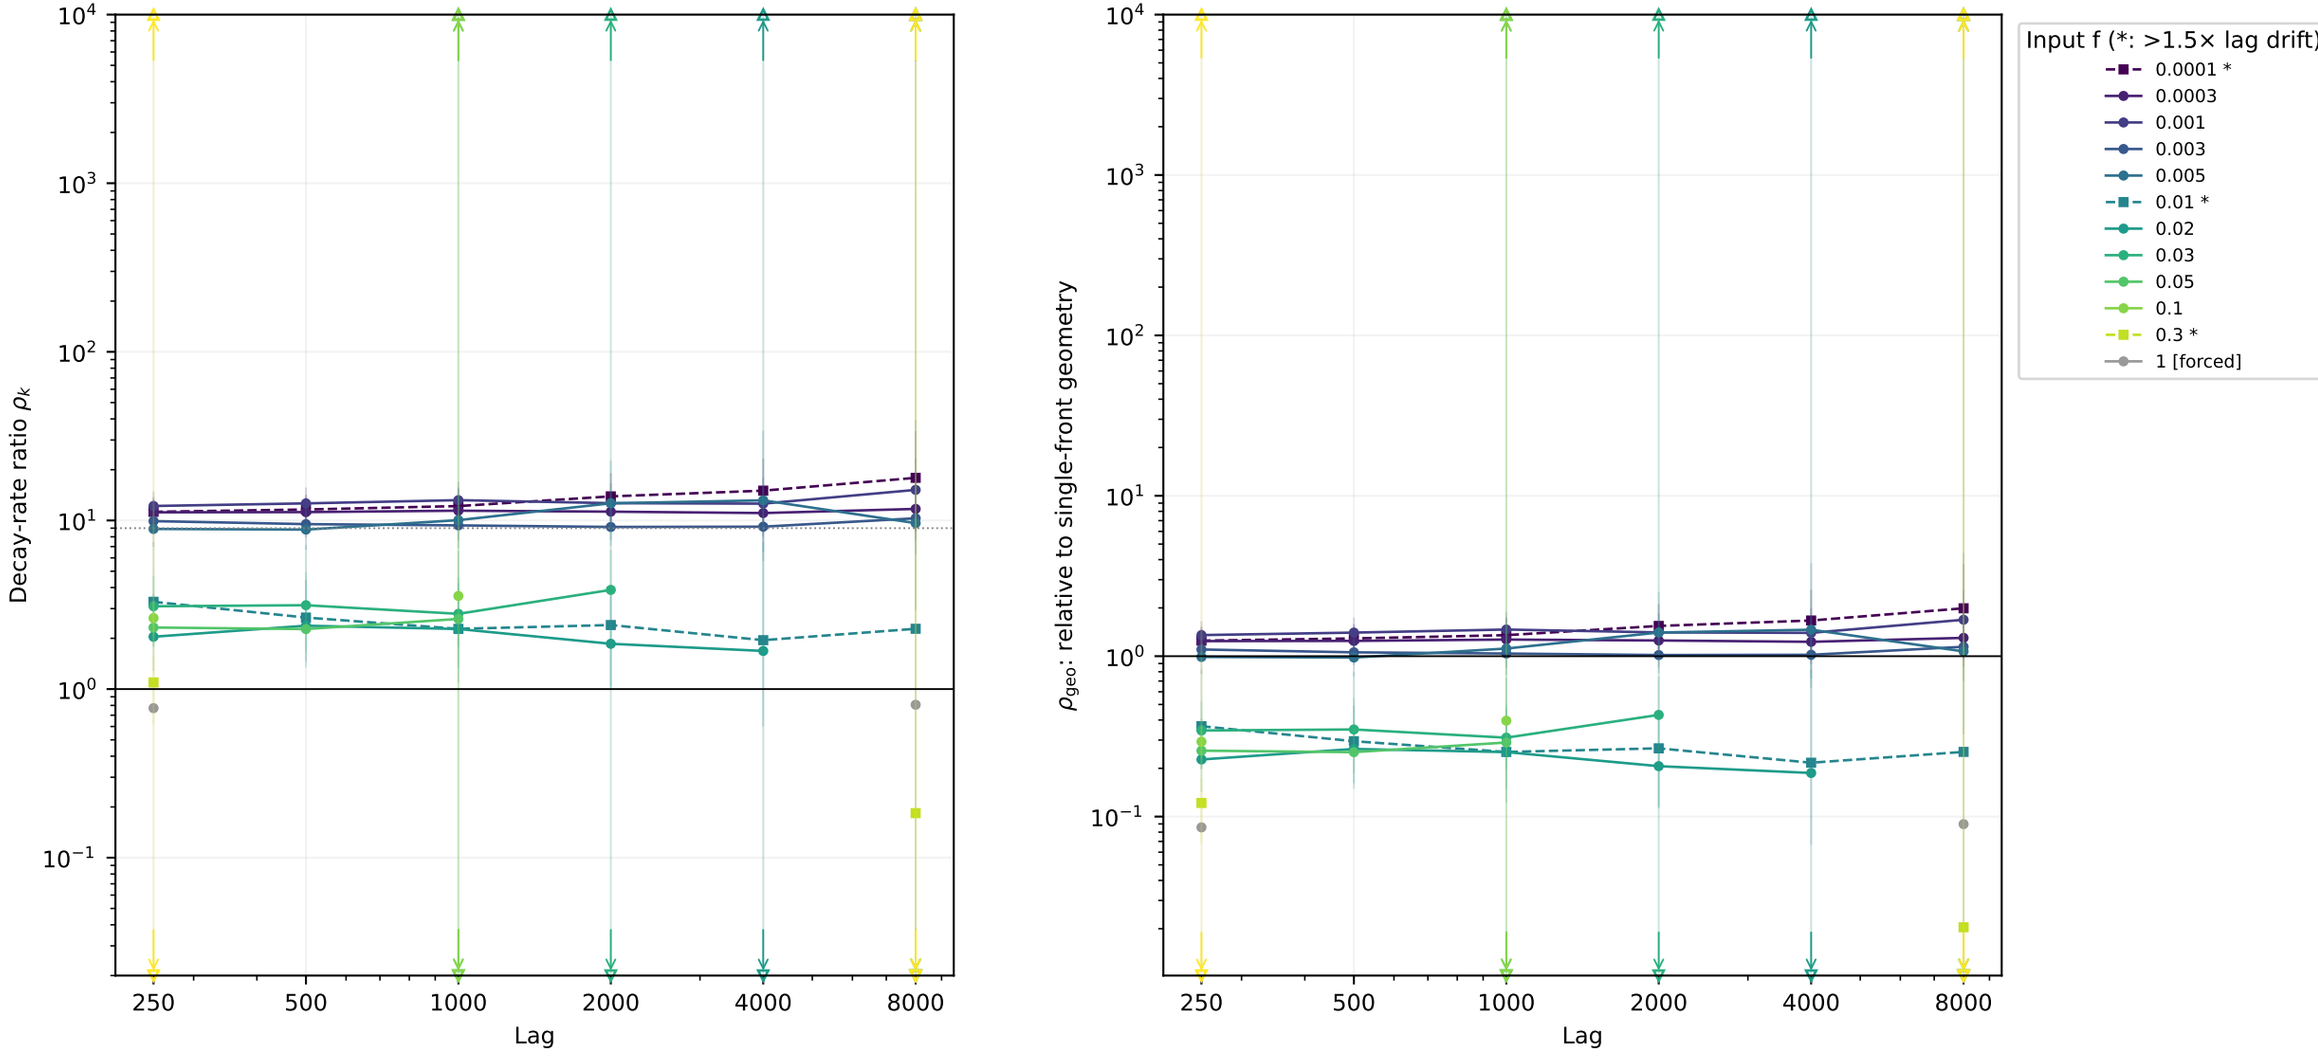

f=0.0001: 6 usable, 0 undefined; f=0.0003: 6 usable, 0 undefined; f=0.001: 6 usable, 0 undefined; f=0.003: 6 usable, 0 undefined; f=0.005: 6 usable, 0 undefined; f=0.01: 6 usable, 0 undefined; f=0.02: 6 usable, 1 undefined; f=0.03: 6 usable, 2 undefined; f=0.05: 6 usable, 3 undefined; f=0.1: 6 usable, 4 undefined; f=0.3: 6 usable, 4 undefined; f=1: 6 usable, 4 undefined

Pointwise whole-seed 95% intervals; every finite positive point is within the axes. Open edge triangles and arrows denote CI tails beyond the axes; full intervals are in CSV. A usable lag can have C ≤ 0, where −ln C and its ratio are undefined; all such counts are retained above. Asterisks/squares flag >1.5× drift. Geometry is not site diffusivity.


Spring: all usable lags — longest, analysis_second_half

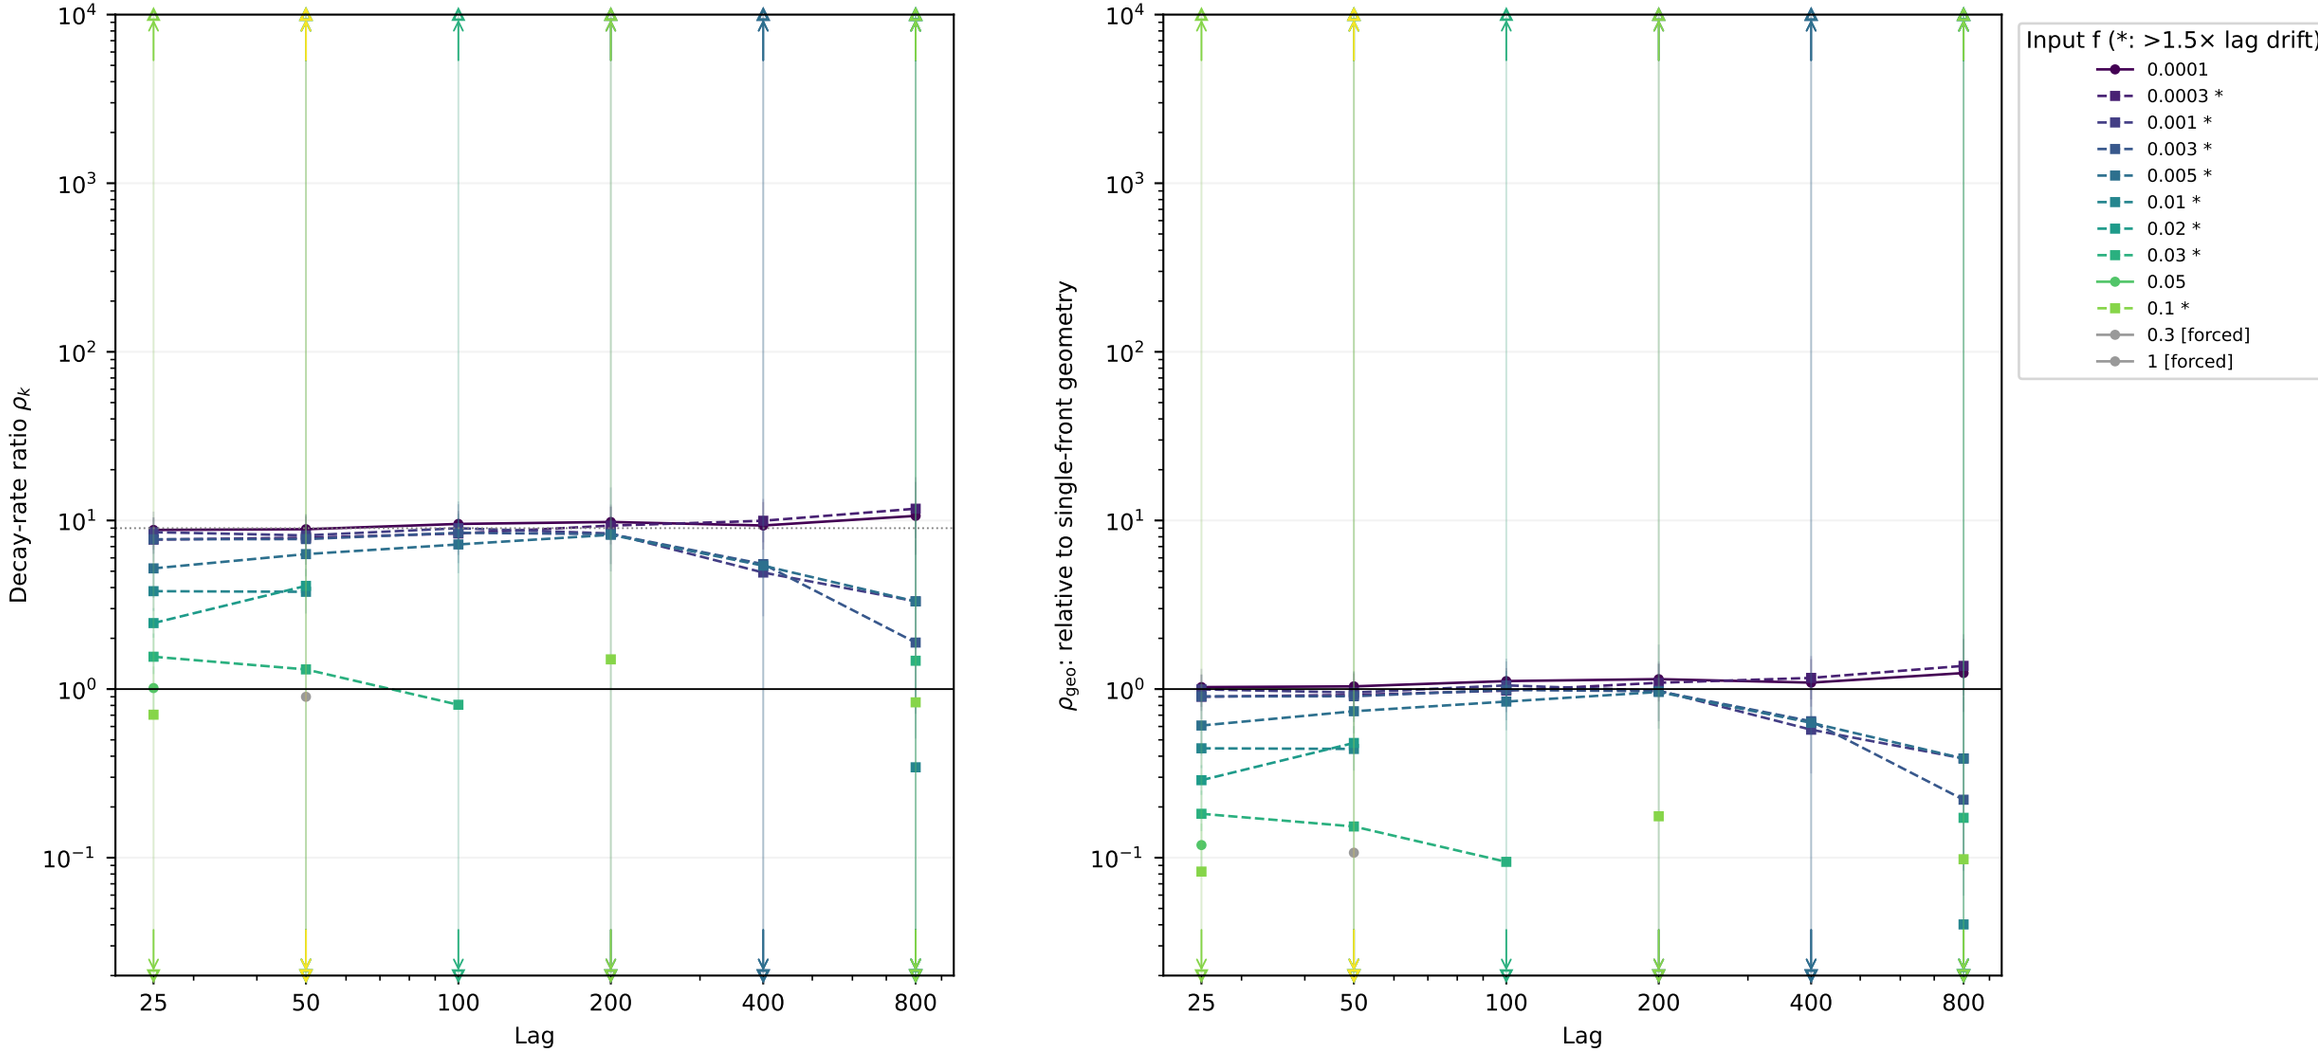

f=0.0001: 6 usable, 0 undefined; f=0.0003: 6 usable, 0 undefined; f=0.001: 6 usable, 0 undefined; f=0.003: 6 usable, 0 undefined; f=0.005: 6 usable, 0 undefined; f=0.01: 6 usable, 3 undefined; f=0.02: 6 usable, 4 undefined; f=0.03: 6 usable, 2 undefined; f=0.05: 6 usable, 5 undefined; f=0.1: 6 usable, 3 undefined; f=0.3: 6 usable, 6 undefined; f=1: 6 usable, 5 undefined

Pointwise whole-seed 95% intervals; every finite positive point is within the axes. Open edge triangles and arrows denote CI tails beyond the axes; full intervals are in CSV. A usable lag can have C ≤ 0, where −ln C and its ratio are undefined; all such counts are retained above. Asterisks/squares flag >1.5× drift. Geometry is not site diffusivity.


Wave-pinning: all usable lags — longest, late_quarter

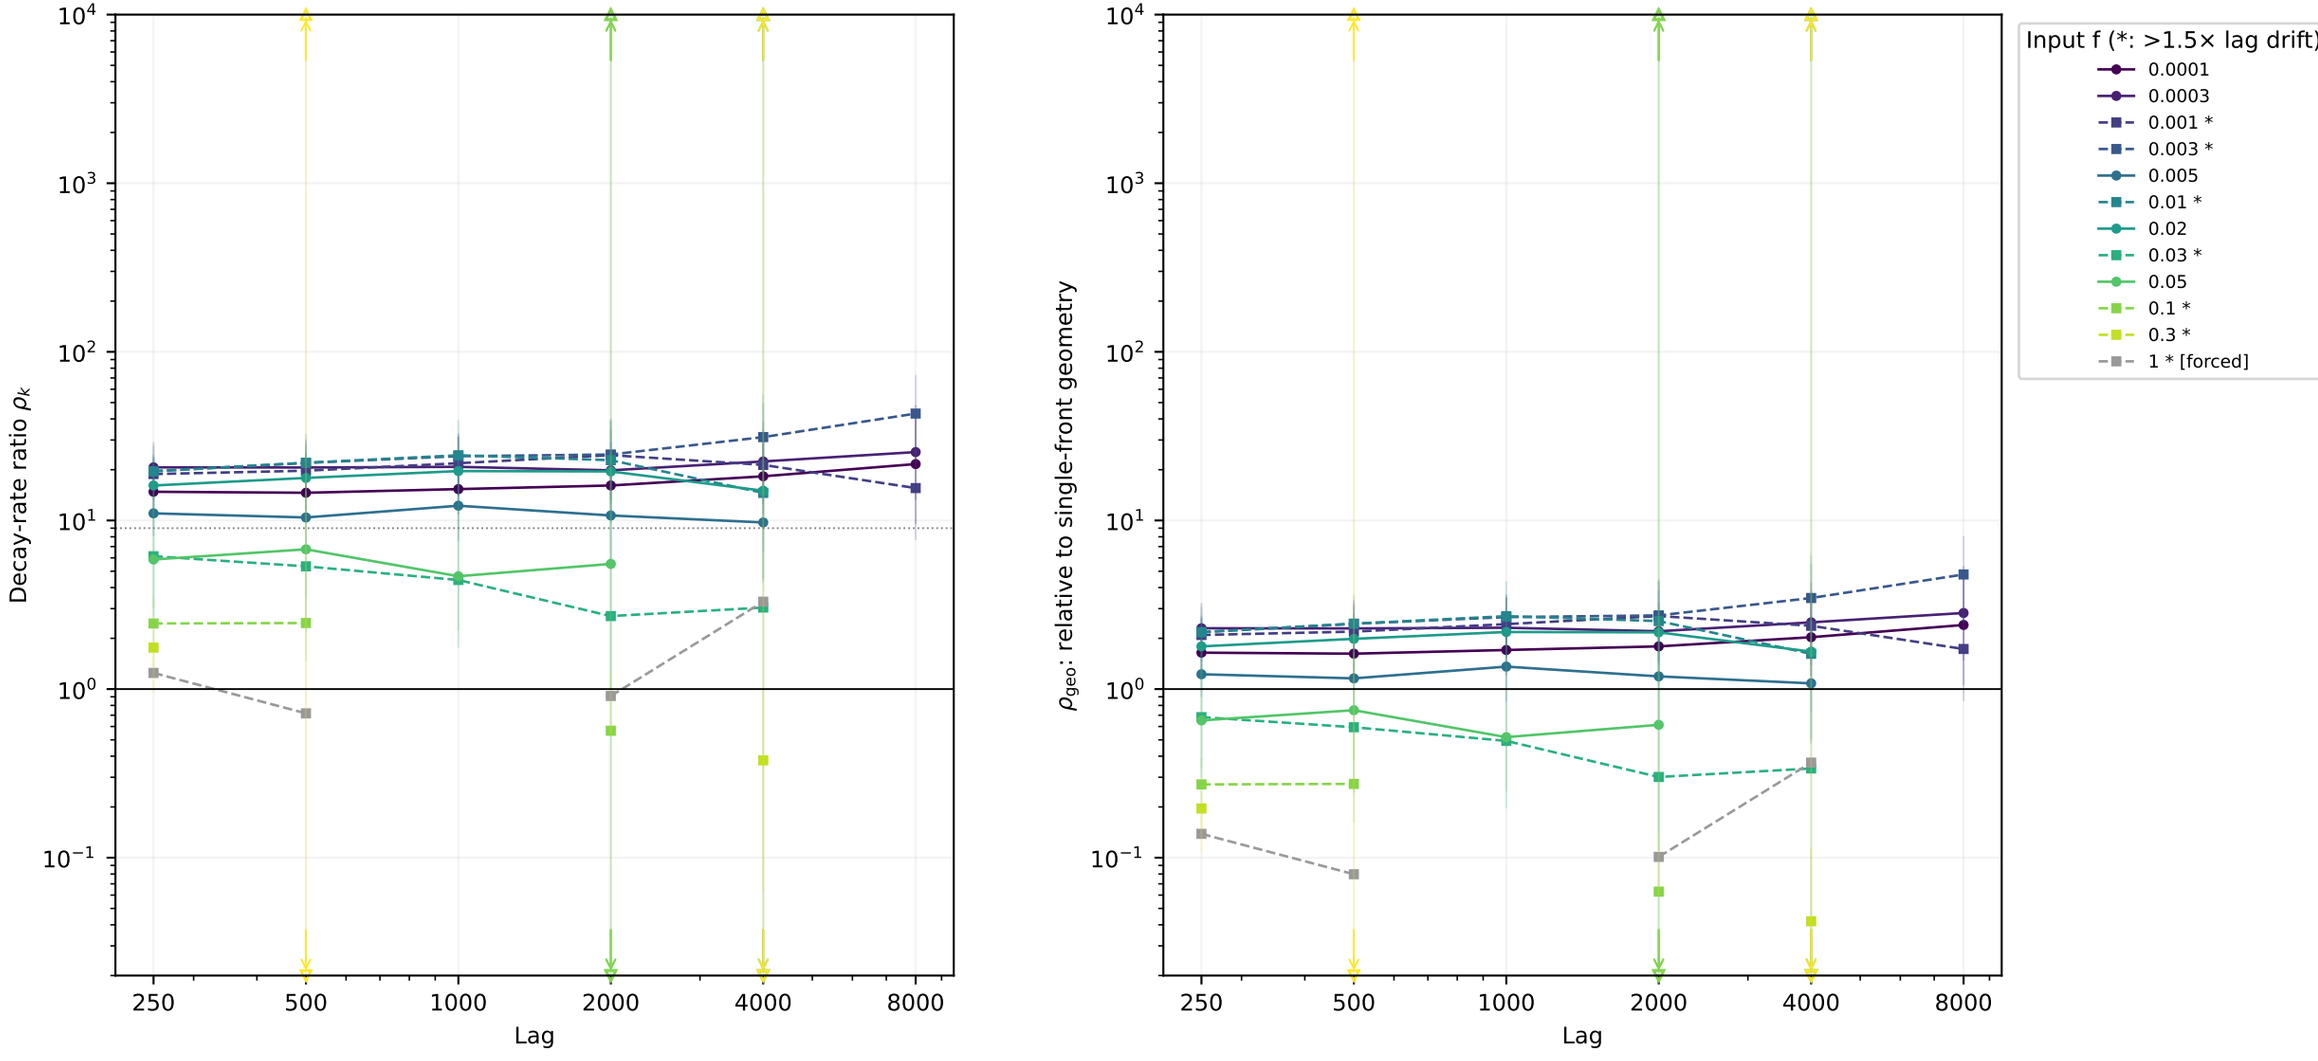

f=0.0001: 6 usable, 0 undefined; f=0.0003: 6 usable, 0 undefined; f=0.001: 6 usable, 0 undefined; f=0.003: 6 usable, 0 undefined; f=0.005: 5 usable, 0 undefined; f=0.01: 5 usable, 0 undefined; f=0.02: 5 usable, 0 undefined; f=0.03: 5 usable, 0 undefined; f=0.05: 5 usable, 1 undefined; f=0.1: 5 usable, 2 undefined; f=0.3: 5 usable, 3 undefined; f=1: 5 usable, 1 undefined

Pointwise whole-seed 95% intervals; every finite positive point is within the axes. Open edge triangles and arrows denote CI tails beyond the axes; full intervals are in CSV.
A usable lag can have C ≤ 0, where −ln C and its ratio are undefined; all such counts are retained above. Asterisks/squares flag >1.5× drift. Geometry is not site diffusivity.


Goryachev: all usable lags — longest, late_quarter

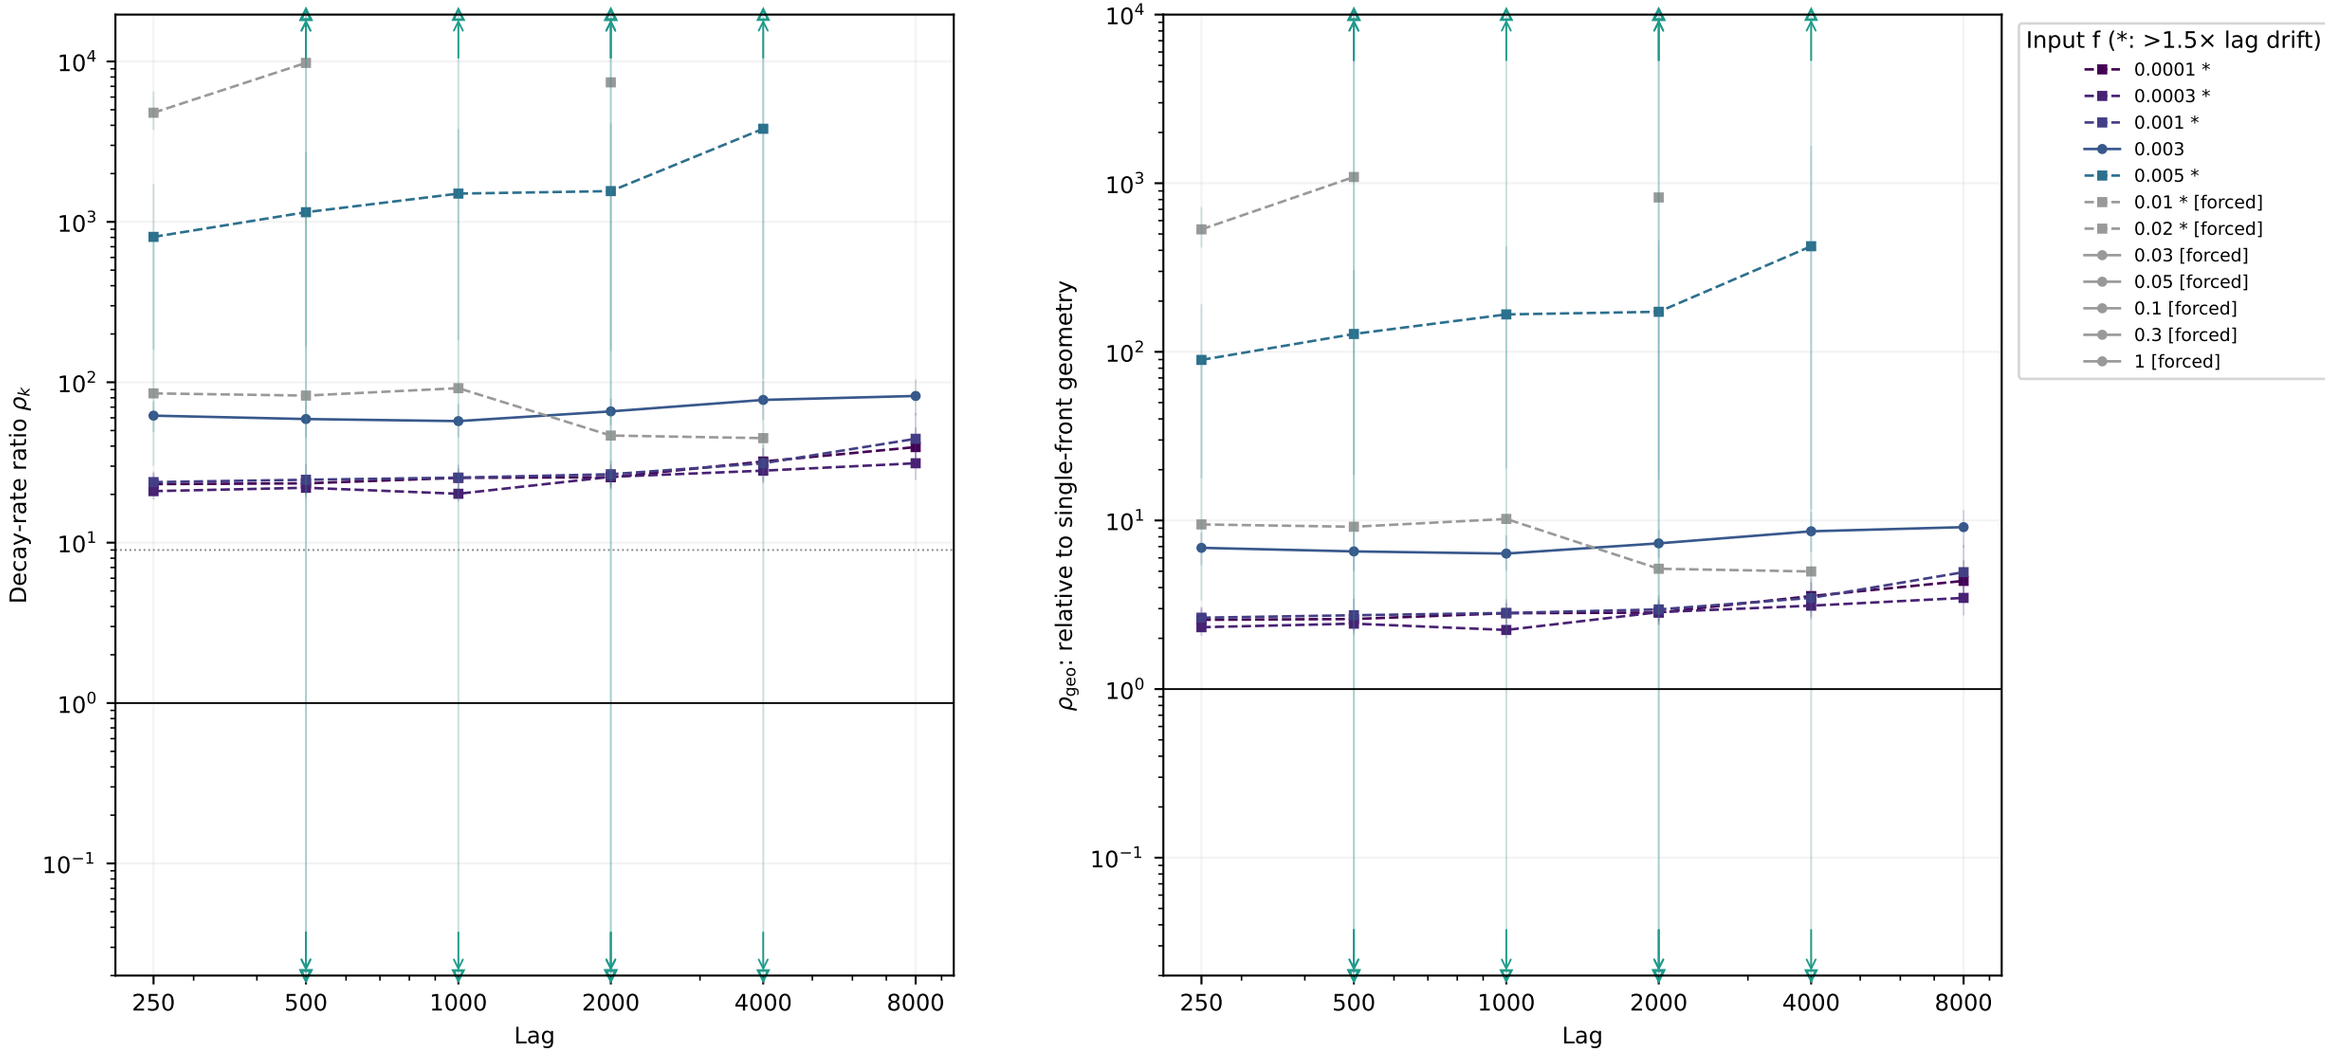

f=0.0001: 6 usable, 0 undefined; f=0.0003: 6 usable, 0 undefined; f=0.001: 6 usable, 0 undefined; f=0.003: 6 usable, 0 undefined; f=0.005: 5 usable, 0 undefined; f=0.01: 5 usable, 2 undefined; f=0.02: 5 usable, 0 undefined; f=0.03: 0 usable, 0 undefined; f=0.05: 0 usable, 0 undefined; f=0.1: 0 usable, 0 undefined; f=0.3: 0 usable, 0 undefined; f=1: 0 usable, 0 undefined

Pointwise whole-seed 95% intervals; every finite positive point is within the axes. Open edge triangles and arrows denote CI tails beyond the axes; full intervals are in CSV.
A usable lag can have C ≤ 0, where −ln C and its ratio are undefined; all such counts are retained above. Asterisks/squares flag >1.5× drift. Geometry is not site diffusivity.


Holmes: all usable lags — longest, late_quarter

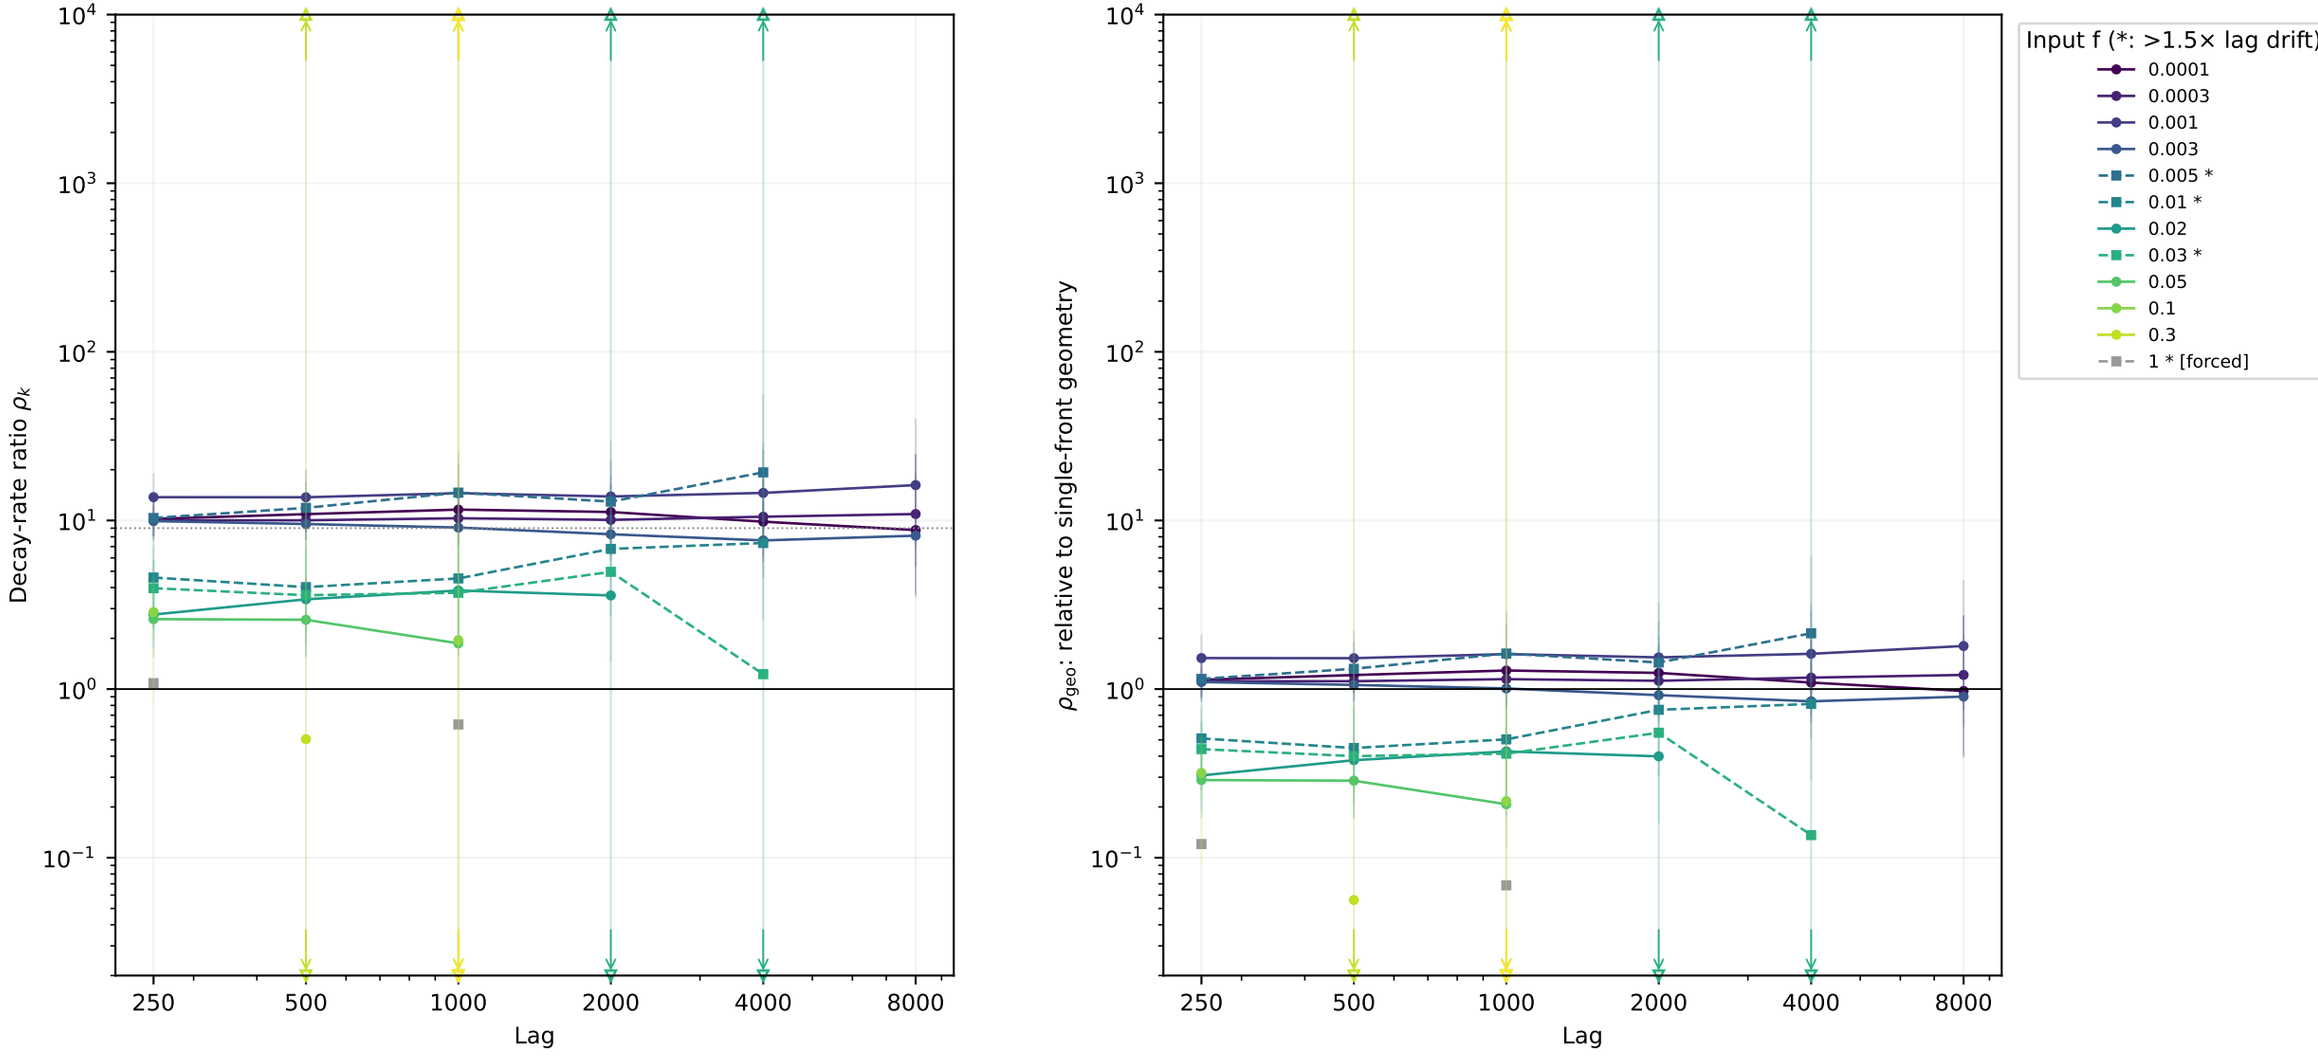

f=0.0001: 6 usable, 0 undefined; f=0.0003: 6 usable, 0 undefined; f=0.001: 6 usable, 0 undefined; f=0.003: 6 usable, 0 undefined; f=0.005: 5 usable, 0 undefined; f=0.01: 5 usable, 0 undefined; f=0.02: 5 usable, 1 undefined; f=0.03: 5 usable, 0 undefined; f=0.05: 5 usable, 2 undefined; f=0.1: 5 usable, 3 undefined; f=0.3: 5 usable, 4 undefined; f=1: 5 usable, 3 undefined

Pointwise whole-seed 95% intervals; every finite positive point is within the axes. Open edge triangles and arrows denote CI tails beyond the axes; full intervals are in CSV. A usable lag can have C ≤ 0, where −ln C and its ratio are undefined; all such counts are retained above. Asterisks/squares flag >1.5× drift. Geometry is not site diffusivity.


Spring: all usable lags — longest, late_quarter

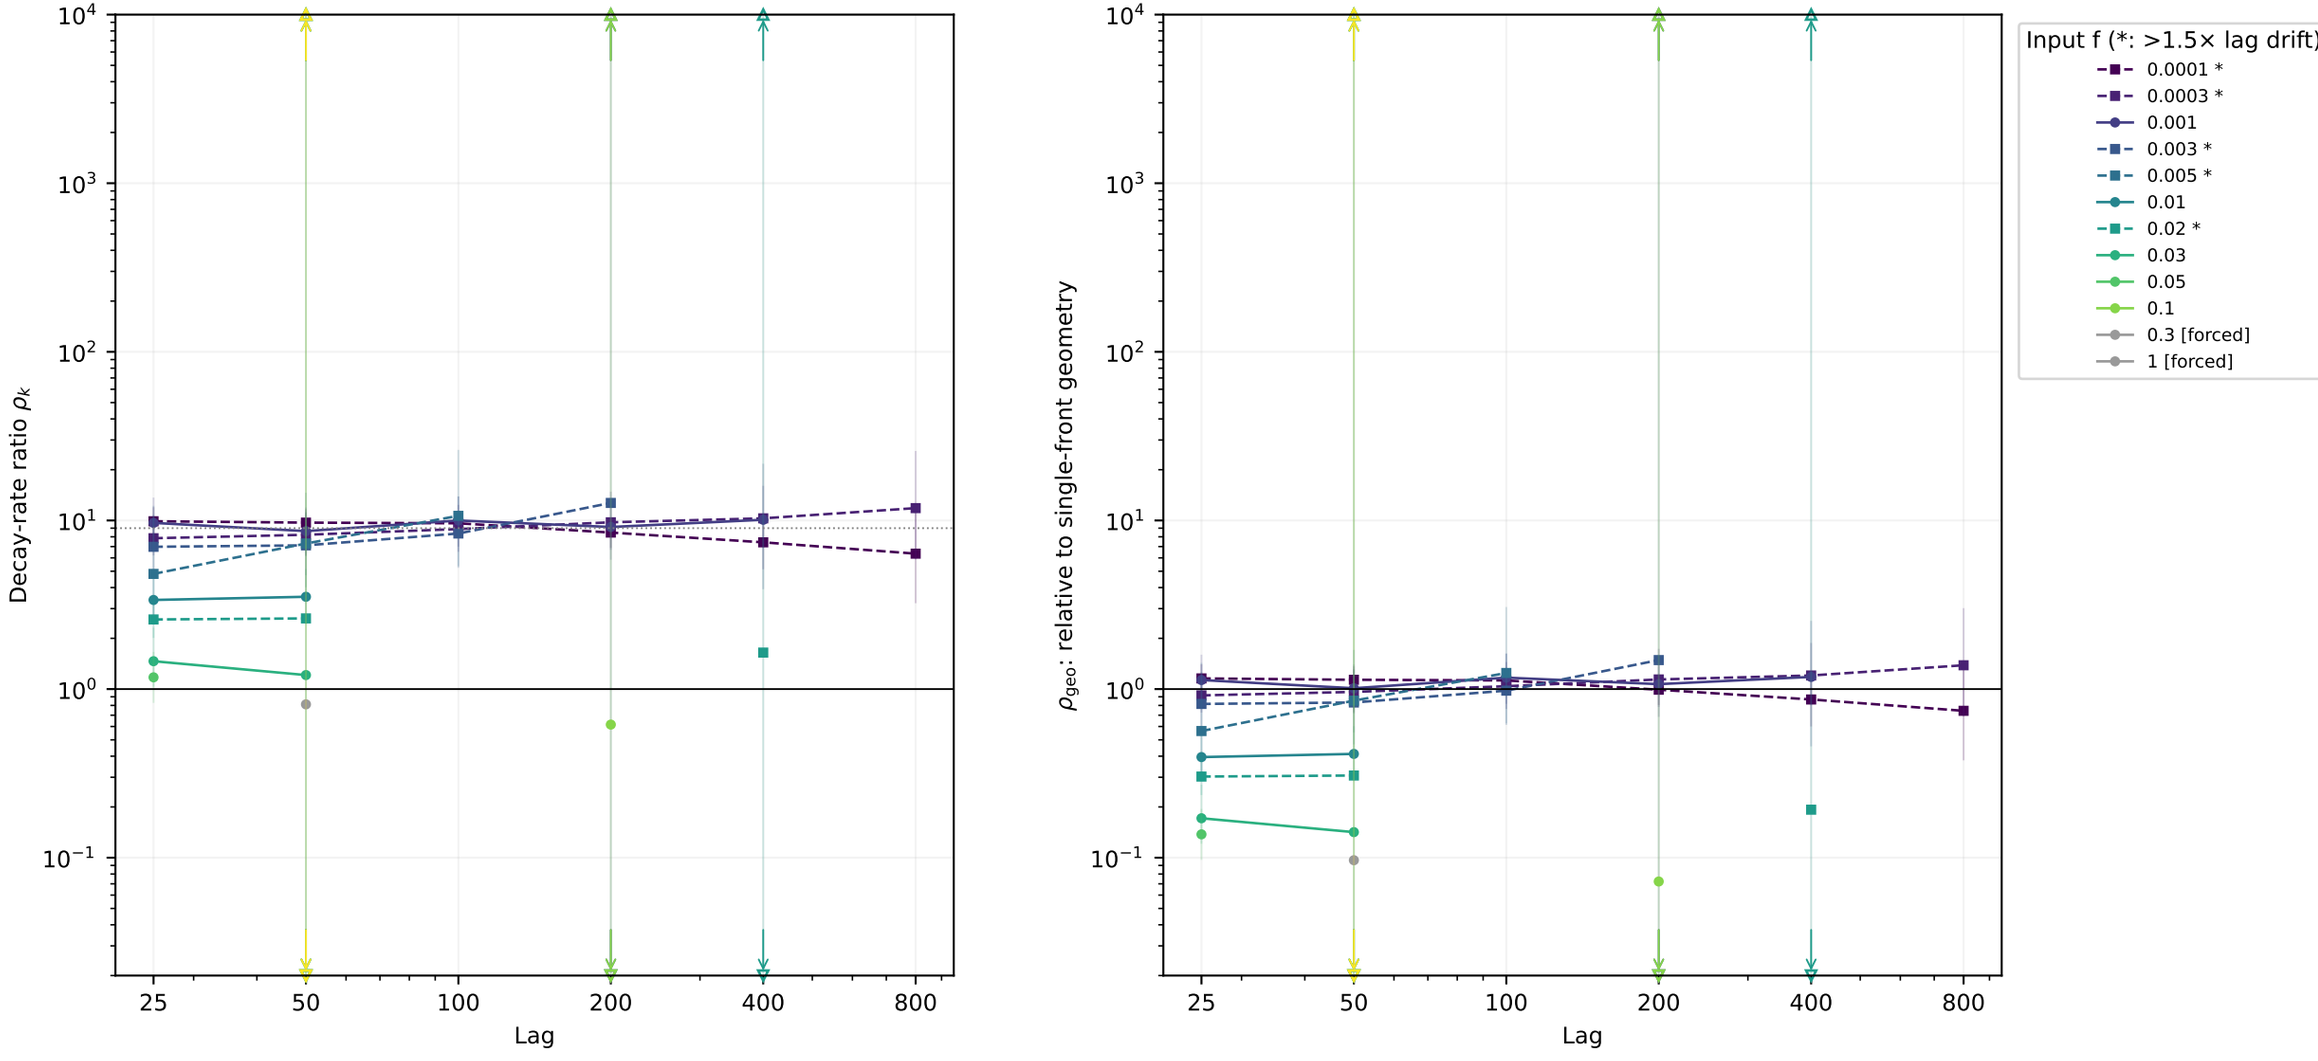

f=0.0001: 6 usable, 0 undefined; f=0.0003: 6 usable, 0 undefined; f=0.001: 5 usable, 0 undefined; f=0.003: 5 usable, 1 undefined; f=0.005: 5 usable, 2 undefined; f=0.01: 5 usable, 3 undefined; f=0.02: 5 usable, 2 undefined; f=0.03: 5 usable, 3 undefined; f=0.05: 5 usable, 4 undefined; f=0.1: 5 usable, 4 undefined; f=0.3: 5 usable, 5 undefined; f=1: 5 usable, 4 undefined

Pointwise whole-seed 95% intervals; every finite positive point is within the axes. Open edge triangles and arrows denote CI tails beyond the axes; full intervals are in CSV.
A usable lag can have C ≤ 0, where −ln C and its ratio are undefined; all such counts are retained above. Asterisks/squares flag >1.5× drift. Geometry is not site diffusivity.


Wave-pinning: all usable lags — longest, cadence_x2

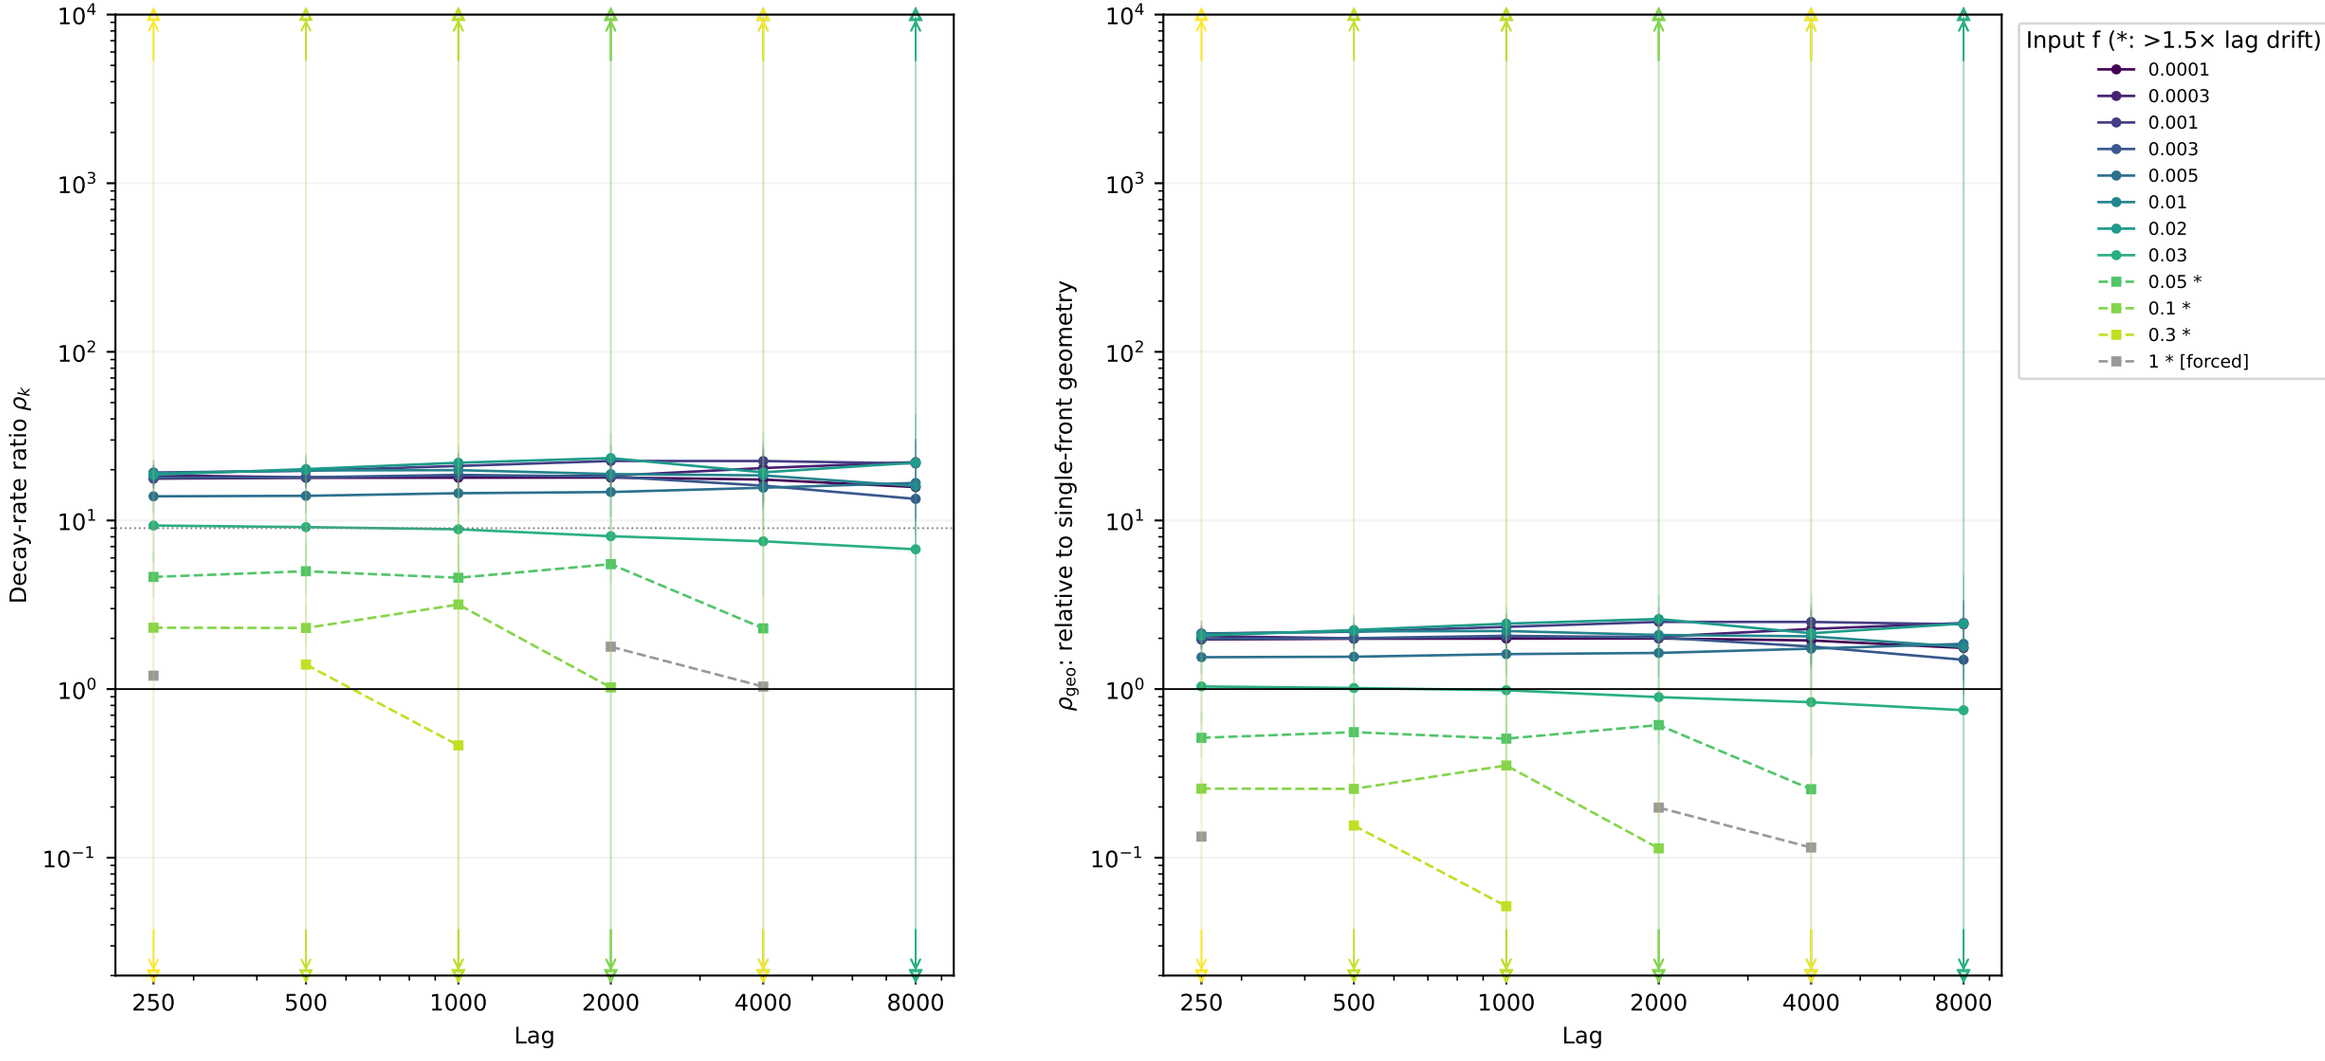

f=0.0001: 6 usable, 0 undefined; f=0.0003: 6 usable, 0 undefined; f=0.001: 6 usable, 0 undefined; f=0.003: 6 usable, 0 undefined; f=0.005: 6 usable, 0 undefined; f=0.01: 6 usable, 0 undefined; f=0.02: 6 usable, 0 undefined; f=0.03: 6 usable, 0 undefined; f=0.05: 6 usable, 1 undefined; f=0.1: 6 usable, 2 undefined; f=0.3: 6 usable, 4 undefined; f=1: 6 usable, 3 undefined

Pointwise whole-seed 95% intervals; every finite positive point is within the axes. Open edge triangles and arrows denote CI tails beyond the axes; full intervals are in CSV.
A usable lag can have C ≤ 0, where −ln C and its ratio are undefined; all such counts are retained above. Asterisks/squares flag >1.5× drift. Geometry is not site diffusivity.


Goryachev: all usable lags — longest, cadence_x2

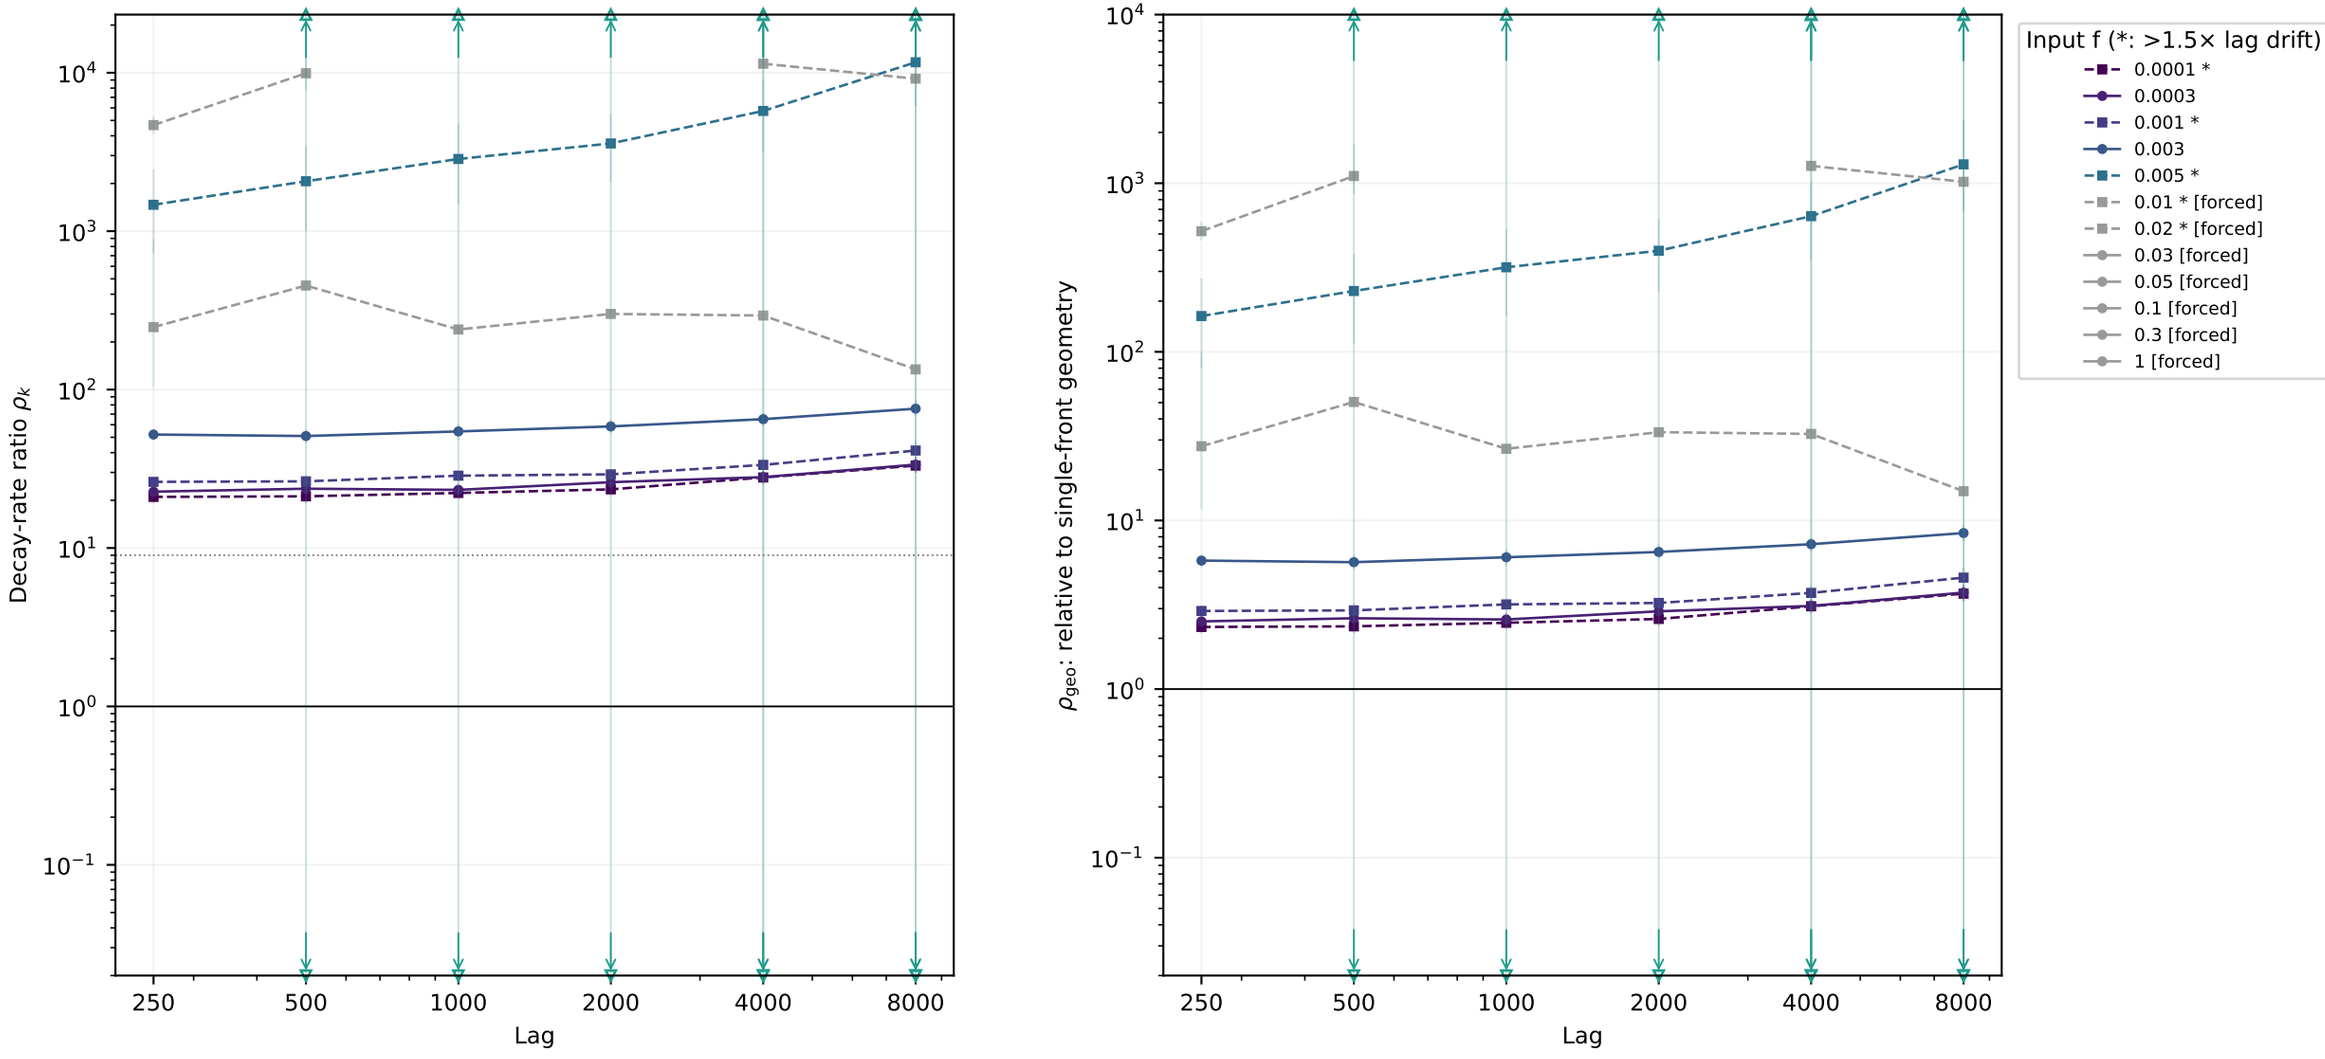

f=0.0001: 6 usable, 0 undefined; f=0.0003: 6 usable, 0 undefined; f=0.001: 6 usable, 0 undefined; f=0.003: 6 usable, 0 undefined; f=0.005: 6 usable, 0 undefined; f=0.01: 6 usable, 2 undefined; f=0.02: 6 usable, 0 undefined; f=0.03: 0 usable, 0 undefined; f=0.05: 0 usable, 0 undefined; f=0.1: 0 usable, 0 undefined; f=0.3: 0 usable, 0 undefined; f=1: 0 usable, 0 undefined

Pointwise whole-seed 95% intervals; every finite positive point is within the axes. Open edge triangles and arrows denote CI tails beyond the axes; full intervals are in CSV.
A usable lag can have C ≤ 0, where −ln C and its ratio are undefined; all such counts are retained above. Asterisks/squares flag >1.5× drift. Geometry is not site diffusivity.


Holmes: all usable lags — longest, cadence_x2

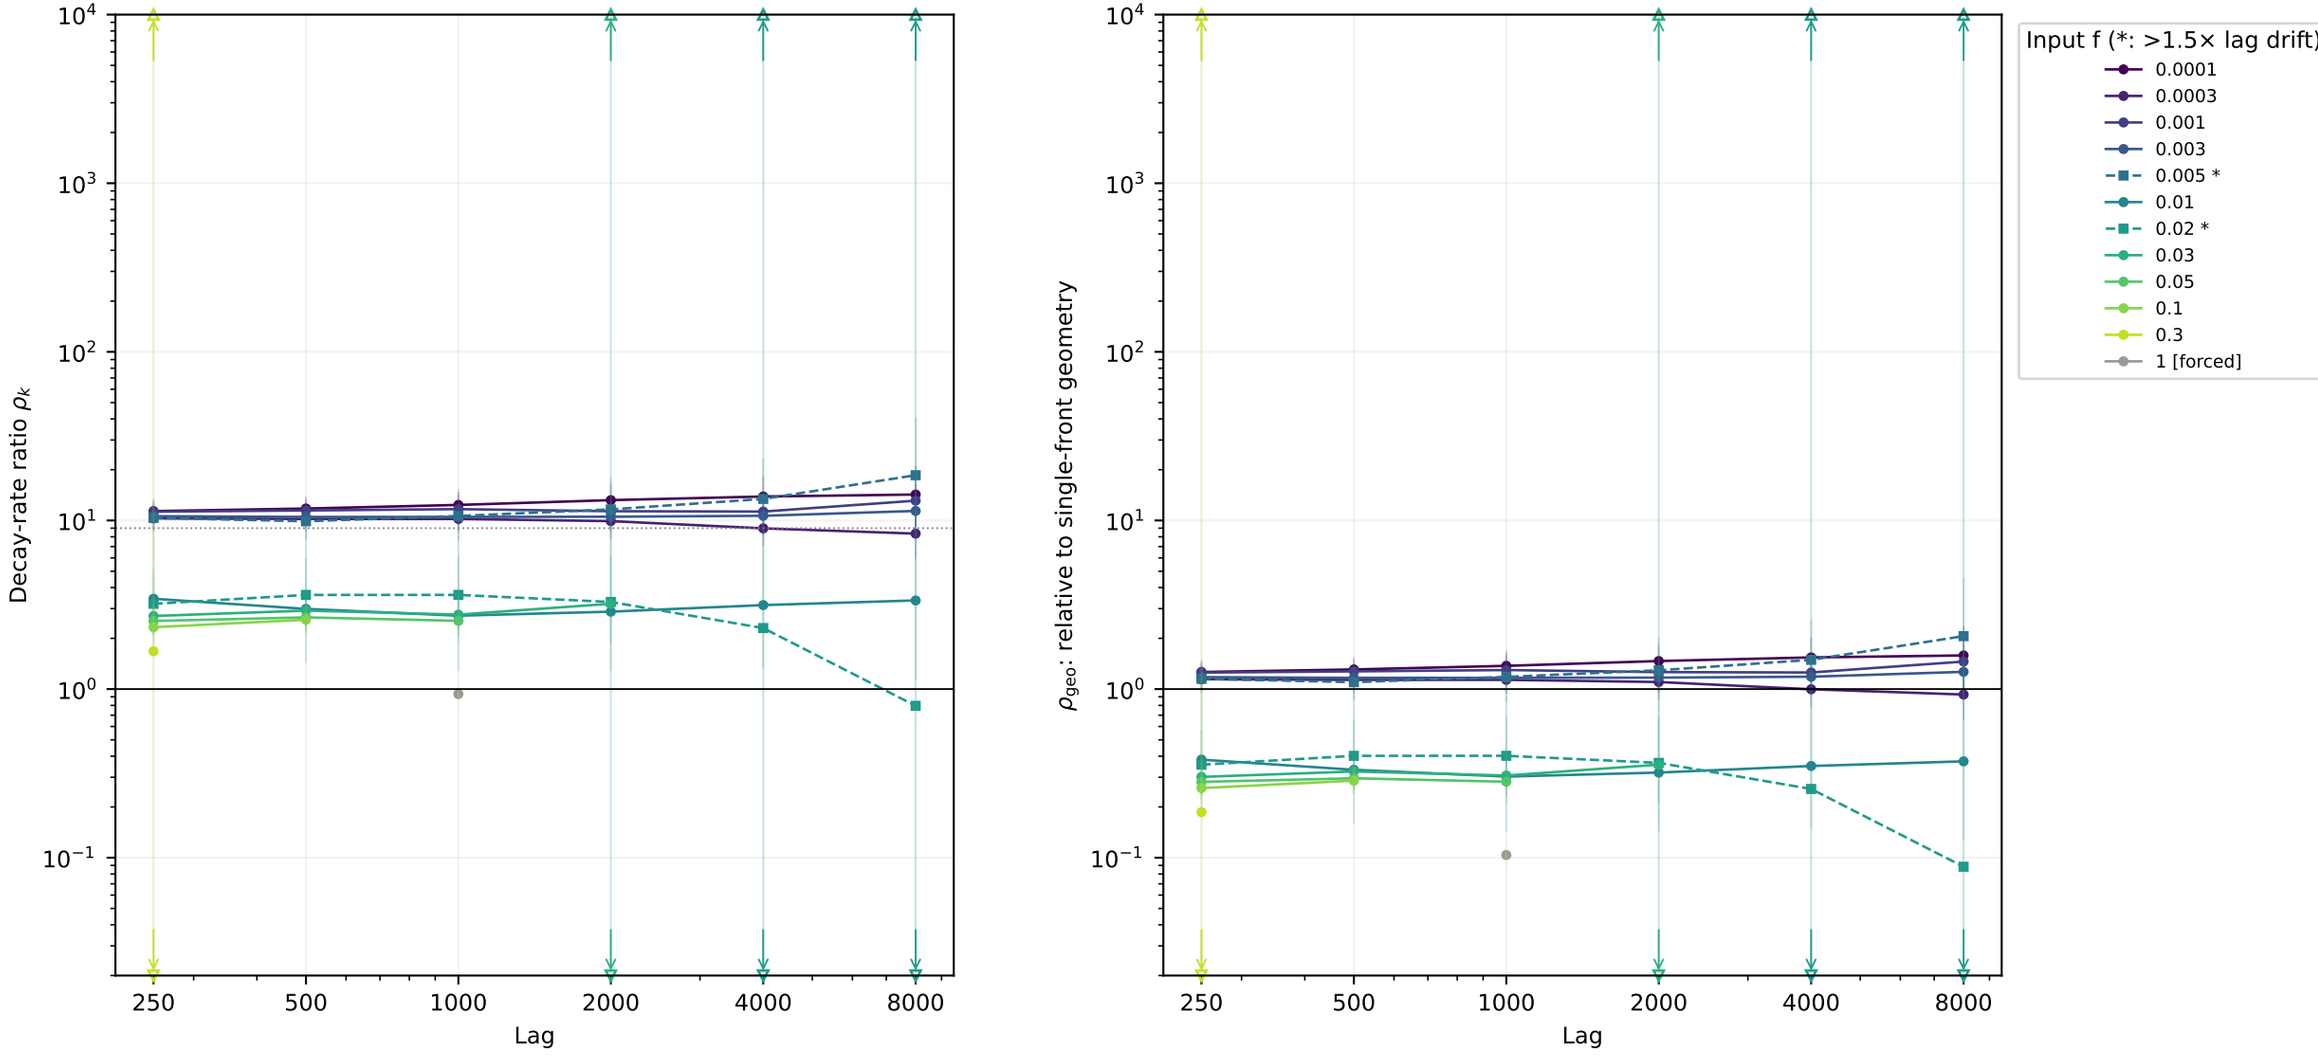

f=0.0001: 6 usable, 0 undefined; f=0.0003: 6 usable, 0 undefined; f=0.001: 6 usable, 0 undefined; f=0.003: 6 usable, 0 undefined; f=0.005: 6 usable, 0 undefined; f=0.01: 6 usable, 0 undefined; f=0.02: 6 usable, 0 undefined; f=0.03: 6 usable, 2 undefined; f=0.05: 6 usable, 3 undefined; f=0.1: 6 usable, 4 undefined; f=0.3: 6 usable, 5 undefined; f=1: 6 usable, 5 undefined

Pointwise whole-seed 95% intervals; every finite positive point is within the axes. Open edge triangles and arrows denote CI tails beyond the axes; full intervals are in CSV. A usable lag can have C ≤ 0, where −ln C and its ratio are undefined; all such counts are retained above. Asterisks/squares flag >1.5× drift. Geometry is not site diffusivity.


Spring: all usable lags — longest, cadence_x2

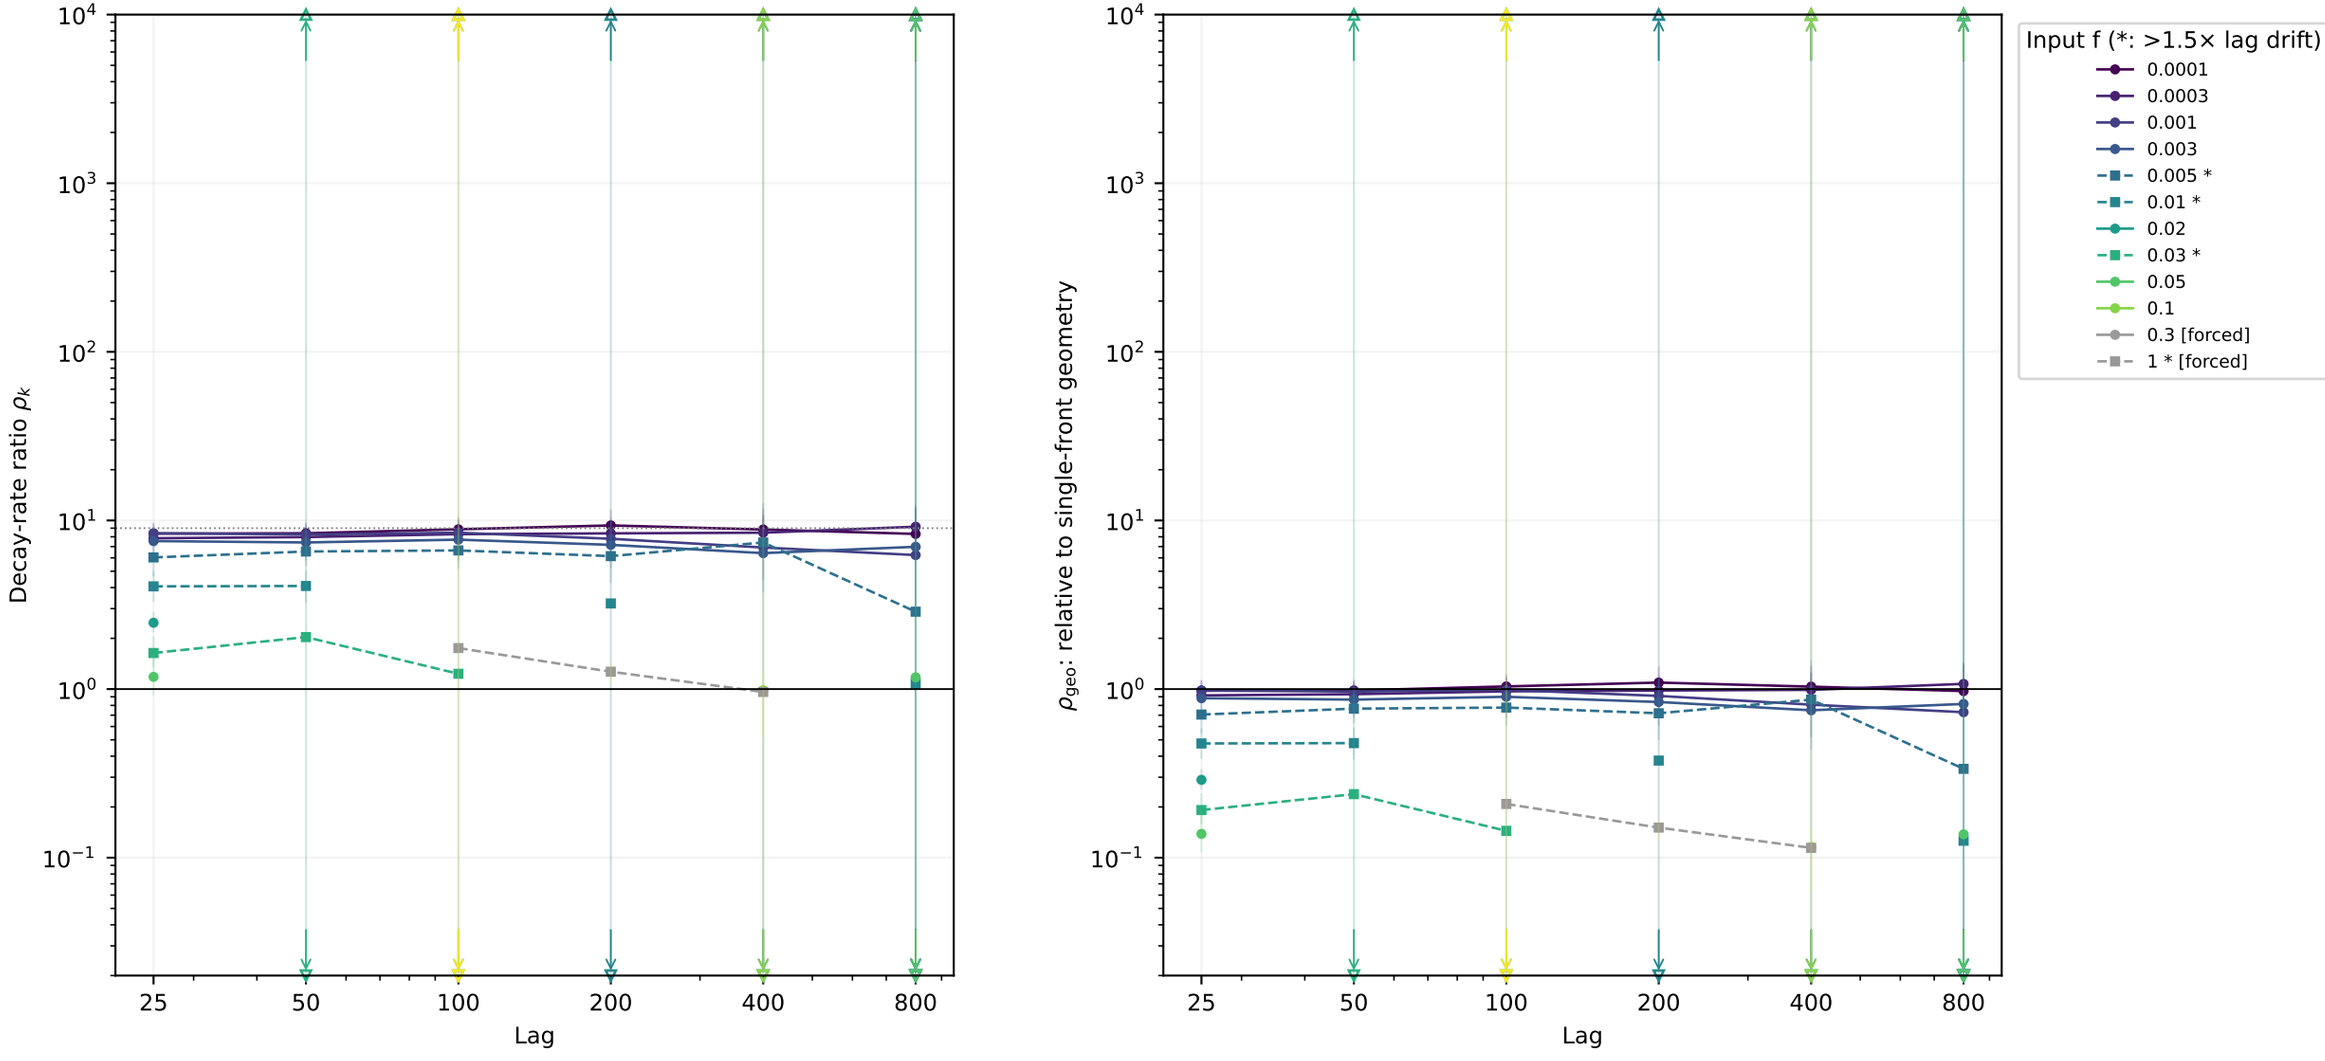

f=0.0001: 6 usable, 0 undefined; f=0.0003: 6 usable, 0 undefined; f=0.001: 6 usable, 0 undefined; f=0.003: 6 usable, 0 undefined; f=0.005: 6 usable, 0 undefined; f=0.01: 6 usable, 2 undefined; f=0.02: 6 usable, 5 undefined; f=0.03: 6 usable, 3 undefined; f=0.05: 6 usable, 4 undefined; f=0.1: 6 usable, 5 undefined; f=0.3: 6 usable, 6 undefined; f=1: 6 usable, 3 undefined

Pointwise whole-seed 95% intervals; every finite positive point is within the axes. Open edge triangles and arrows denote CI tails beyond the axes; full intervals are in CSV. A usable lag can have C ≤ 0, where −ln C and its ratio are undefined; all such counts are retained above. Asterisks/squares flag >1.5× drift. Geometry is not site diffusivity.


Wave-pinning: all usable lags — longest, cadence_x4

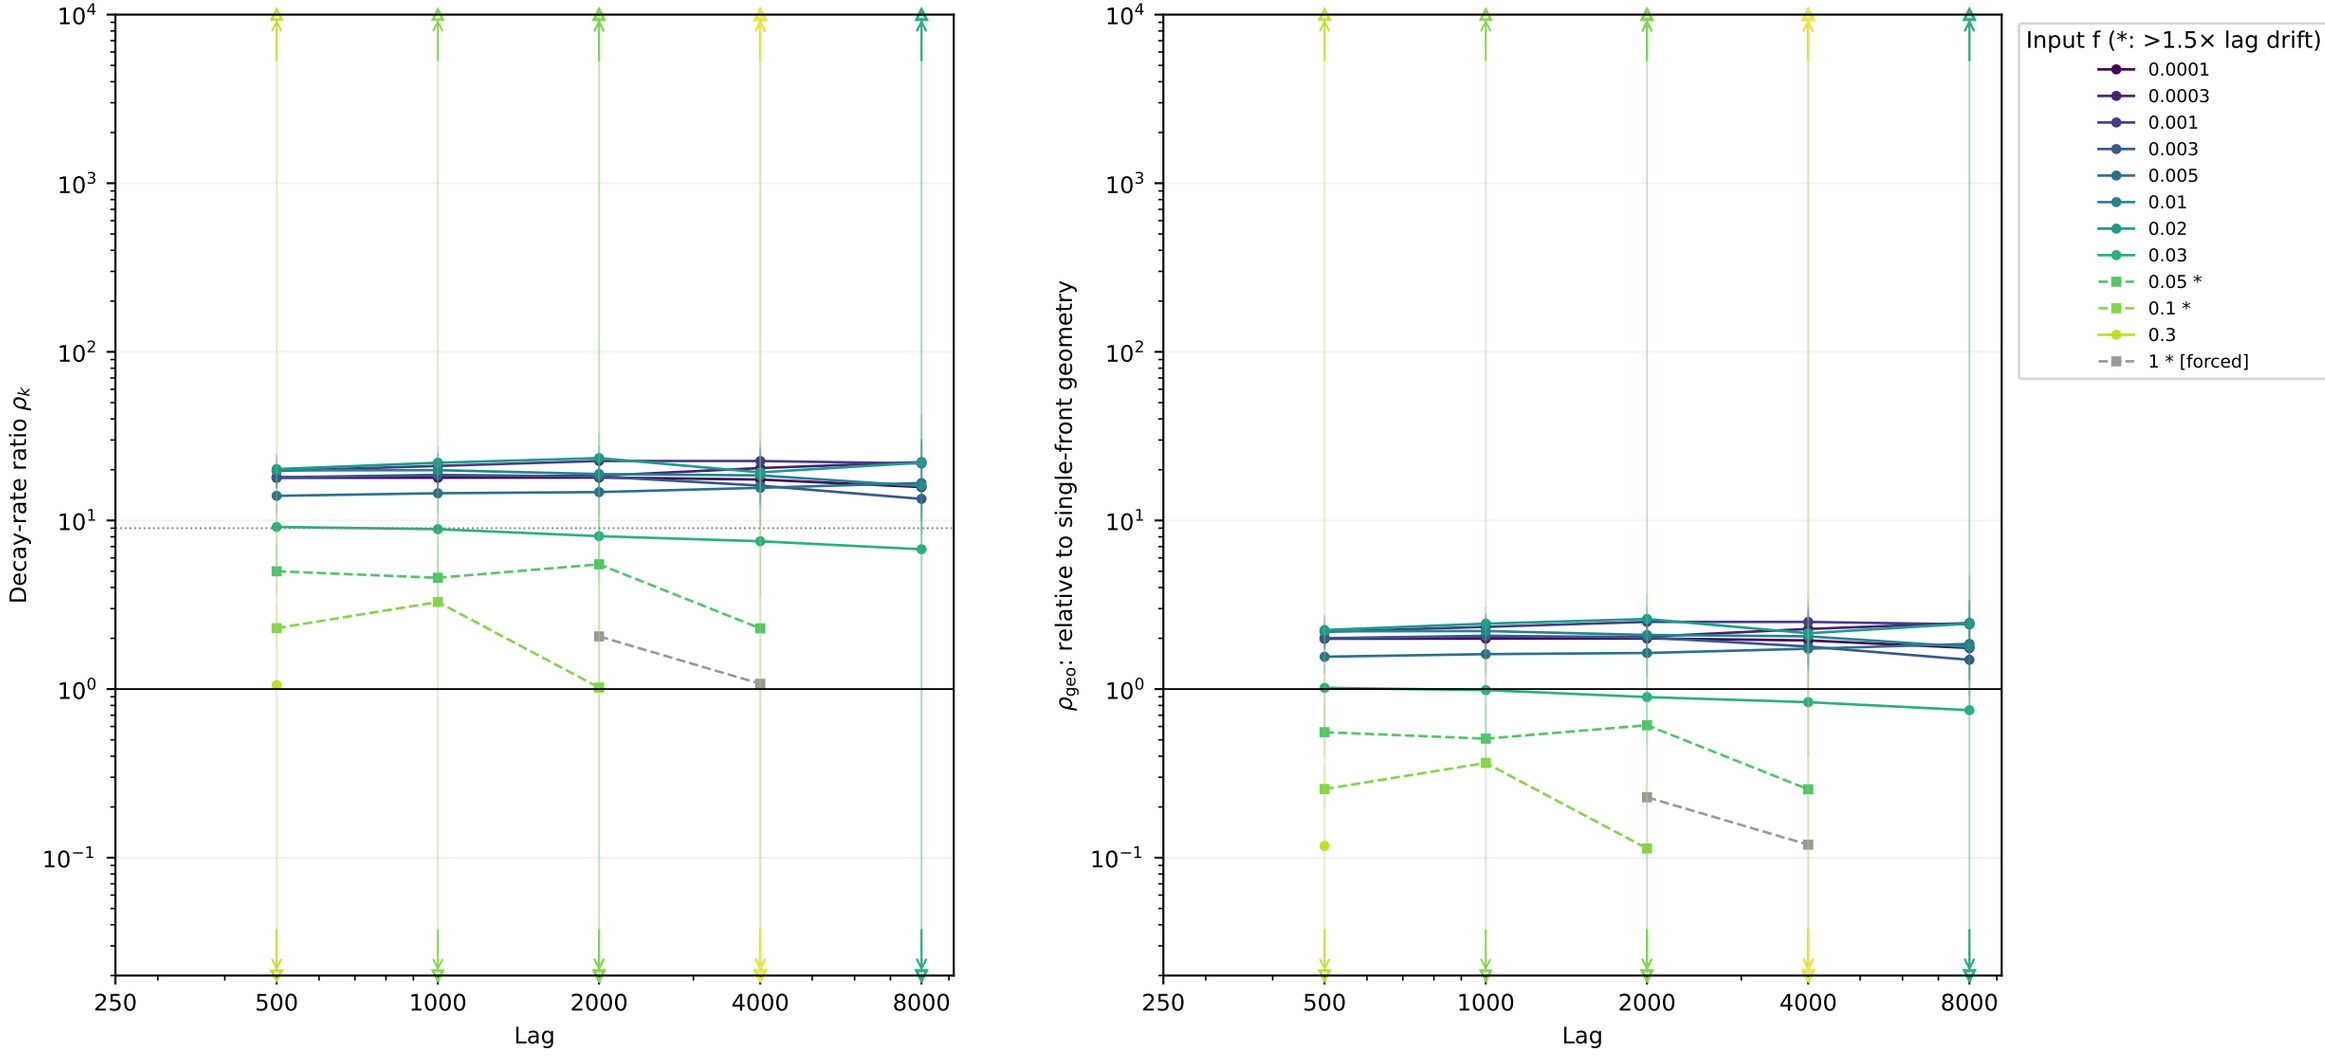

f=0.0001: 5 usable, 0 undefined; f=0.0003: 5 usable, 0 undefined; f=0.001: 5 usable, 0 undefined; f=0.003: 5 usable, 0 undefined; f=0.005: 5 usable, 0 undefined; f=0.01: 5 usable, 0 undefined; f=0.02: 5 usable, 0 undefined; f=0.03: 5 usable, 0 undefined; f=0.05: 5 usable, 1 undefined; f=0.1: 5 usable, 2 undefined; f=0.3: 5 usable, 4 undefined; f=1: 5 usable, 3 undefined

Pointwise whole-seed 95% intervals; every finite positive point is within the axes. Open edge triangles and arrows denote CI tails beyond the axes; full intervals are in CSV. A usable lag can have C ≤ 0, where −ln C and its ratio are undefined; all such counts are retained above. Asterisks/squares flag >1.5× drift. Geometry is not site diffusivity.


Goryachev: all usable lags — longest, cadence_x4

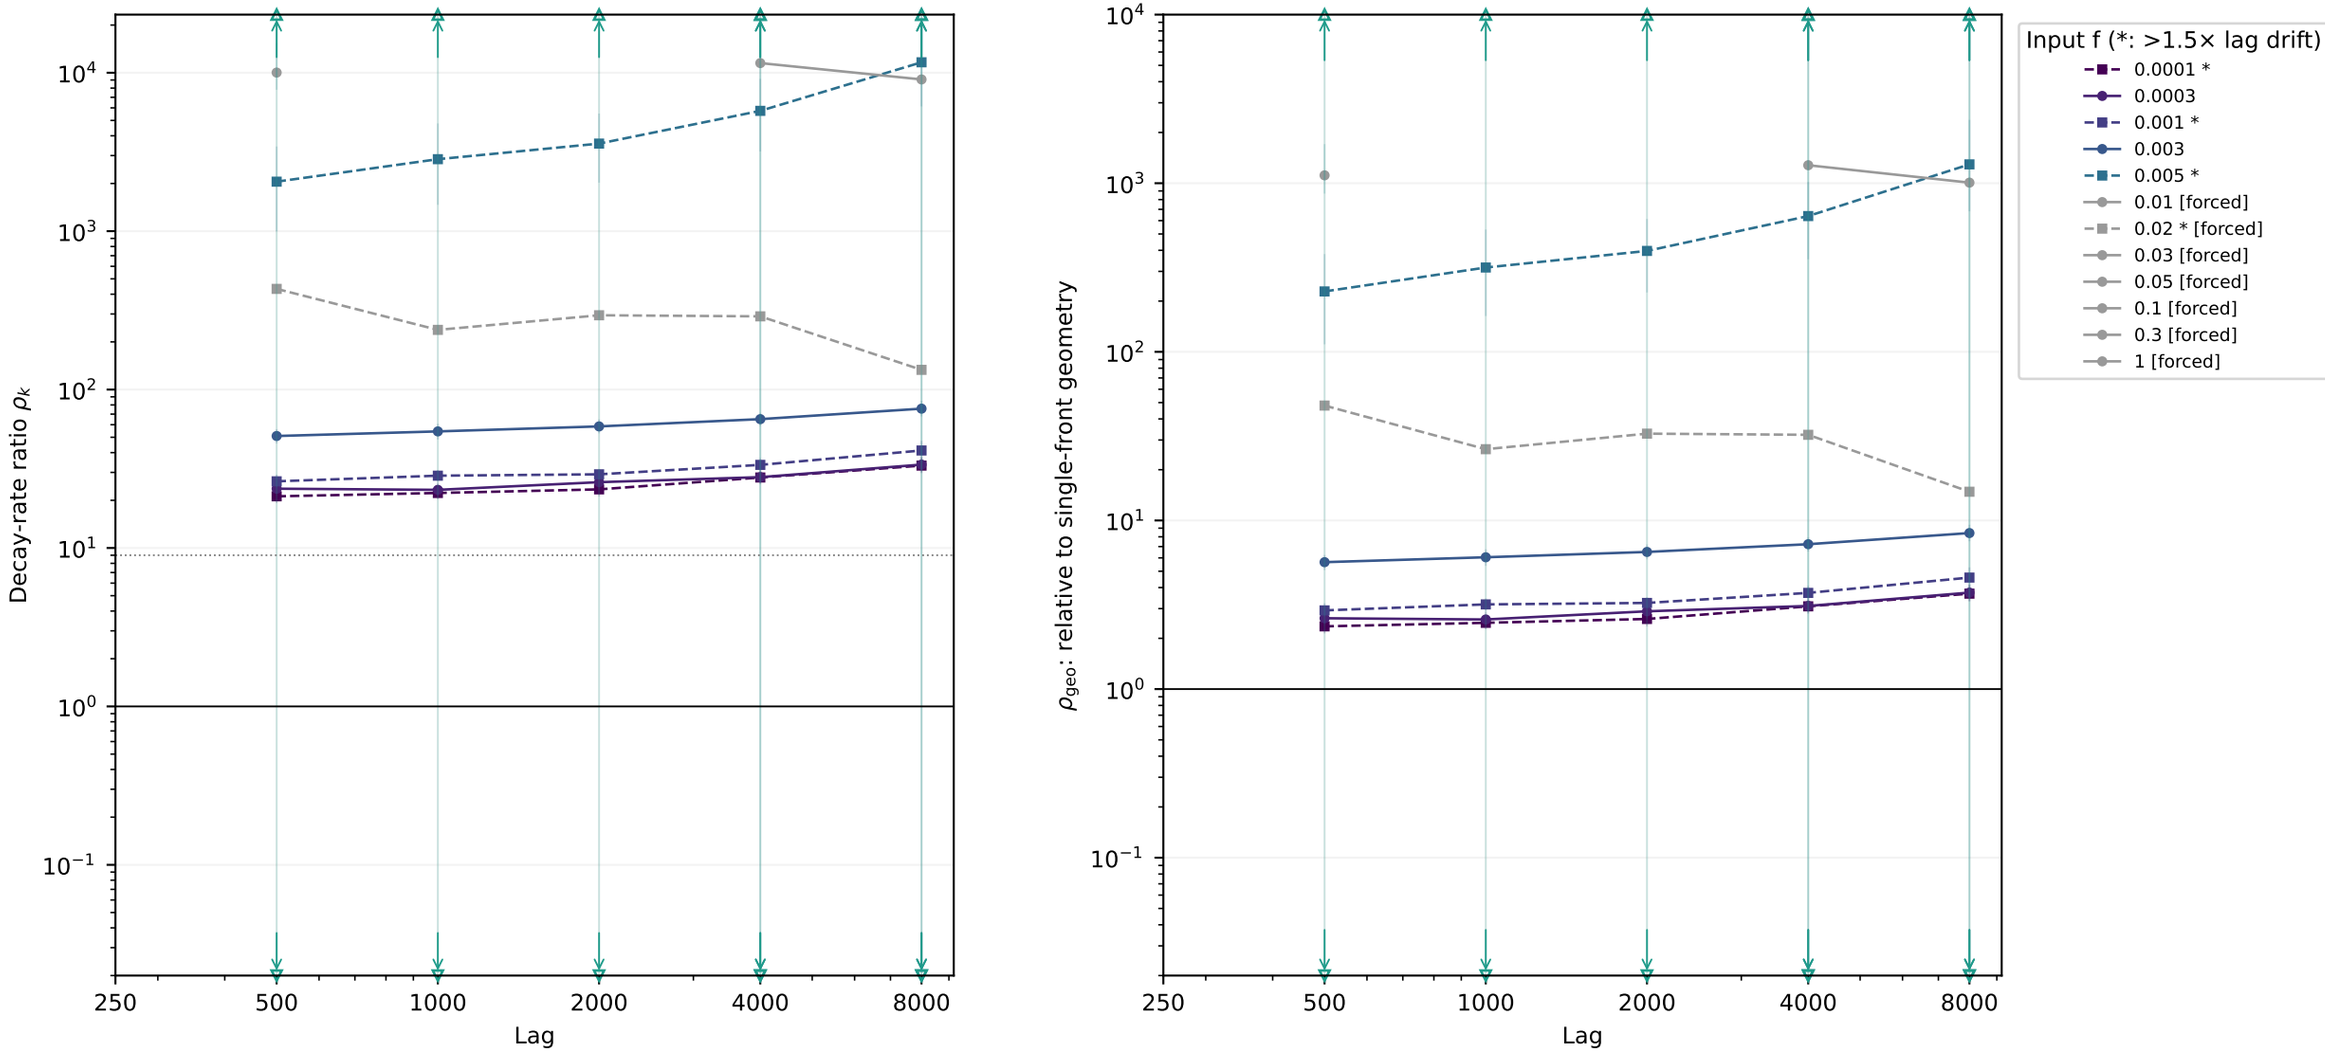

f=0.0001: 5 usable, 0 undefined; f=0.0003: 5 usable, 0 undefined; f=0.001: 5 usable, 0 undefined; f=0.003: 5 usable, 0 undefined; f=0.005: 5 usable, 0 undefined; f=0.01: 5 usable, 2 undefined; f=0.02: 5 usable, 0 undefined; f=0.03: 0 usable, 0 undefined; f=0.05: 0 usable, 0 undefined; f=0.1: 0 usable, 0 undefined; f=0.3: 0 usable, 0 undefined; f=1: 0 usable, 0 undefined

Pointwise whole-seed 95% intervals; every finite positive point is within the axes. Open edge triangles and arrows denote CI tails beyond the axes; full intervals are in CSV.
A usable lag can have C ≤ 0, where −ln C and its ratio are undefined; all such counts are retained above. Asterisks/squares flag >1.5× drift. Geometry is not site diffusivity.


Holmes: all usable lags — longest, cadence_x4

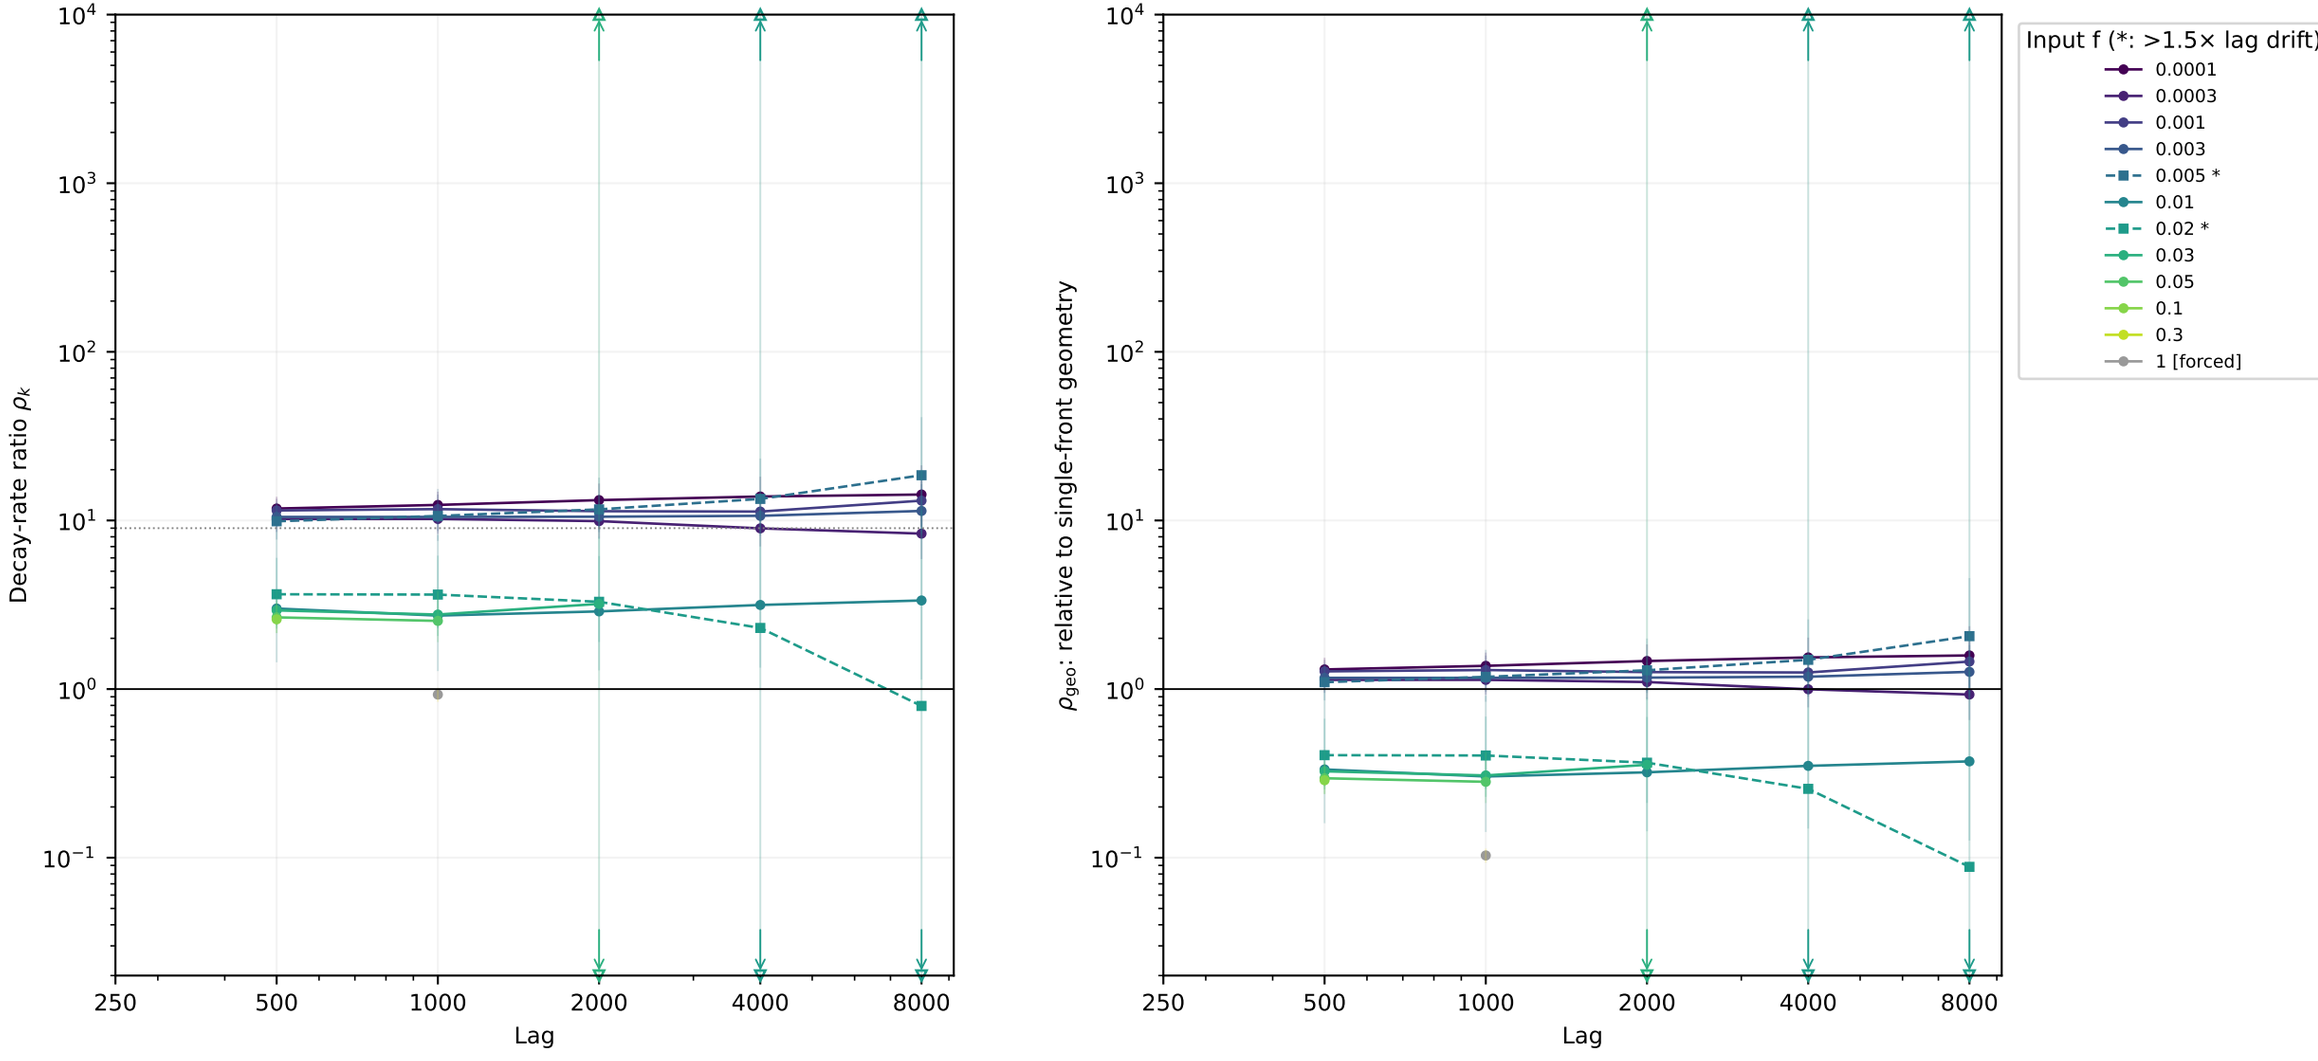

f=0.0001: 5 usable, 0 undefined; f=0.0003: 5 usable, 0 undefined; f=0.001: 5 usable, 0 undefined; f=0.003: 5 usable, 0 undefined; f=0.005: 5 usable, 0 undefined; f=0.01: 5 usable, 0 undefined; f=0.02: 5 usable, 0 undefined; f=0.03: 5 usable, 2 undefined; f=0.05: 5 usable, 3 undefined; f=0.1: 5 usable, 4 undefined; f=0.3: 5 usable, 5 undefined; f=1: 5 usable, 4 undefined

Pointwise whole-seed 95% intervals; every finite positive point is within the axes. Open edge triangles and arrows denote CI tails beyond the axes; full intervals are in CSV.
A usable lag can have C ≤ 0, where −ln C and its ratio are undefined; all such counts are retained above. Asterisks/squares flag >1.5× drift. Geometry is not site diffusivity.


Spring: all usable lags — longest, cadence_x4

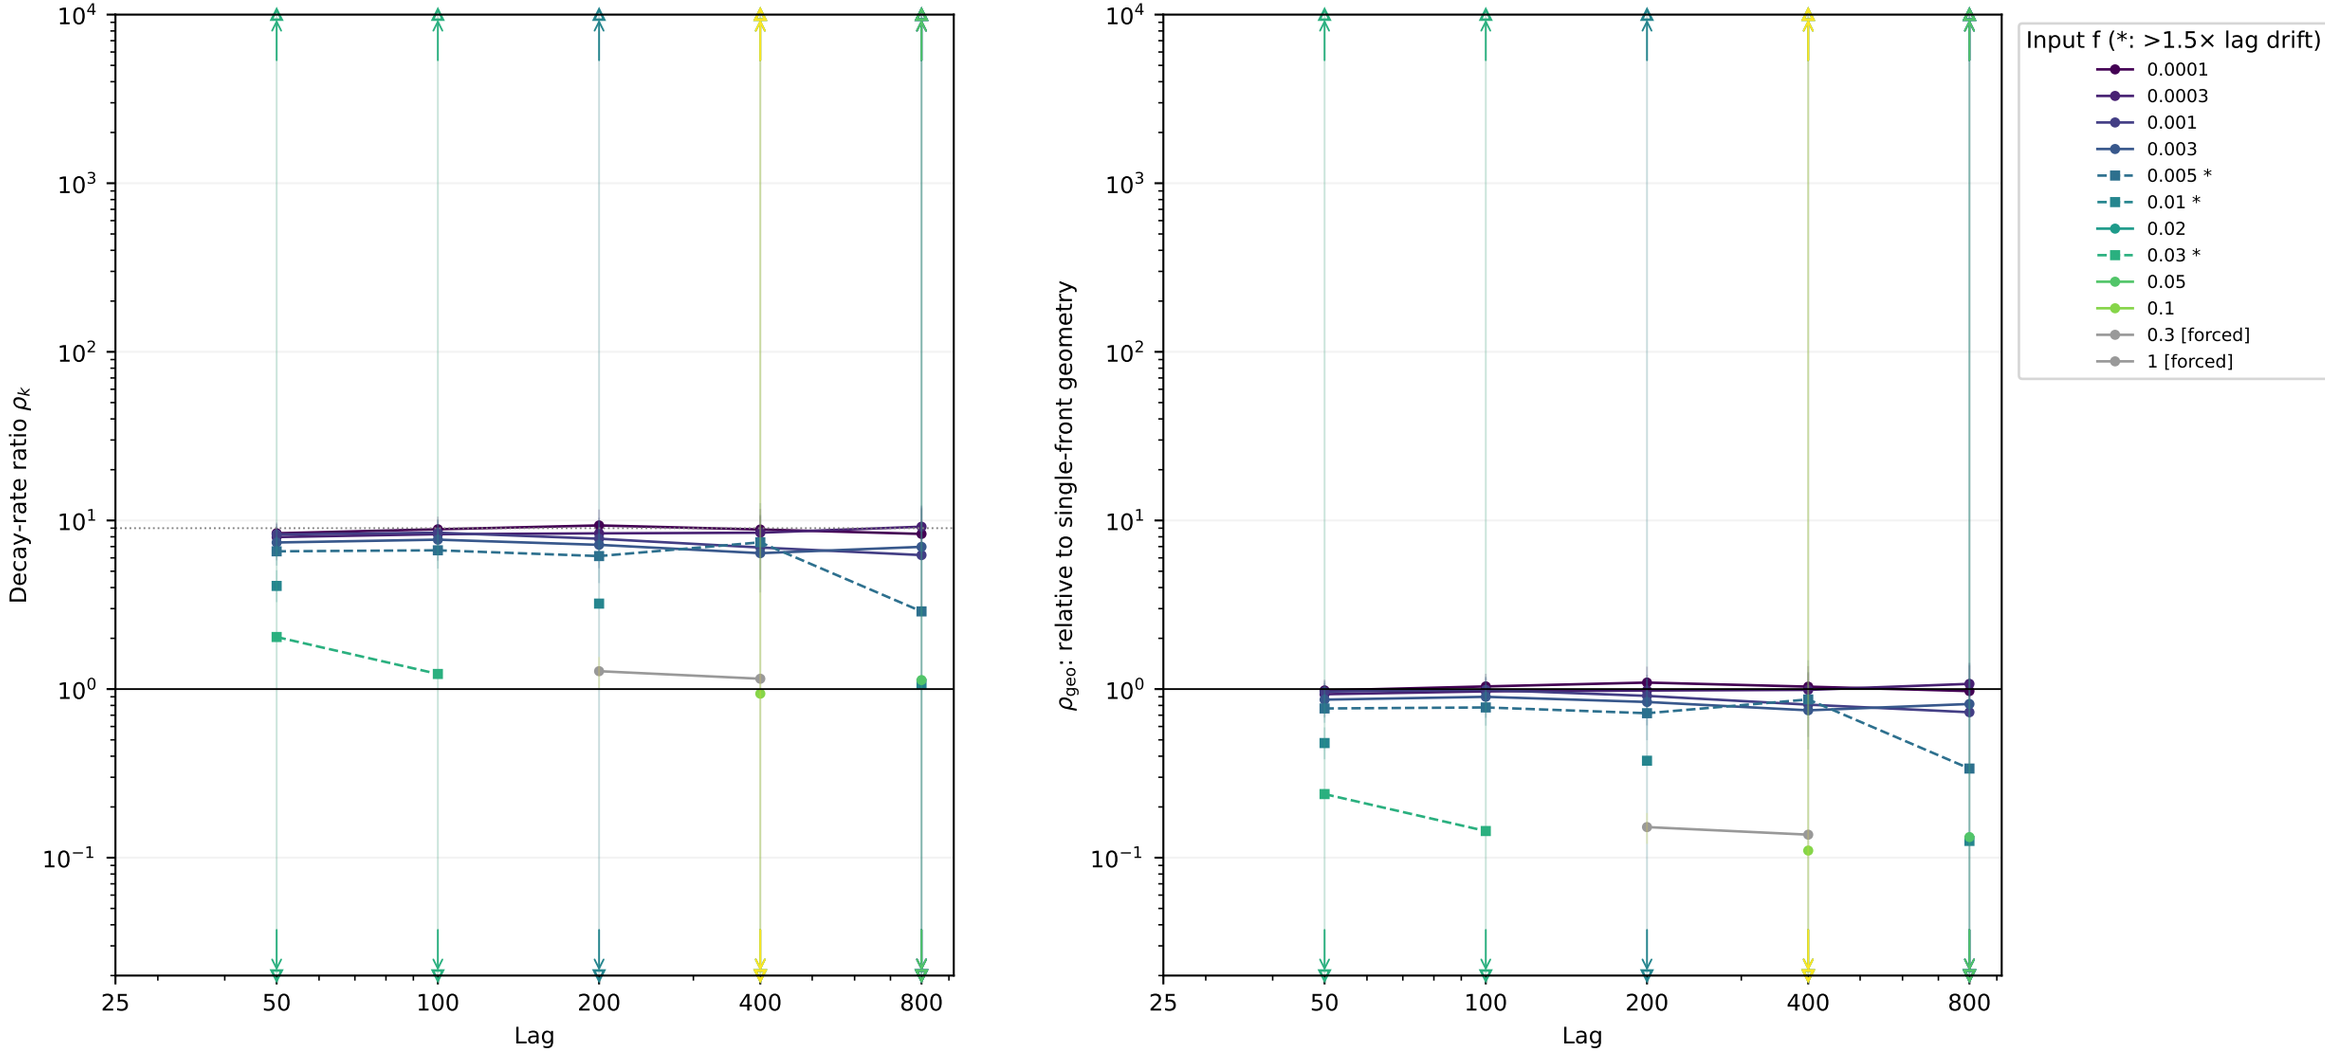

f=0.0001: 5 usable, 0 undefined; f=0.0003: 5 usable, 0 undefined; f=0.001: 5 usable, 0 undefined; f=0.003: 5 usable, 0 undefined; f=0.005: 5 usable, 0 undefined; f=0.01: 5 usable, 2 undefined; f=0.02: 5 usable, 5 undefined; f=0.03: 5 usable, 3 undefined; f=0.05: 5 usable, 4 undefined; f=0.1: 5 usable, 4 undefined; f=0.3: 5 usable, 5 undefined; f=1: 5 usable, 3 undefined

Pointwise whole-seed 95% intervals; every finite positive point is within the axes. Open edge triangles and arrows denote CI tails beyond the axes; full intervals are in CSV.
A usable lag can have C ≤ 0, where −ln C and its ratio are undefined; all such counts are retained above. Asterisks/squares flag >1.5× drift. Geometry is not site diffusivity.


Wave-pinning: all usable lags — longest, cadence_x8

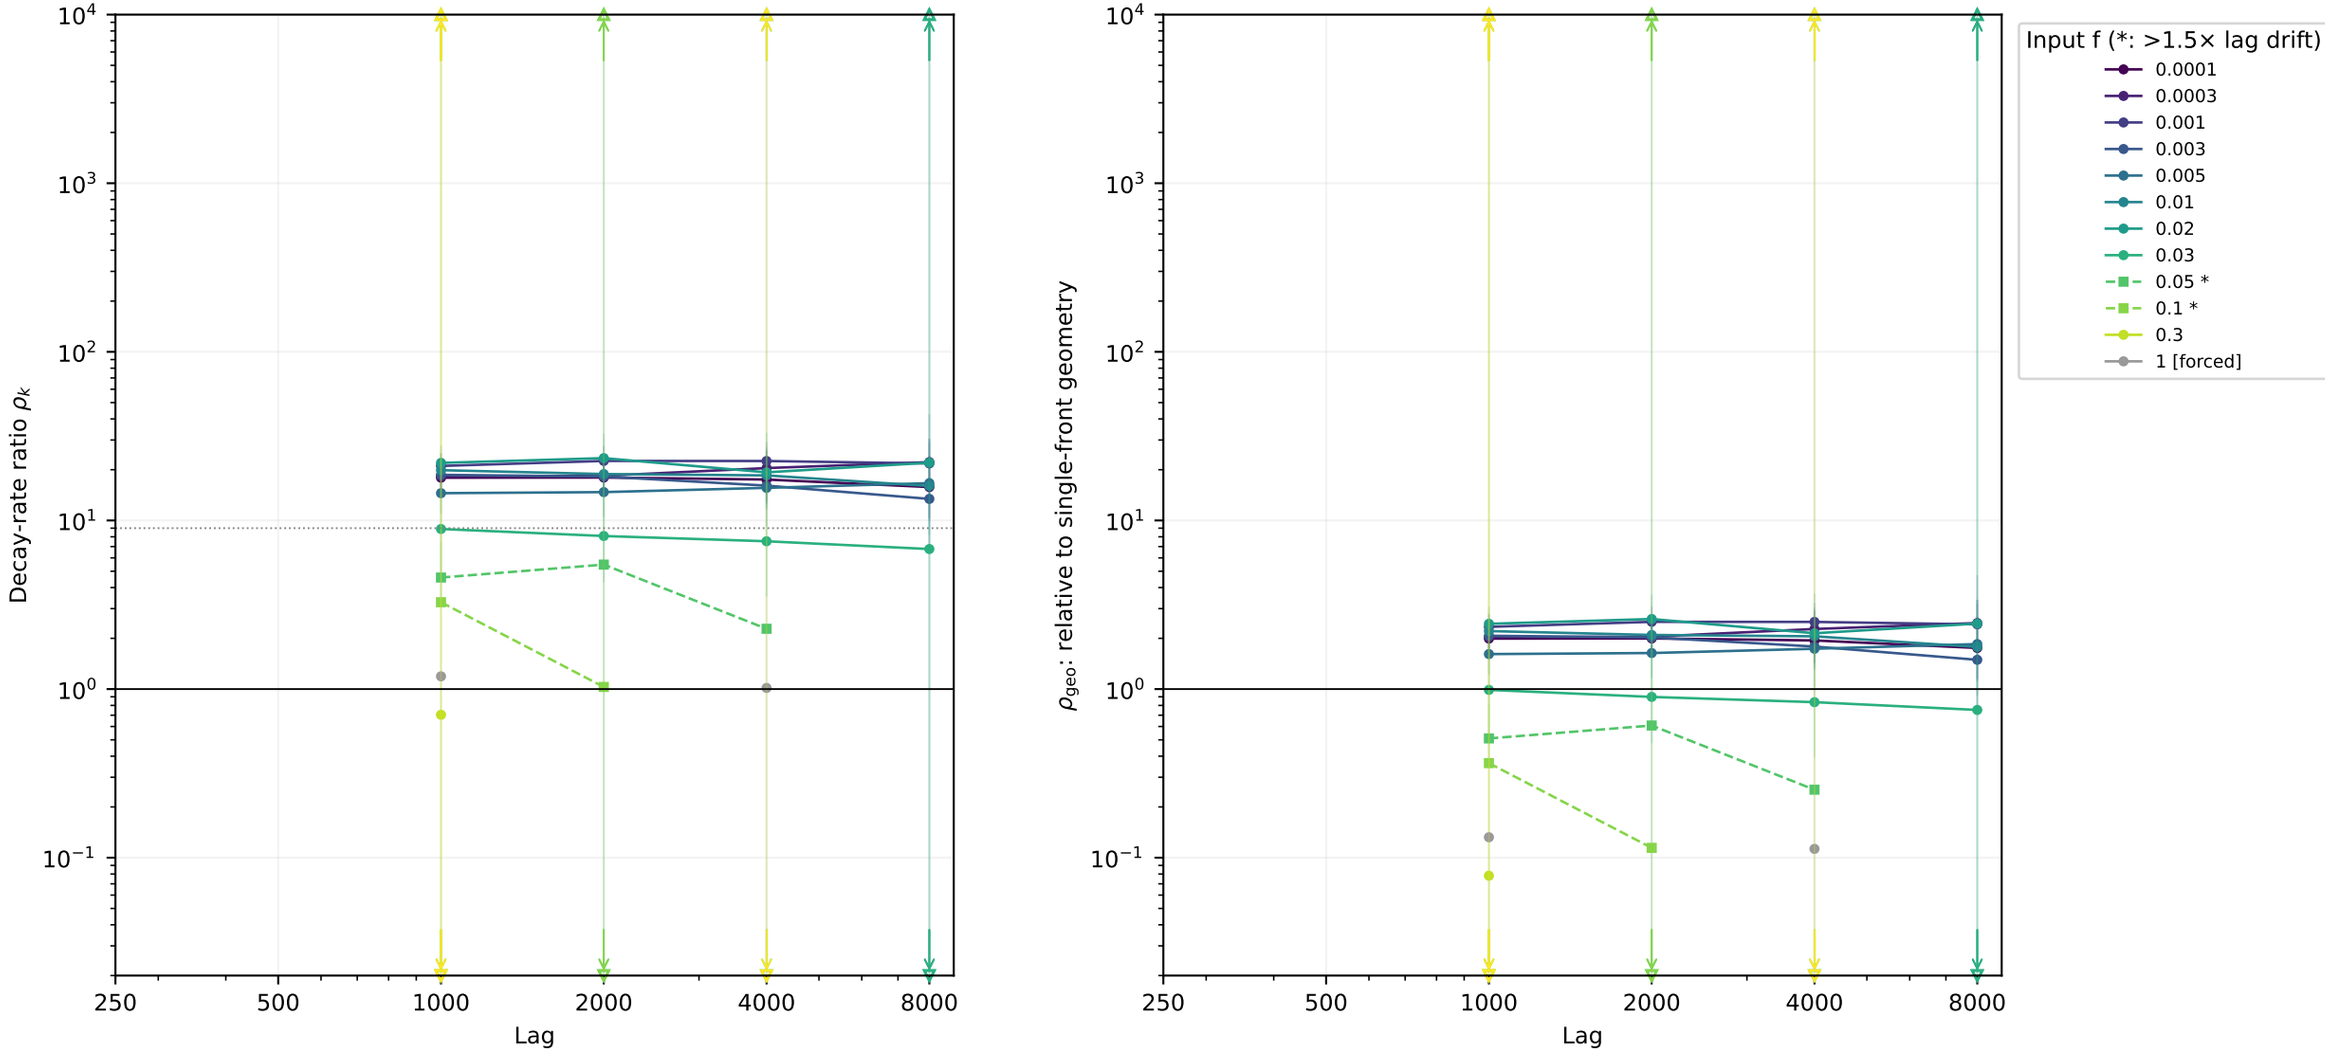


f=0.0001: 4 usable, 0 undefined; f=0.0003: 4 usable, 0 undefined; f=0.001: 4 usable, 0 undefined; f=0.003: 4 usable, 0 undefined; f=0.005: 4 usable, 0 undefined; f=0.01: 4 usable, 0 undefined; f=0.02: 4 usable, 0 undefined; f=0.03: 4 usable, 0 undefined; f=0.05: 4 usable, 1 undefined; f=0.1: 4 usable, 2 undefined; f=0.3: 4 usable, 3 undefined; f=1: 4 usable, 2 undefined

Pointwise whole-seed 95% intervals; every finite positive point is within the axes. Open edge triangles and arrows denote CI tails beyond the axes; full intervals are in CSV.
A usable lag can have C ≤ 0, where −ln C and its ratio are undefined; all such counts are retained above. Asterisks/squares flag >1.5× drift. Geometry is not site diffusivity.

Goryachev: all usable lags — longest, cadence_x8

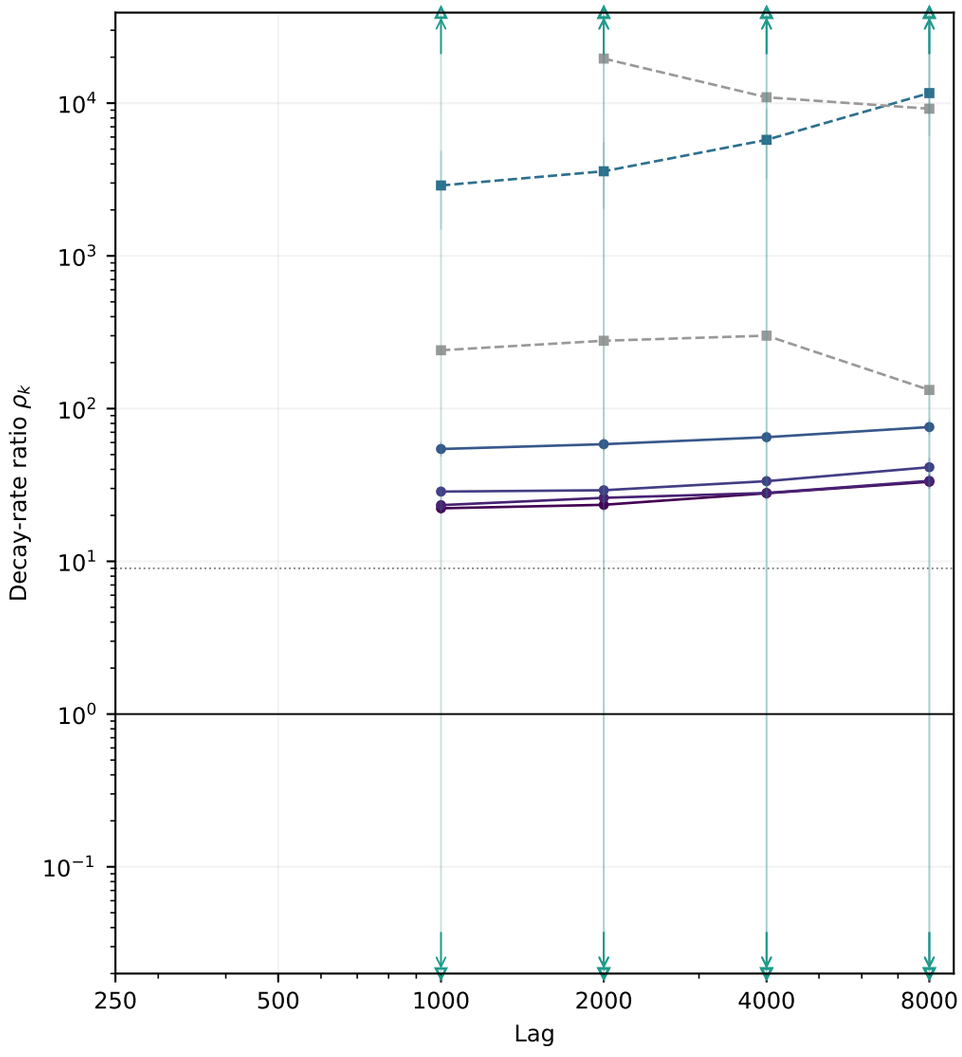


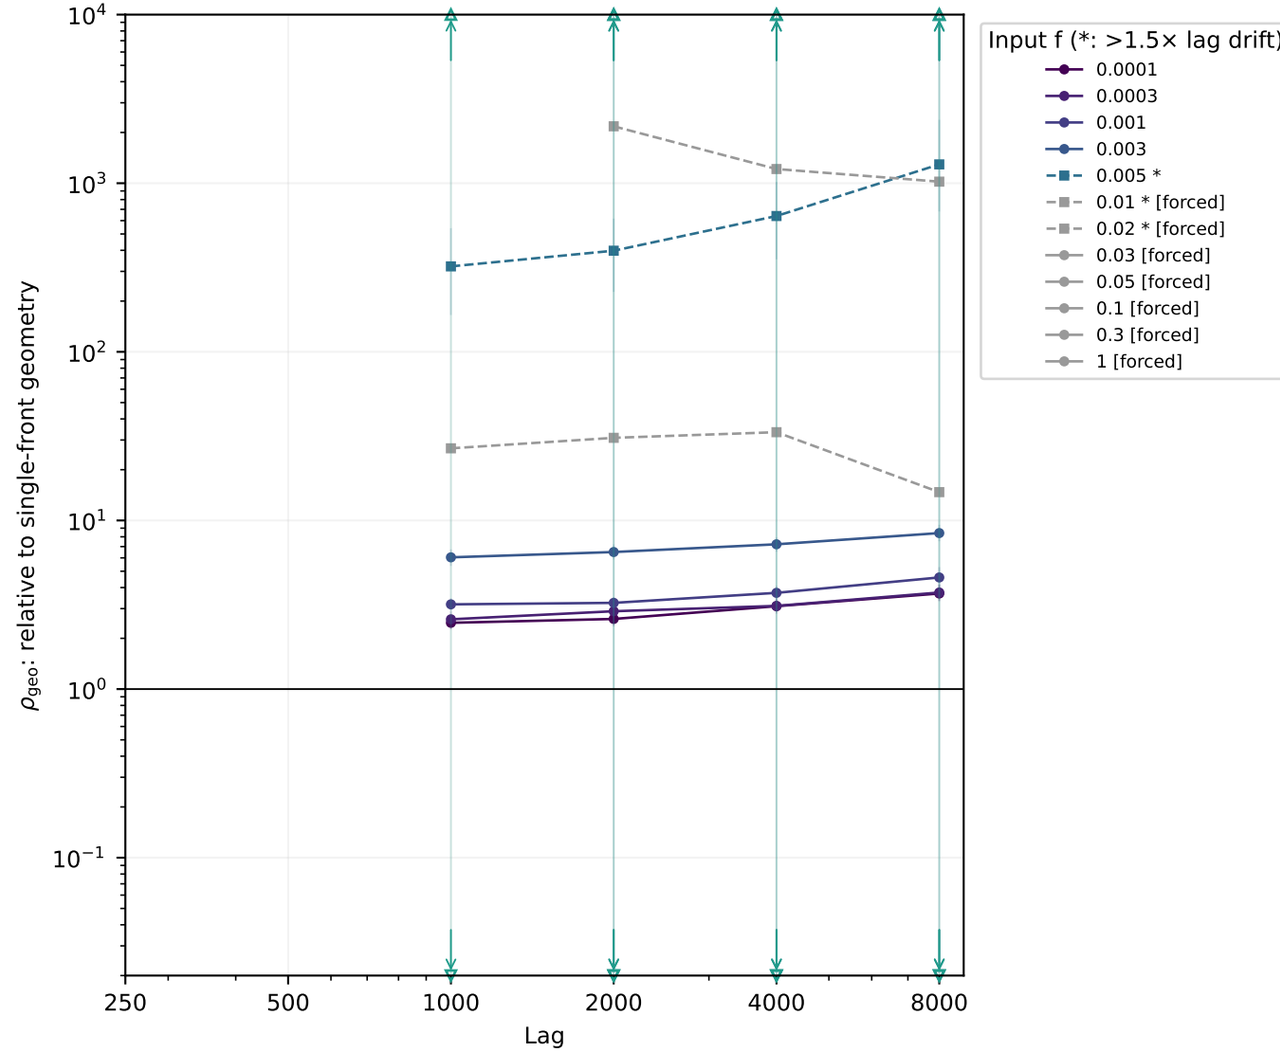

f=0.0001: 4 usable, 0 undefined; f=0.0003: 4 usable, 0 undefined; f=0.001: 4 usable, 0 undefined; f=0.003: 4 usable, 0 undefined; f=0.005: 4 usable, 0 undefined; f=0.01: 4 usable, 1 undefined; f=0.02: 4 usable, 0 undefined; f=0.03: 0 usable, 0 undefined; f=0.05: 0 usable, 0 undefined; f=0.1: 0 usable, 0 undefined; f=0.3: 0 usable, 0 undefined; f=1: 0 usable, 0 undefined

Pointwise whole-seed 95% intervals; every finite positive point is within the axes. Open edge triangles and arrows denote CI tails beyond the axes; full intervals are in CSV. A usable lag can have C ≤ 0, where −ln C and its ratio are undefined; all such counts are retained above. Asterisks/squares flag >1.5× drift. Geometry is not site diffusivity.


Holmes: all usable lags — longest, cadence_x8

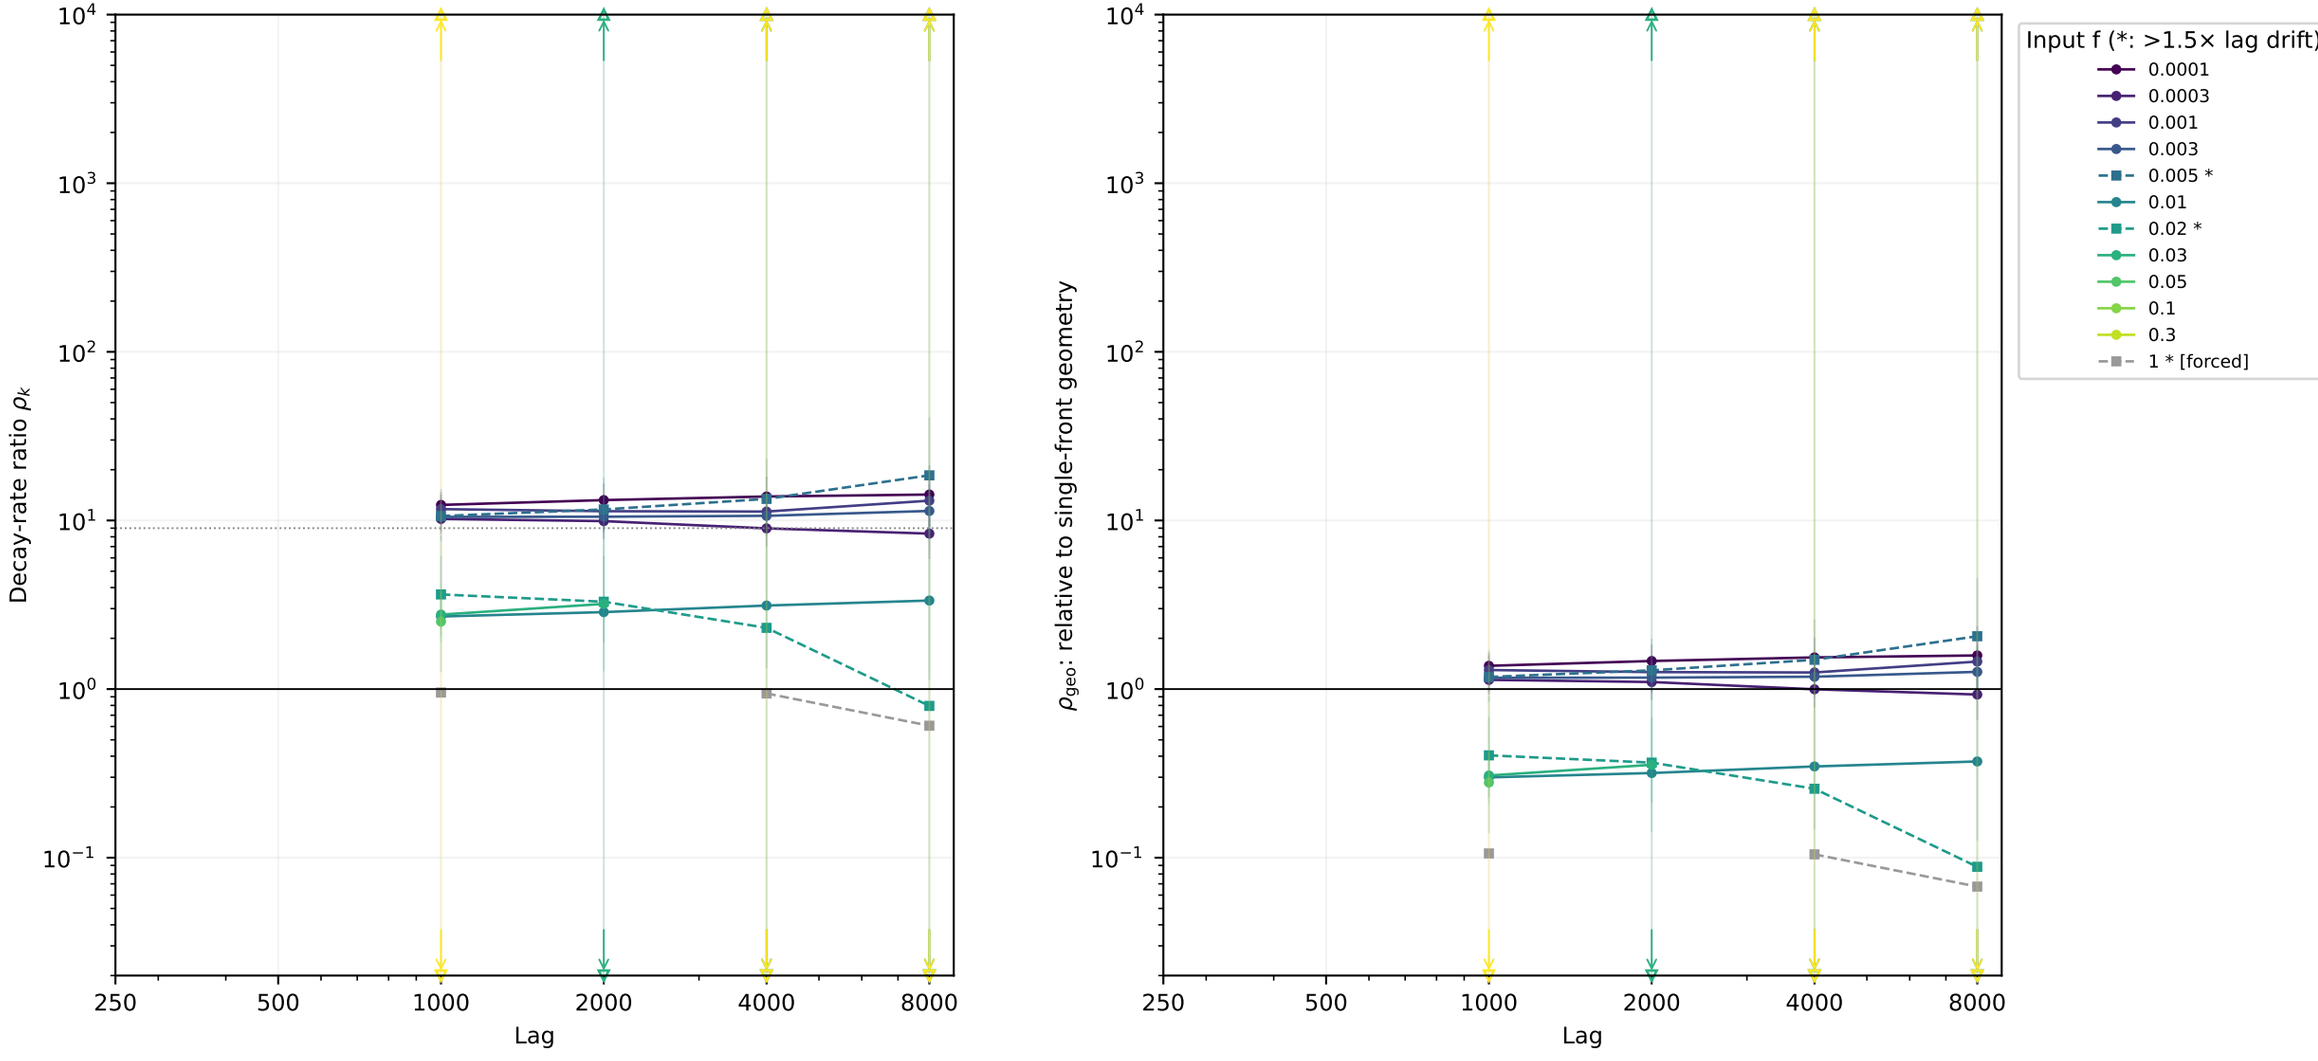

f=0.0001: 4 usable, 0 undefined; f=0.0003: 4 usable, 0 undefined; f=0.001: 4 usable, 0 undefined; f=0.003: 4 usable, 0 undefined; f=0.005: 4 usable, 0 undefined; f=0.01: 4 usable, 0 undefined; f=0.02: 4 usable, 0 undefined; f=0.03: 4 usable, 2 undefined; f=0.05: 4 usable, 3 undefined; f=0.1: 4 usable, 4 undefined; f=0.3: 4 usable, 4 undefined; f=1: 4 usable, 1 undefined

Pointwise whole-seed 95% intervals; every finite positive point is within the axes. Open edge triangles and arrows denote CI tails beyond the axes; full intervals are in CSV.
A usable lag can have C ≤ 0, where −ln C and its ratio are undefined; all such counts are retained above. Asterisks/squares flag >1.5× drift. Geometry is not site diffusivity.

Spring: all usable lags — longest, cadence_x8

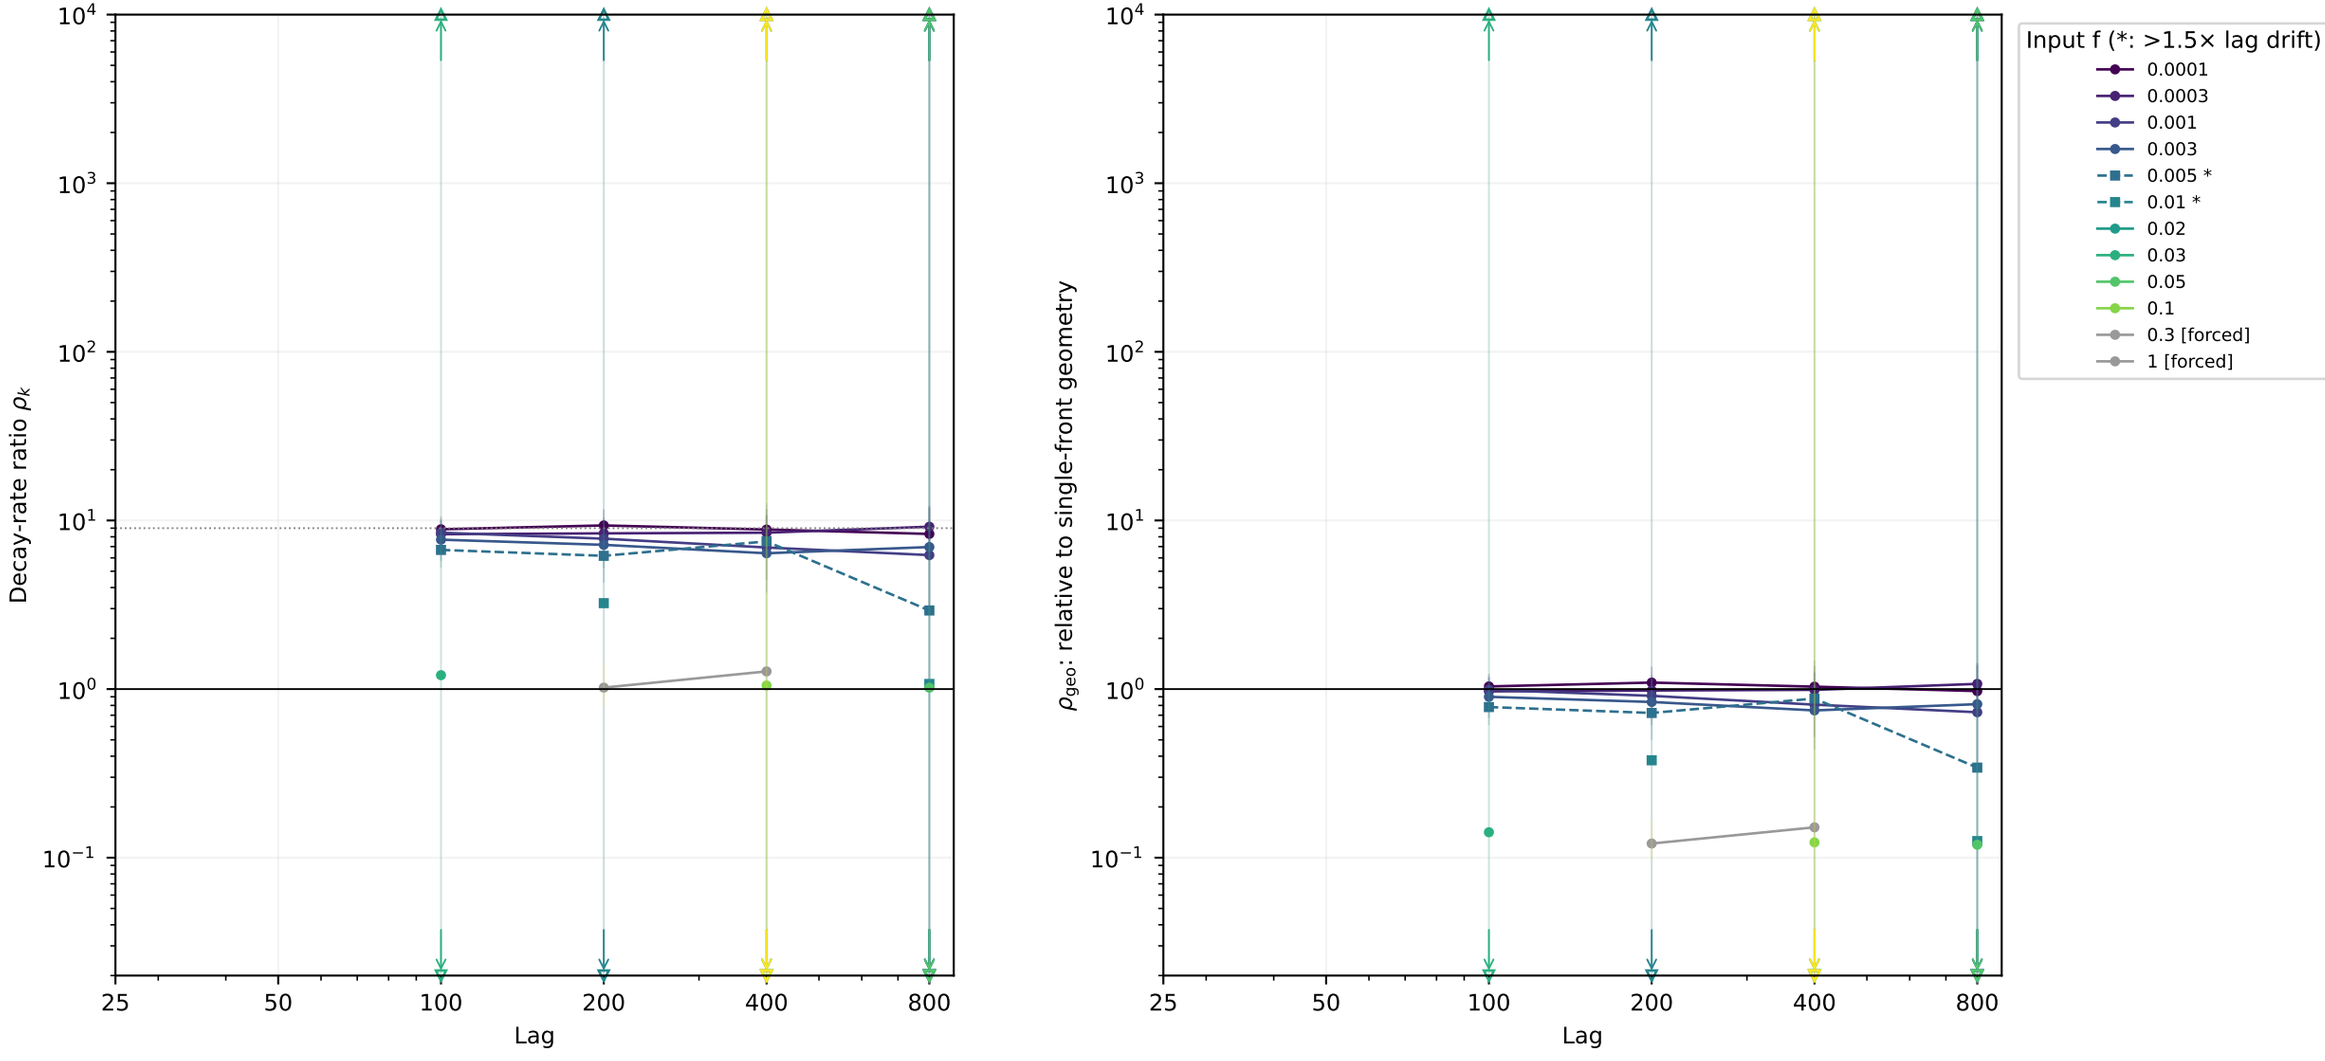

f=0.0001: 4 usable, 0 undefined; f=0.0003: 4 usable, 0 undefined; f=0.001: 4 usable, 0 undefined; f=0.003: 4 usable, 0 undefined; f=0.005: 4 usable, 0 undefined; f=0.01: 4 usable, 2 undefined; f=0.02: 4 usable, 4 undefined; f=0.03: 4 usable, 3 undefined; f=0.05: 4 usable, 3 undefined; f=0.1: 4 usable, 3 undefined; f=0.3: 4 usable, 4 undefined; f=1: 4 usable, 2 undefined

Pointwise whole-seed 95% intervals; every finite positive point is within the axes. Open edge triangles and arrows denote CI tails beyond the axes; full intervals are in CSV.
A usable lag can have C ≤ 0, where −ln C and its ratio are undefined; all such counts are retained above. Asterisks/squares flag >1.5× drift. Geometry is not site diffusivity.