

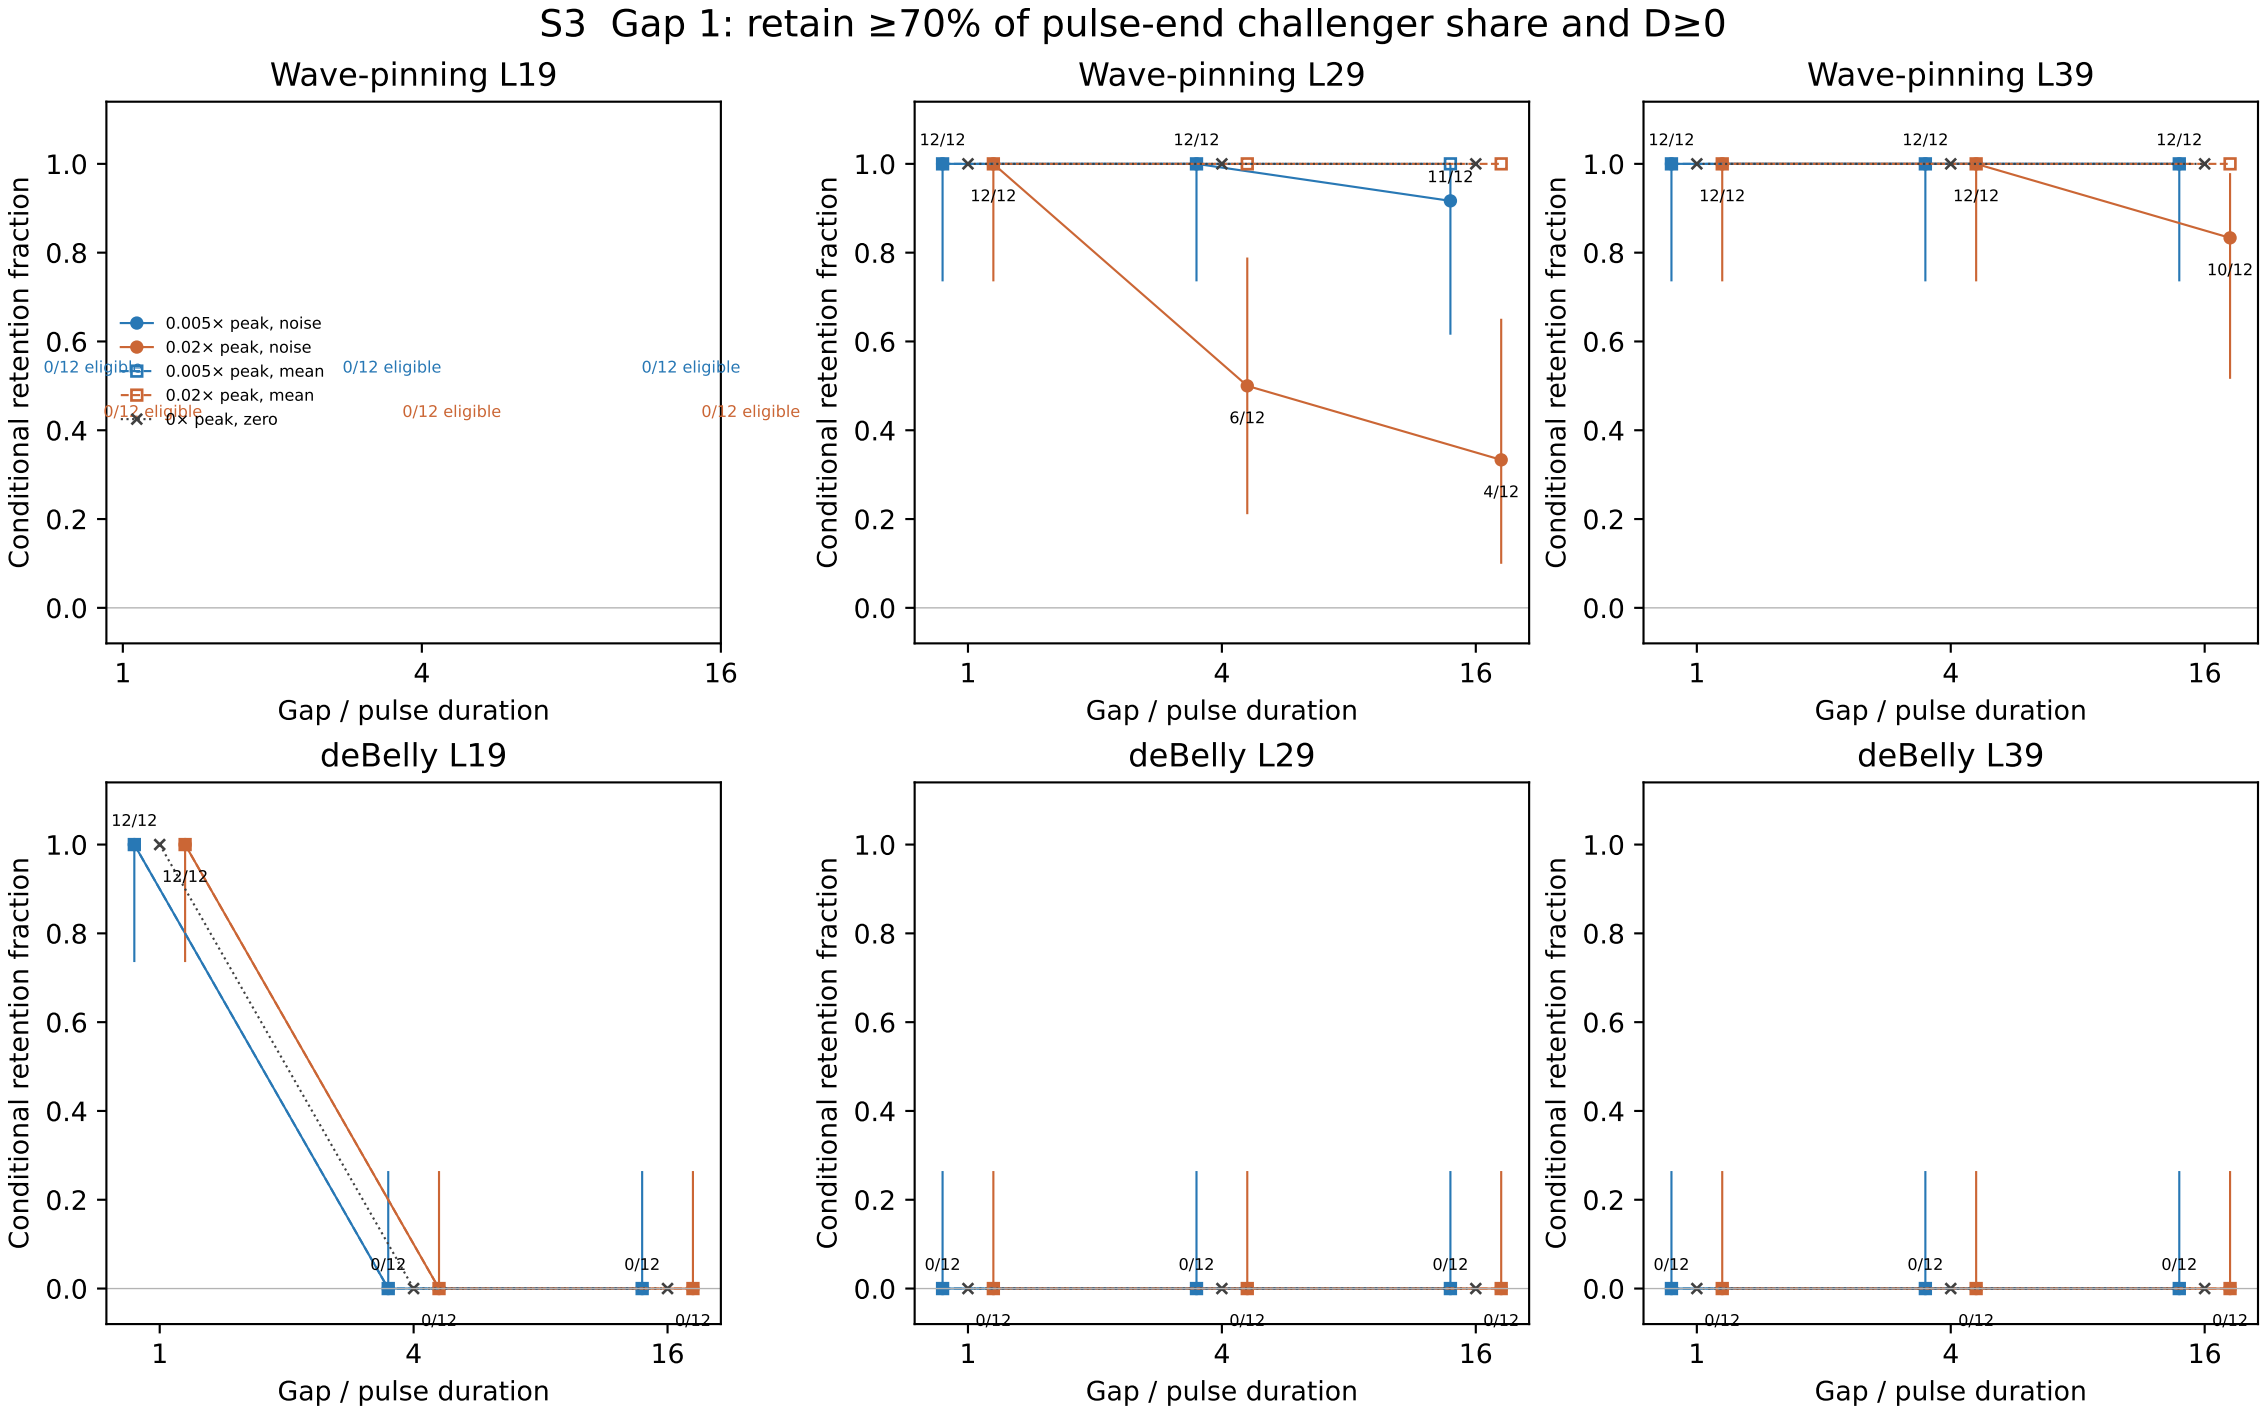



Each noisy denominator contains at most 12 independent trajectories; three gaps from one trajectory are not independent replicates. Eligibility requires pulse-end challenger bias, not eventual replacement. Known gap-end bias/activity loss counts as failure. Error bars: exact 95% finite-seed intervals. deBelly probabilities are conditional on its native0.5 update; later-gap timing is sensitive in S5.

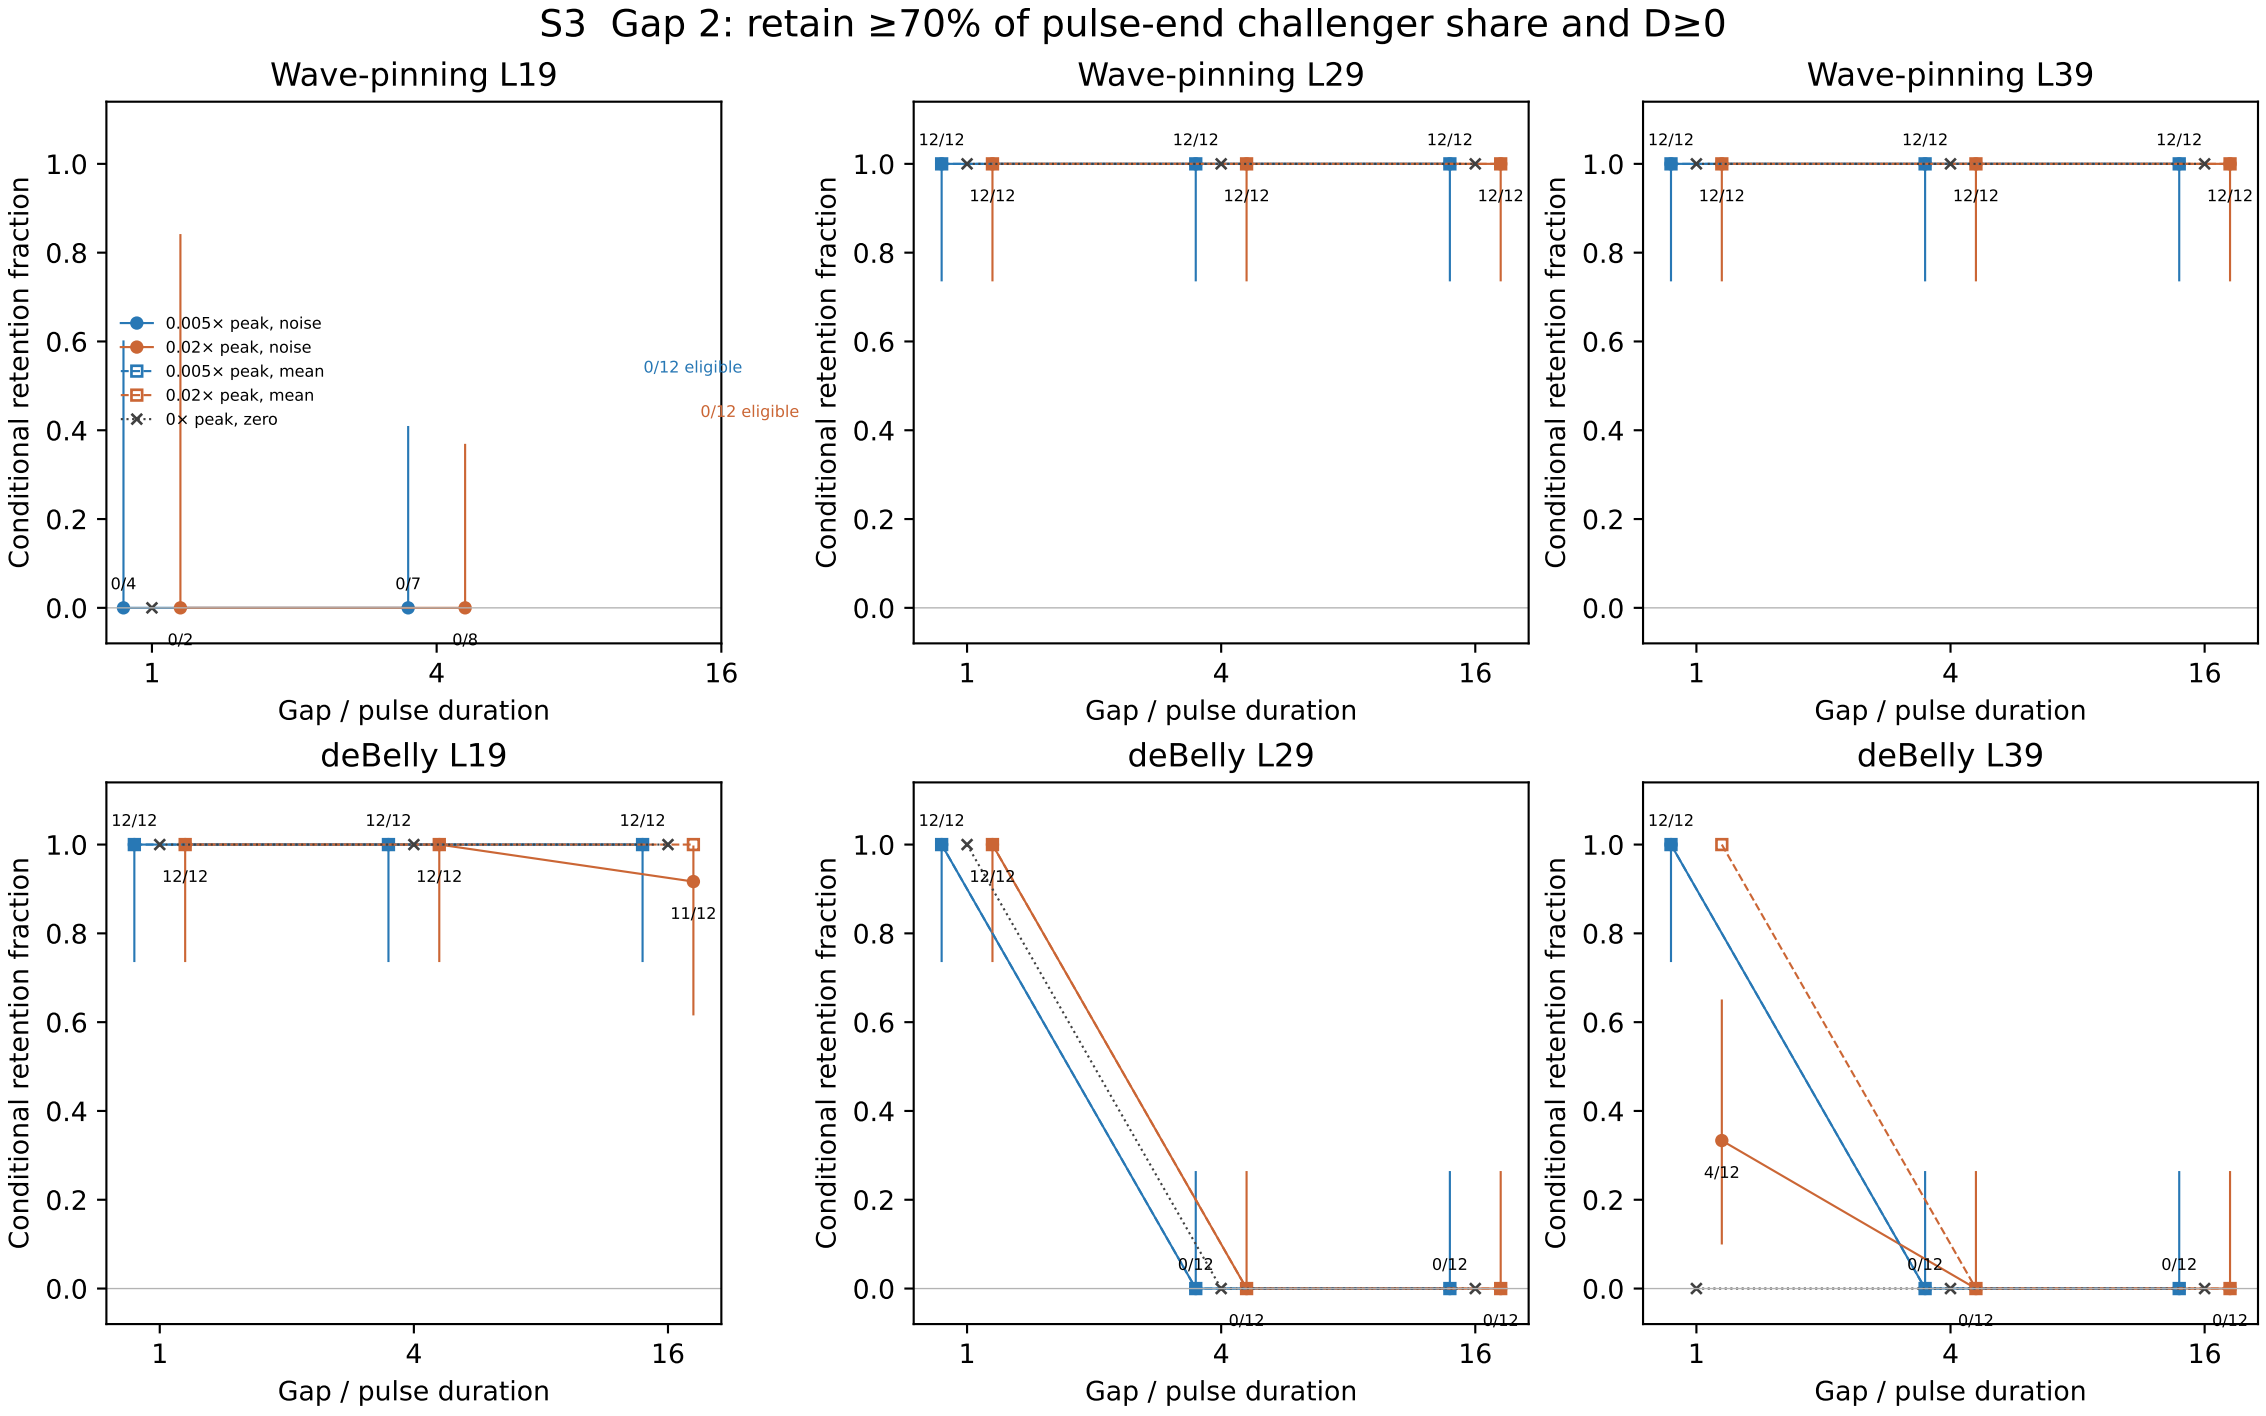


Each noisy denominator contains at most 12 independent trajectories; three gaps from one trajectory are not independent replicates. Eligibility requires pulse-end challenger bias, not eventual replacement. Known gap-end bias/activity loss counts as failure. Error bars: exact 95% finite-seed intervals. deBelly probabilities are conditional on its native0.5 update; later-gap timing is sensitive in S5.

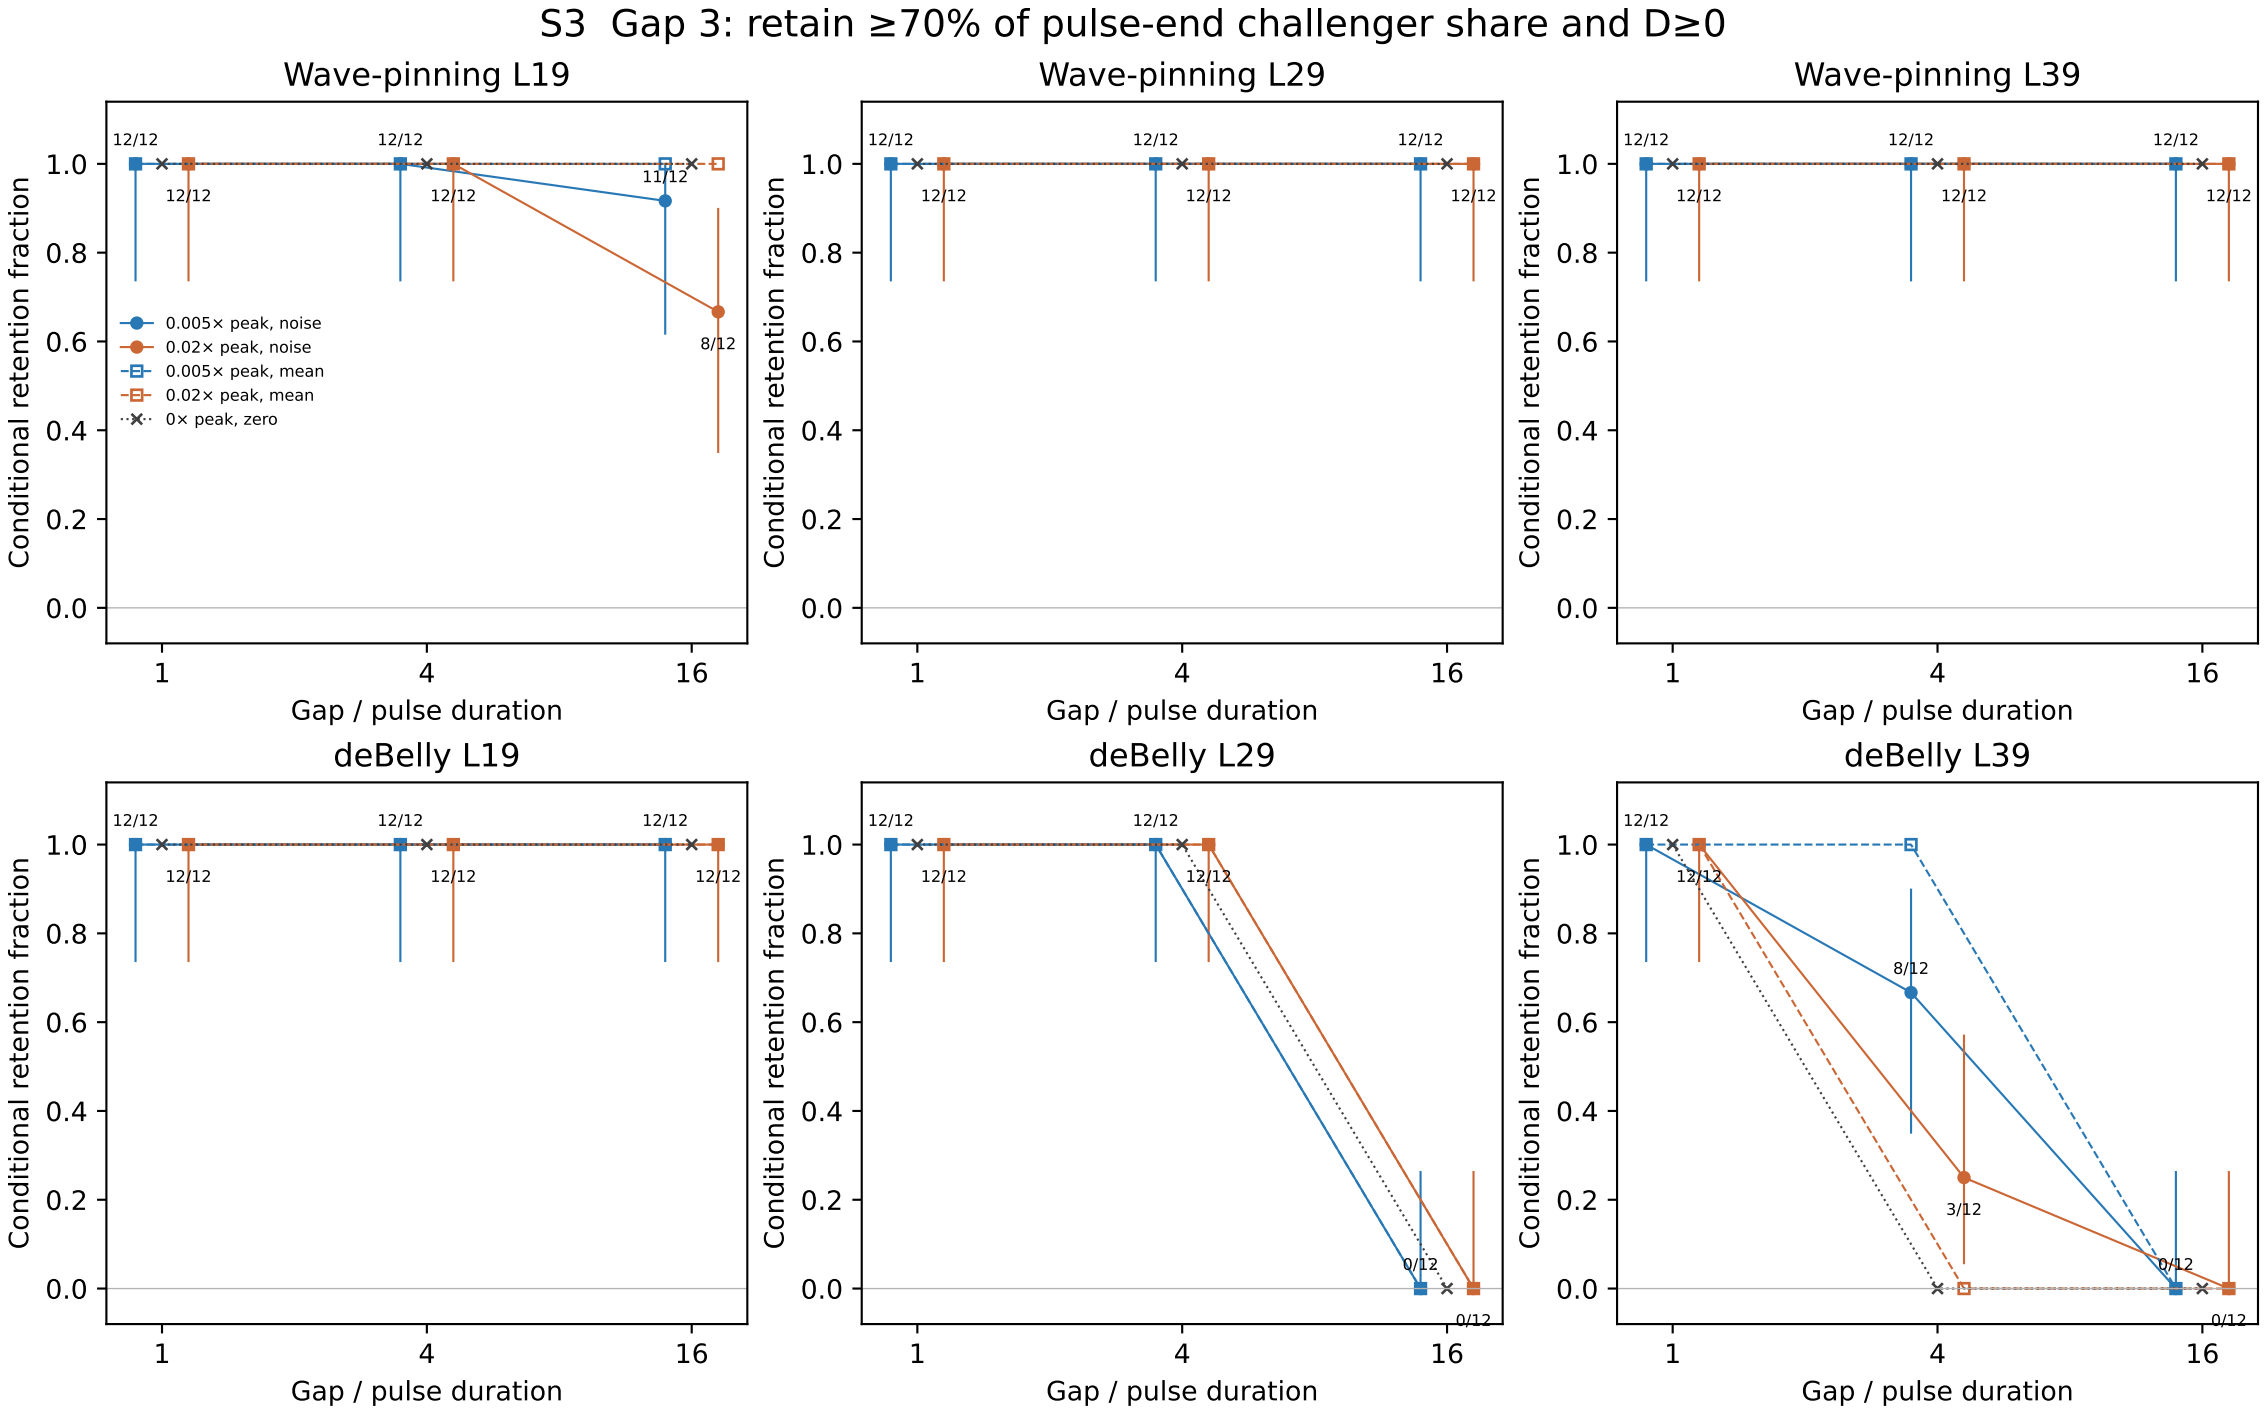


Each noisy denominator contains at most 12 independent trajectories; three gaps from one trajectory are not independent replicates. Eligibility requires pulse-end challenger bias, not eventual replacement. Known gap-end bias/activity loss counts as failure. Error bars: exact 95% finite-seed intervals. deBelly probabilities are conditional on its native0.5 update; later-gap timing is sensitive in S5.

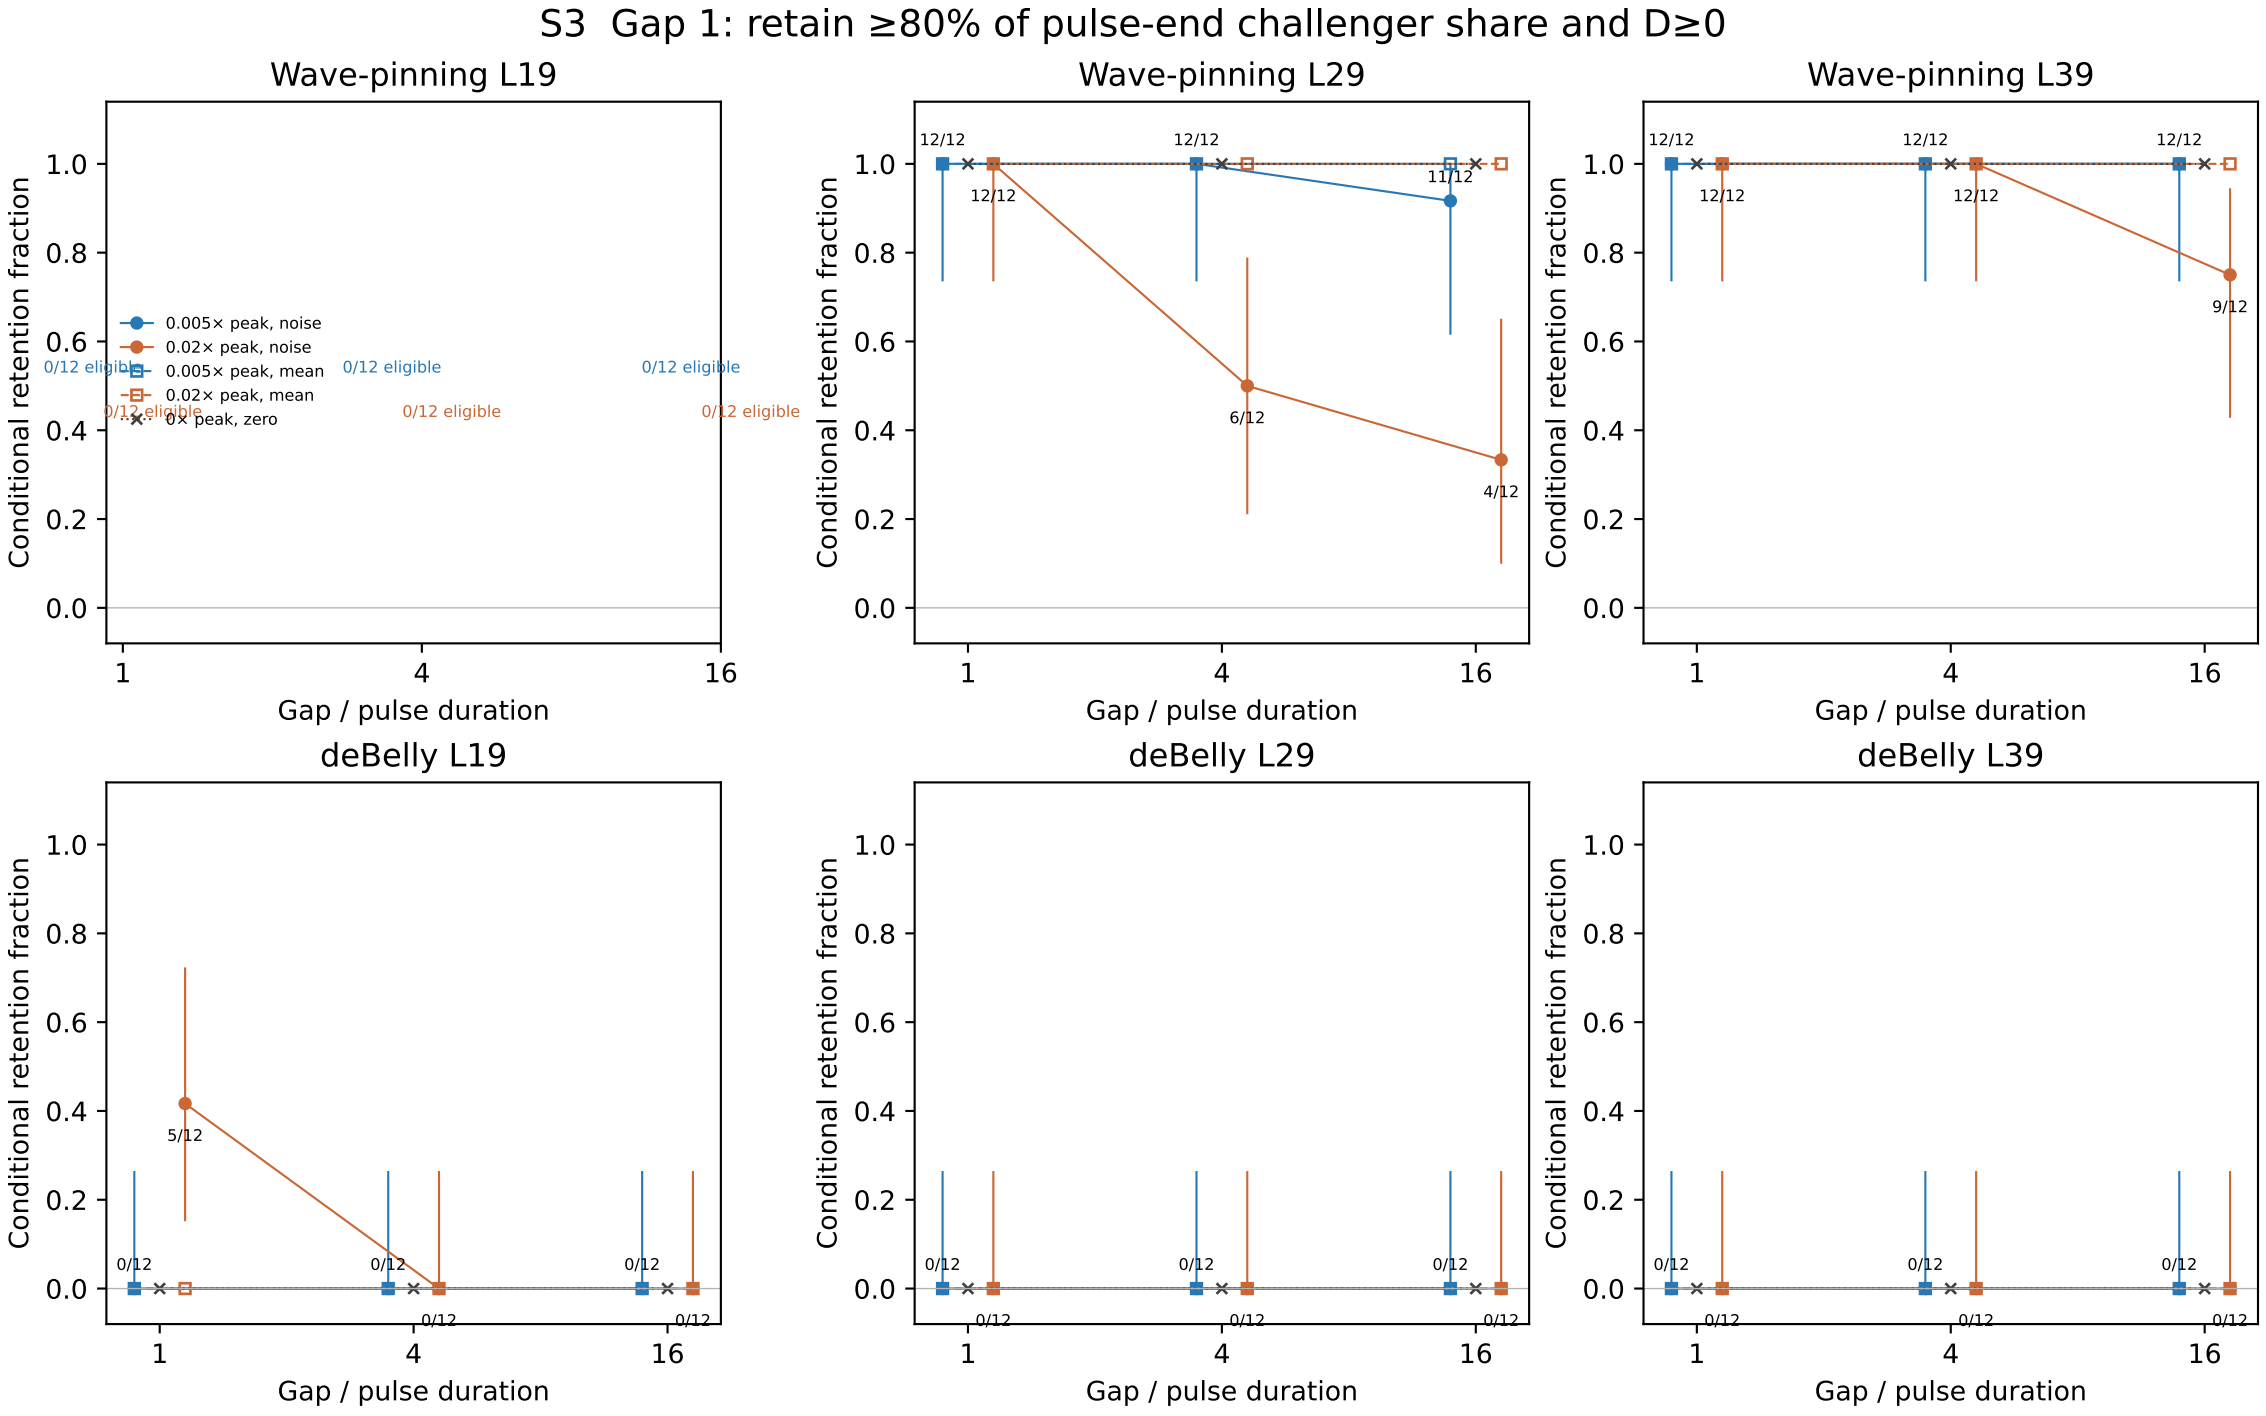

S3 Gap 1: retain ≥80% of pulse-end challenger share and D≥0
Wave-pinning L19
Wave-pinning L29
Wave-pinning L39
deBelly L19
deBelly L29
deBelly L39
Conditional retention fraction
Gap / pulse duration
0.005× peak, noise
0.02× peak, noise
0.005× peak, mean
0.02× peak, mean
0× peak, zero
0/12 eligible
12/12
11/12
9/12
6/12
4/12
5/12
0/12
Each noisy denominator contains at most 12 independent trajectories; three gaps from one trajectory are not independent replicates. Eligibility requires pulse-end challenger bias, not eventual replacement. Known gap-end bias/activity loss counts as failure. Error bars: exact 95% finite-seed intervals. deBelly probabilities are conditional on its native0.5 update; later-gap timing is sensitive in S5.

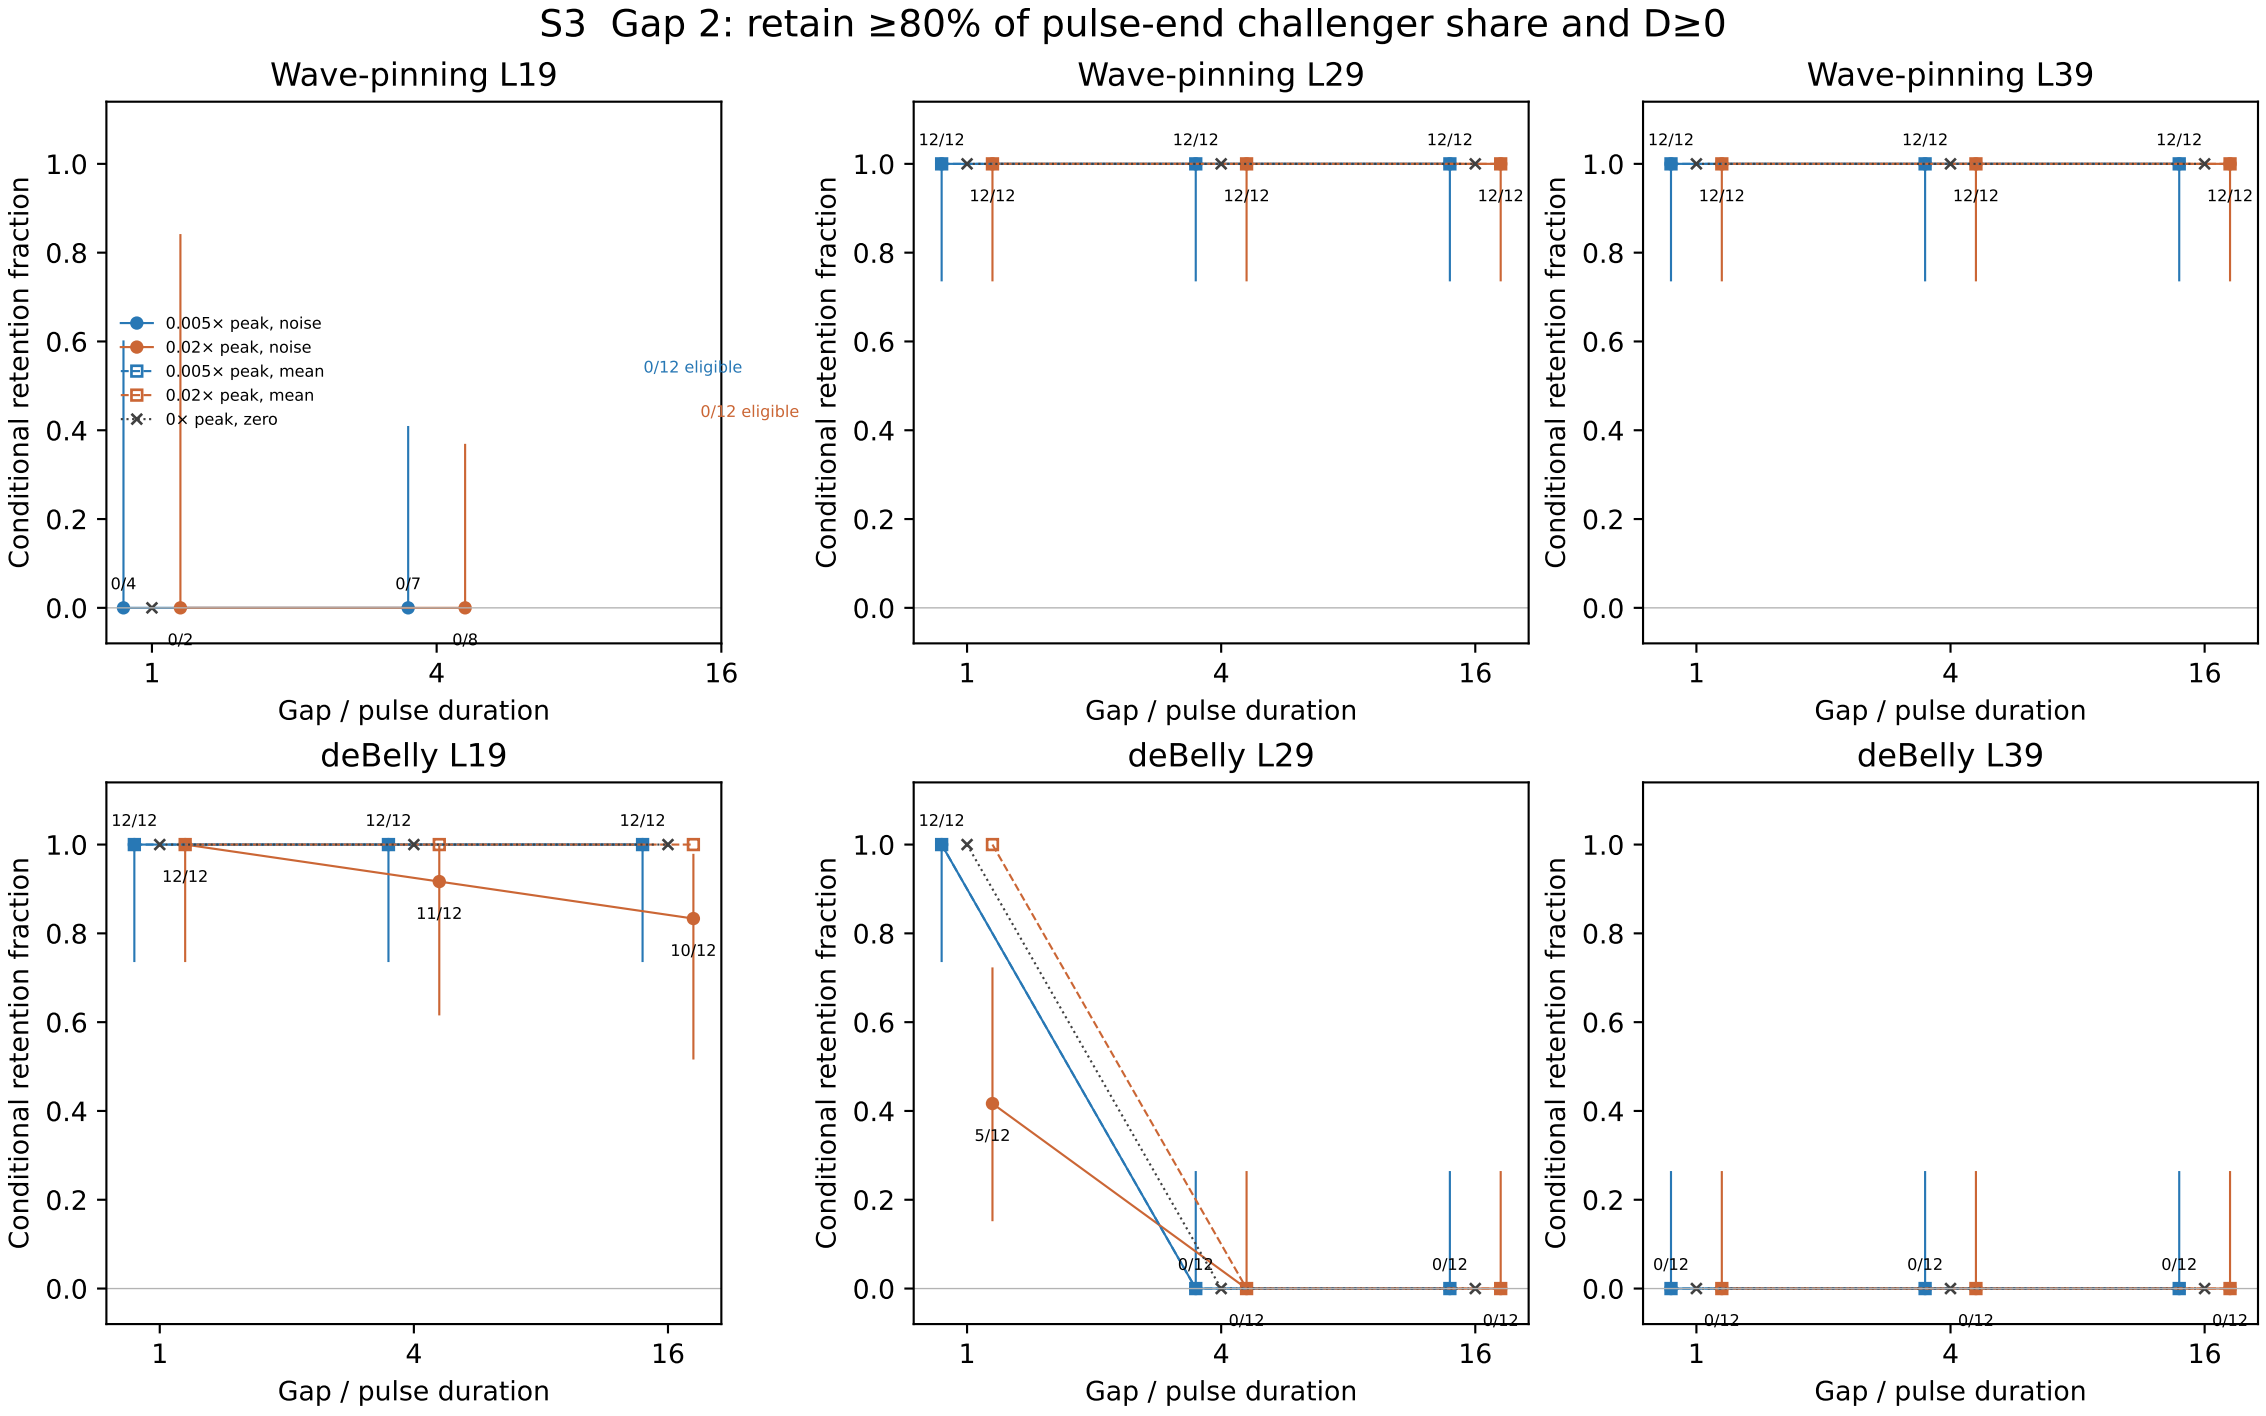


Each noisy denominator contains at most 12 independent trajectories; three gaps from one trajectory are not independent replicates. Eligibility requires pulse-end challenger bias, not eventual replacement. Known gap-end bias/activity loss counts as failure. Error bars: exact 95% finite-seed intervals. deBelly probabilities are conditional on its native0.5 update; later-gap timing is sensitive in S5.

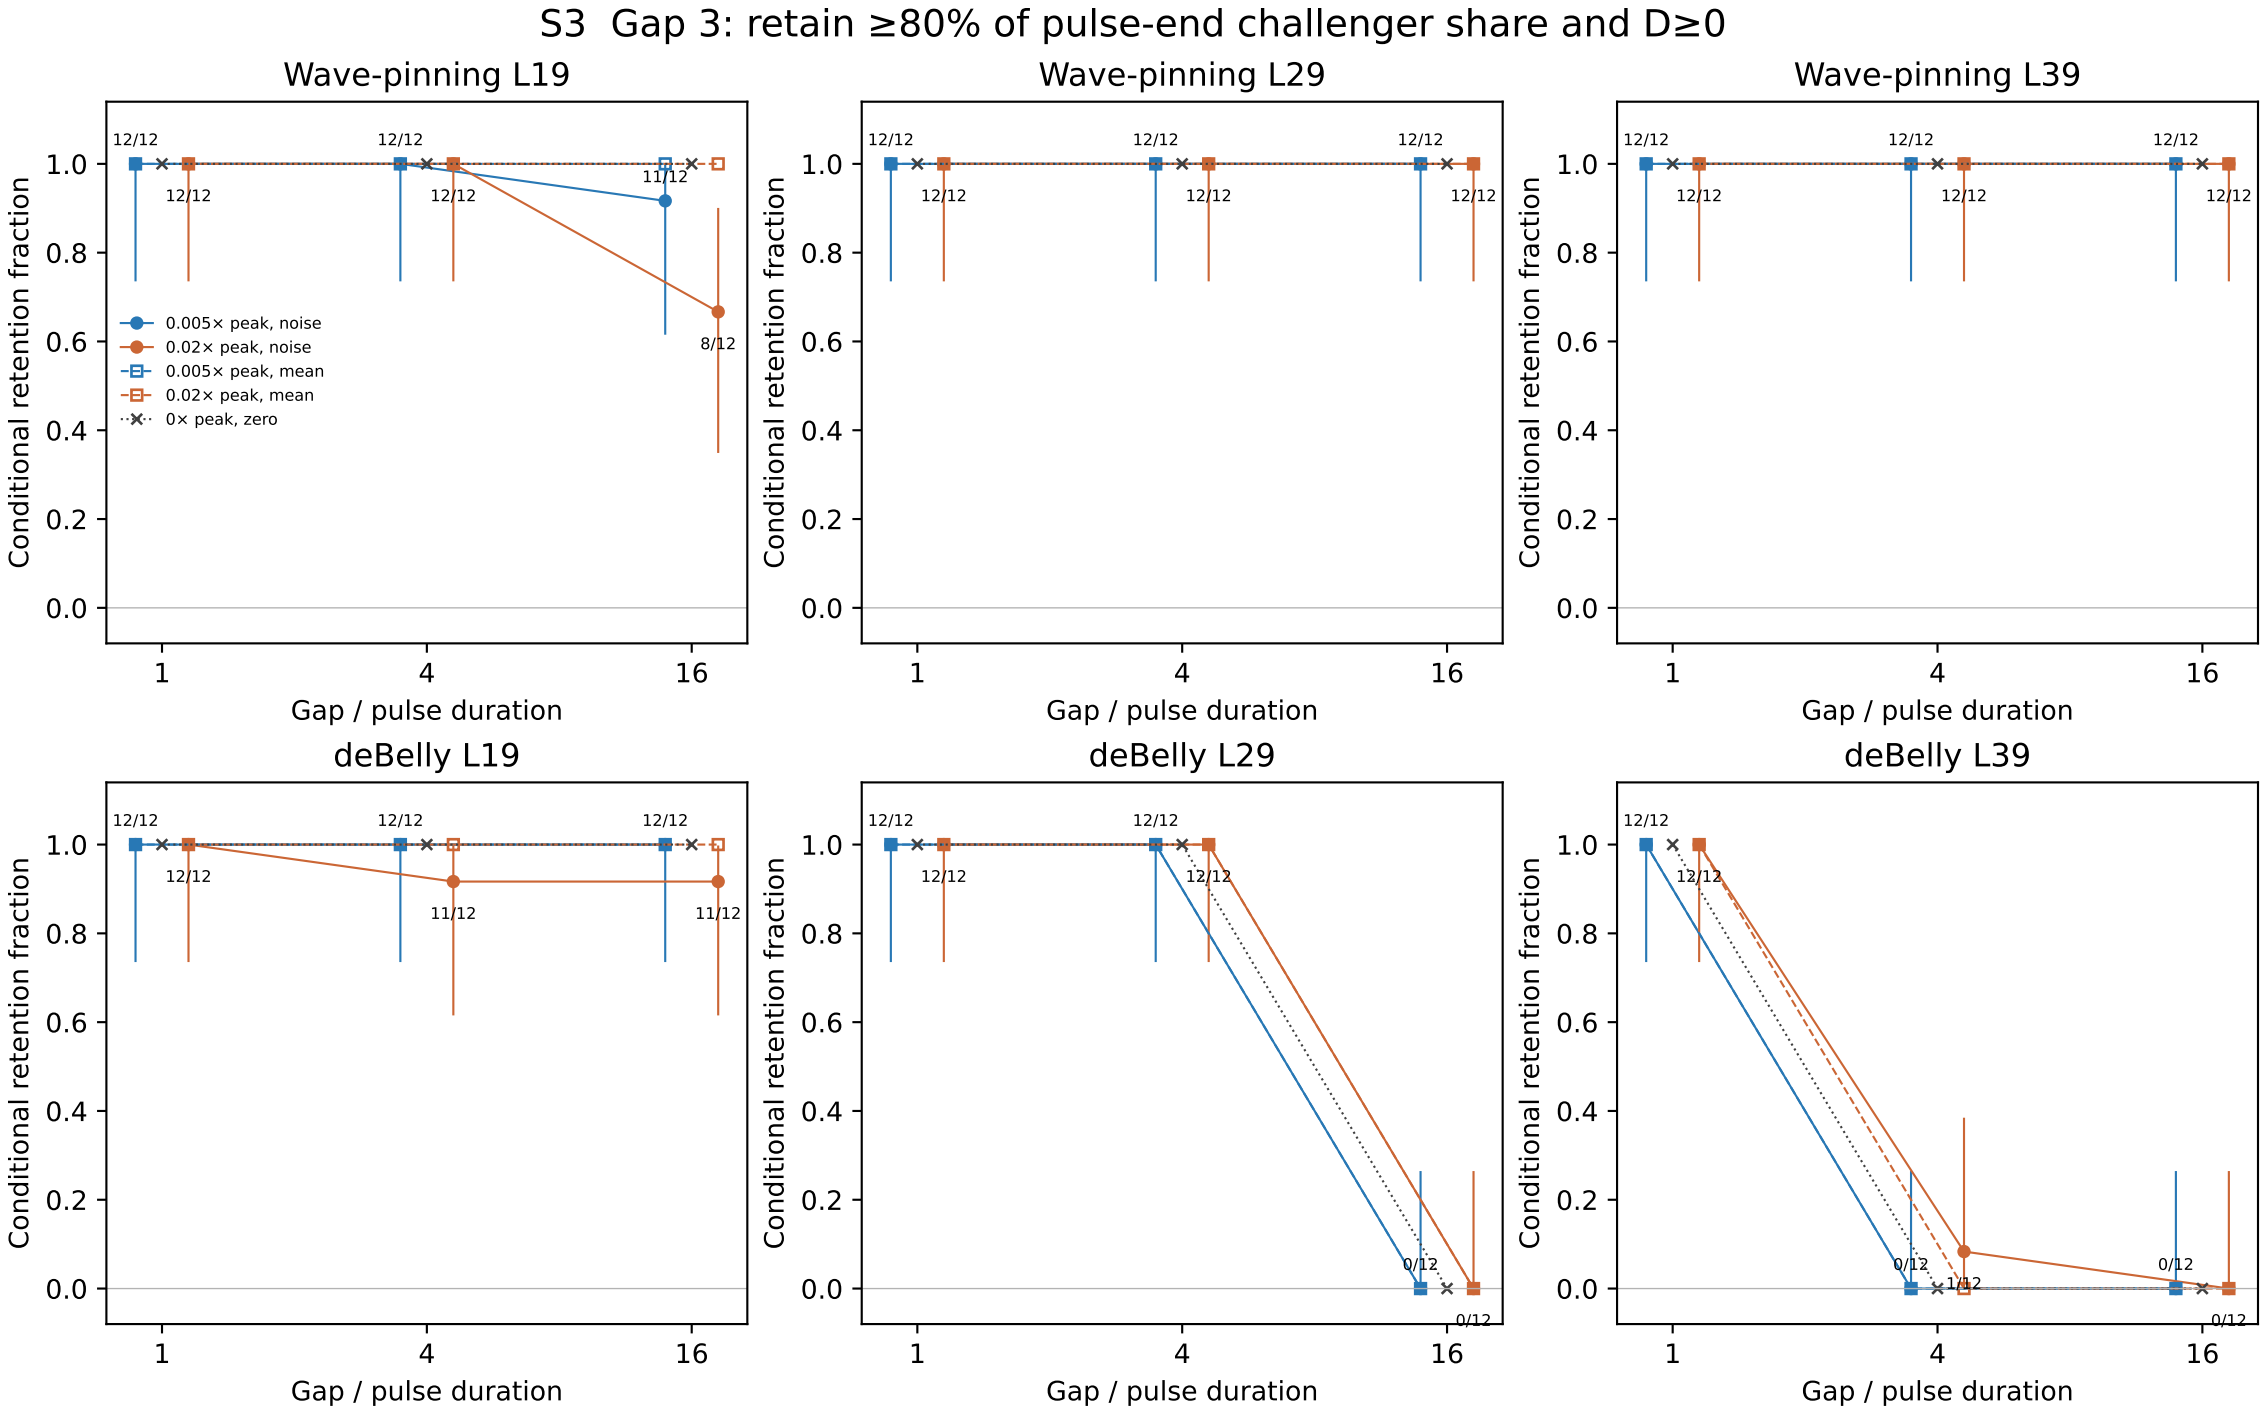


Each noisy denominator contains at most 12 independent trajectories; three gaps from one trajectory are not independent replicates. Eligibility requires pulse-end challenger bias, not eventual replacement. Known gap-end bias/activity loss counts as failure. Error bars: exact 95% finite-seed intervals. deBelly probabilities are conditional on its native0.5 update; later-gap timing is sensitive in S5.

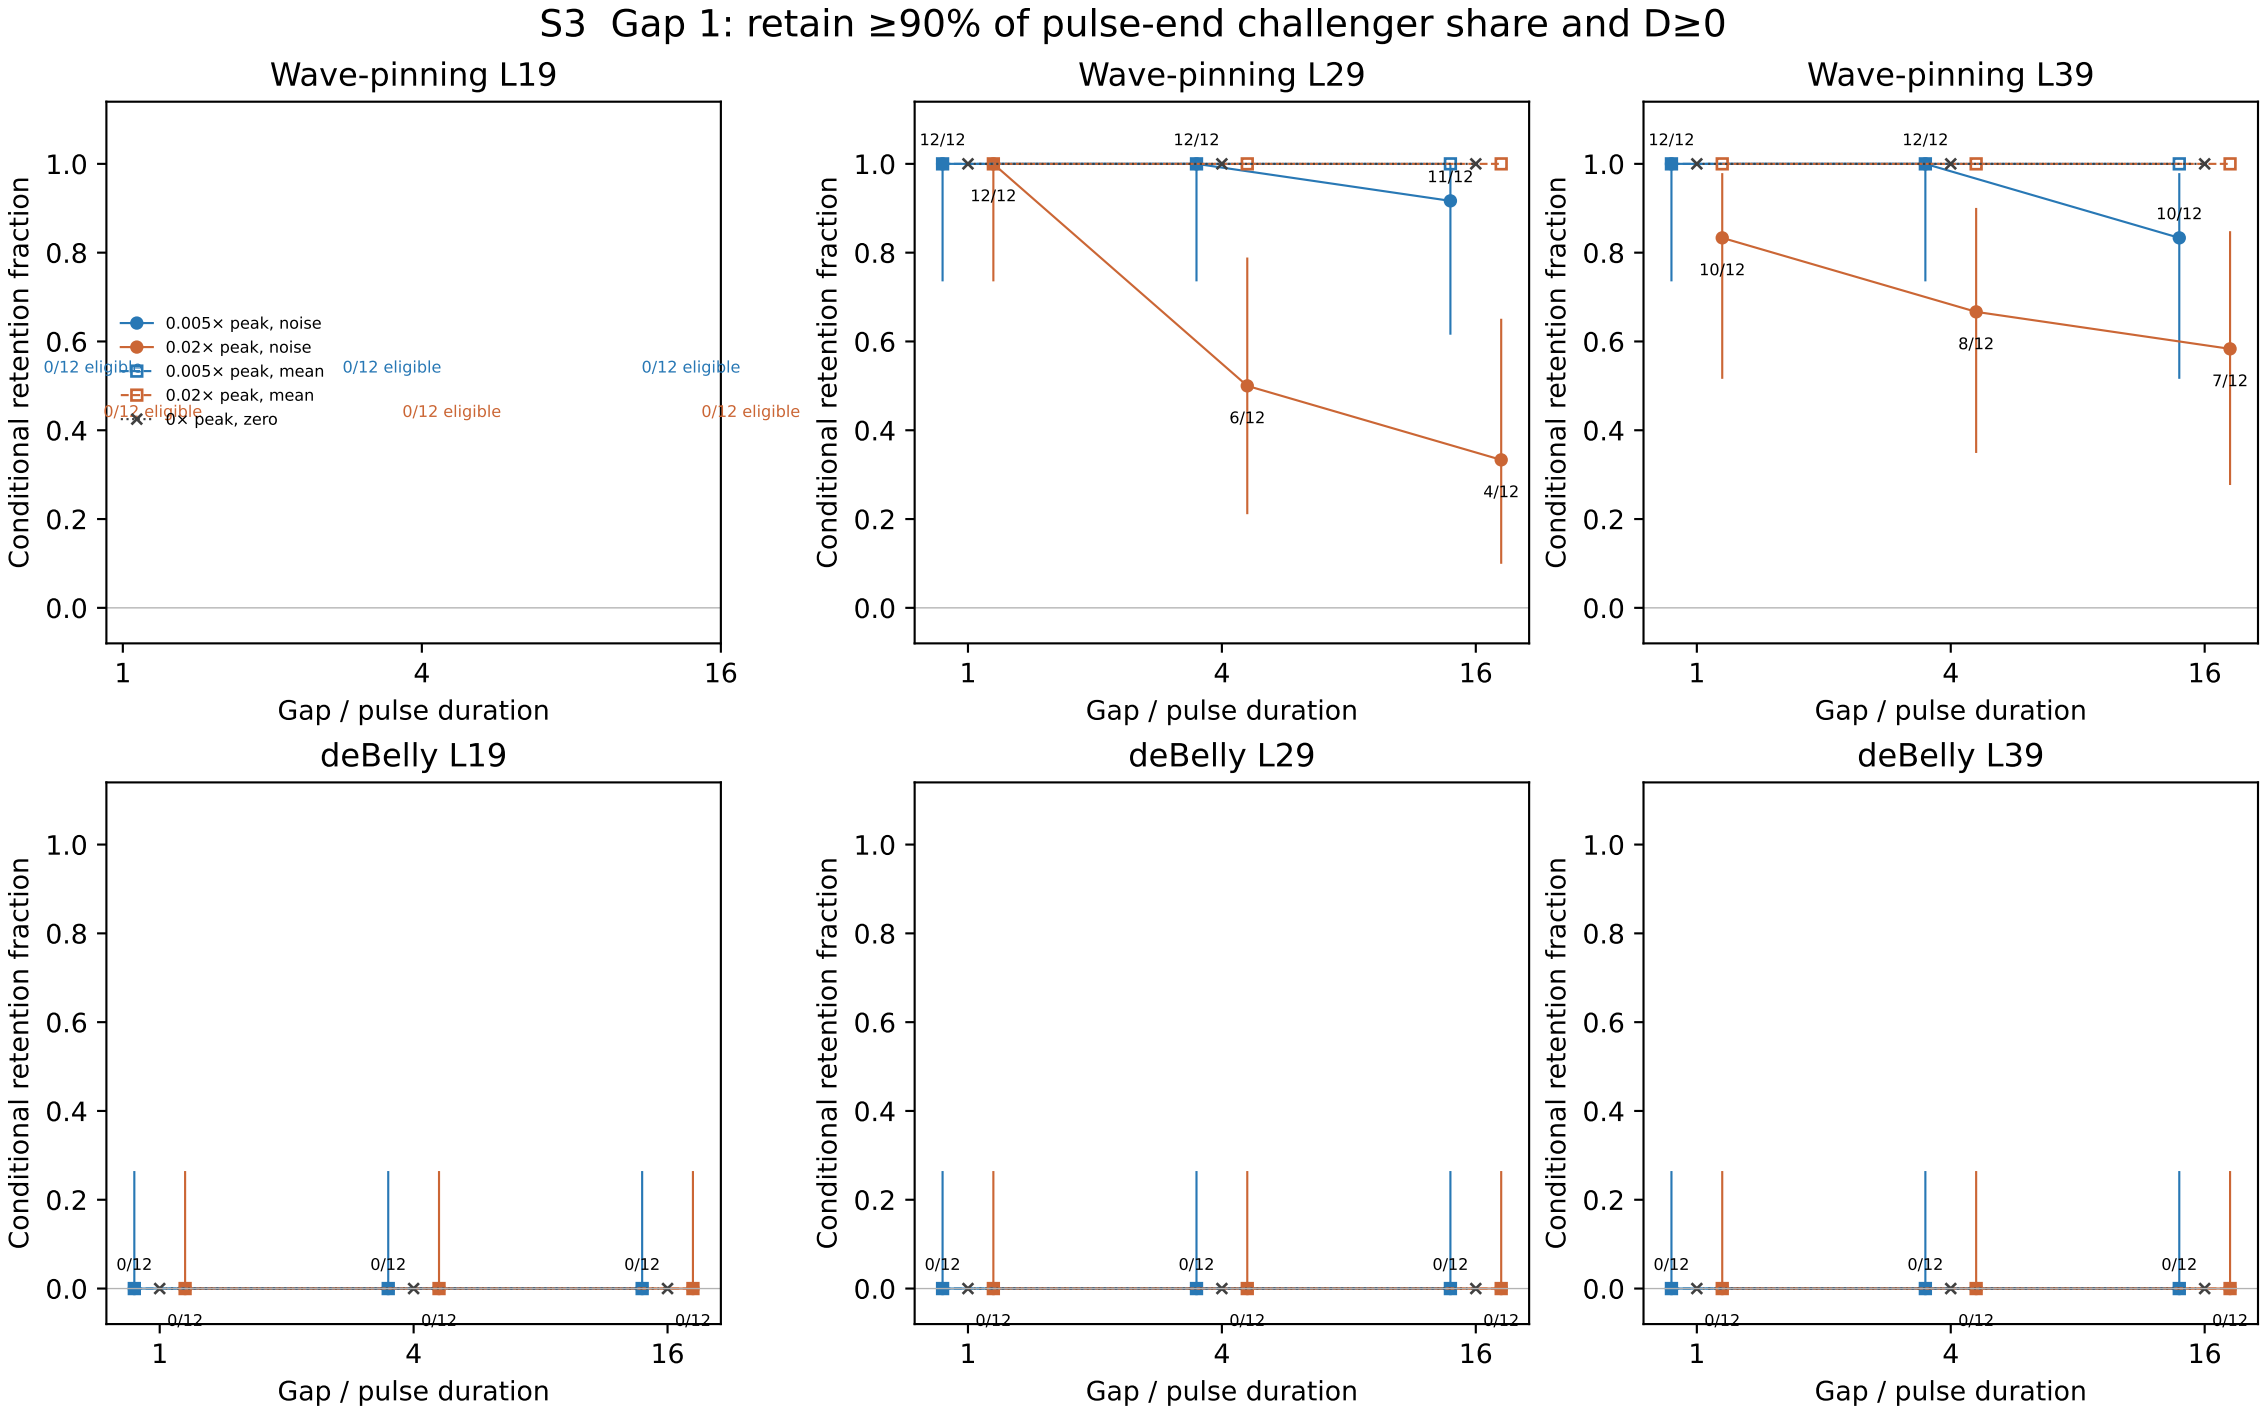


Each noisy denominator contains at most 12 independent trajectories; three gaps from one trajectory are not independent replicates. Eligibility requires pulse-end challenger bias, not eventual replacement. Known gap-end bias/activity loss counts as failure. Error bars: exact 95% finite-seed intervals. deBelly probabilities are conditional on its native0.5 update; later-gap timing is sensitive in S5.

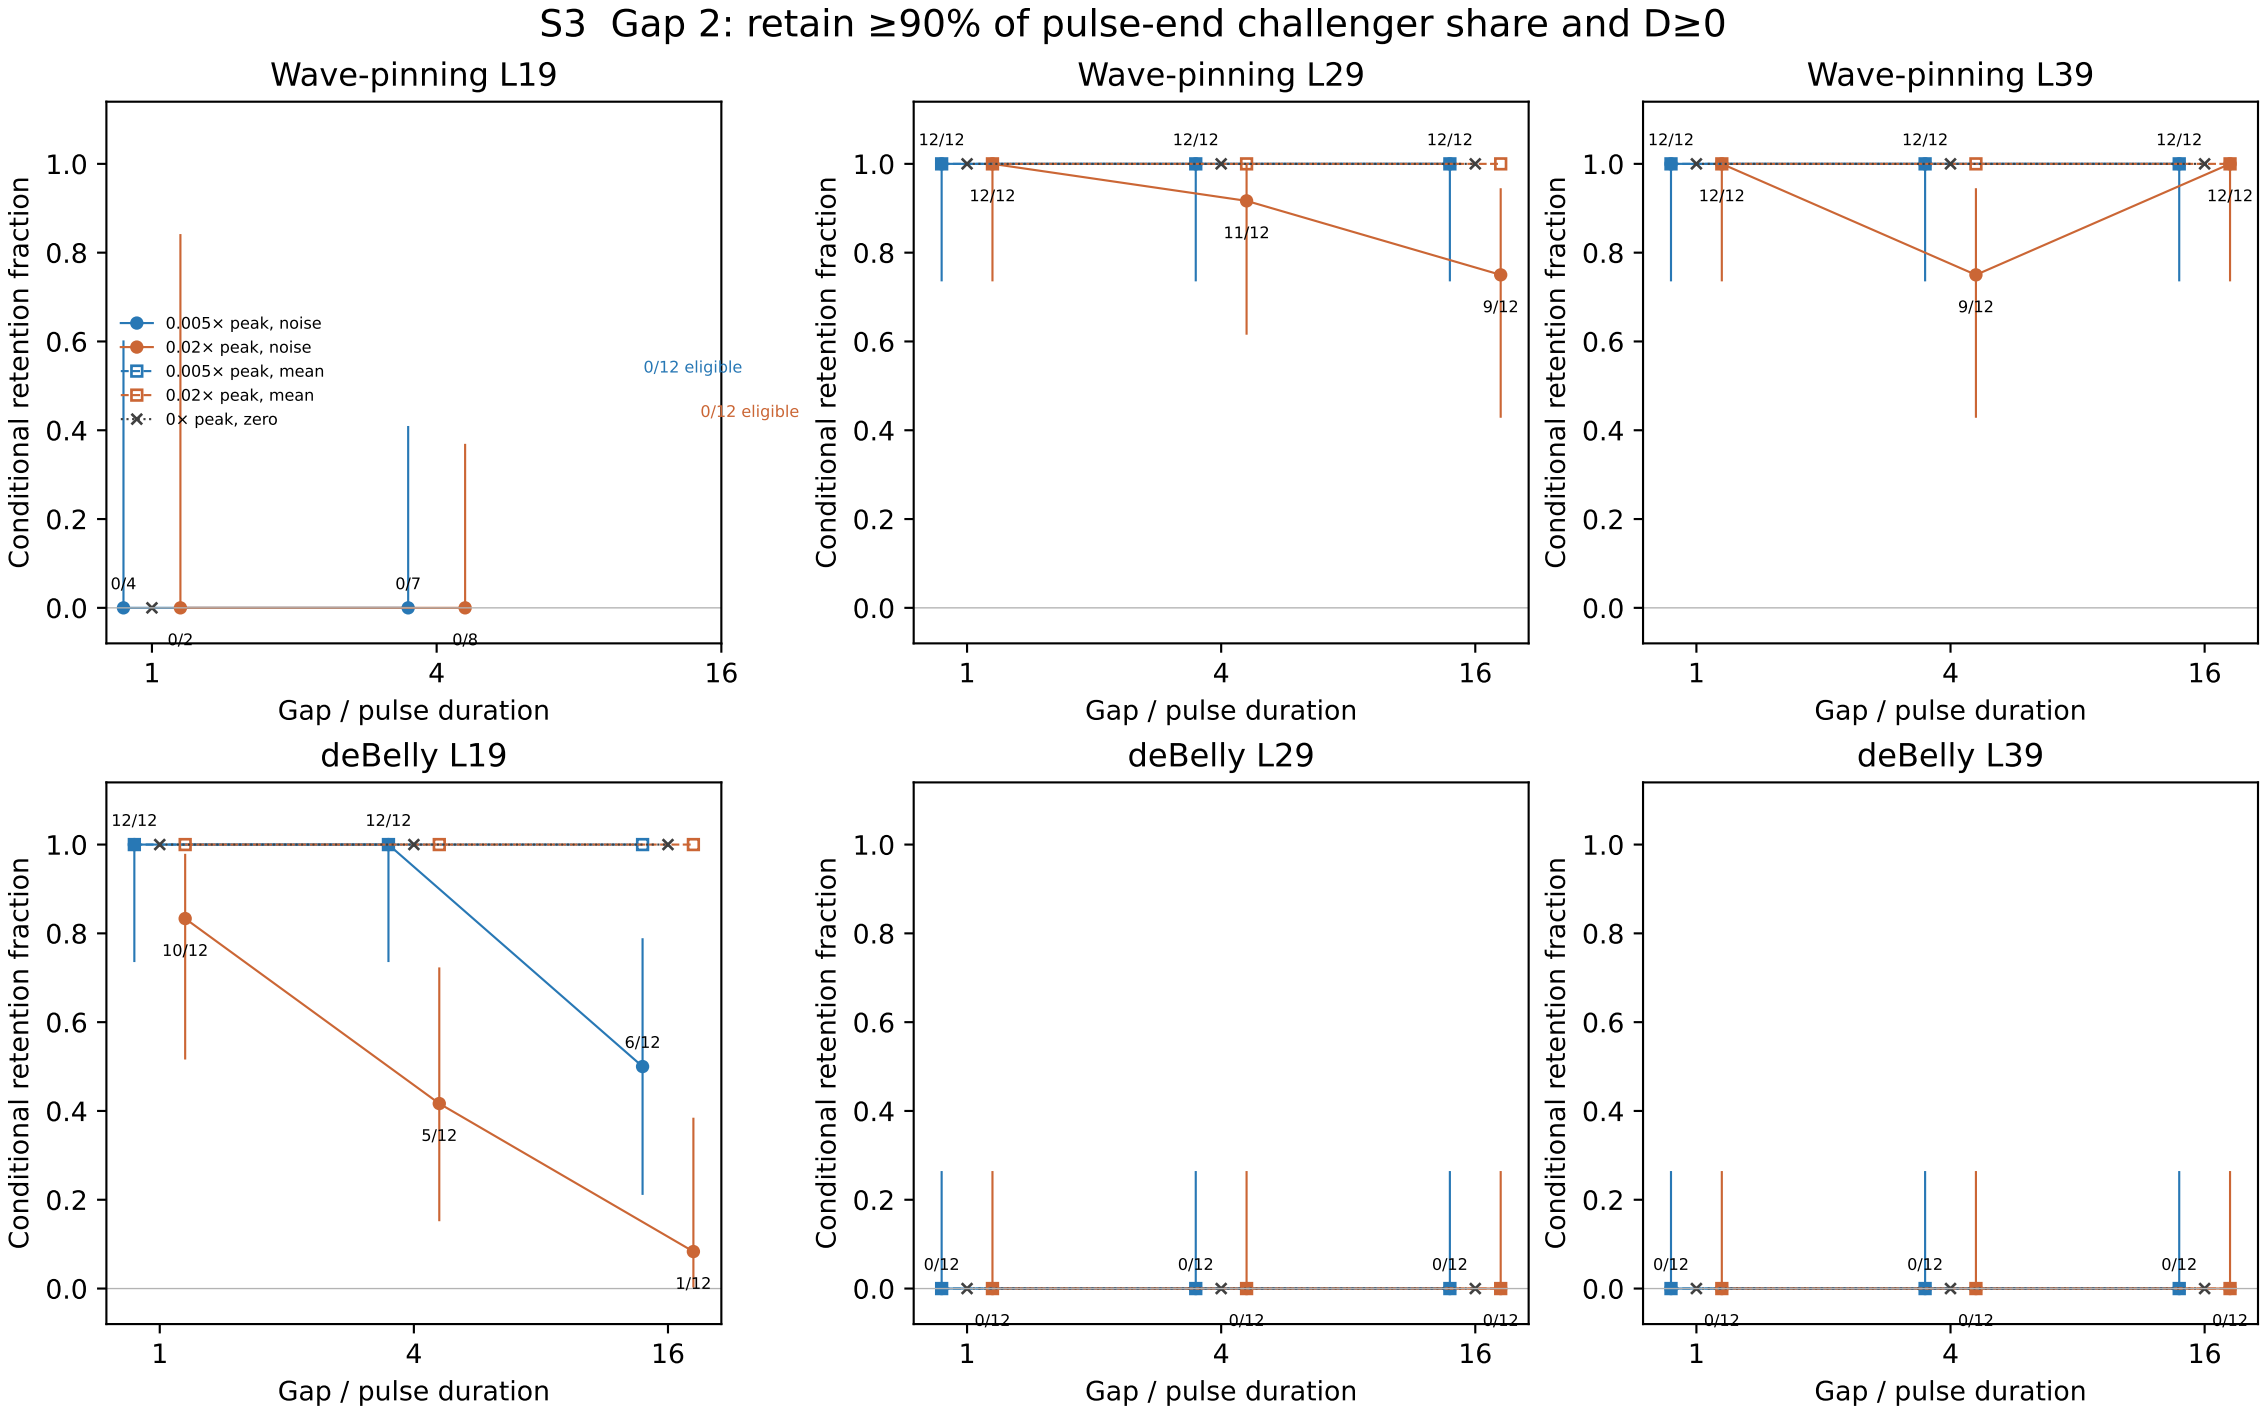

Each noisy denominator contains at most 12 independent trajectories; three gaps from one trajectory are not independent replicates. Eligibility requires pulse-end challenger bias, not eventual replacement. Known gap-end bias/activity loss counts as failure. Error bars: exact 95% finite-seed intervals. deBelly probabilities are conditional on its native0.5 update; later-gap timing is sensitive in S5.

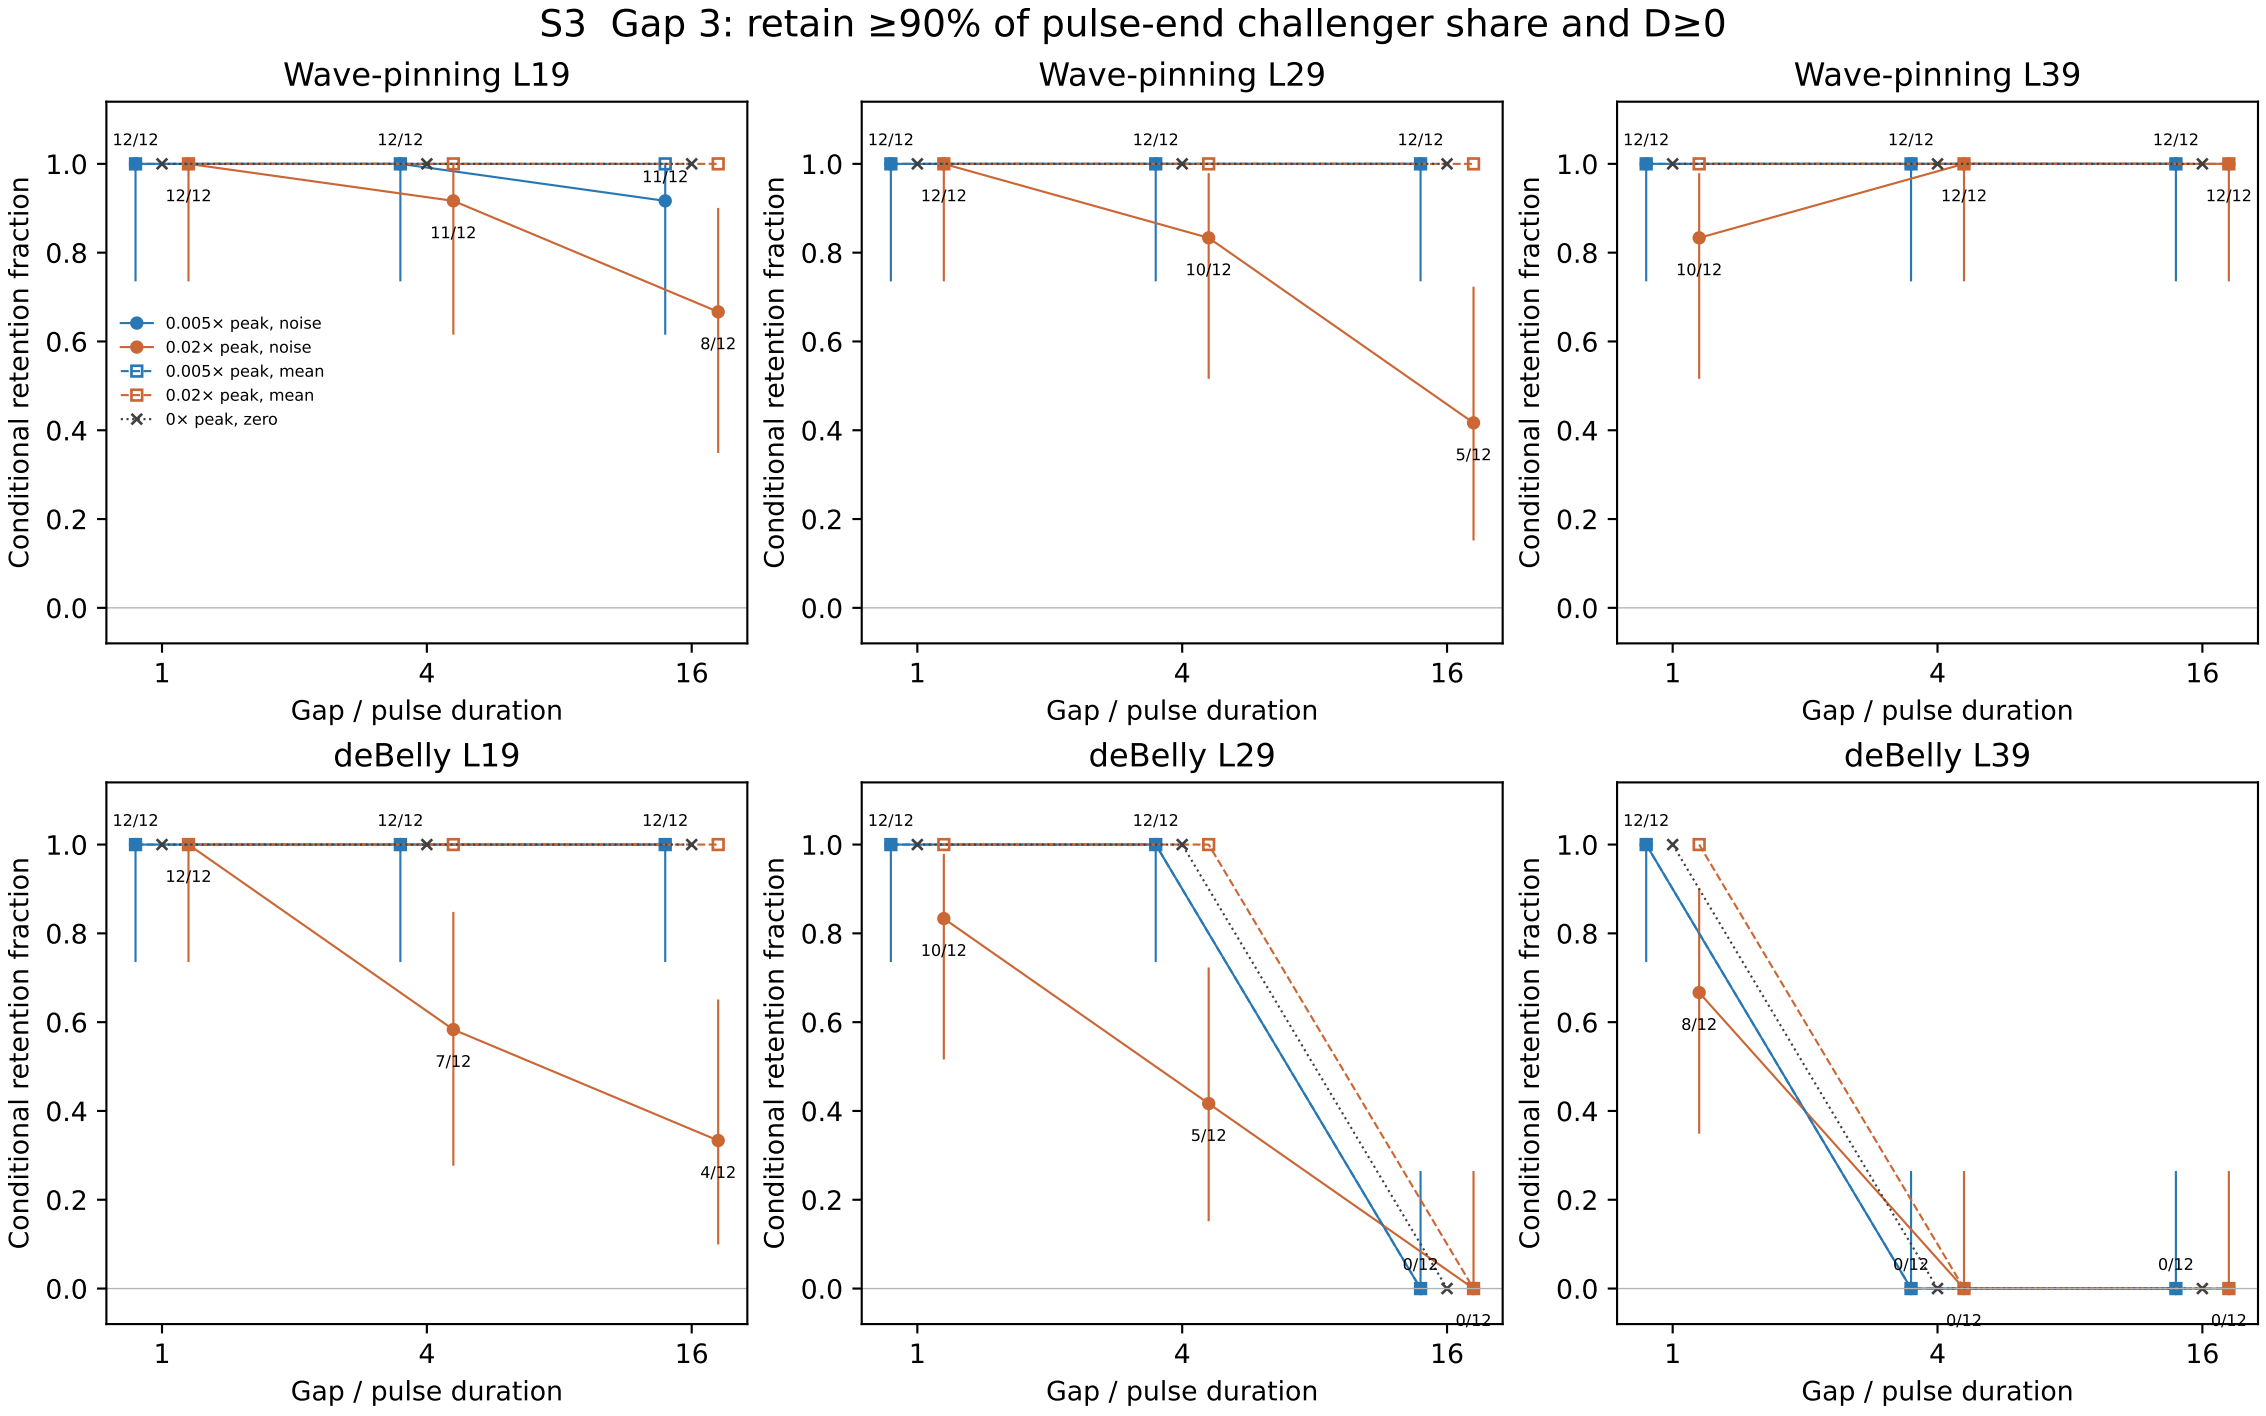

Each noisy denominator contains at most 12 independent trajectories; three gaps from one trajectory are not independent replicates. Eligibility requires pulse-end challenger bias, not eventual replacement. Known gap-end bias/activity loss counts as failure. Error bars: exact 95% finite-seed intervals. deBelly probabilities are conditional on its native0.5 update; later-gap timing is sensitive in S5.

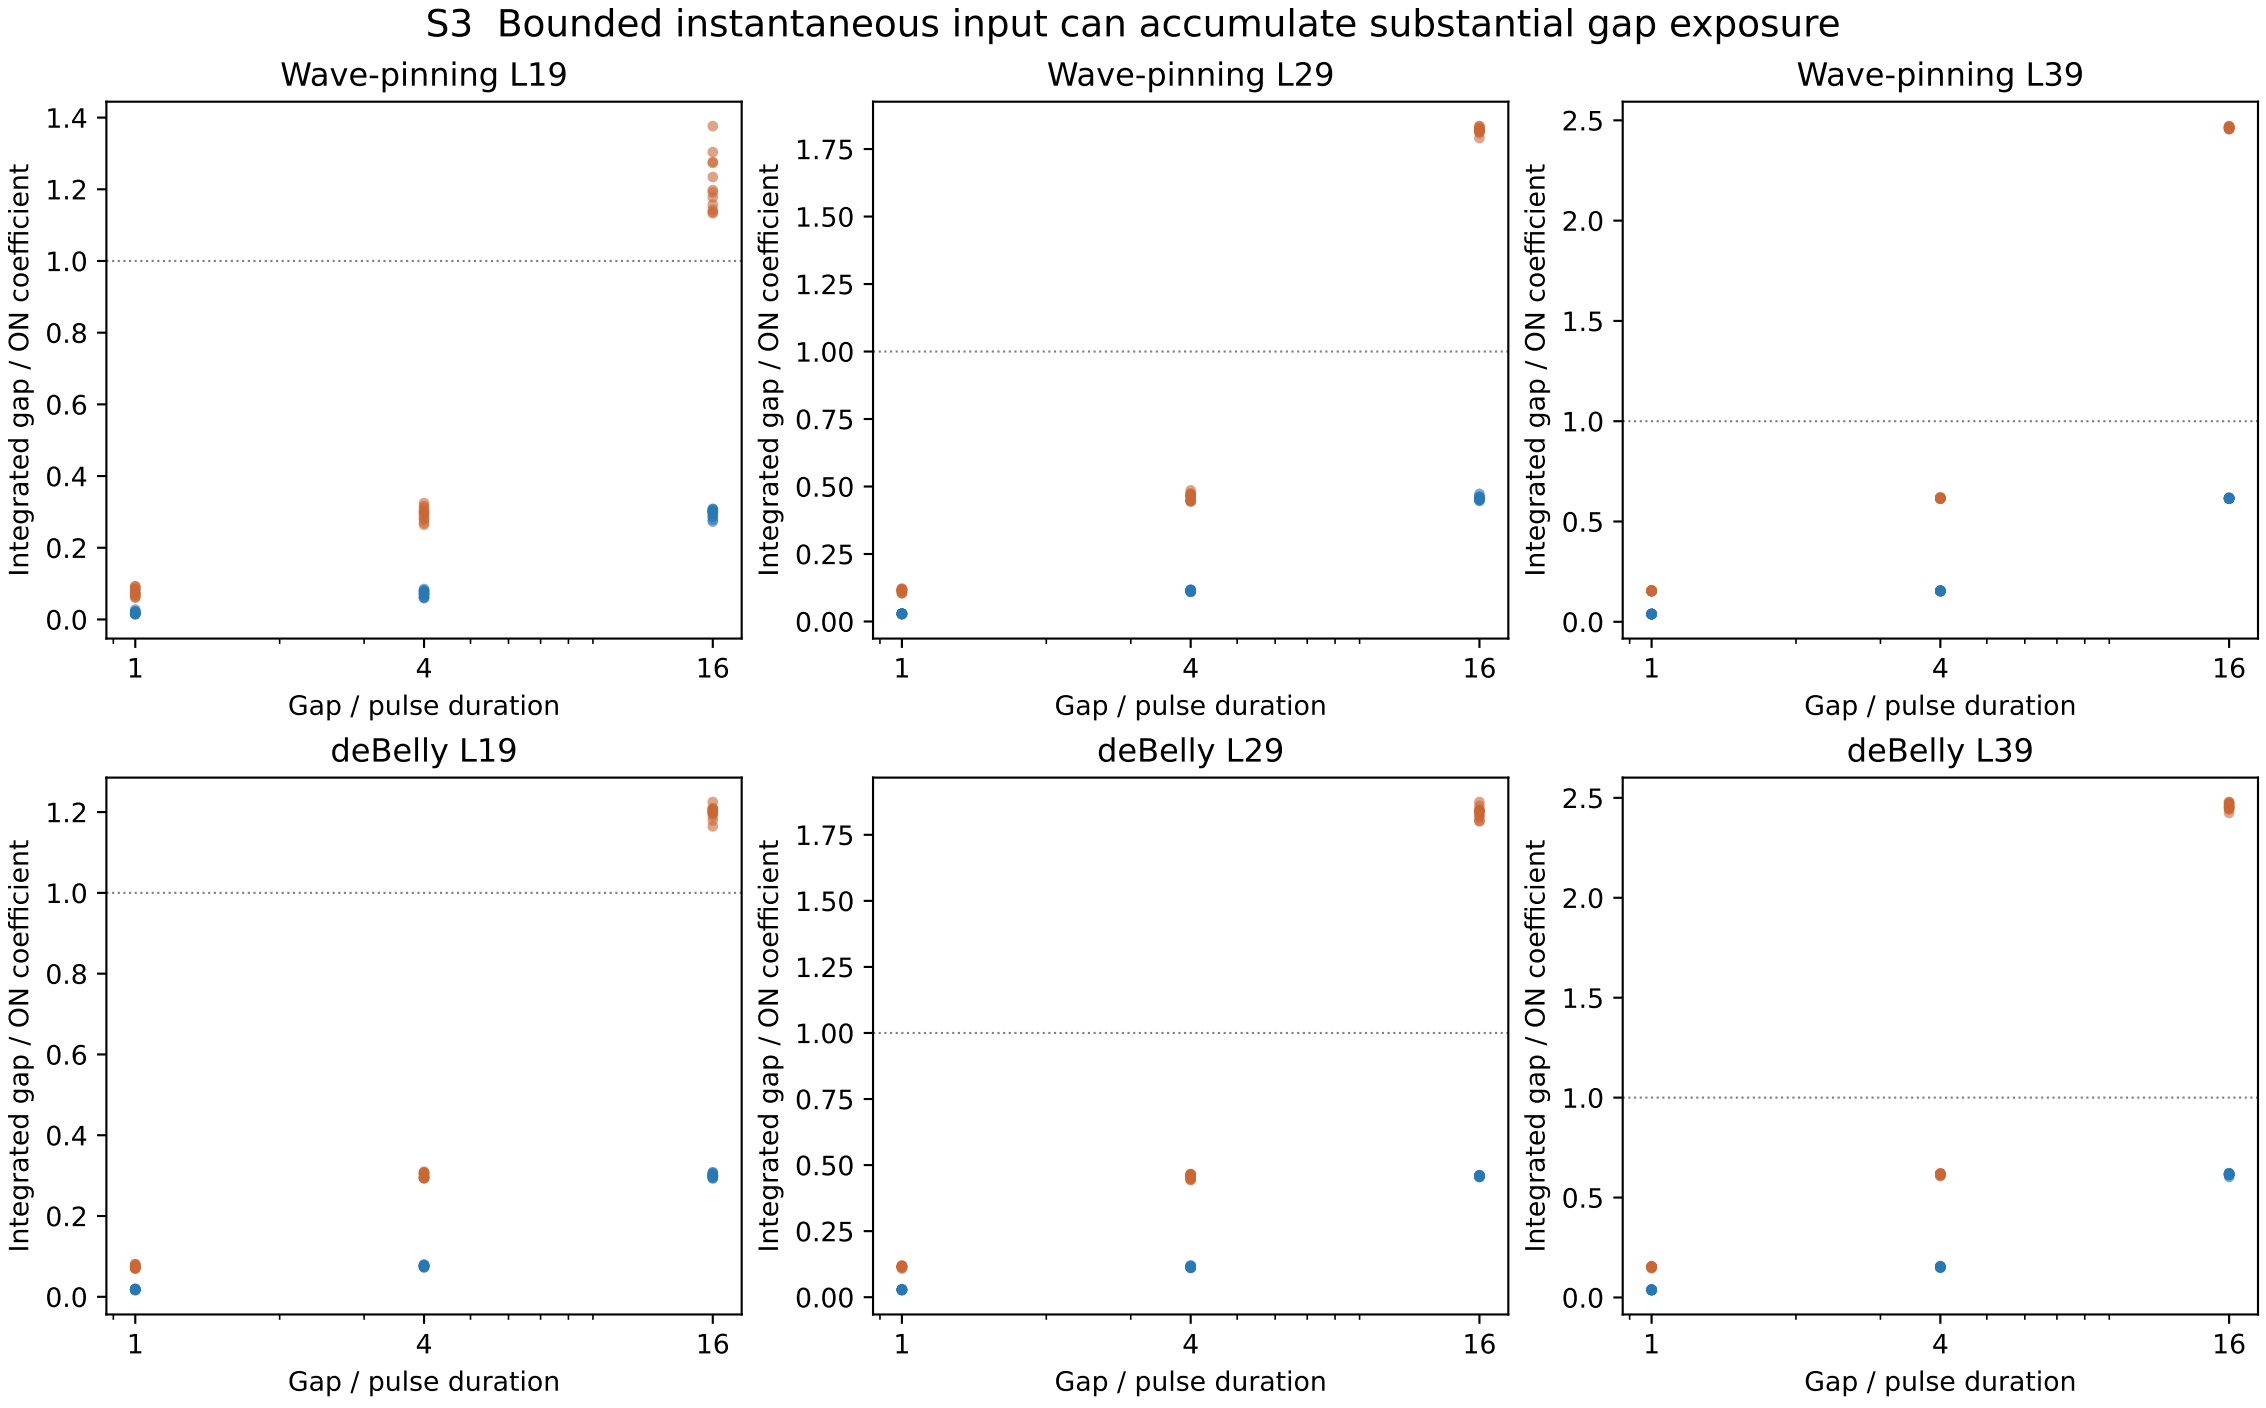

Weak describes the instantaneous bounded coefficient (maximum1% or4% of native peak), not cumulative exposure. Spatially distributed gap input is integrated over the whole native domain; at L39/gap16/mean2% its expected commanded exposure is about2.46× targeted ON exposure. This is not calibrated photon dose or biochemical activation. Native guards, all exposure summaries, final fate and field-tail flags remain separately in the source JSON.