S11 · Wave-pinning · size label 20 · f=0.003 · mean
context common · σ=0 · horizon=32000 · 1 deterministic control

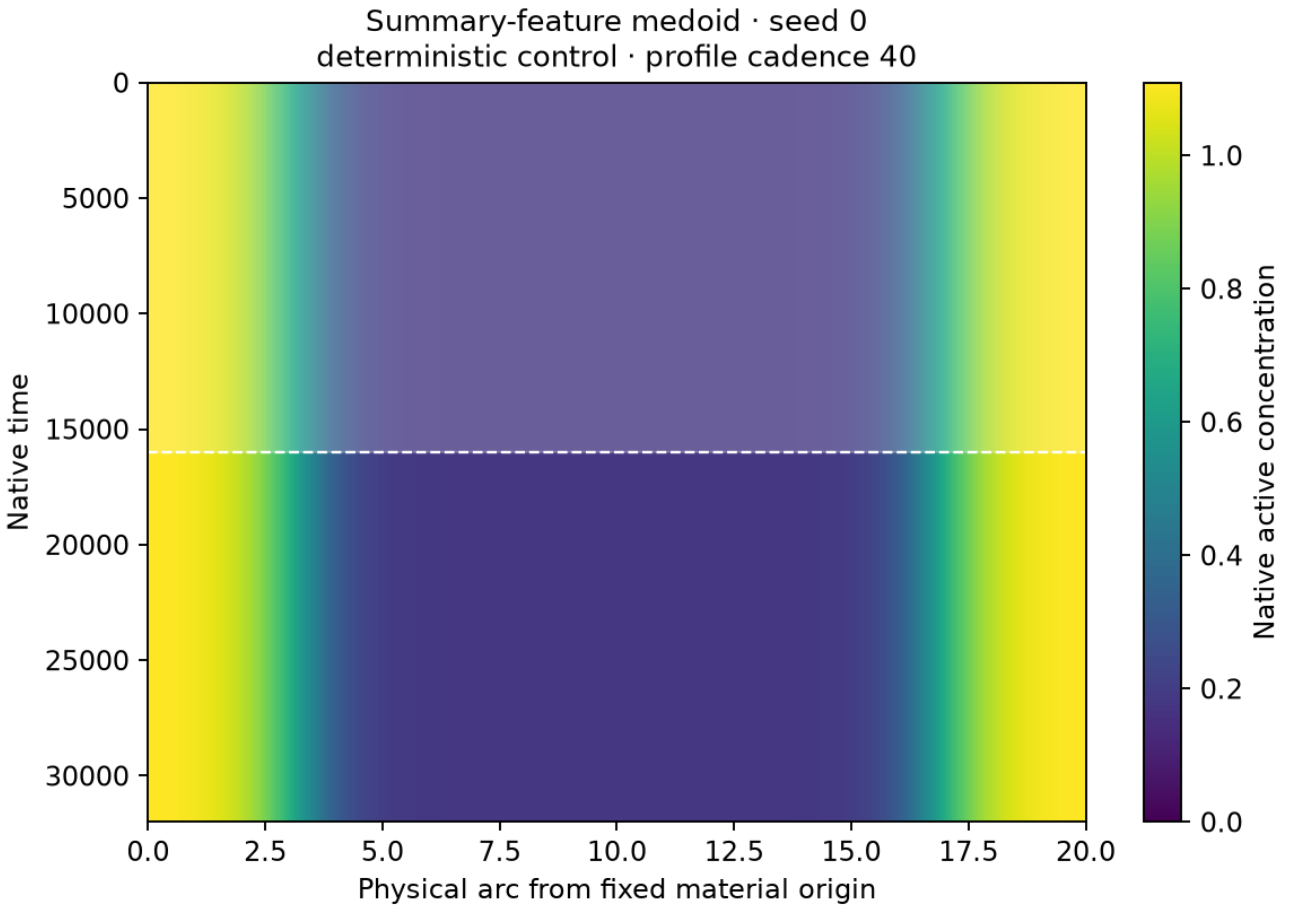

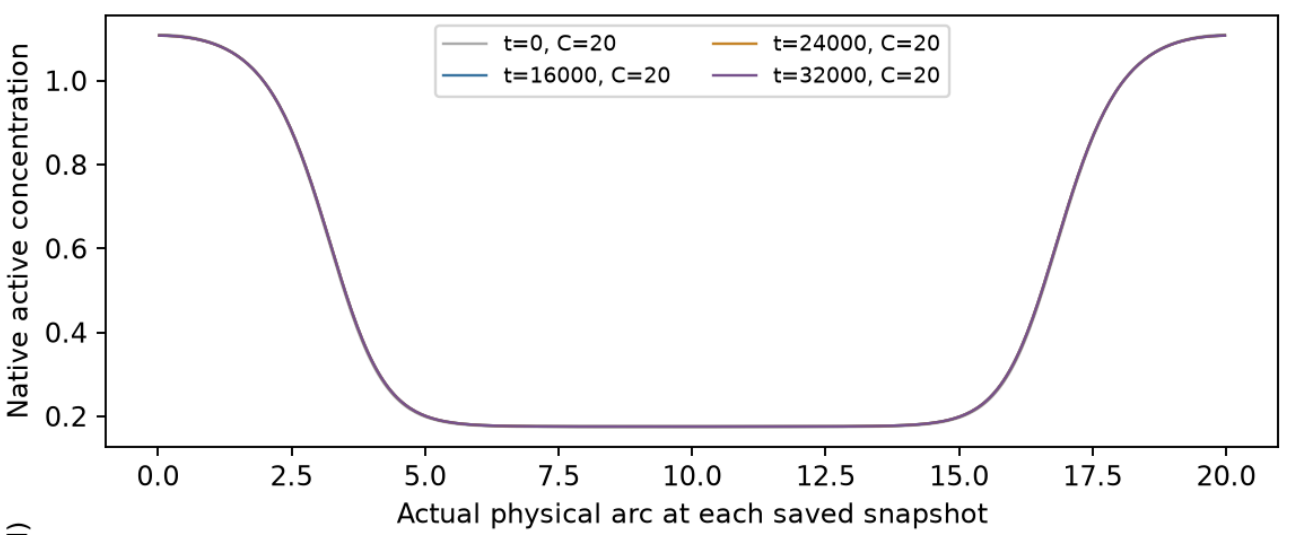

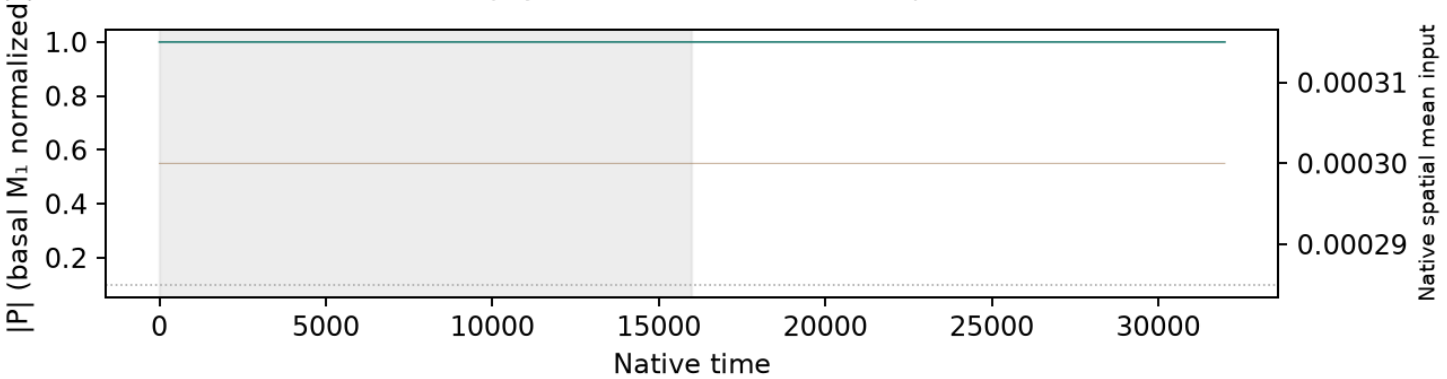

Native concentrations and every retained field frame are plotted without spatial resampling.
First half shaded: excluded from summary selection.
Spring mesh-face interpolation changes only boundary geometry; snapshots use actual saved C(t).
P uses basal M_1 normalization, distinct from instantaneous coherence.
Supplemental selection and controls; no main example is chosen.
Native NPZ/status links remain local/HPC data.

S11 · Wave-pinning · size label 20 · f=0.003 · noise
context common · σ=1 · horizon=32000 · n=12 independent noisy realizations

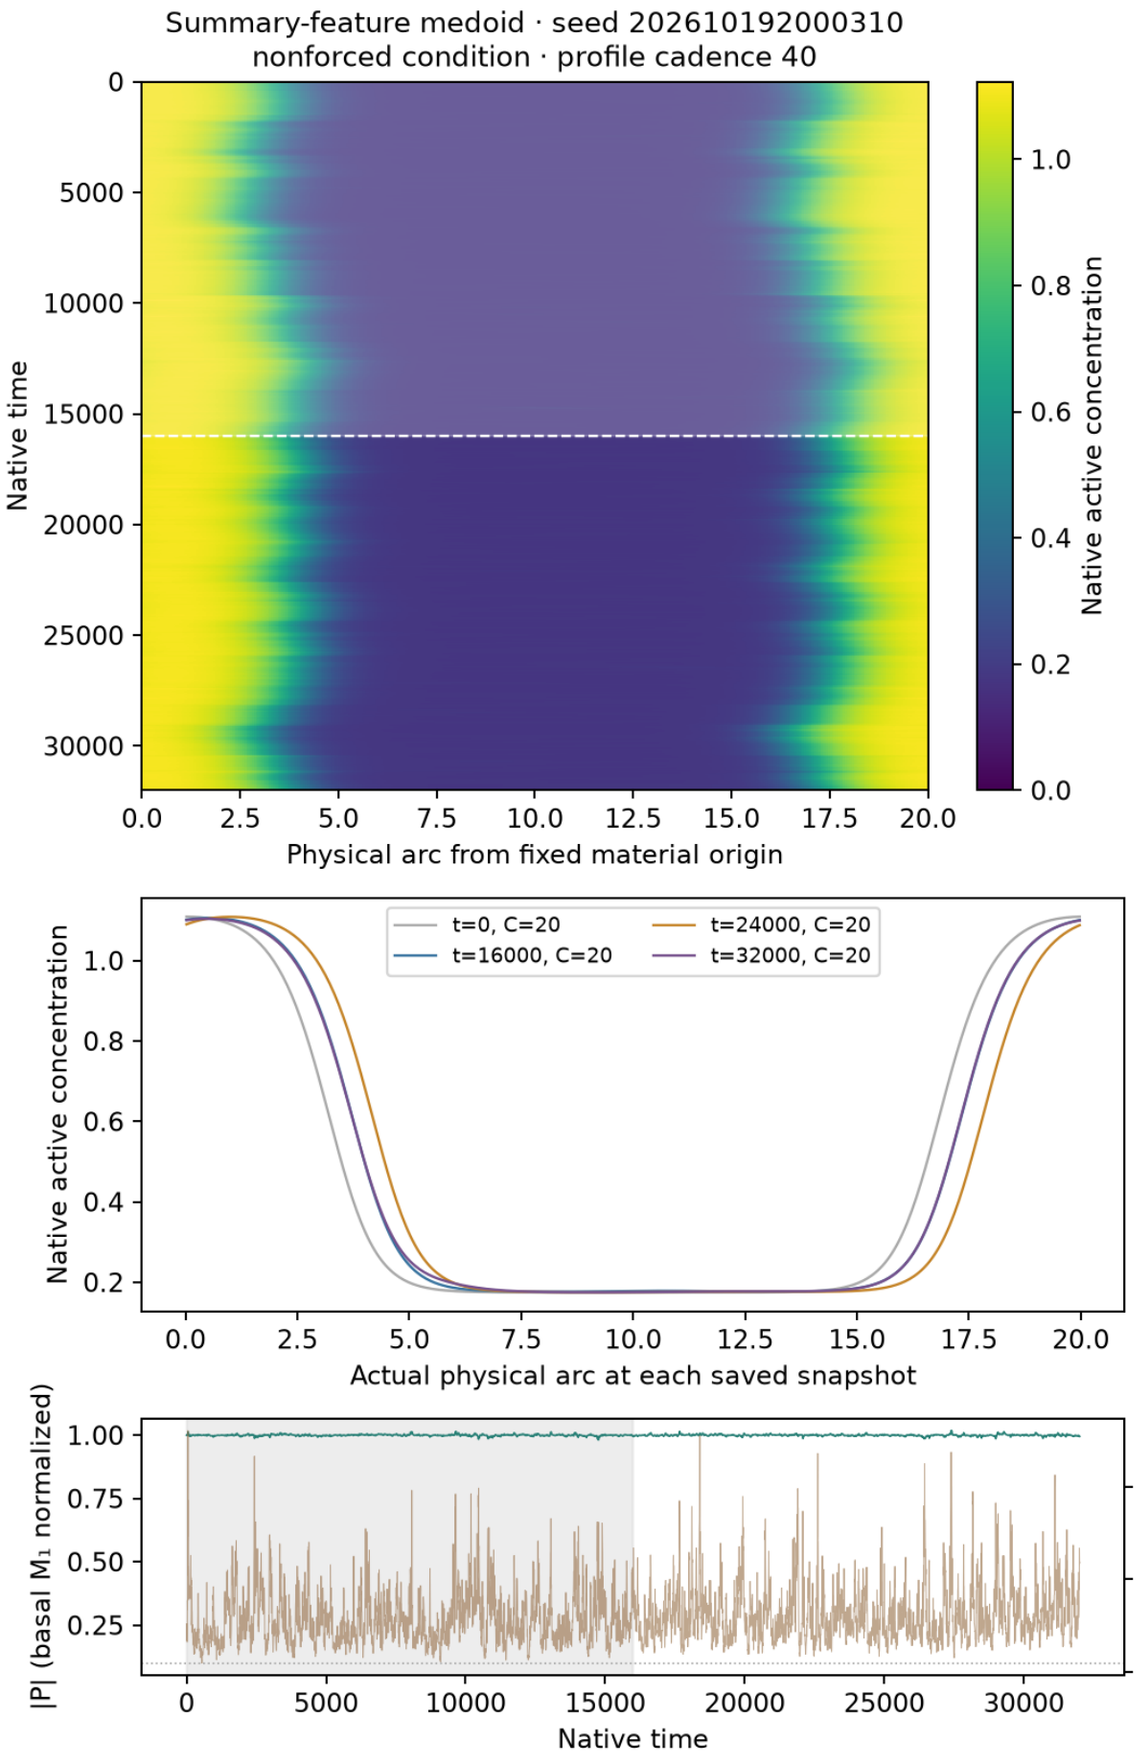

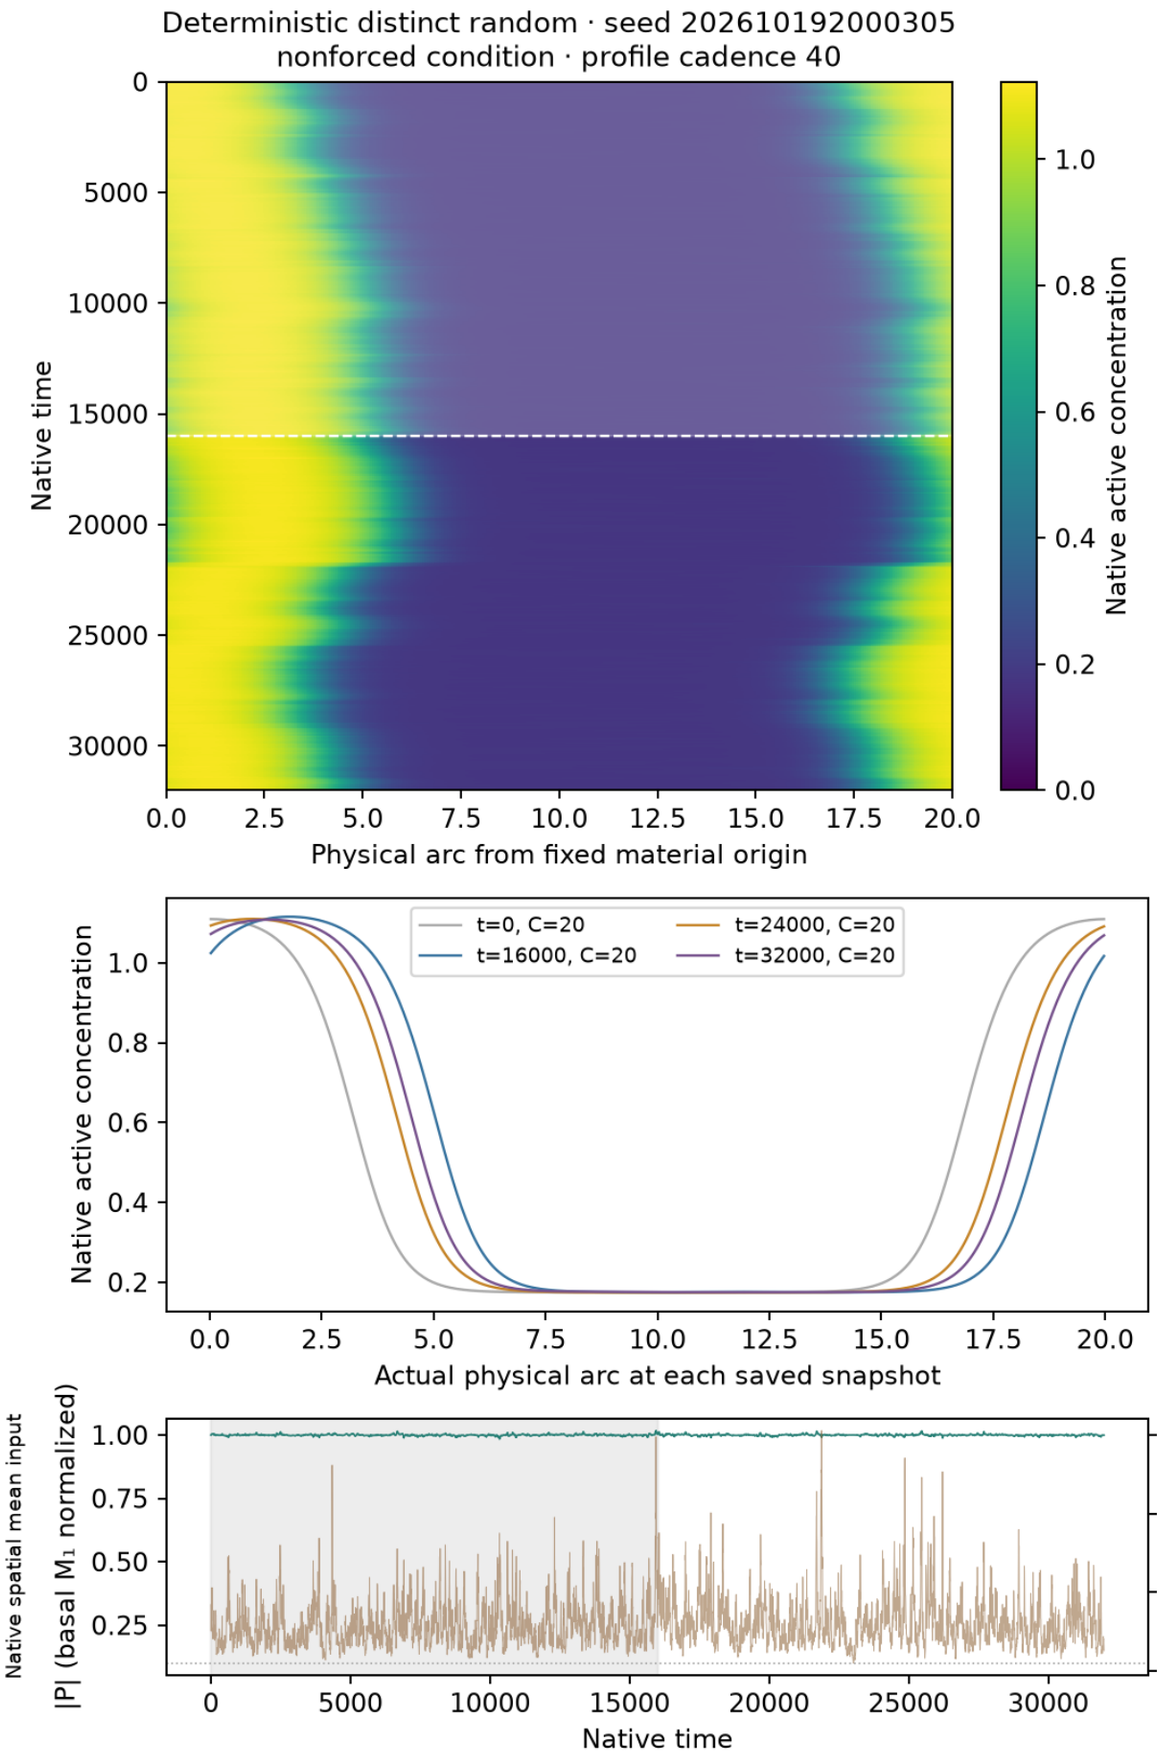

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Wave-pinning · size label 20 · f=0.005 · mean
context common · σ=0 · horizon=32000 · 1 deterministic control

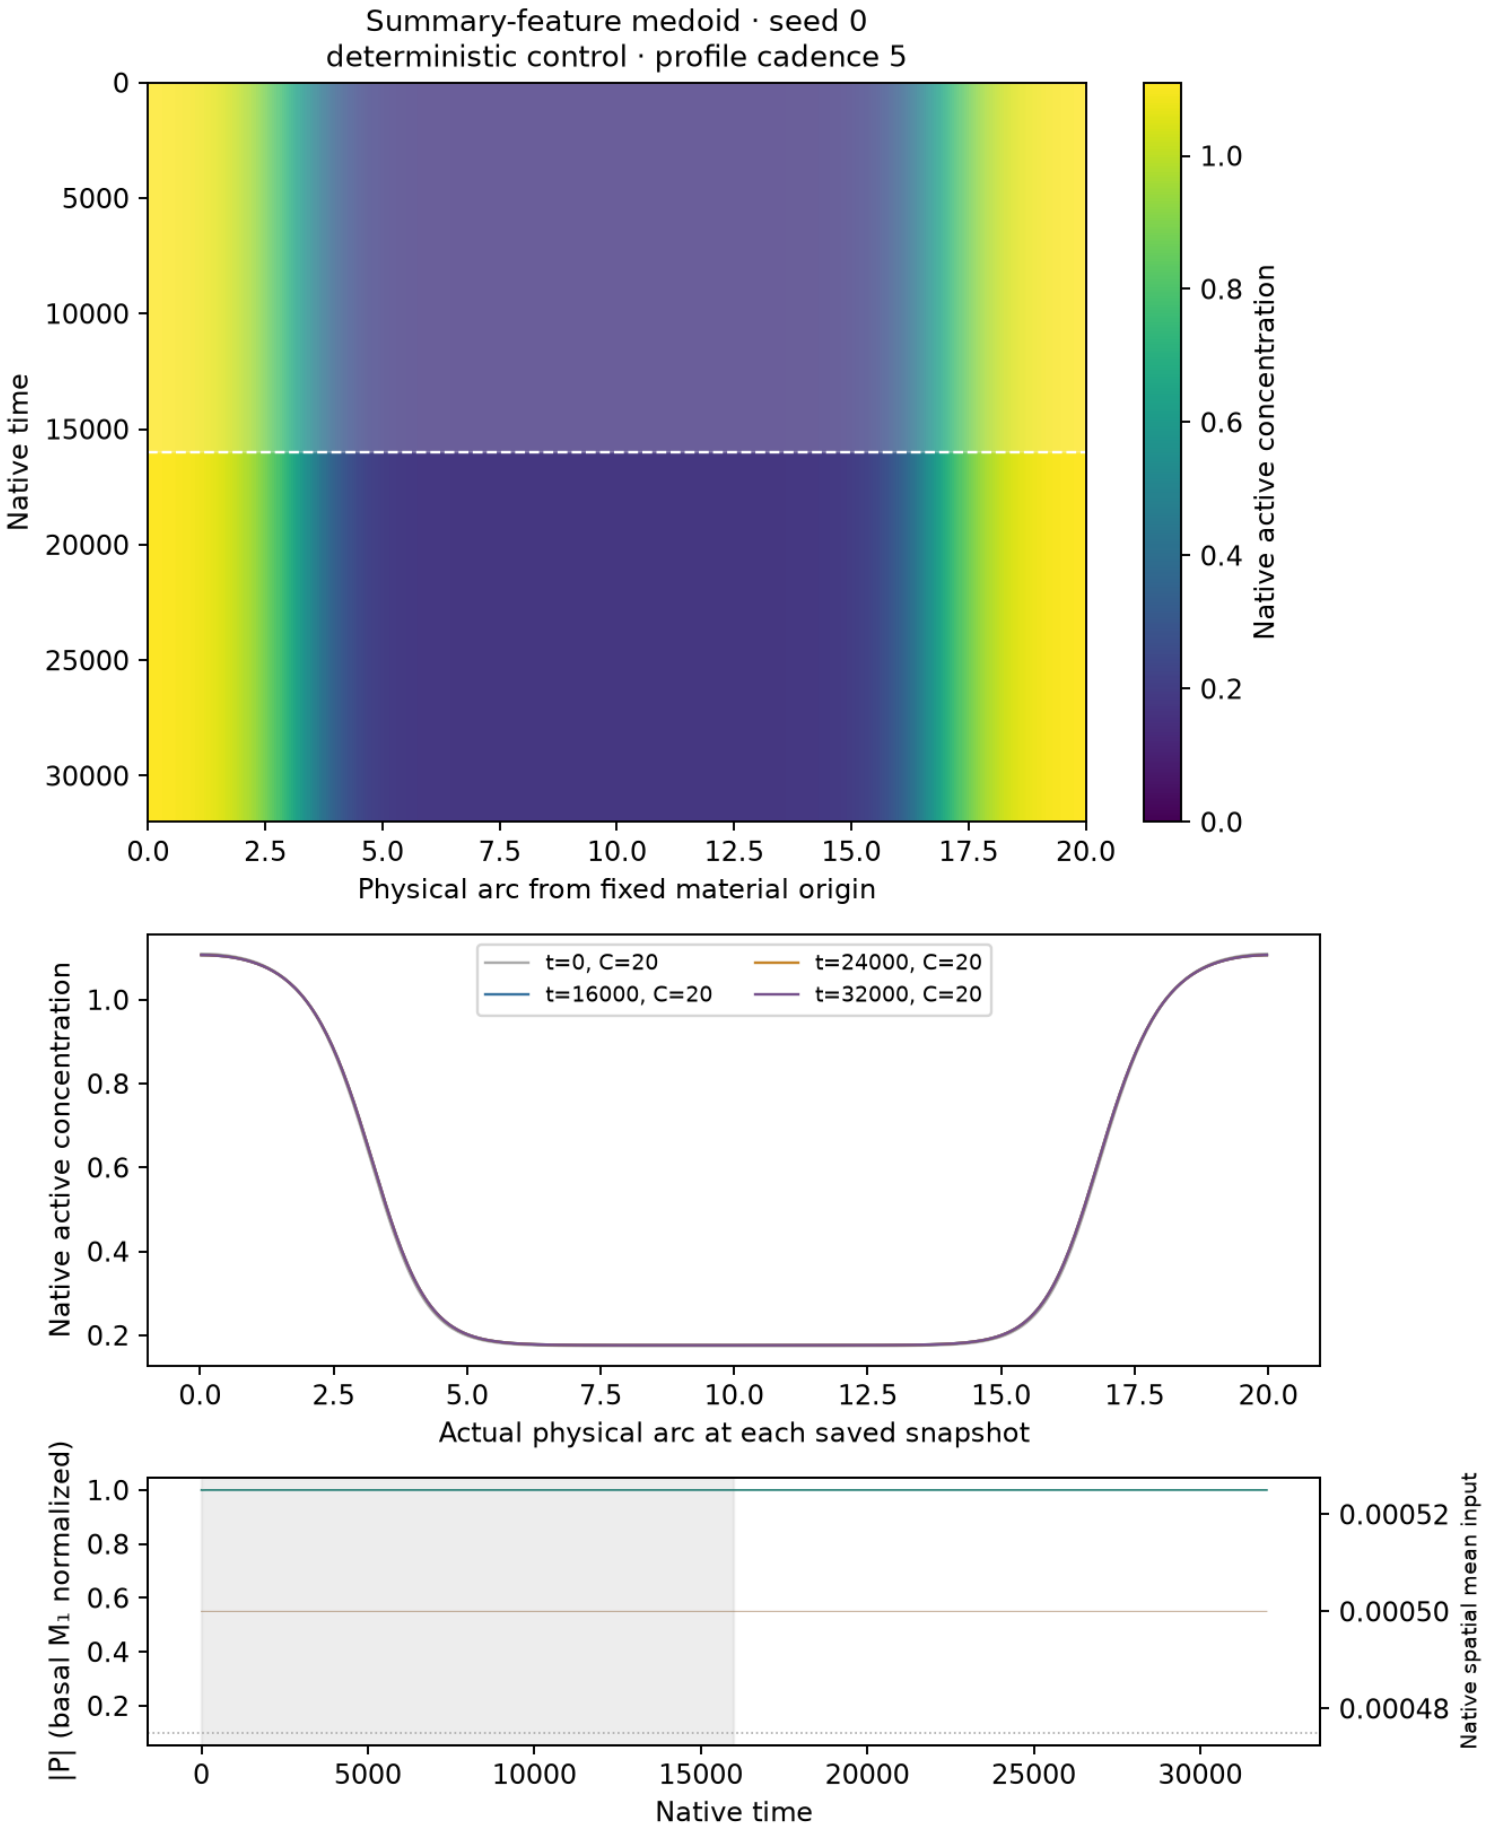

Native concentrations and every retained field frame are plotted without spatial resampling.
First half shaded: excluded from summary selection.
Spring mesh-face interpolation changes only boundary geometry; snapshots use actual saved C(t).
P uses basal M_1 normalization, distinct from instantaneous coherence.
Supplemental selection and controls; no main example is chosen.
Native NPZ/status links remain local/HPC data.

S11 · Wave-pinning · size label 20 · f=0.005 · noise
context common · σ=1 · horizon=32000 · n=12 independent noisy realizations

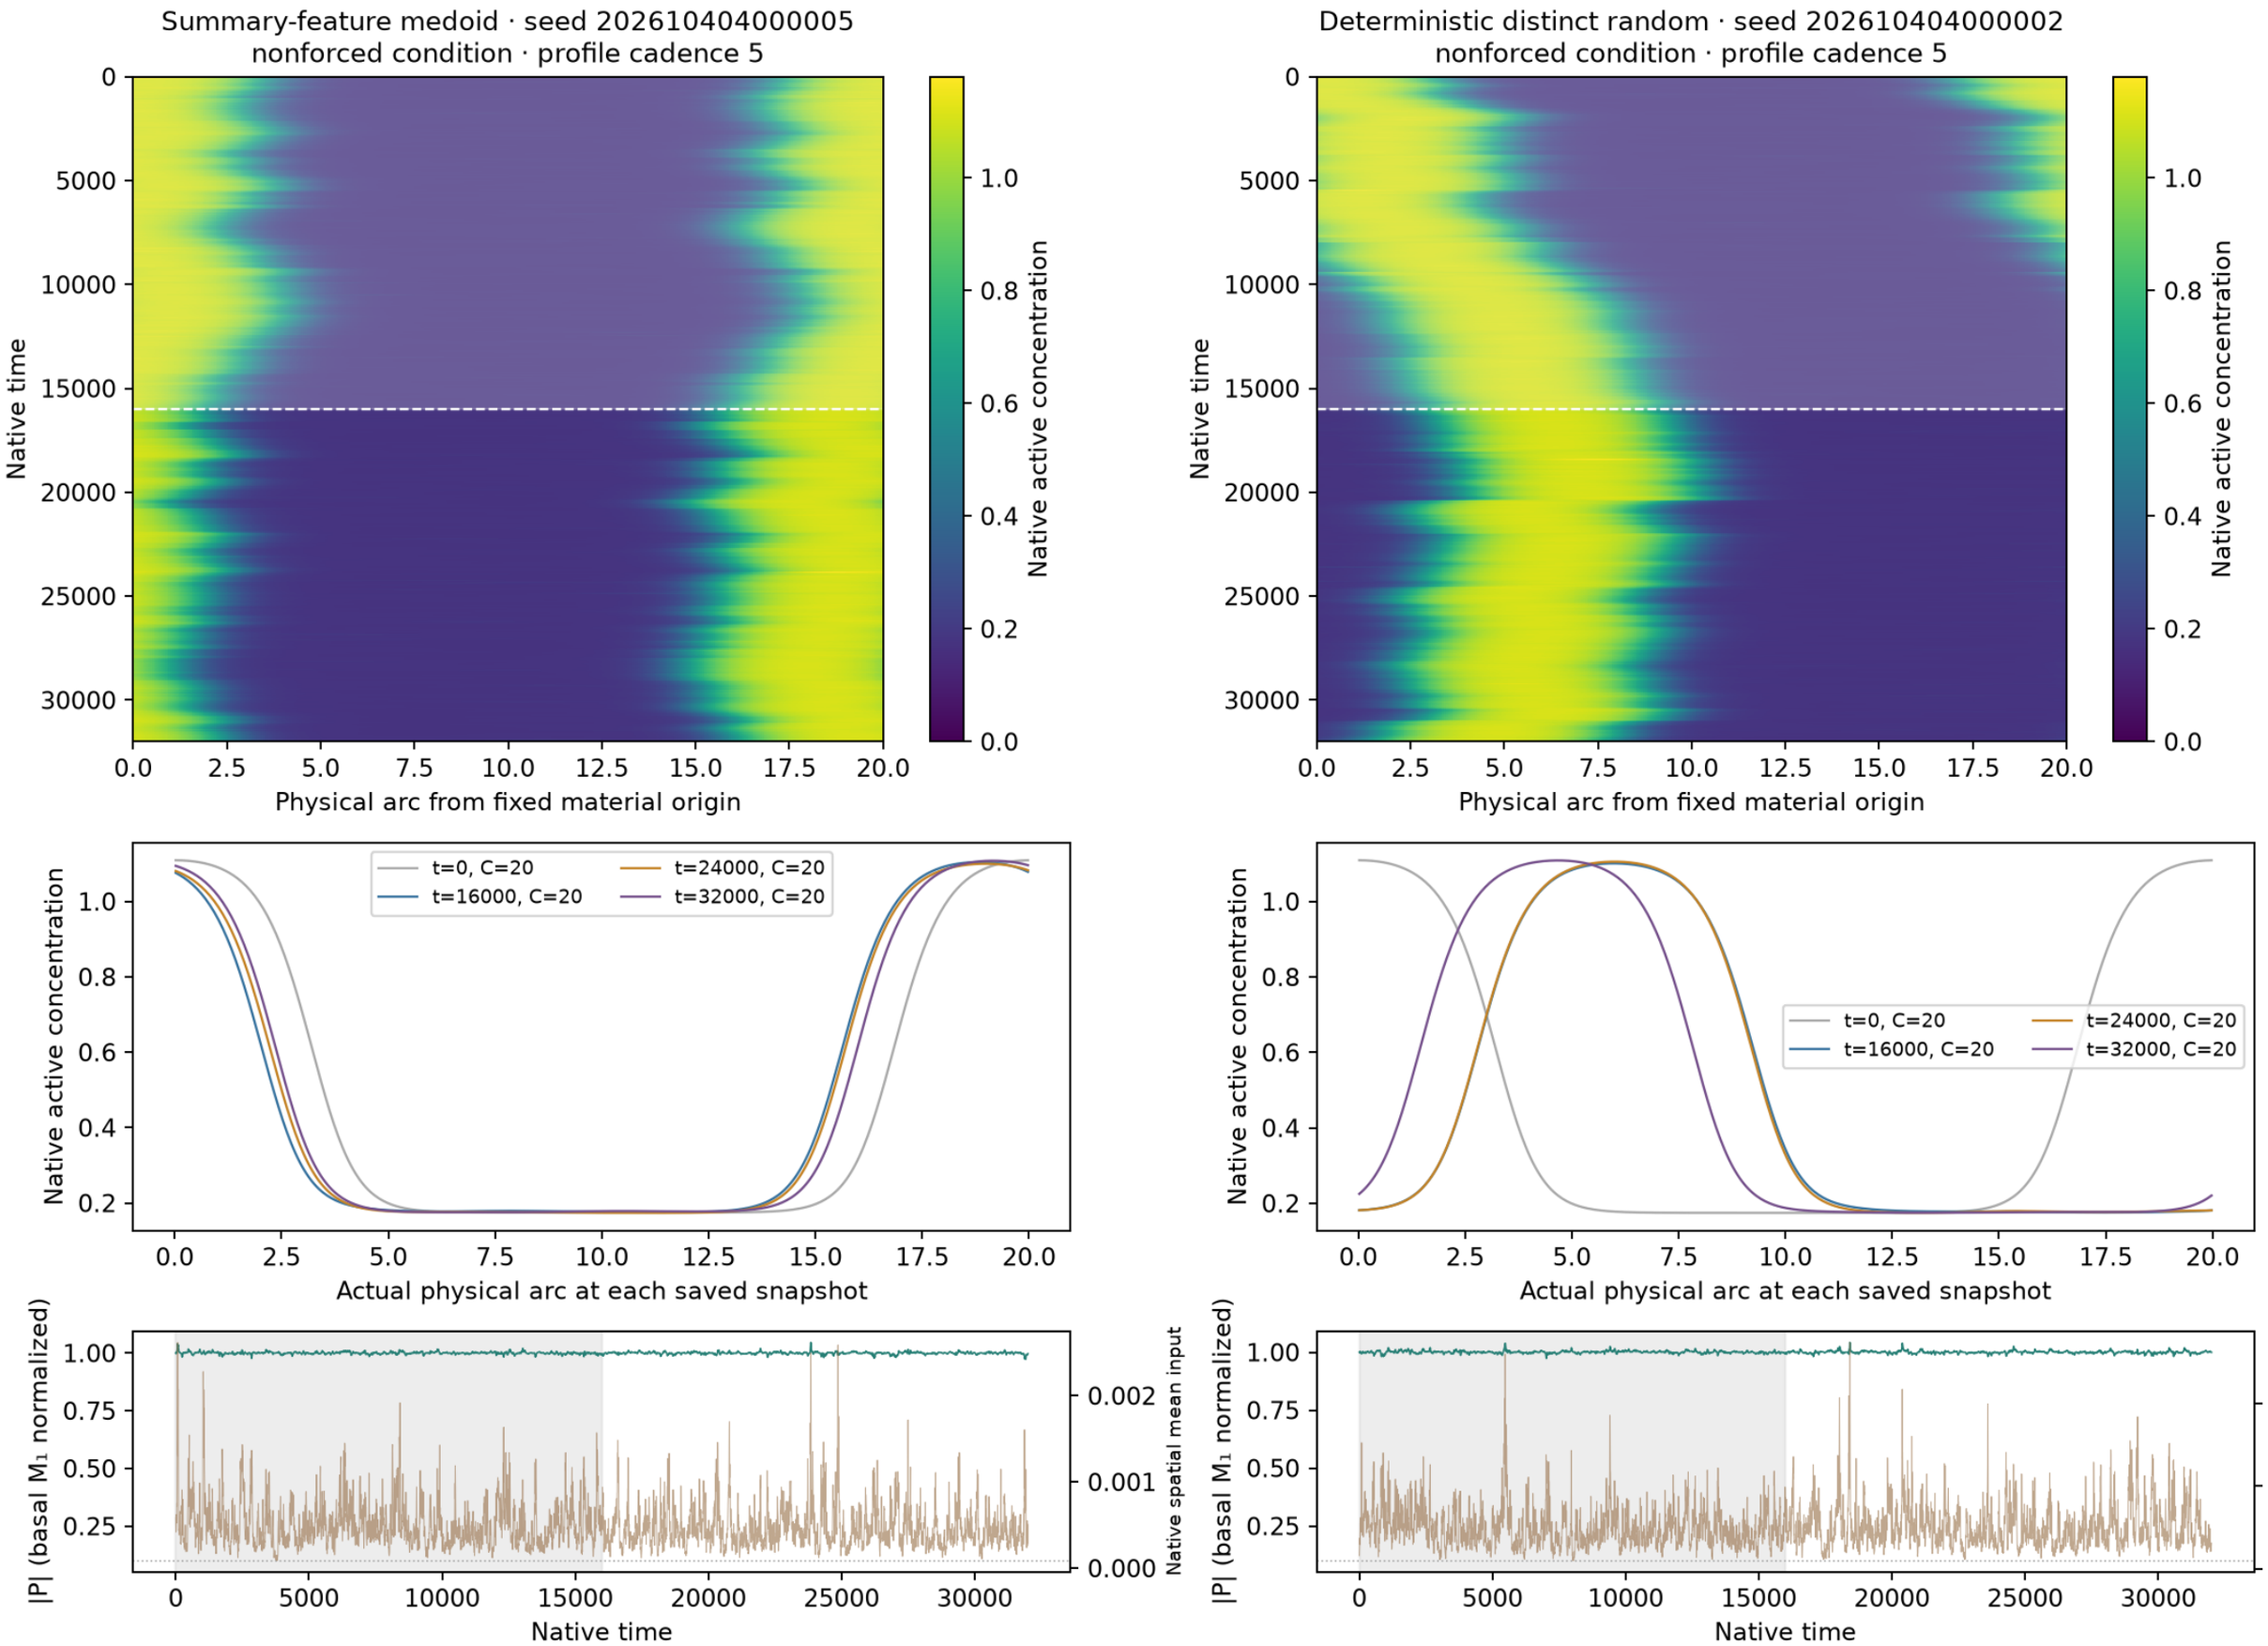

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Wave-pinning · size label 20 · f=0.01 · mean
context common · σ=0 · horizon=32000 · 1 deterministic control

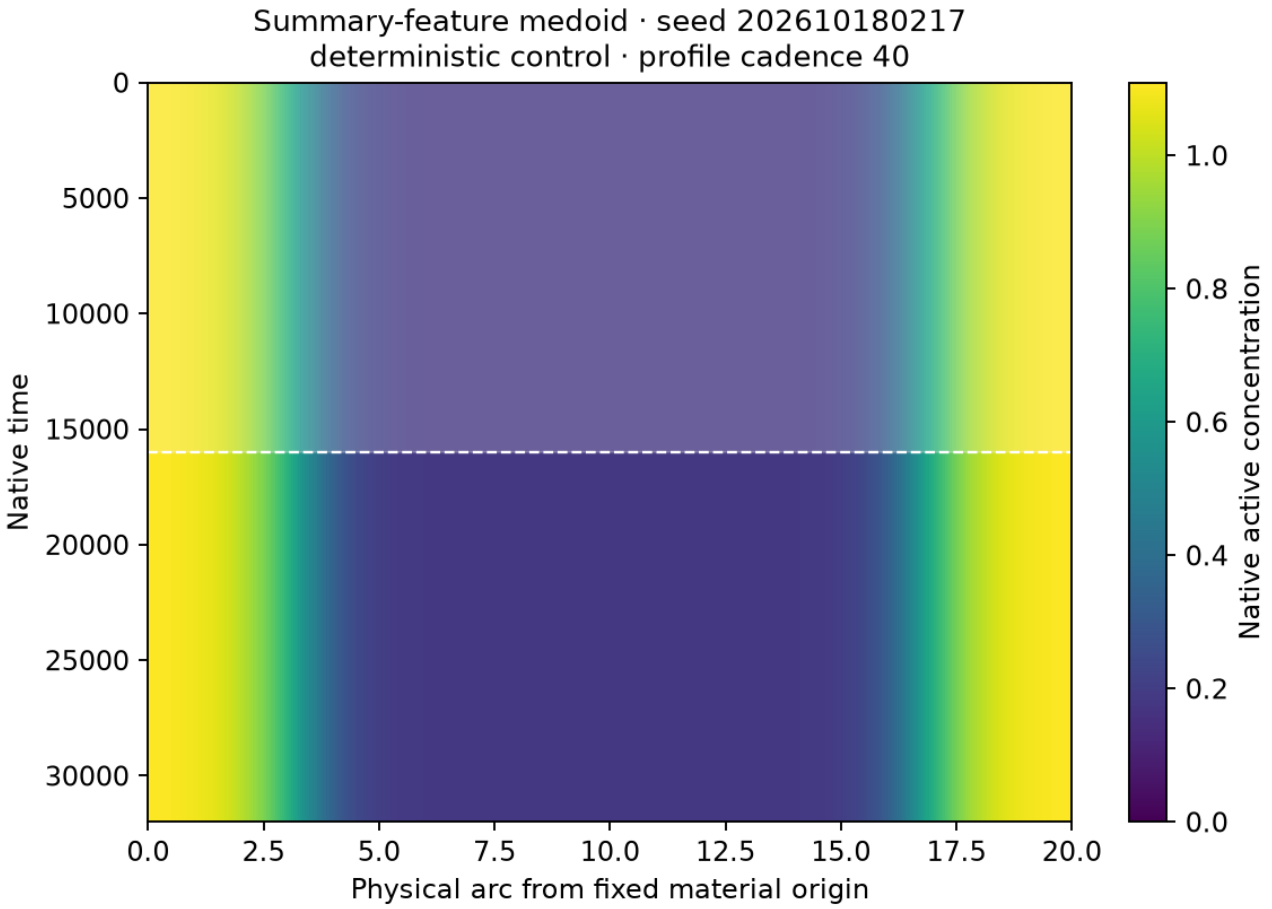

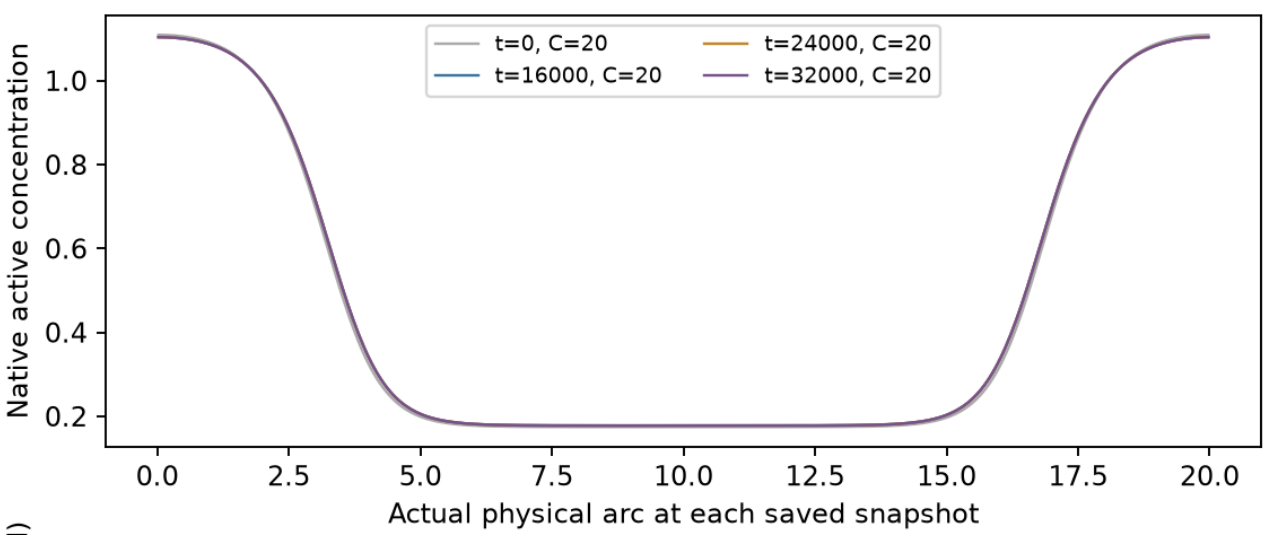

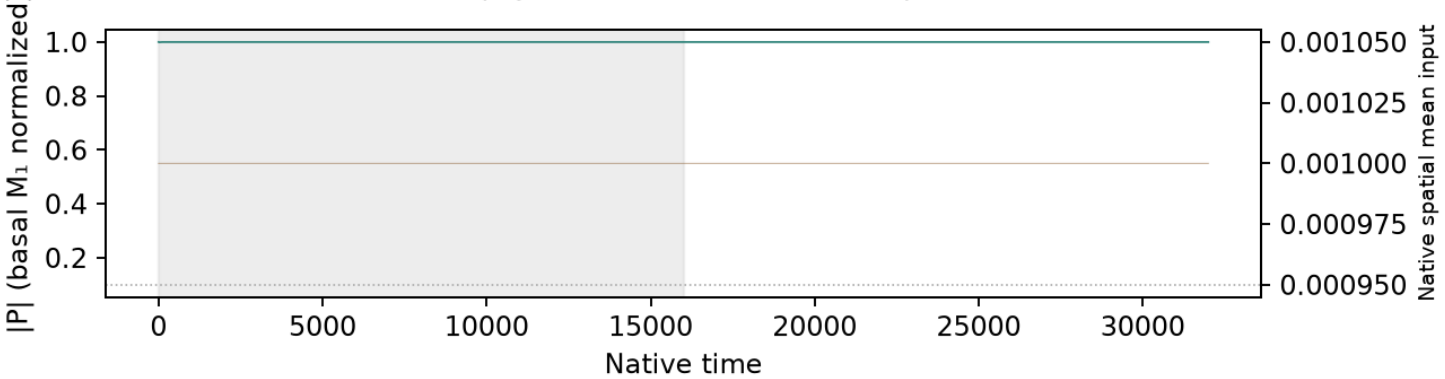

Native concentrations and every retained field frame are plotted without spatial resampling.
First half shaded: excluded from summary selection.
Spring mesh-face interpolation changes only boundary geometry; snapshots use actual saved C(t).
P uses basal M_1 normalization, distinct from instantaneous coherence.
Supplemental selection and controls; no main example is chosen.
Native NPZ/status links remain local/HPC data.

S11 · Wave-pinning · size label 20 · f=0.01 · noise
context common · σ=1 · horizon=32000 · n=12 independent noisy realizations

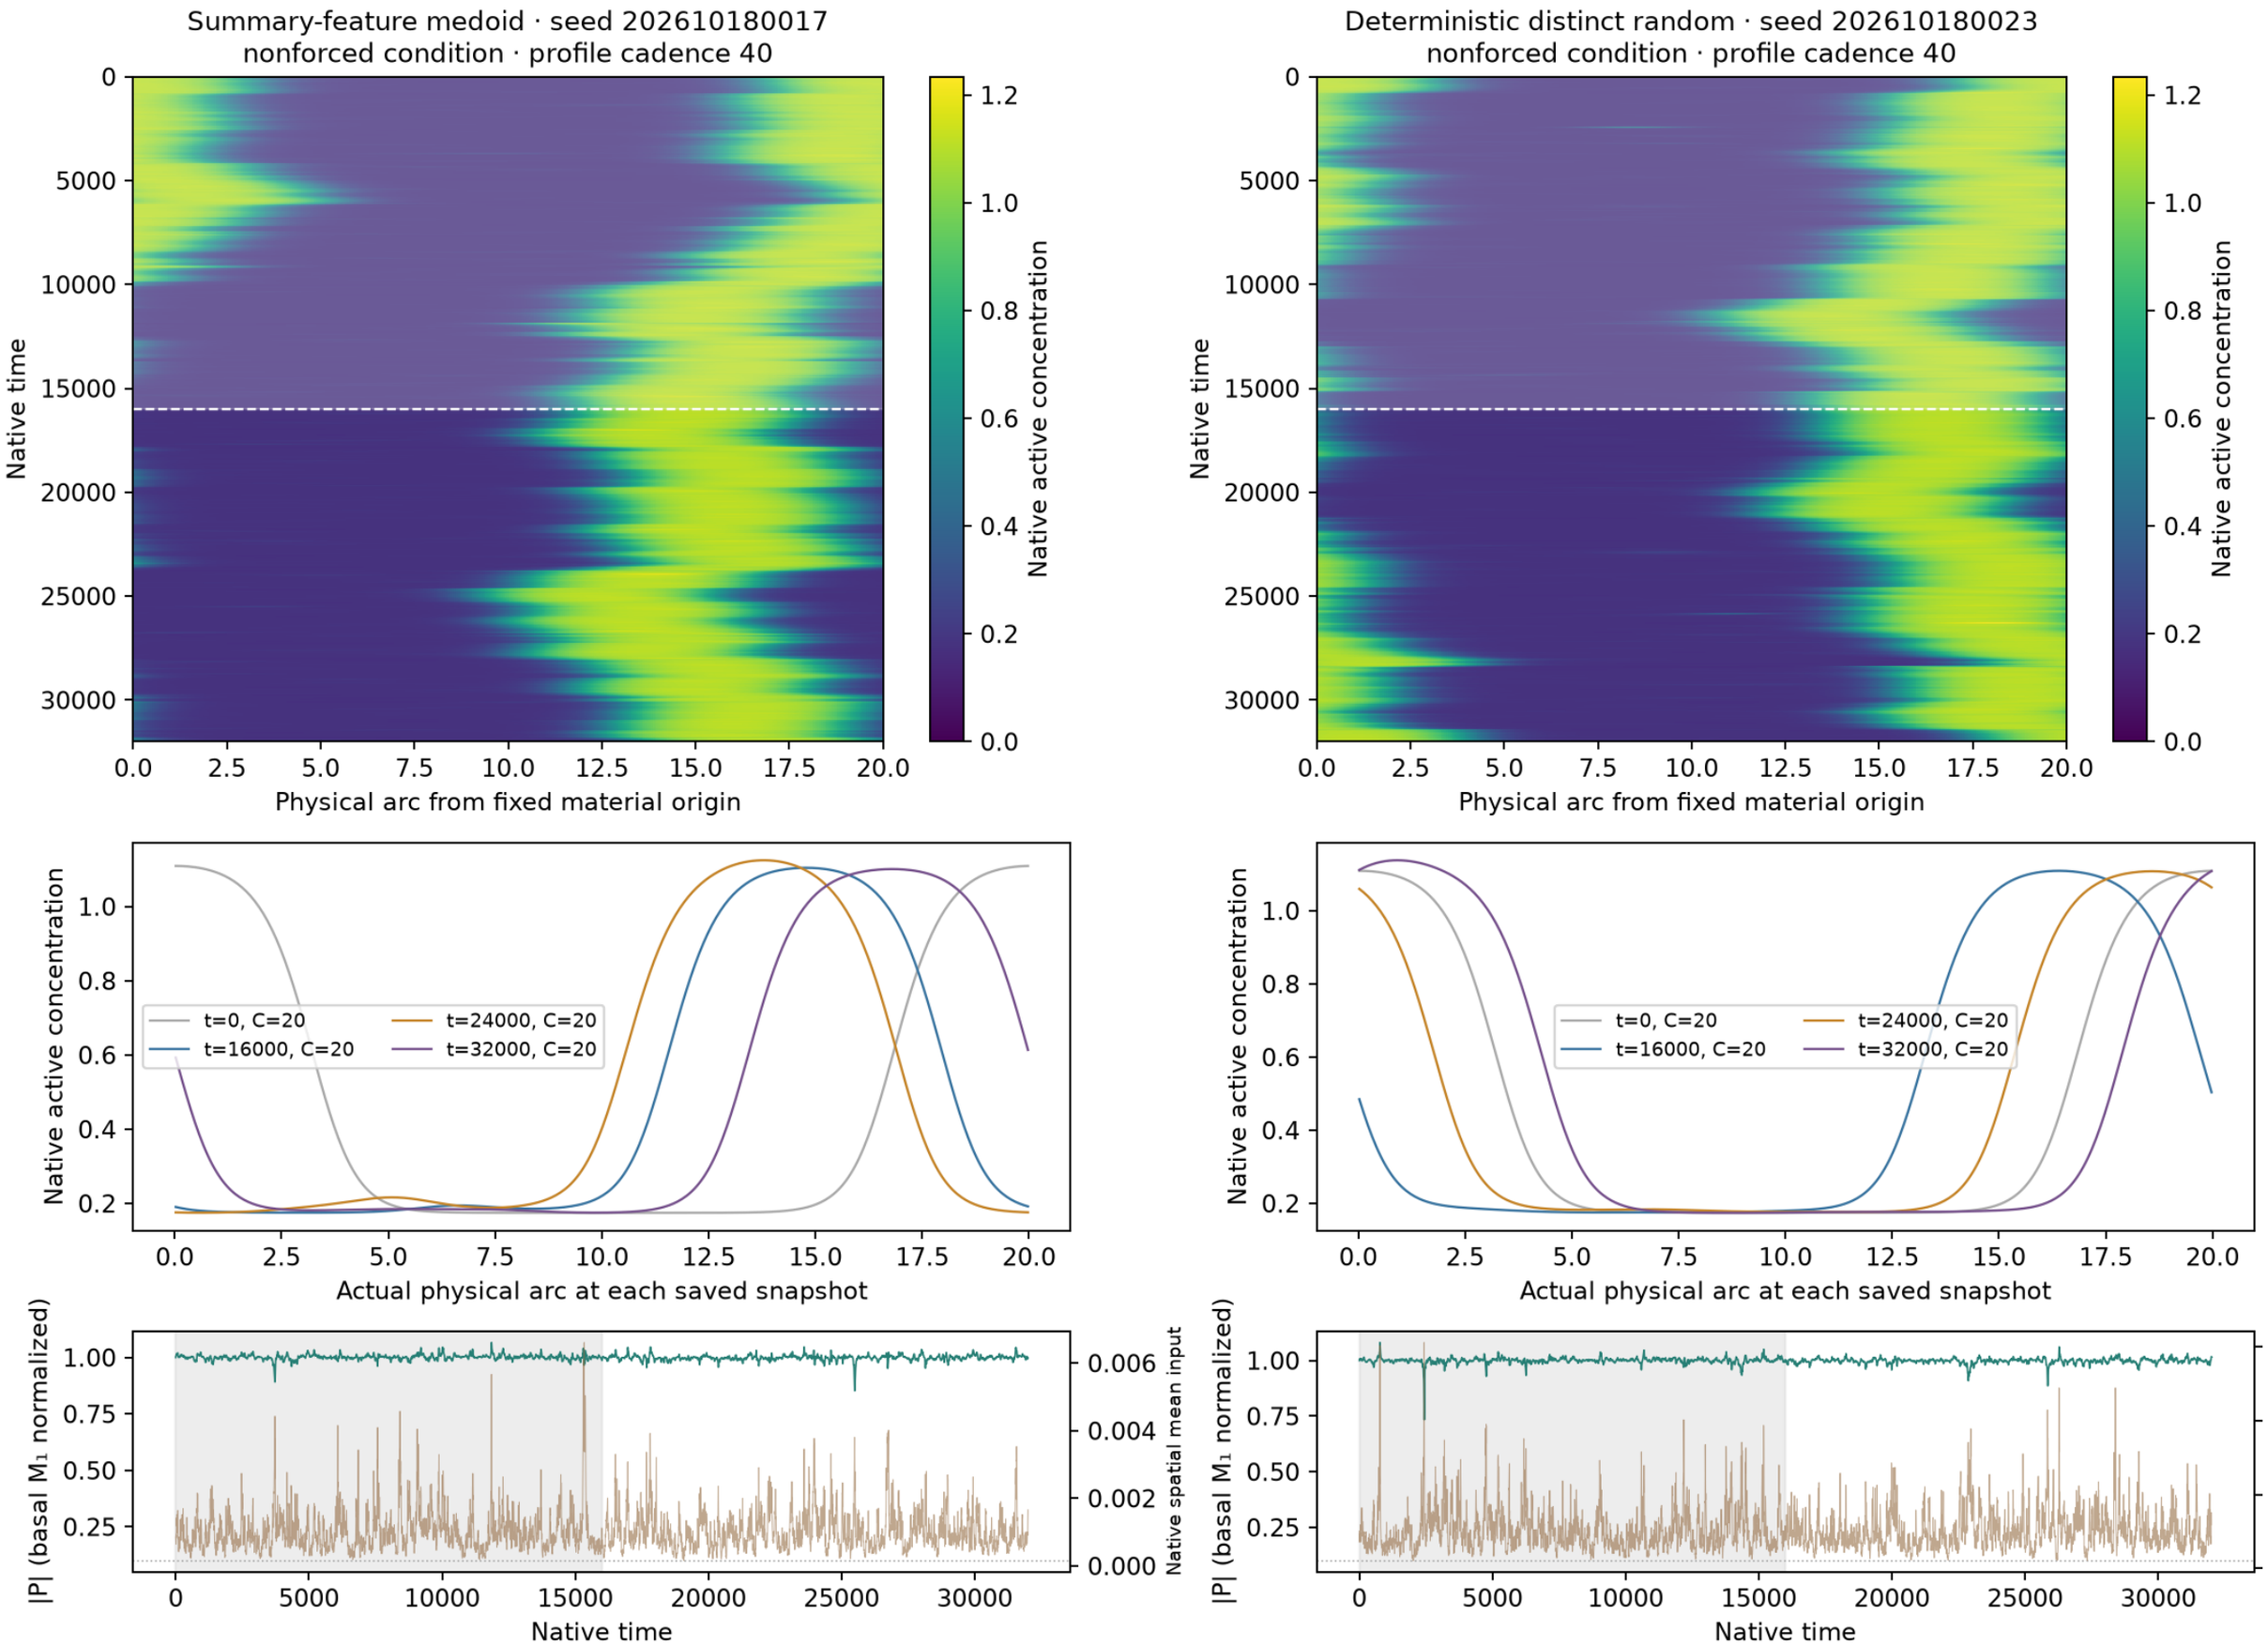

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Wave-pinning · size label 20 · f=0.02 · mean
context common · σ=0 · horizon=32000 · 1 deterministic control

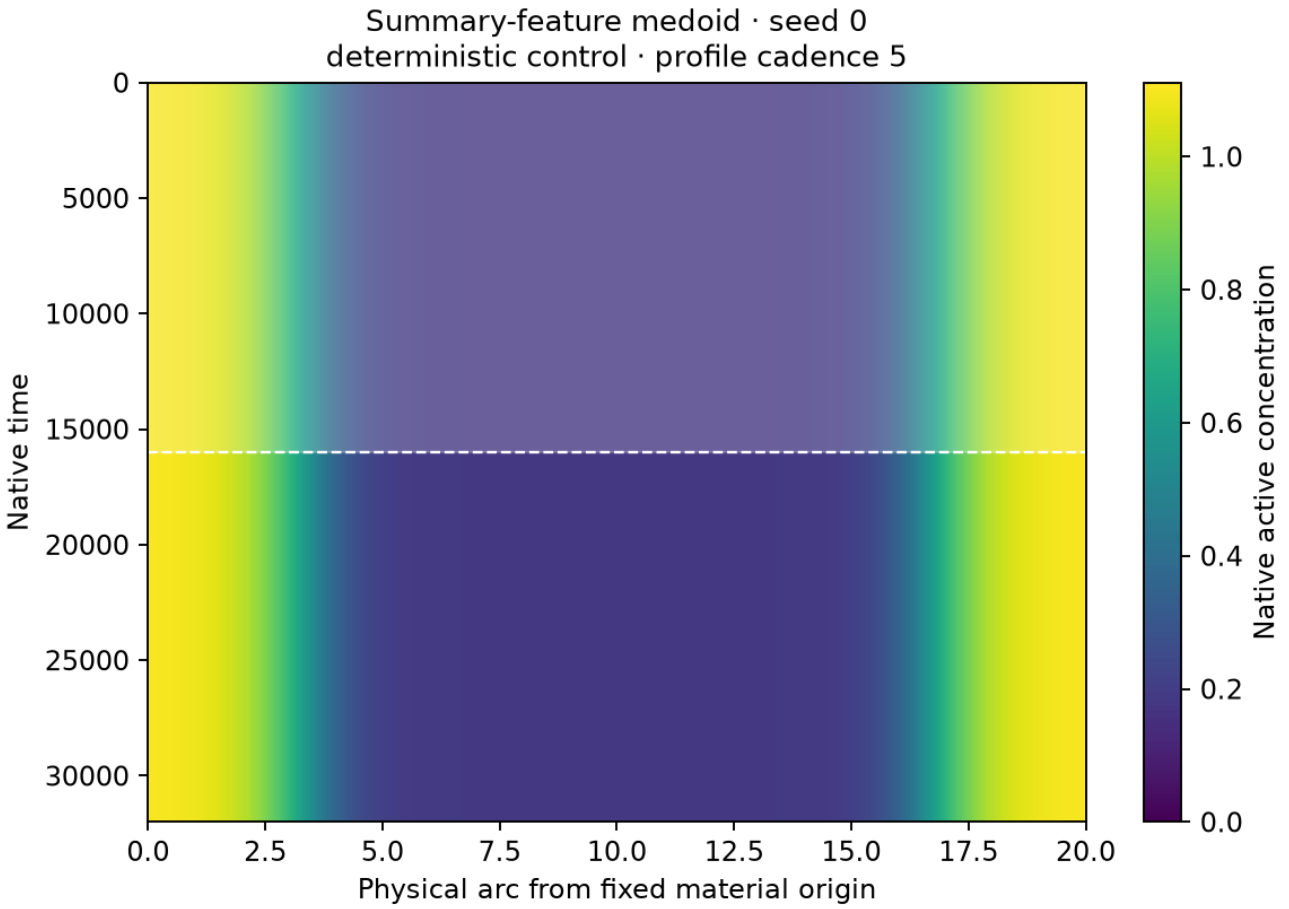

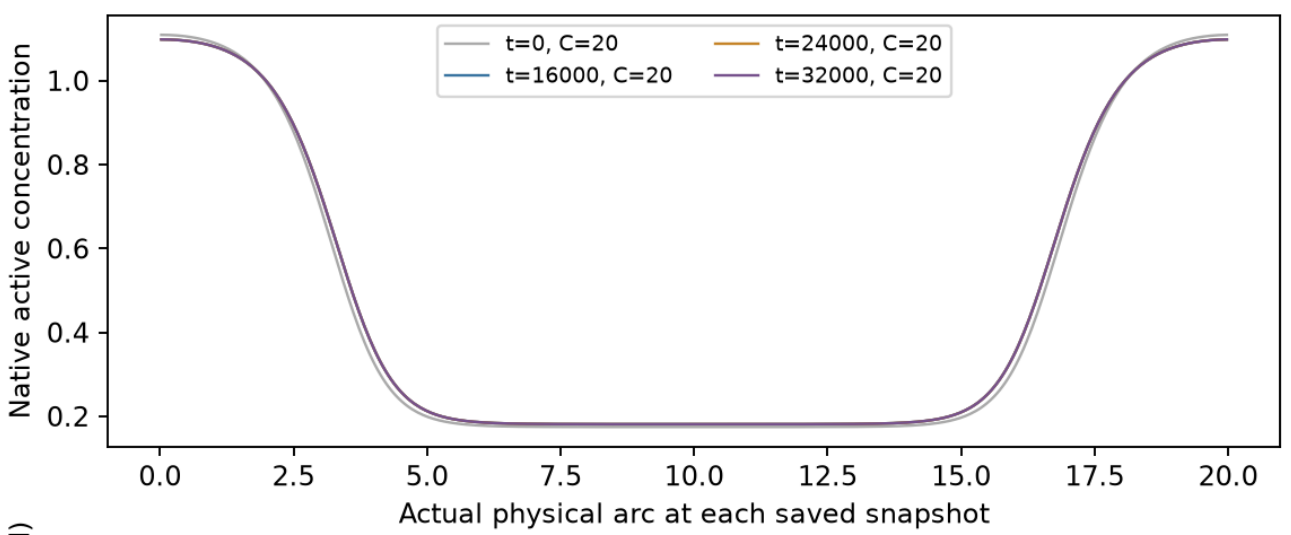

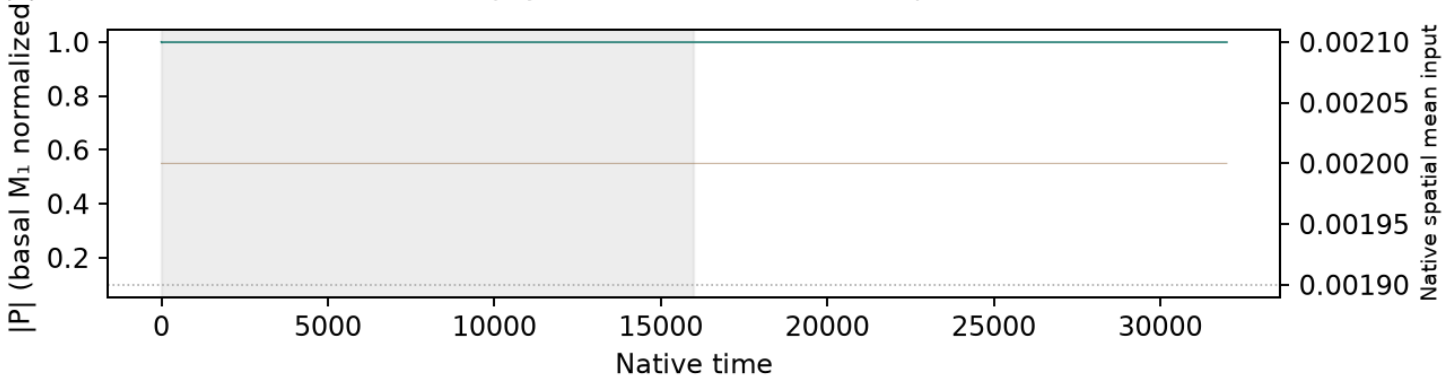

Native concentrations and every retained field frame are plotted without spatial resampling.
First half shaded: excluded from summary selection.
Spring mesh-face interpolation changes only boundary geometry; snapshots use actual saved C(t).
P uses basal M_1 normalization, distinct from instantaneous coherence.
Supplemental selection and controls; no main example is chosen.
Native NPZ/status links remain local/HPC data.

S11 · Wave-pinning · size label 20 · f=0.02 · noise
context common · σ=1 · horizon=32000 · n=12 independent noisy realizations

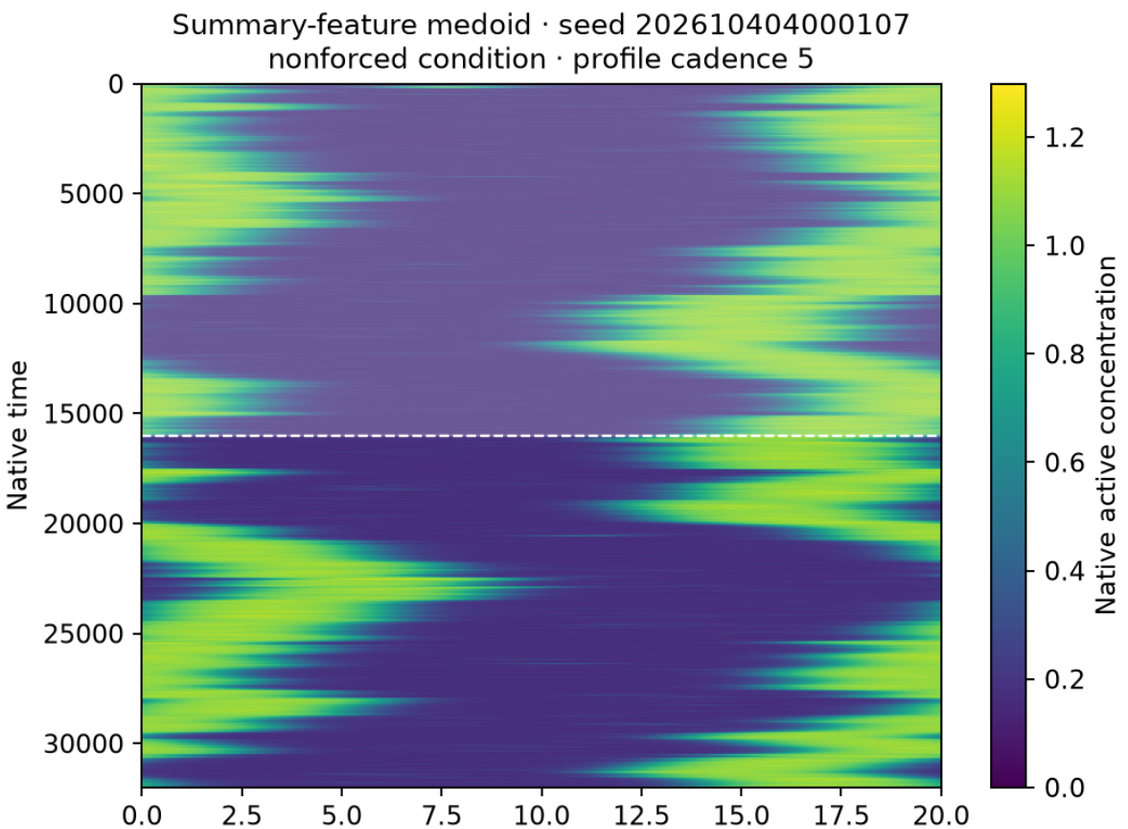

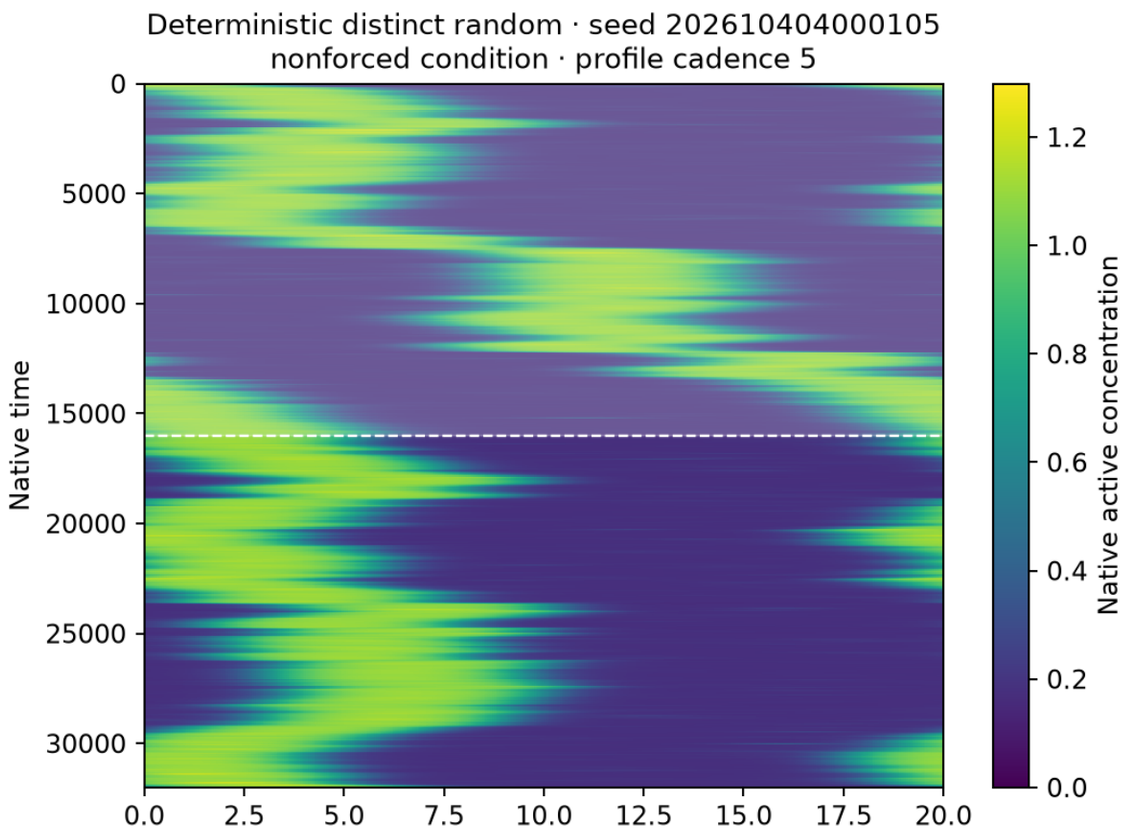

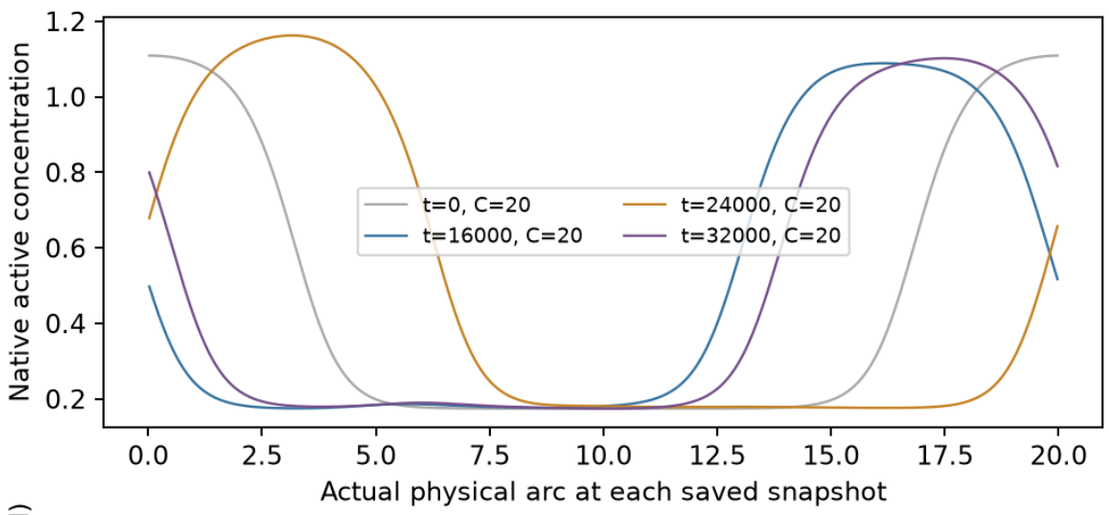

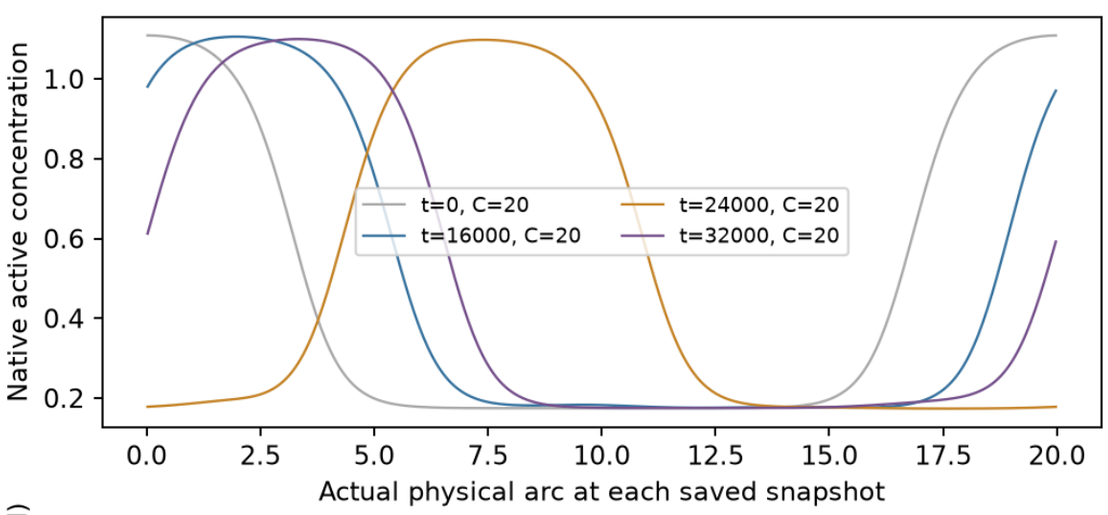

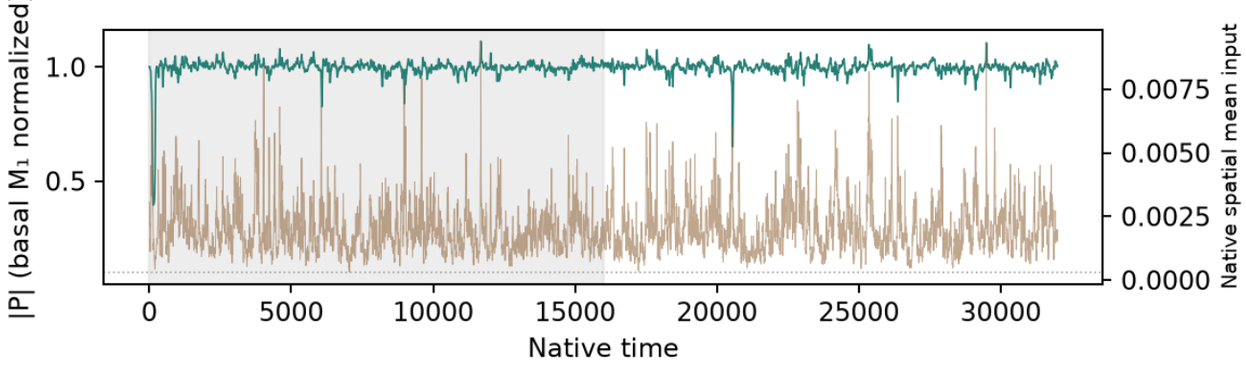

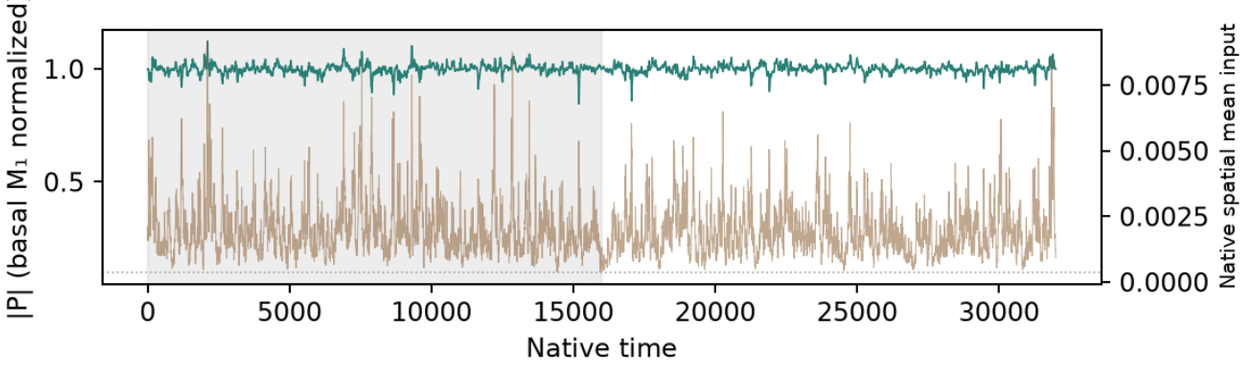

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M_1 normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Wave-pinning · size label 20 · f=0.03 · mean
context common · σ=0 · horizon=32000 · 1 deterministic control

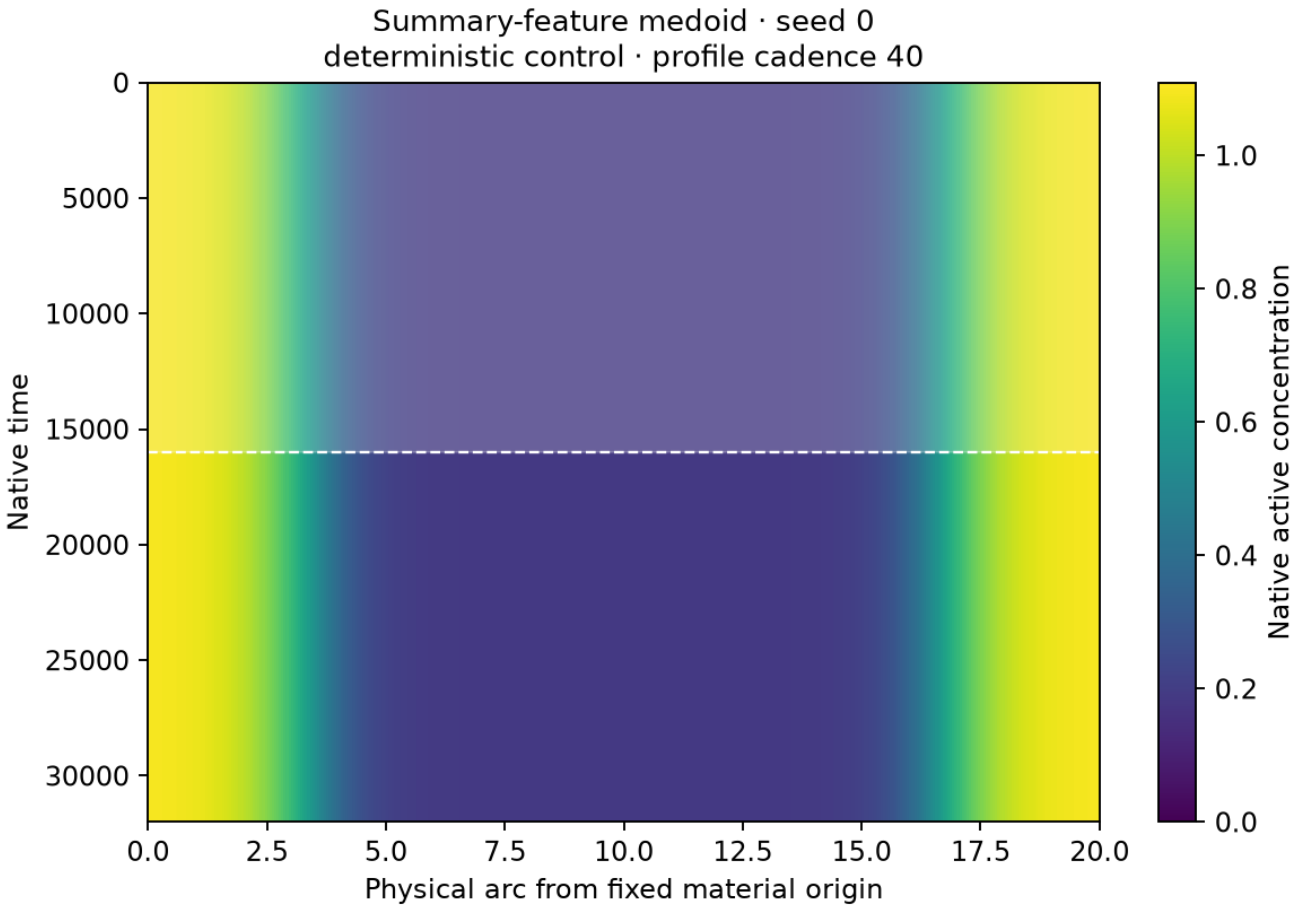

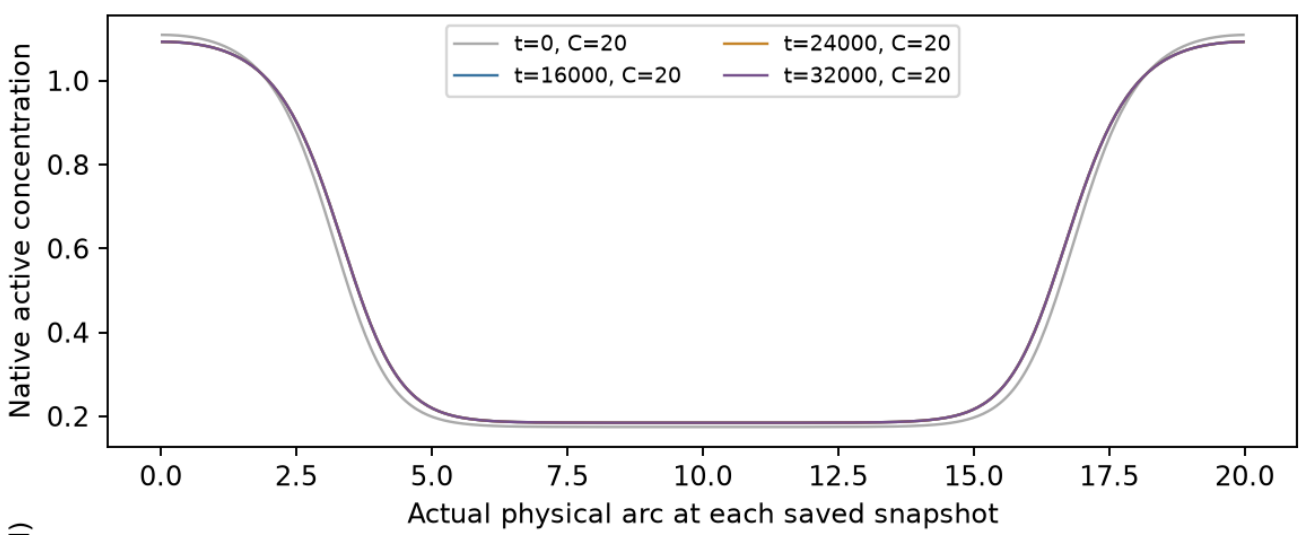

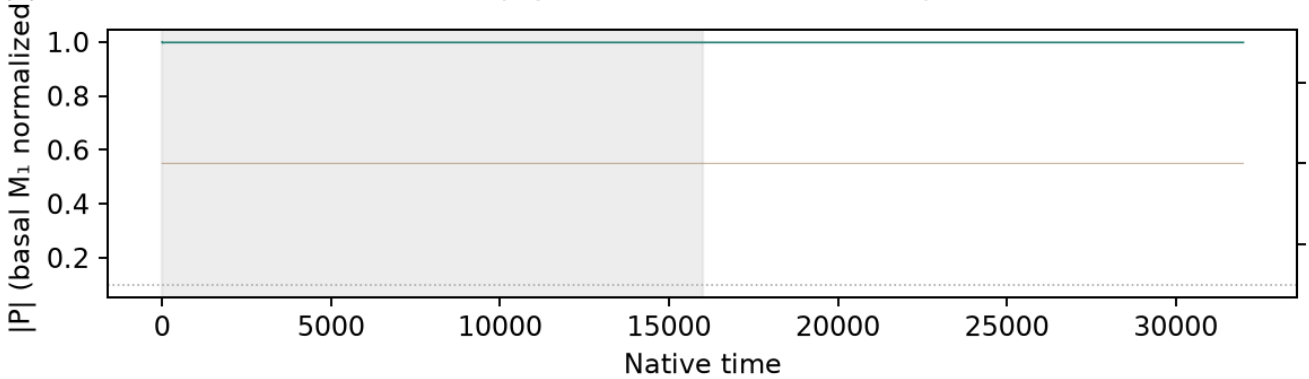

Native concentrations and every retained field frame are plotted without spatial resampling.
First half shaded: excluded from summary selection.
Spring mesh-face interpolation changes only boundary geometry; snapshots use actual saved C(t).
P uses basal M_1 normalization, distinct from instantaneous coherence.
Supplemental selection and controls; no main example is chosen.
Native NPZ/status links remain local/HPC data.

S11 · Wave-pinning · size label 20 · f=0.03 · noise
context common · σ=1 · horizon=32000 · n=12 independent noisy realizations

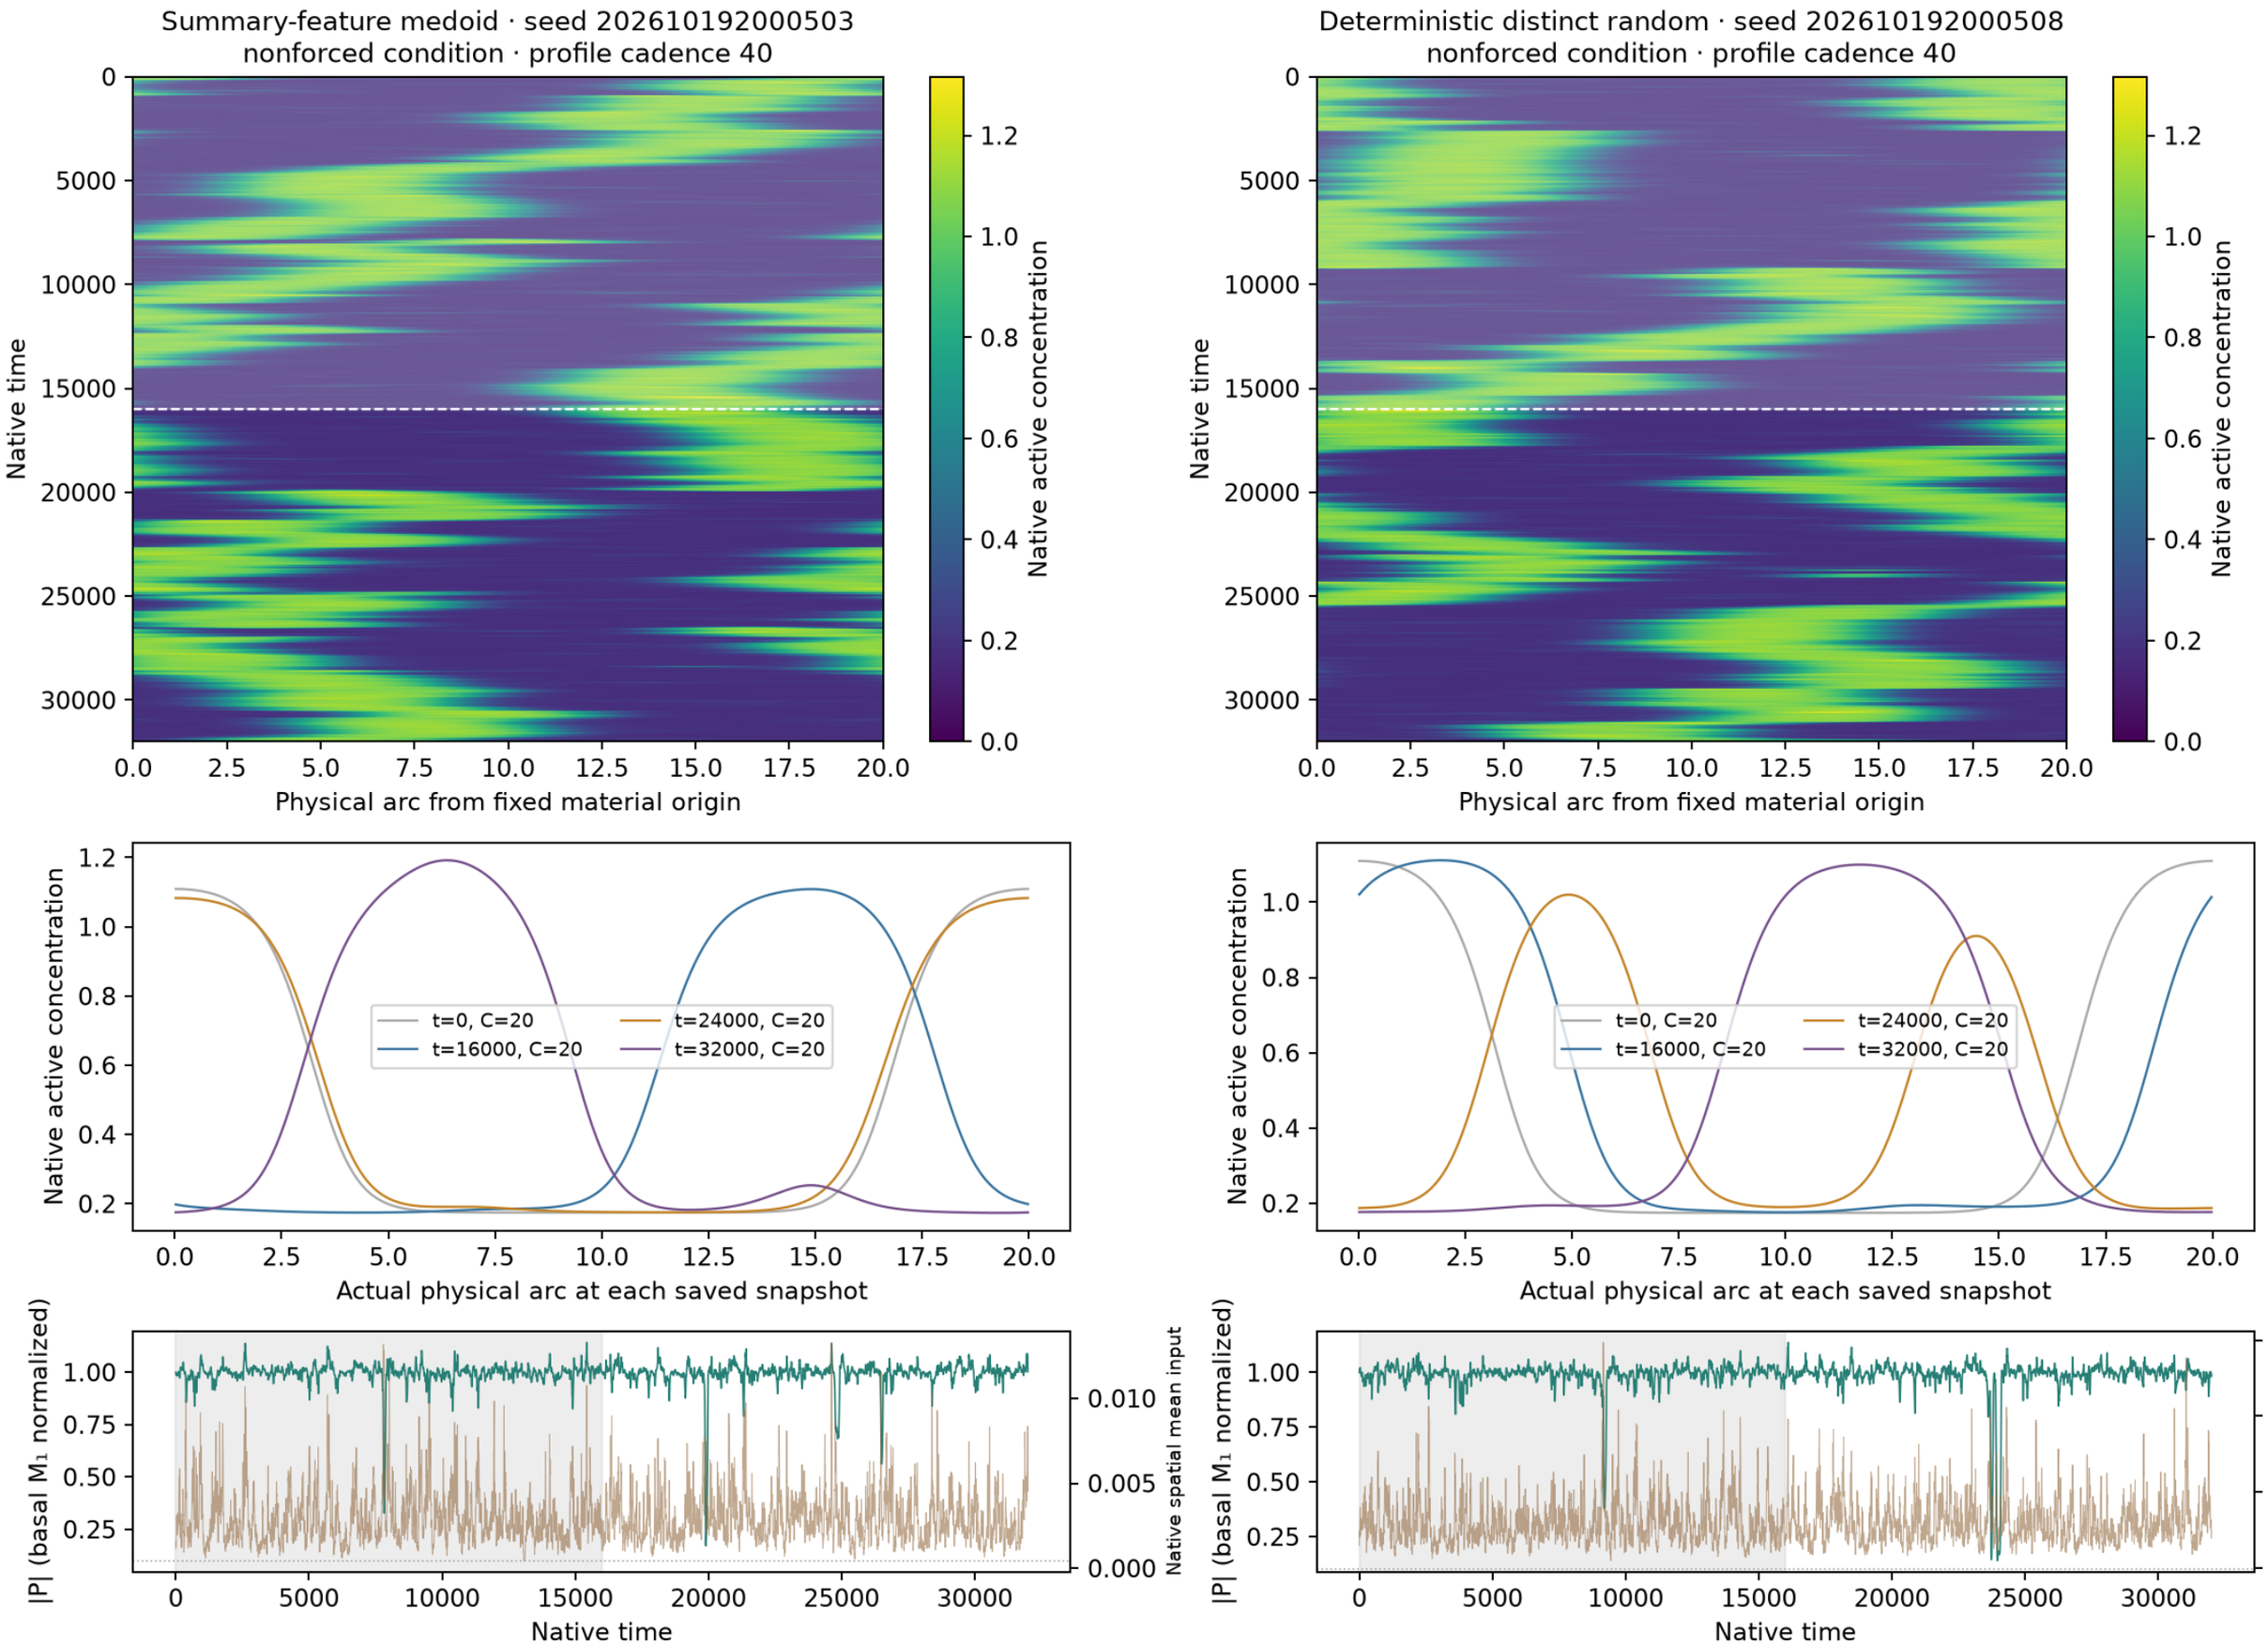

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Wave-pinning · size label 20 · f=0.05 · mean
context common · σ=0 · horizon=32000 · 1 deterministic control

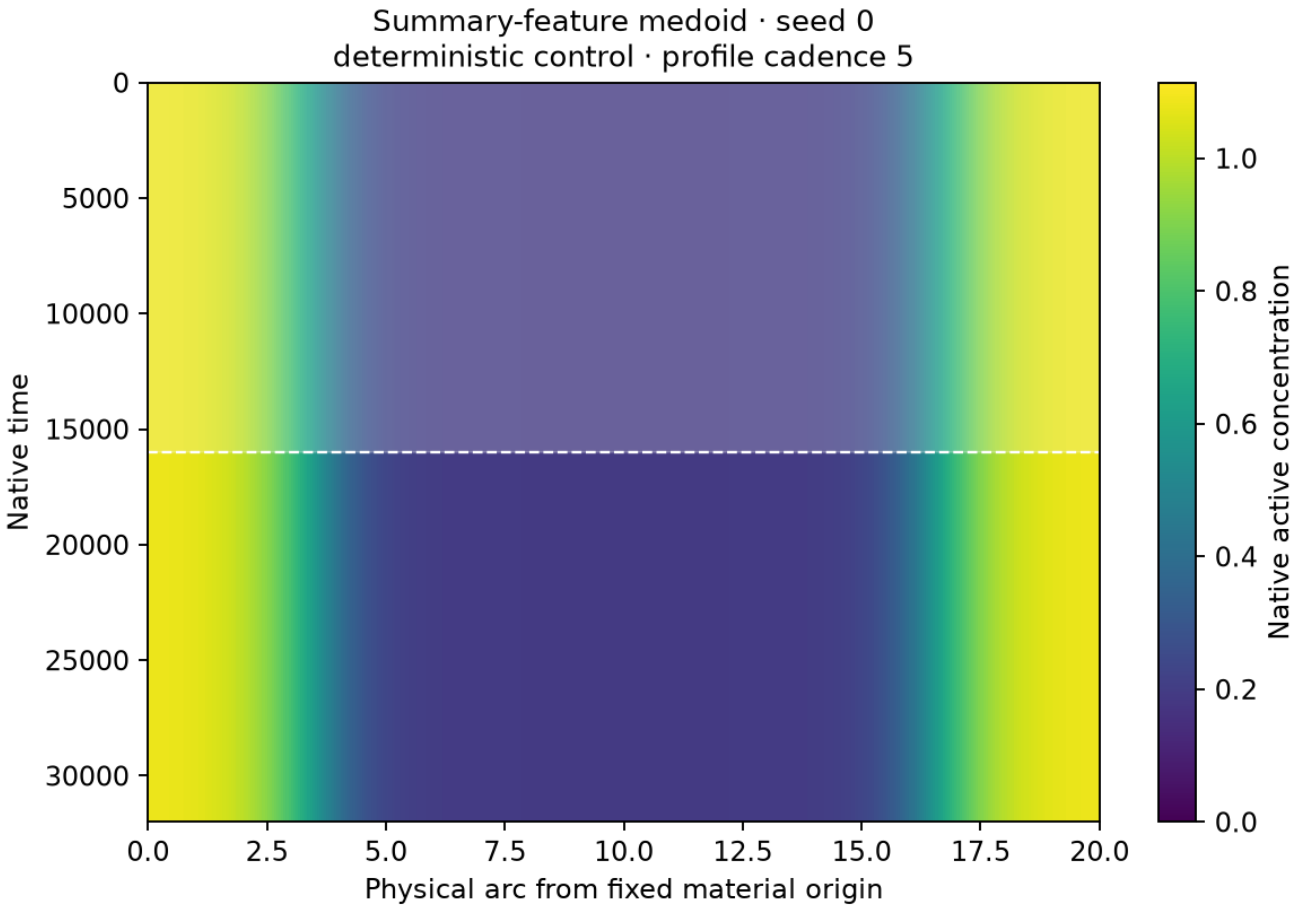

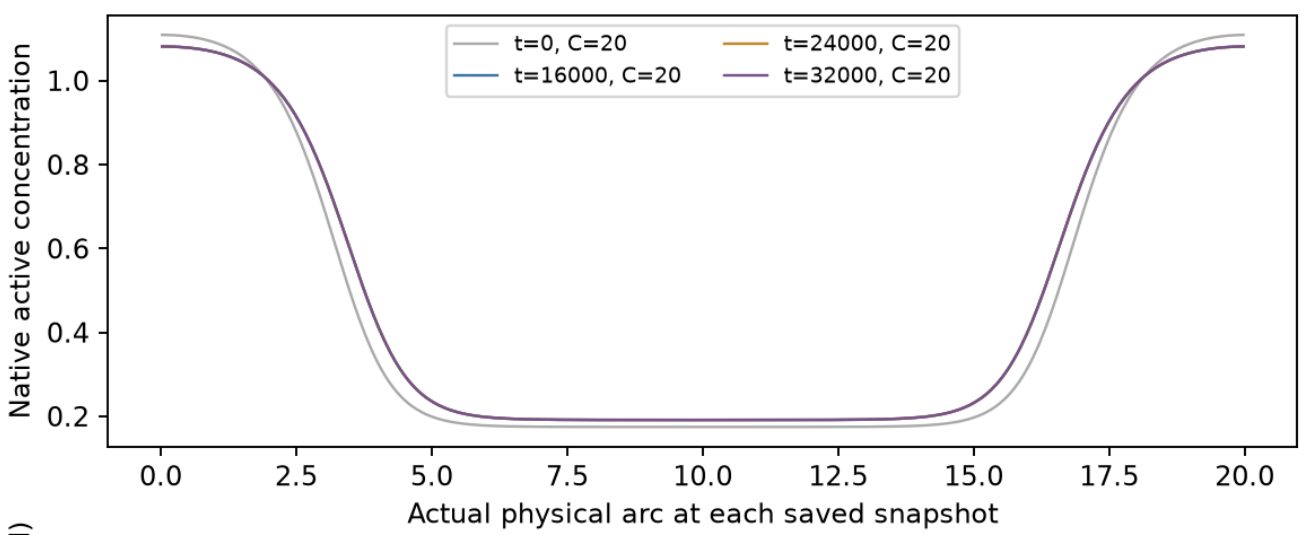

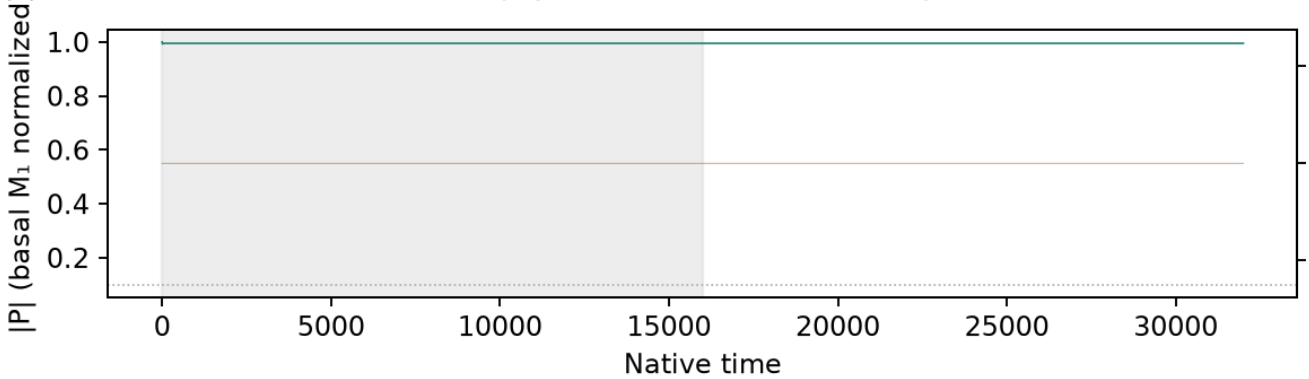

Native concentrations and every retained field frame are plotted without spatial resampling.
First half shaded: excluded from summary selection.
Spring mesh-face interpolation changes only boundary geometry; snapshots use actual saved C(t).
P uses basal M_1 normalization, distinct from instantaneous coherence.
Supplemental selection and controls; no main example is chosen.
Native NPZ/status links remain local/HPC data.

S11 · Wave-pinning · size label 20 · f=0.05 · noise
context common · σ=1 · horizon=32000 · n=12 independent noisy realizations

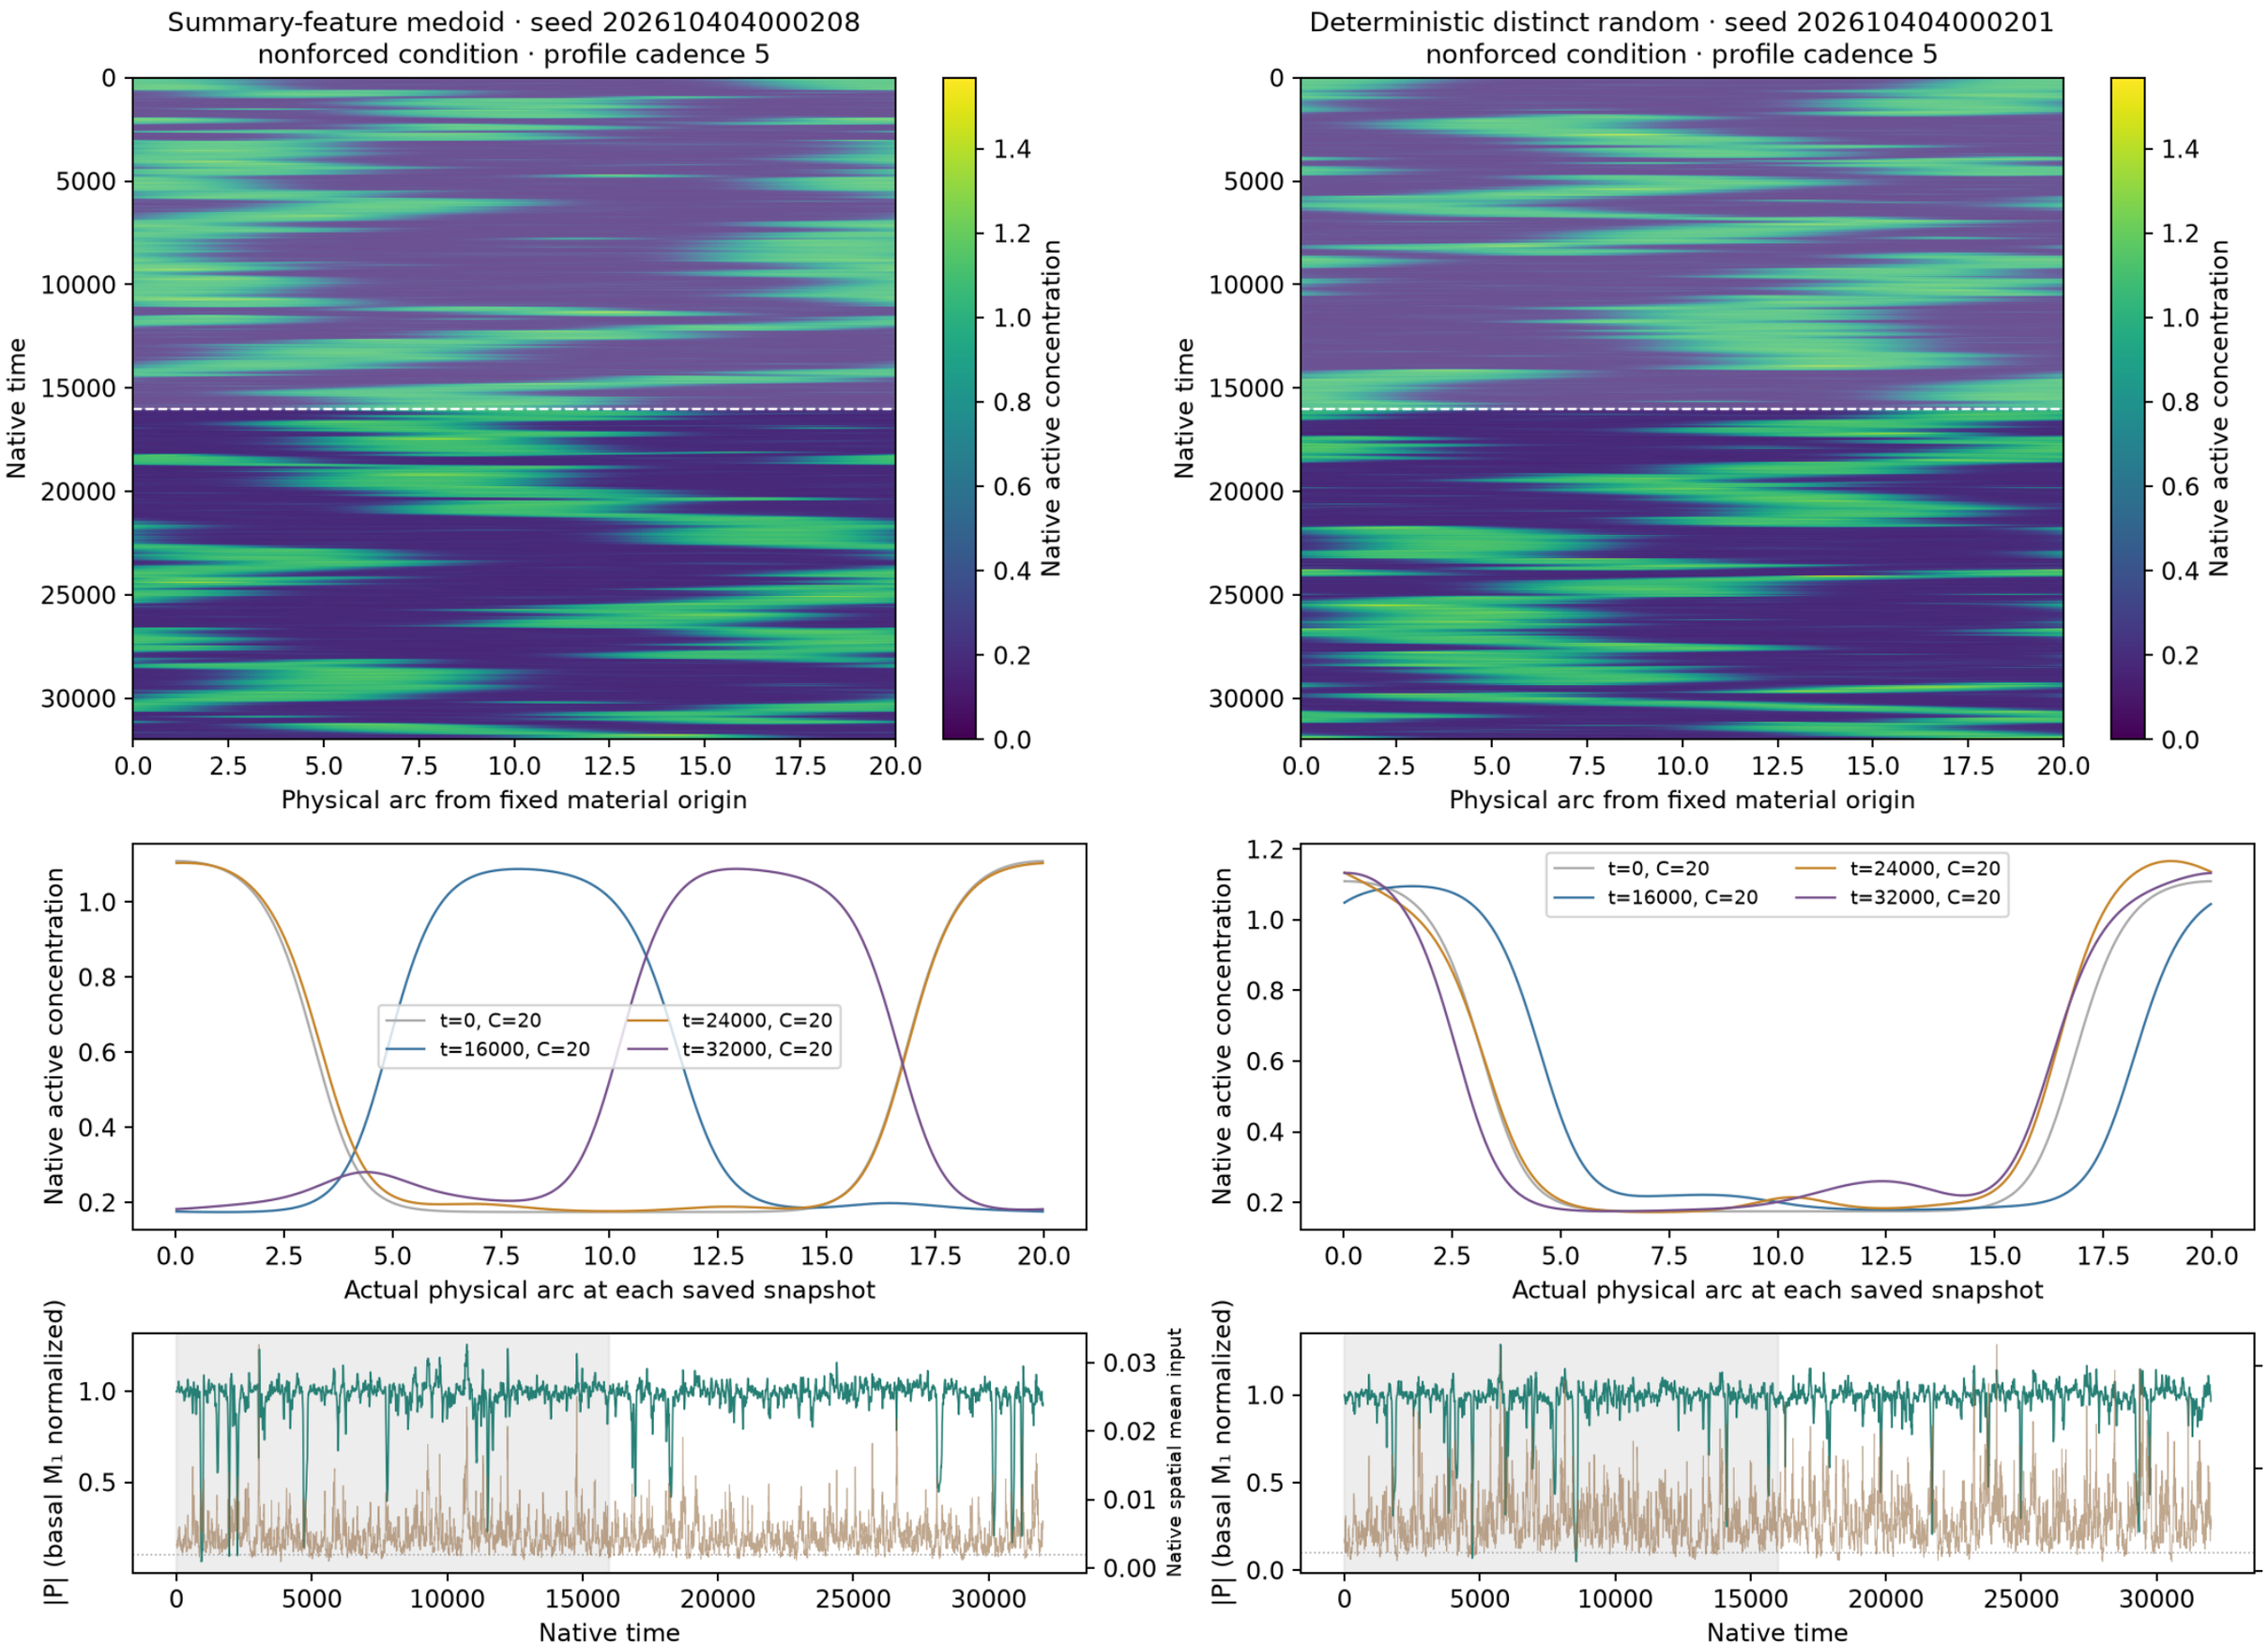

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M_1 normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Wave-pinning · size label 20 · f=0.1 · mean
context common · σ=0 · horizon=32000 · 1 deterministic control

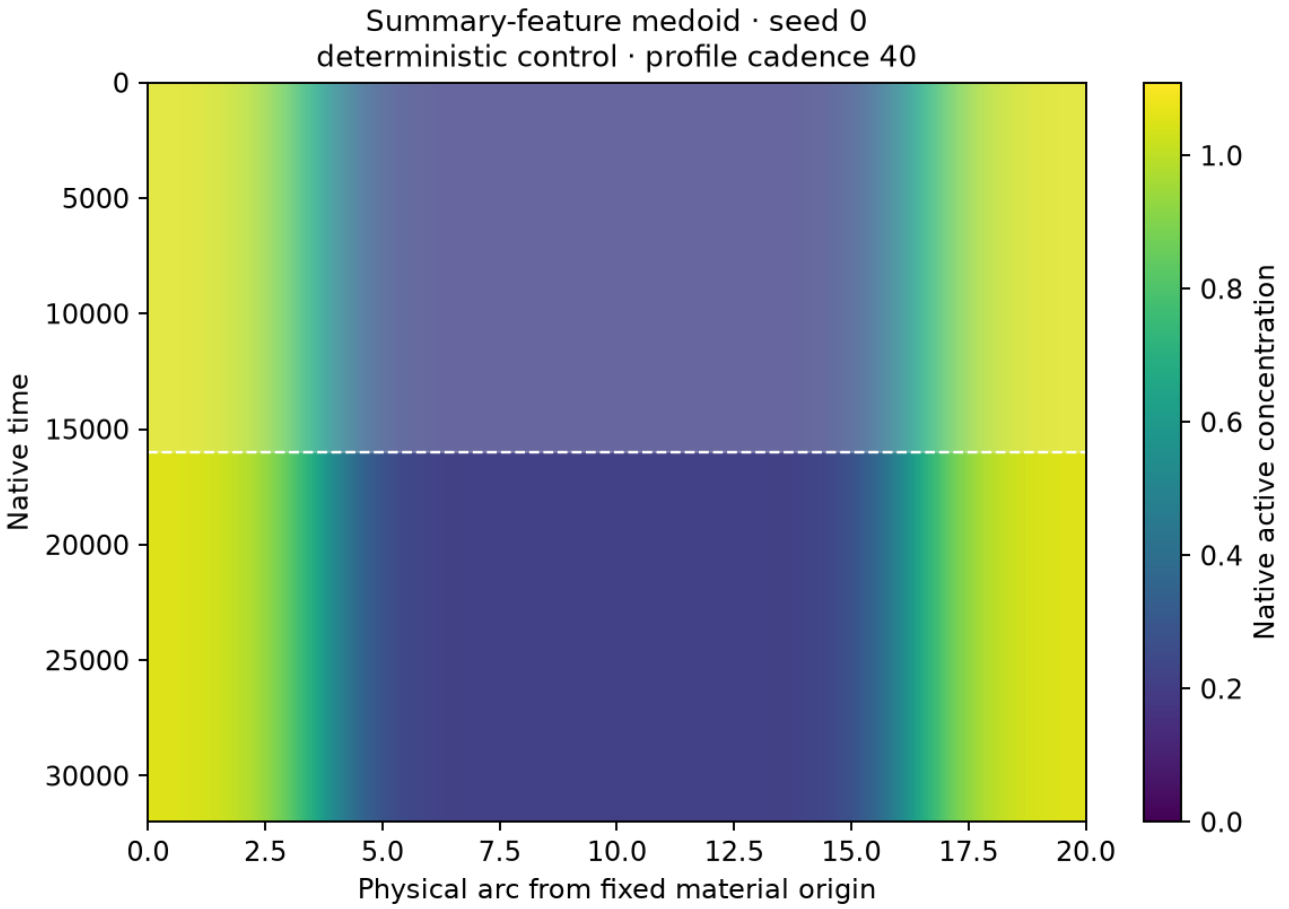

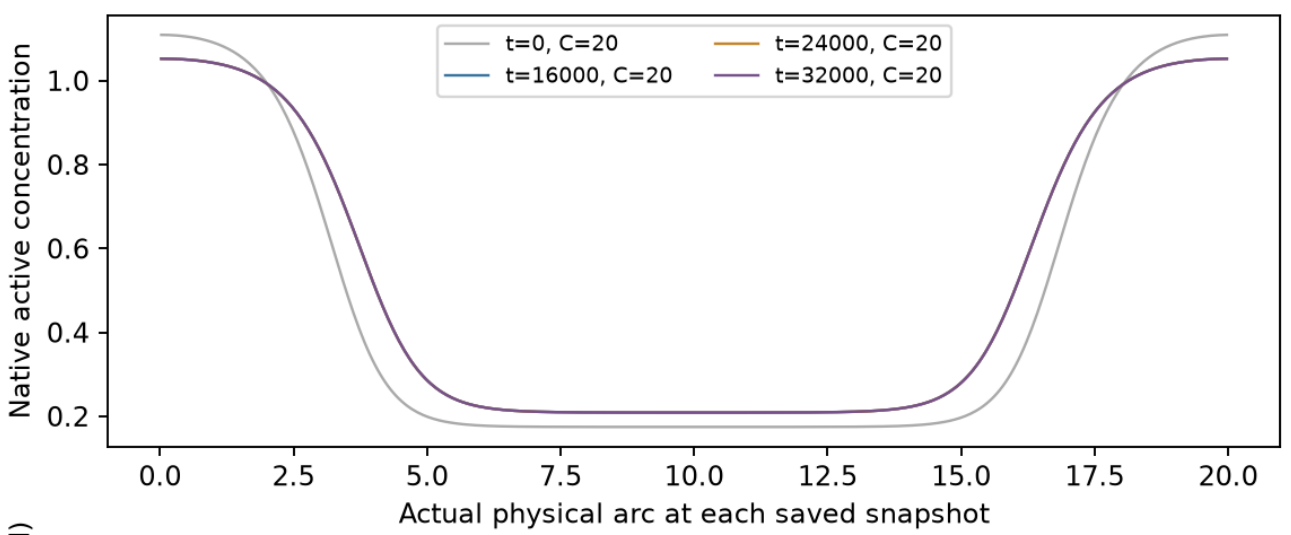

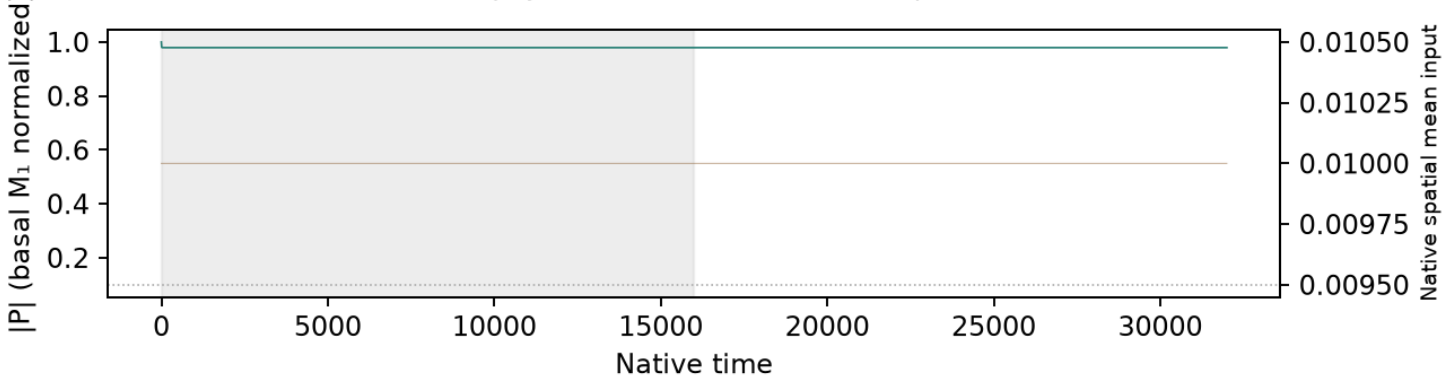

Native concentrations and every retained field frame are plotted without spatial resampling.
First half shaded: excluded from summary selection.
Spring mesh-face interpolation changes only boundary geometry; snapshots use actual saved C(t).
P uses basal M_1 normalization, distinct from instantaneous coherence.
Supplemental selection and controls; no main example is chosen.
Native NPZ/status links remain local/HPC data.

S11 · Wave-pinning · size label 20 · f=0.1 · noise
context common · σ=1 · horizon=32000 · n=12 independent noisy realizations

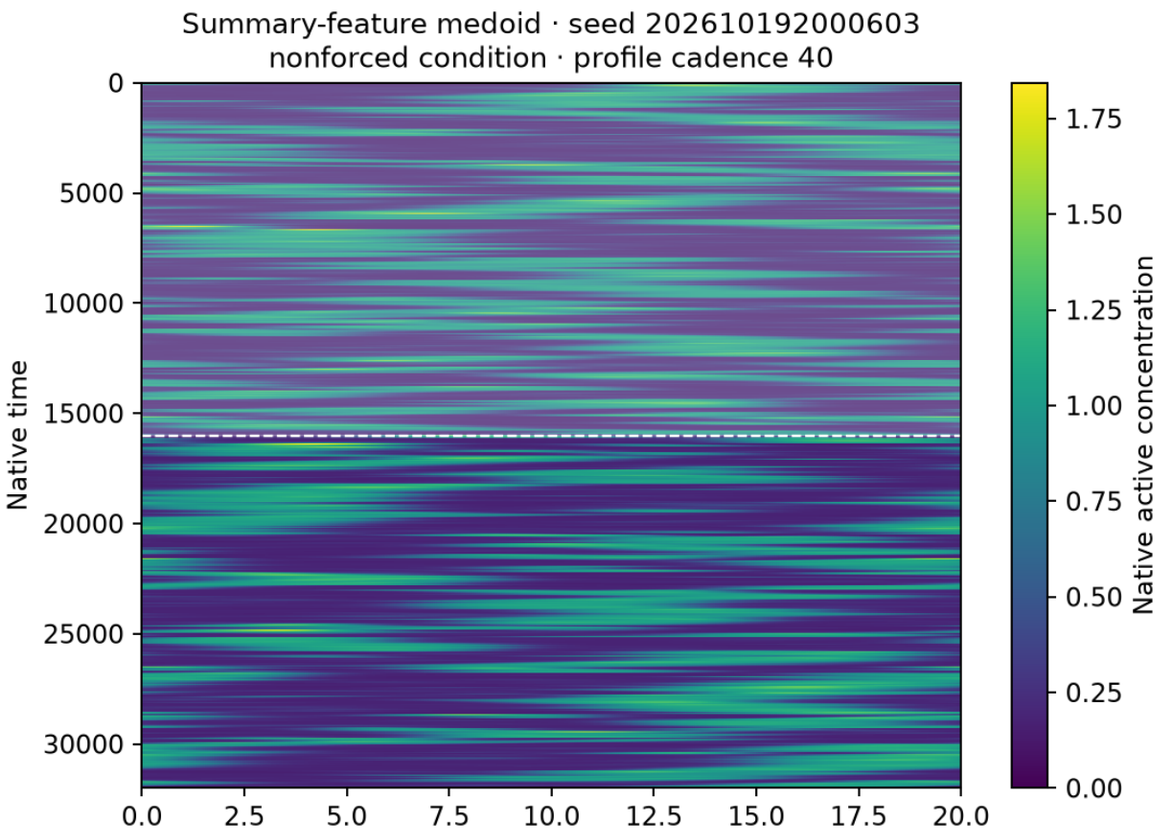

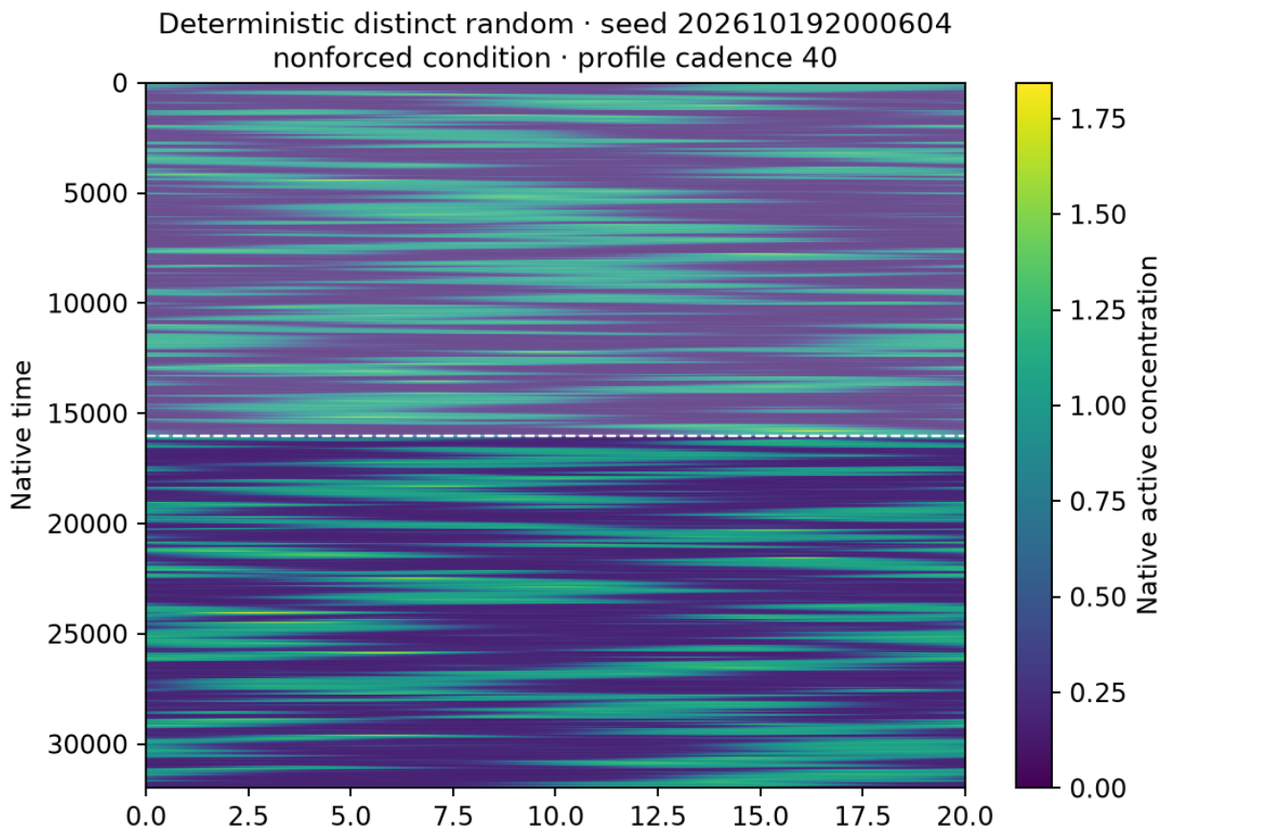

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M_1 normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Wave-pinning · size label 20 · f=0.3 · mean
context common · σ=0 · horizon=32000 · 1 deterministic control

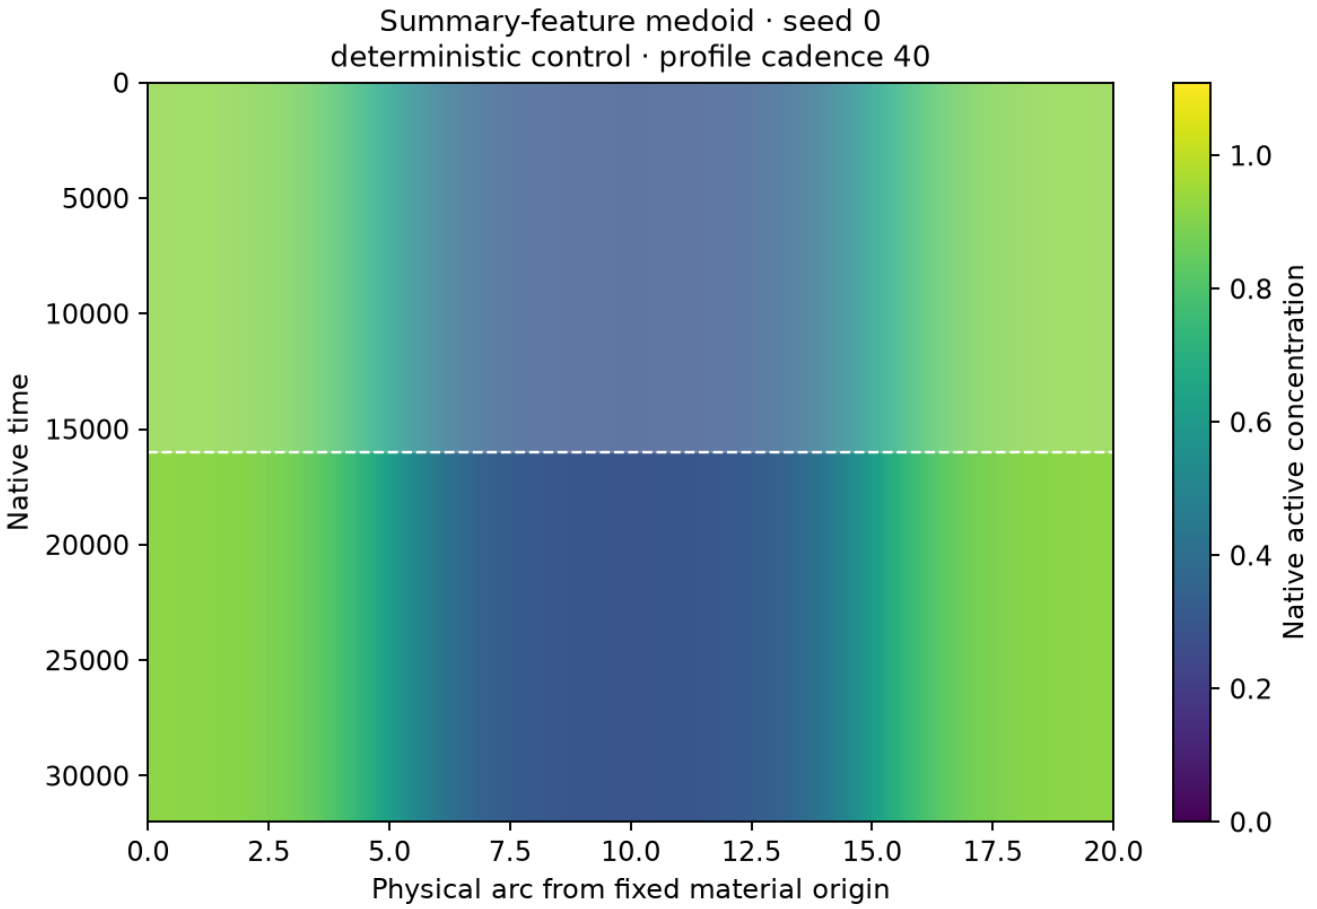

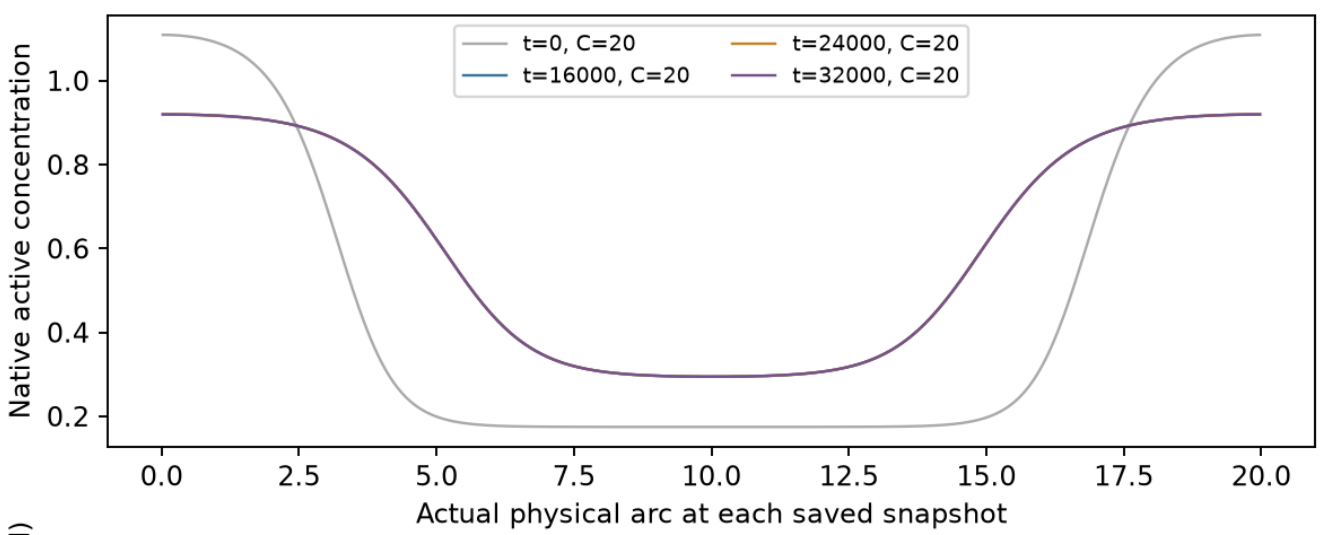

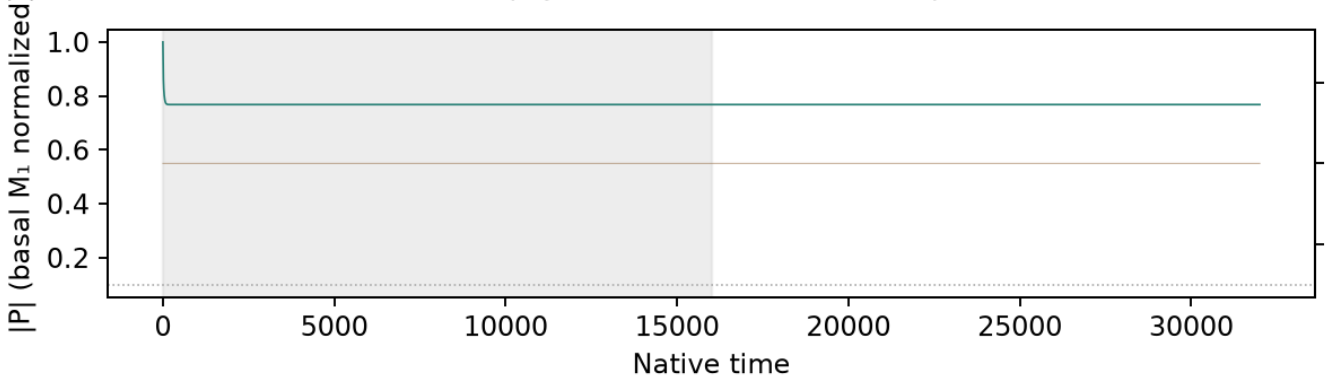

Native concentrations and every retained field frame are plotted without spatial resampling.
First half shaded: excluded from summary selection.
Spring mesh-face interpolation changes only boundary geometry; snapshots use actual saved C(t).
P uses basal M_1 normalization, distinct from instantaneous coherence.
Supplemental selection and controls; no main example is chosen.
Native NPZ/status links remain local/HPC data.

S11 · Wave-pinning · size label 20 · f=0.3 · noise
context common · σ=1 · horizon=32000 · n=2 independent noisy realizations

Summary-feature medoid · seed 202610192000701
nonforced condition · profile cadence 40

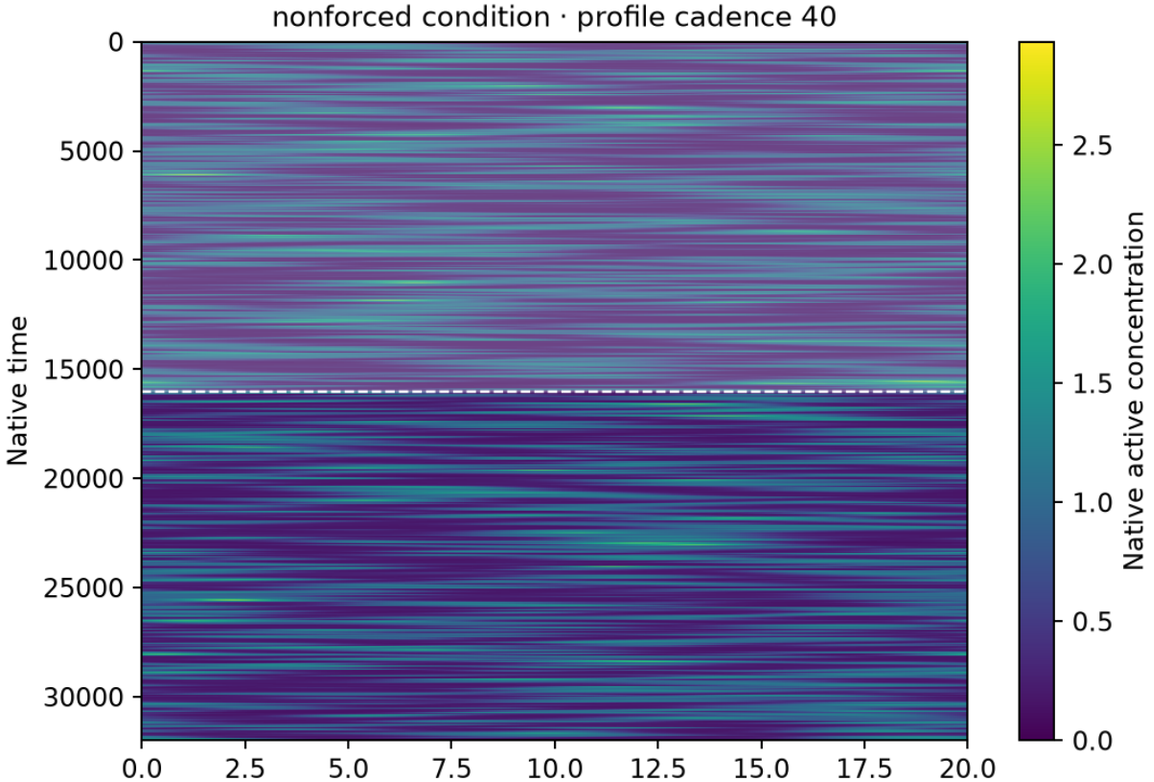

Deterministic distinct random · seed 202610192000700
nonforced condition · profile cadence 40

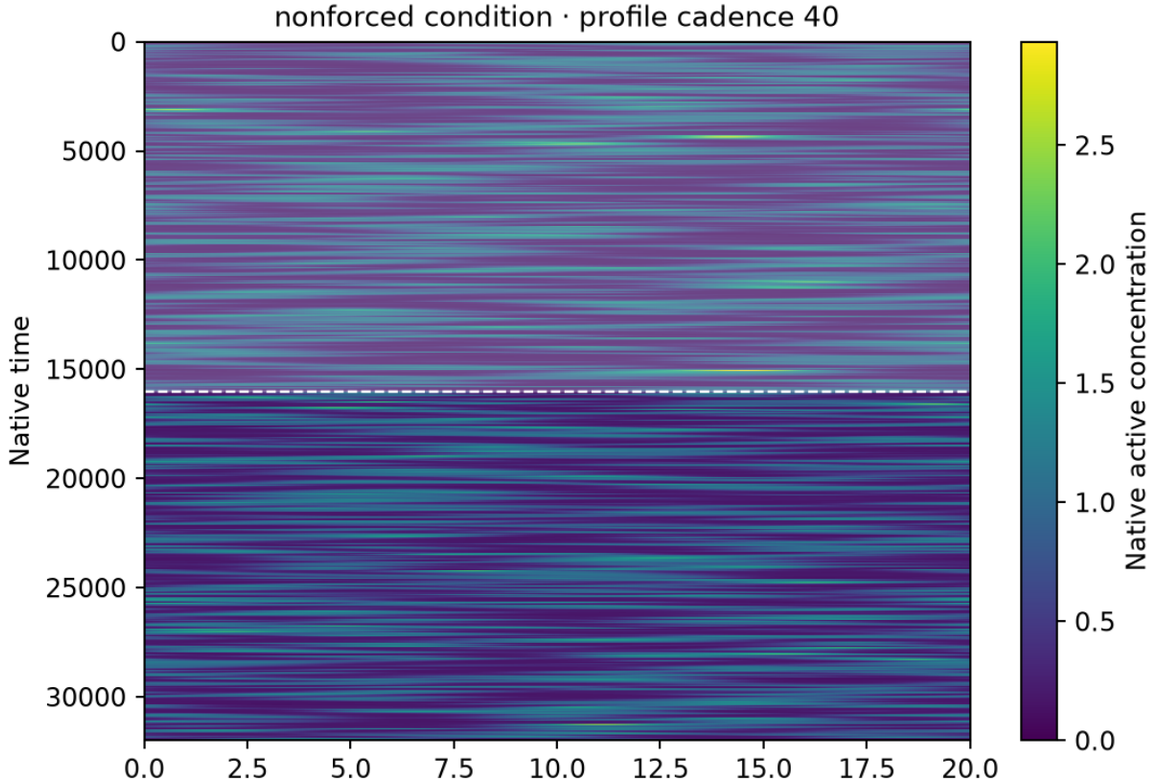

Physical arc from fixed material origin

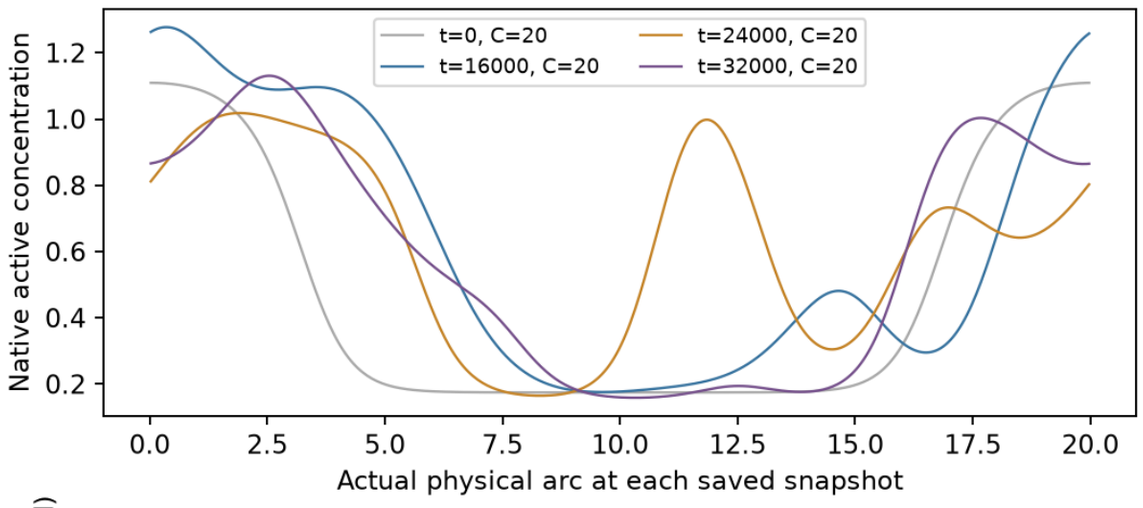

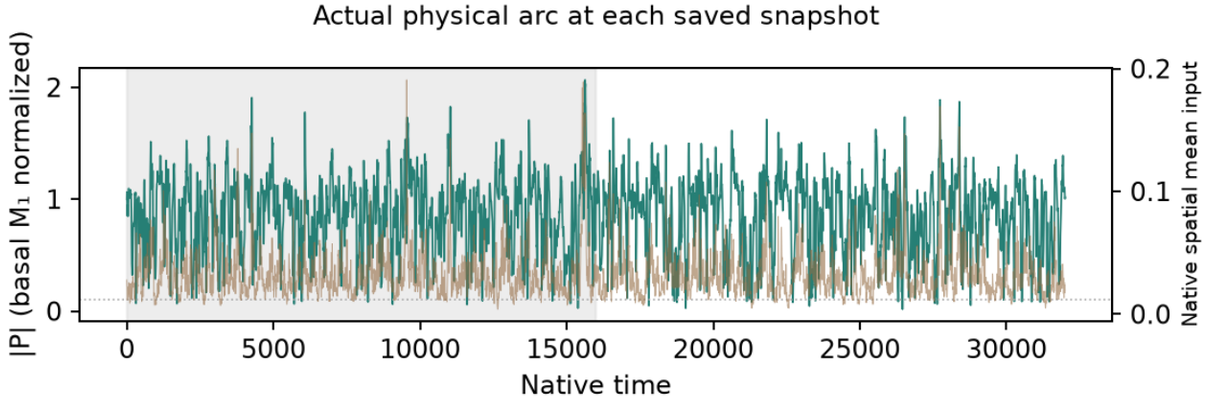

Physical arc from fixed material origin

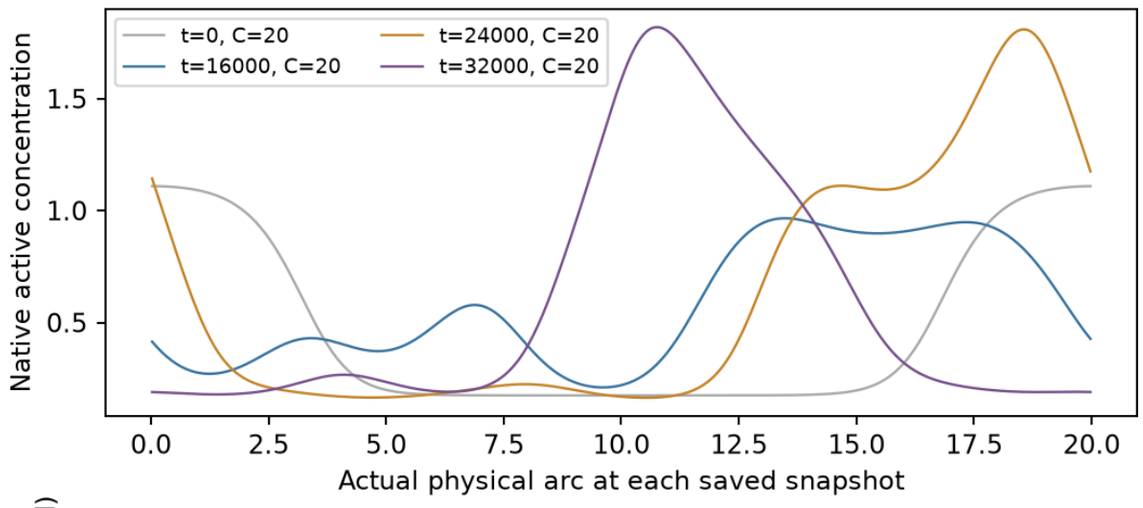

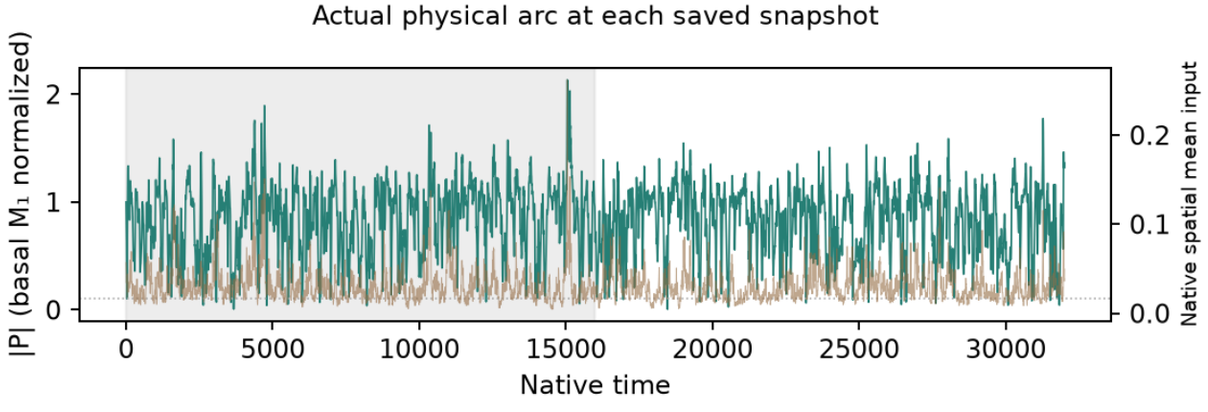

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M_1 normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Wave-pinning · size label 20 · f=1 · mean
context common · σ=0 · horizon=32000 · 1 deterministic control

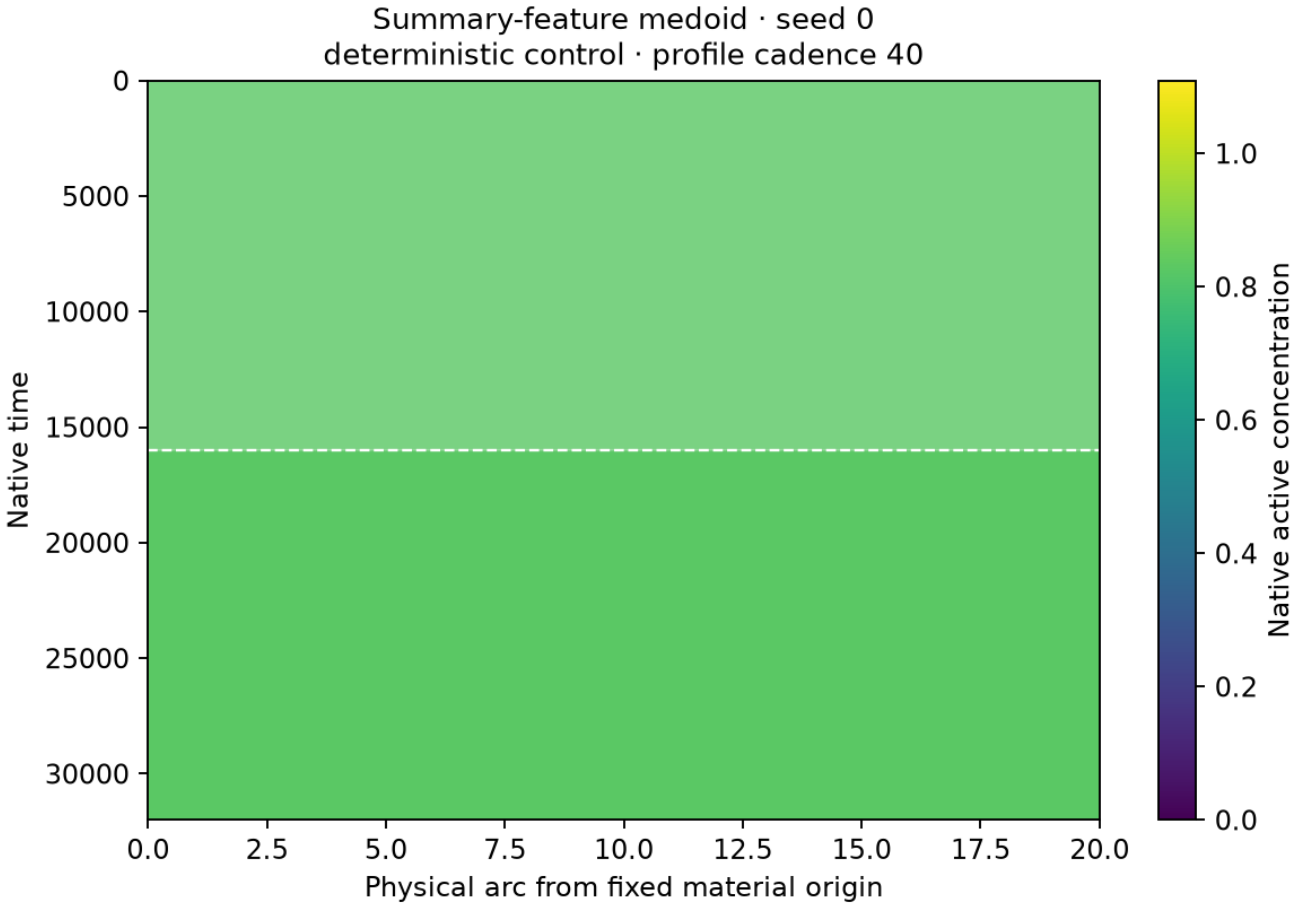

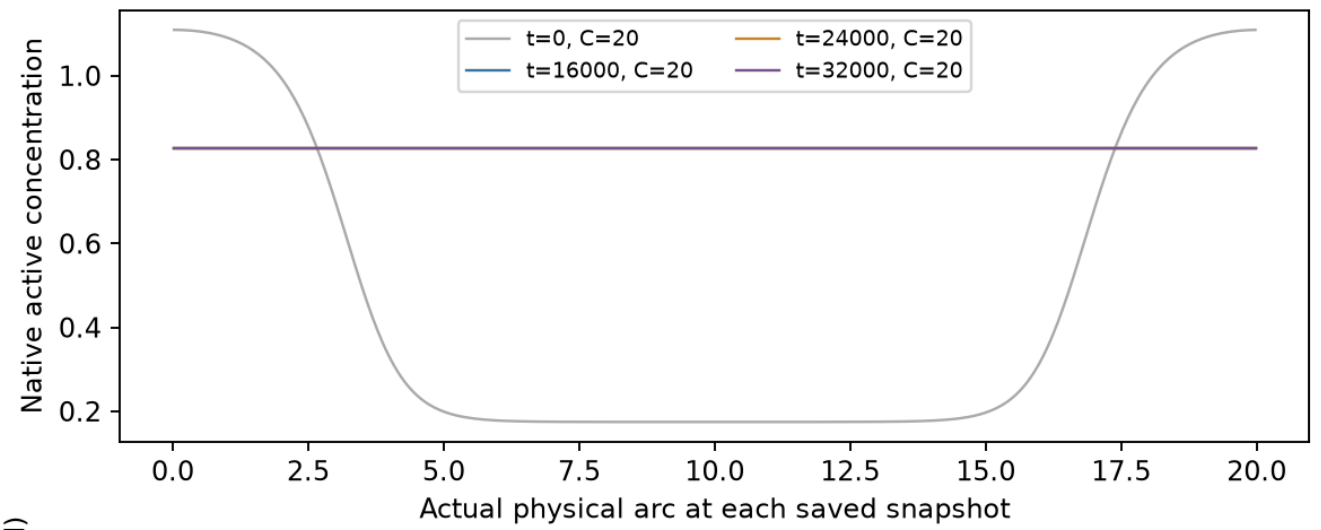

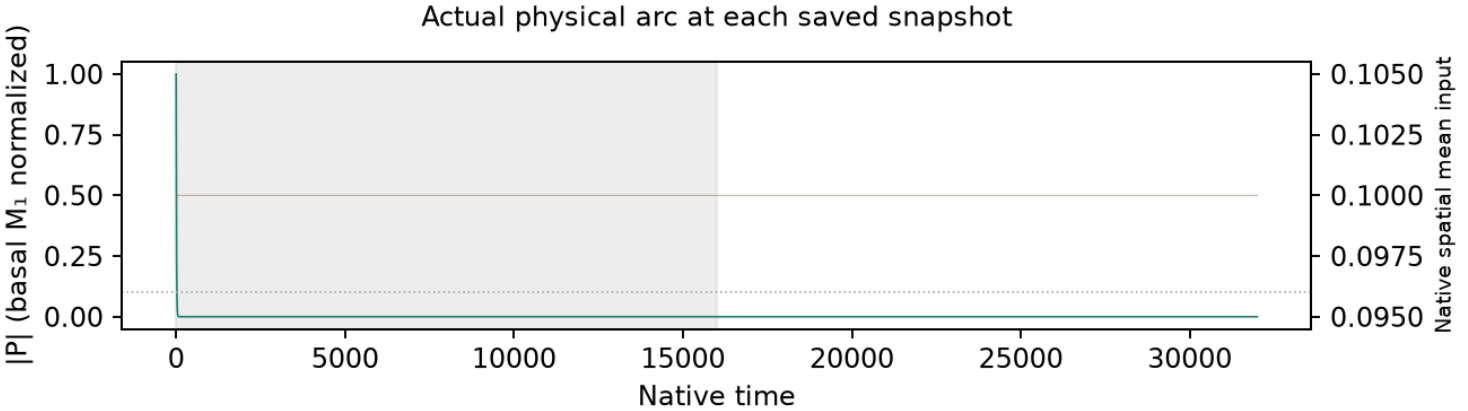

Native concentrations and every retained field frame are plotted without spatial resampling.
First half shaded: excluded from summary selection.
Spring mesh-face interpolation changes only boundary geometry; snapshots use actual saved C(t).
P uses basal M_1 normalization, distinct from instantaneous coherence.
Supplemental selection and controls; no main example is chosen.
Native NPZ/status links remain local/HPC data.

S11 · Wave-pinning · size label 20 · f=1 · noise
context common · σ=1 · horizon=32000 · n=2 independent noisy realizations

Summary-feature medoid · seed 202610192000801
forced condition · profile cadence 40

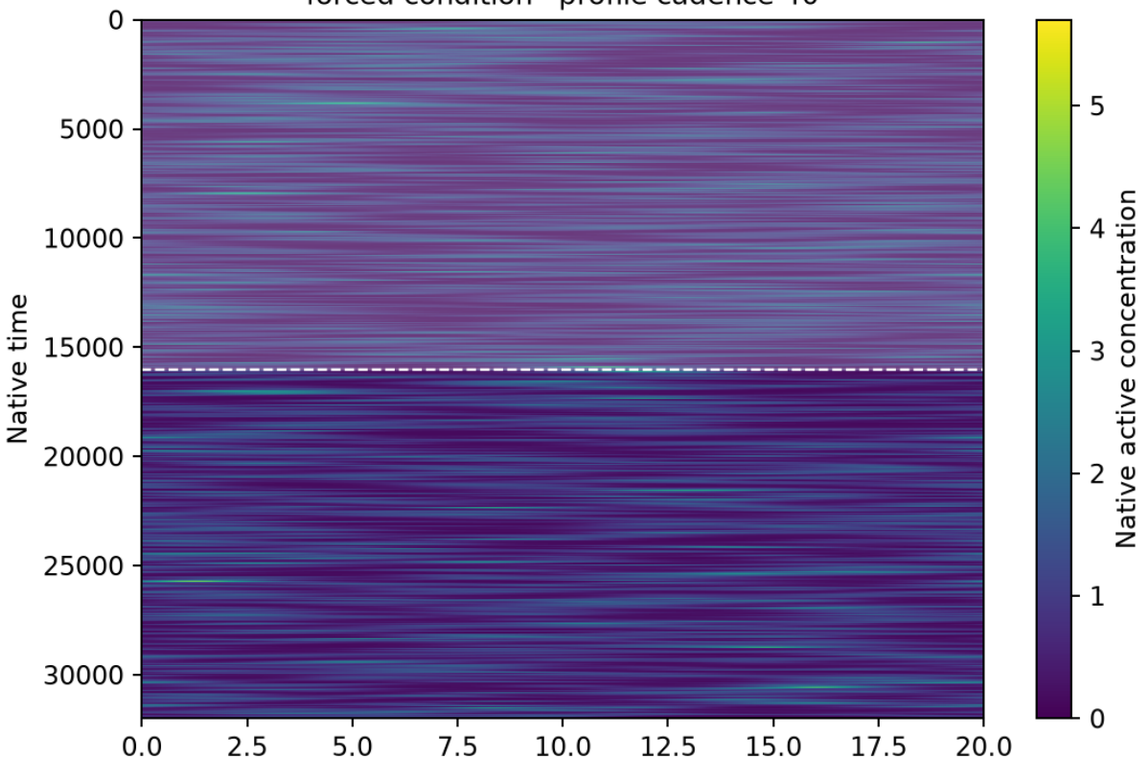

Deterministic distinct random · seed 202610192000800
forced condition · profile cadence 40

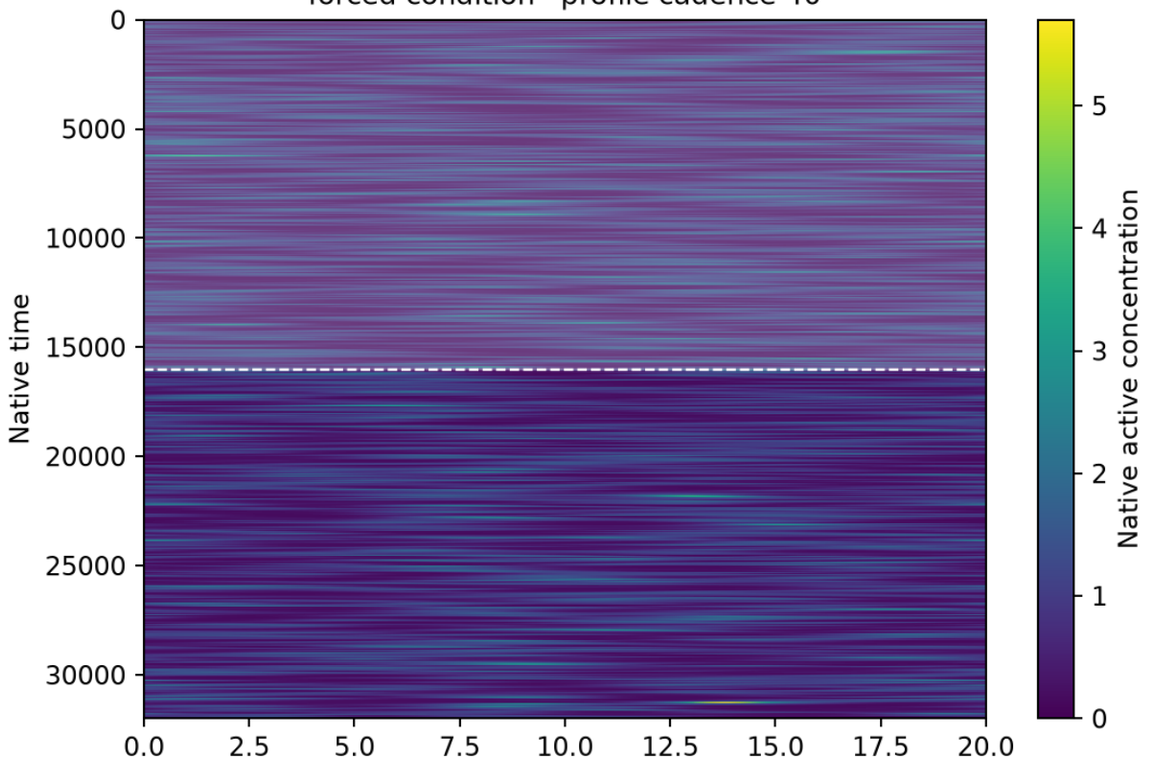

Physical arc from fixed material origin

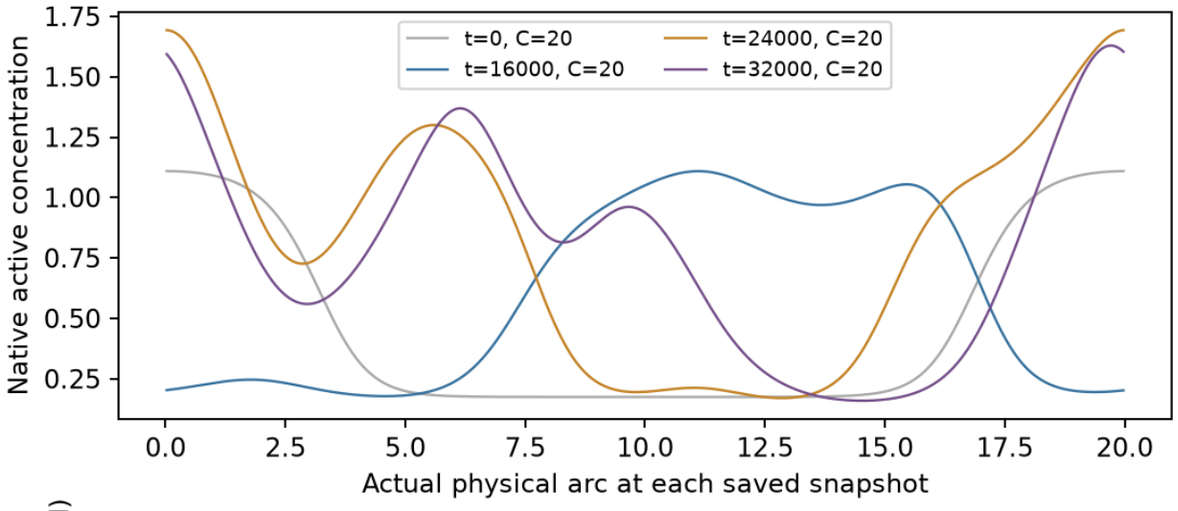

Physical arc from fixed material origin

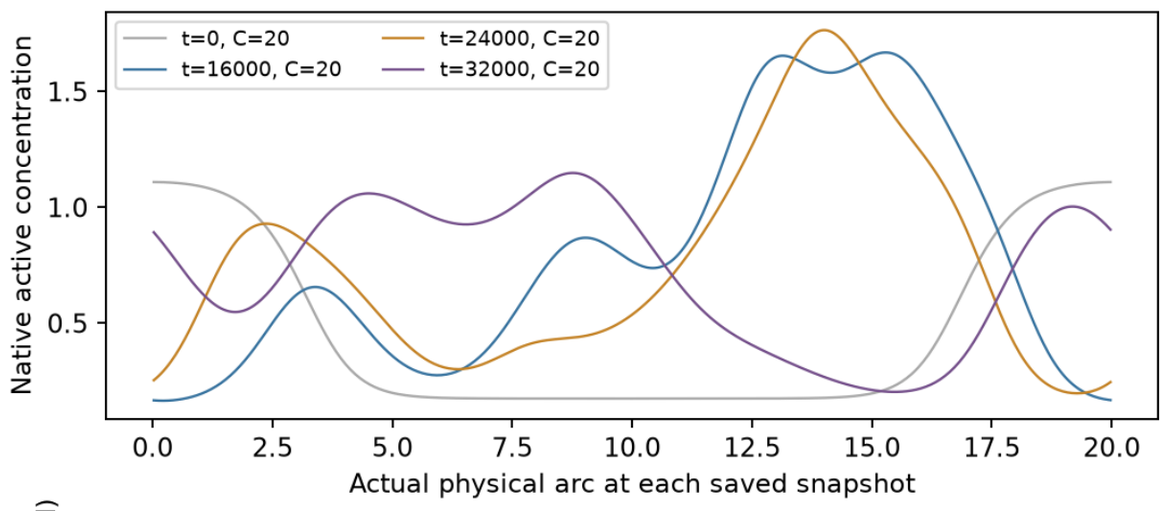

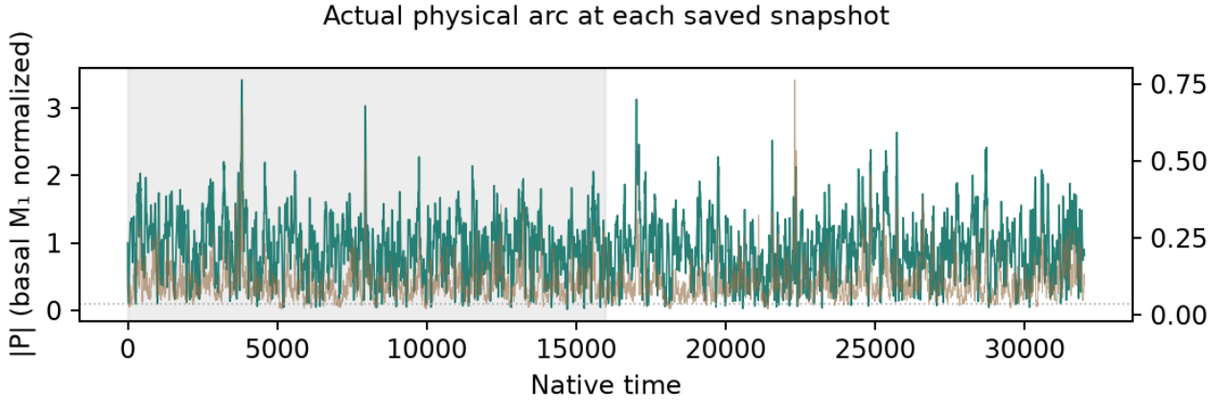

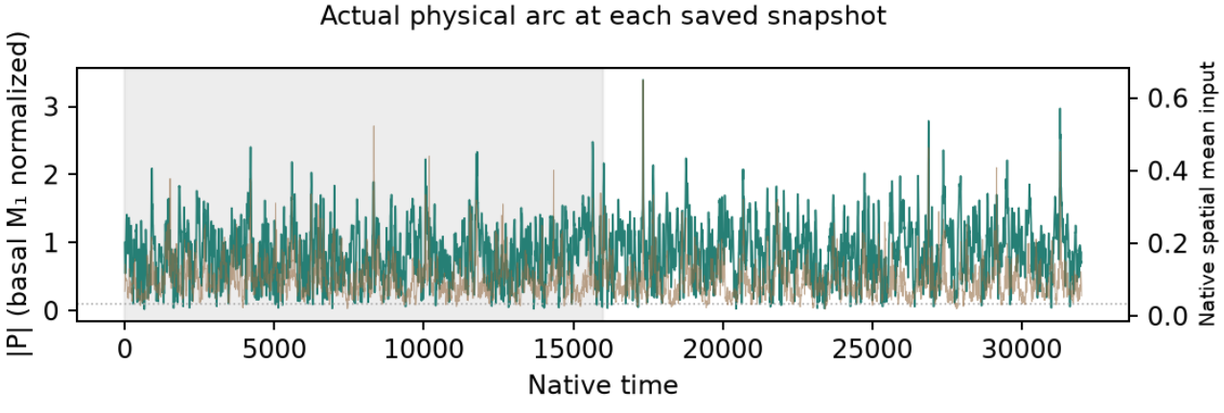

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M_1 normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Wave-pinning · size label 30 · f=0 · zero context common · σ=0 · horizon=32000 · 1 deterministic control

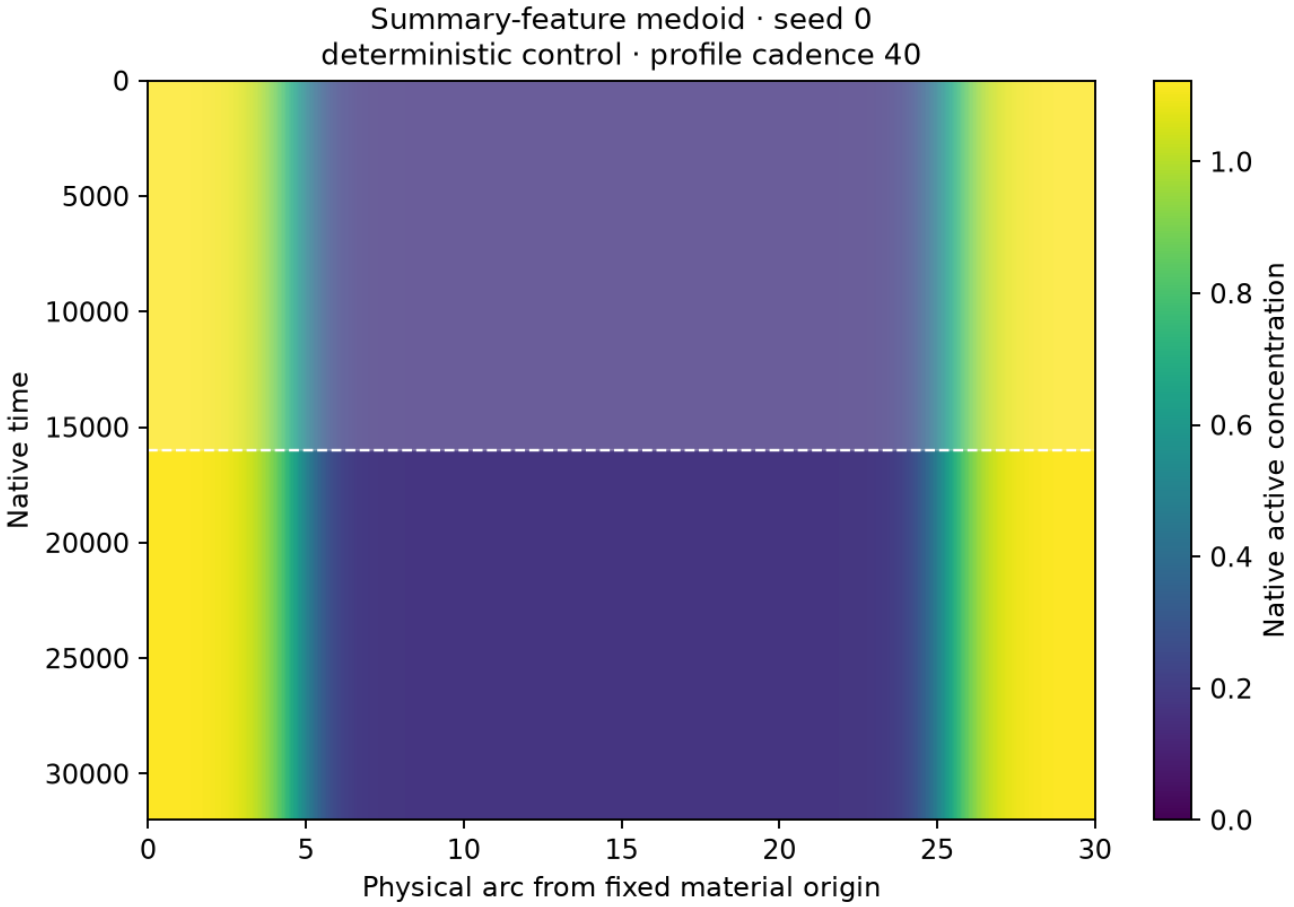

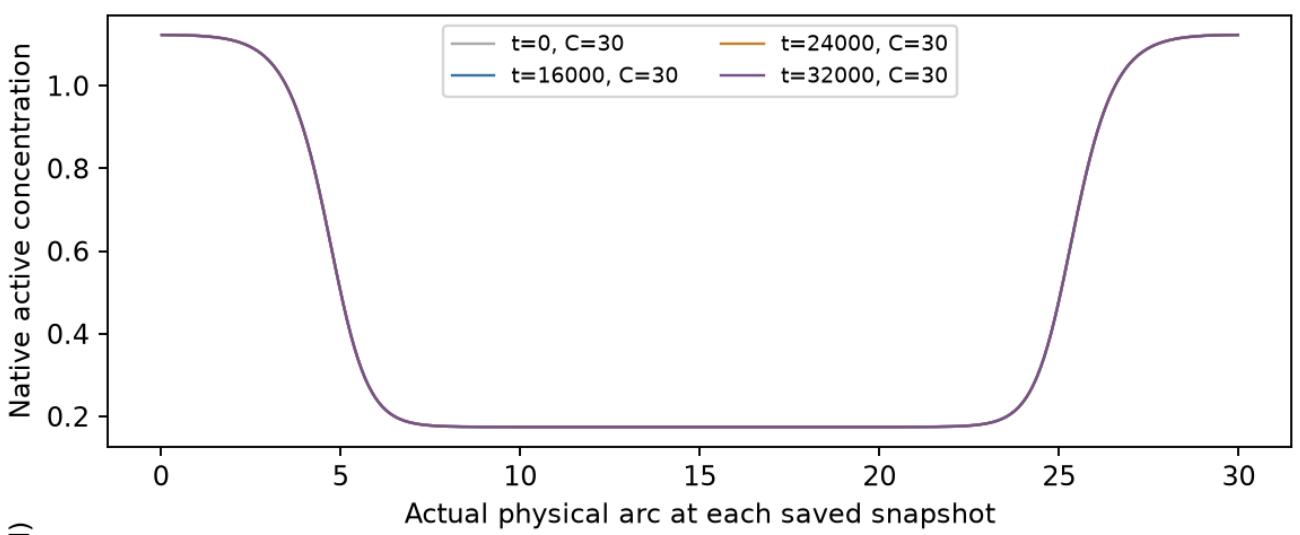

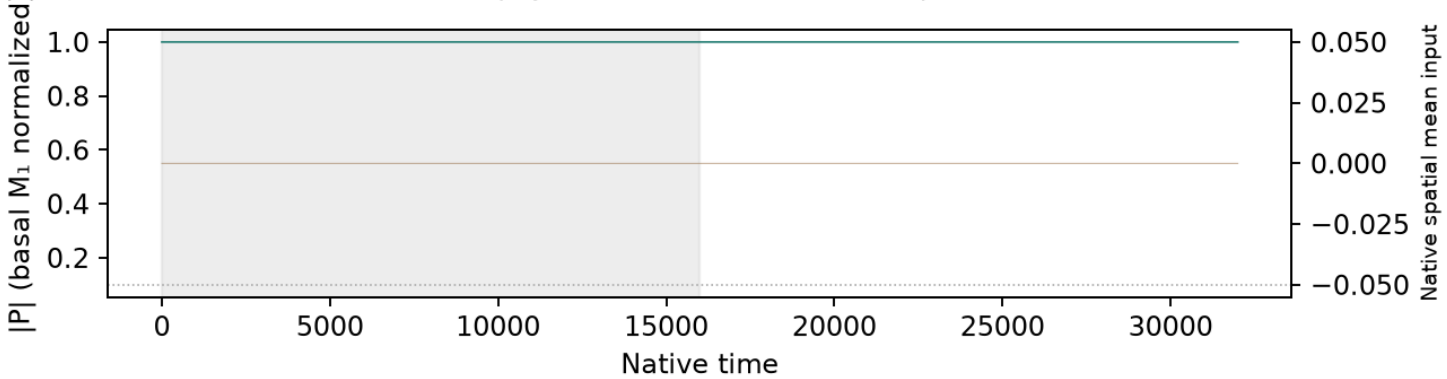

Native concentrations and every retained field frame are plotted without spatial resampling.
First half shaded: excluded from summary selection.
Spring mesh-face interpolation changes only boundary geometry; snapshots use actual saved C(t).
P uses basal M_1 normalization, distinct from instantaneous coherence.
Supplemental selection and controls; no main example is chosen.
Native NPZ/status links remain local/HPC data.

S11 · Wave-pinning · size label 30 · f=0.001 · mean
context common · σ=0 · horizon=32000 · 1 deterministic control

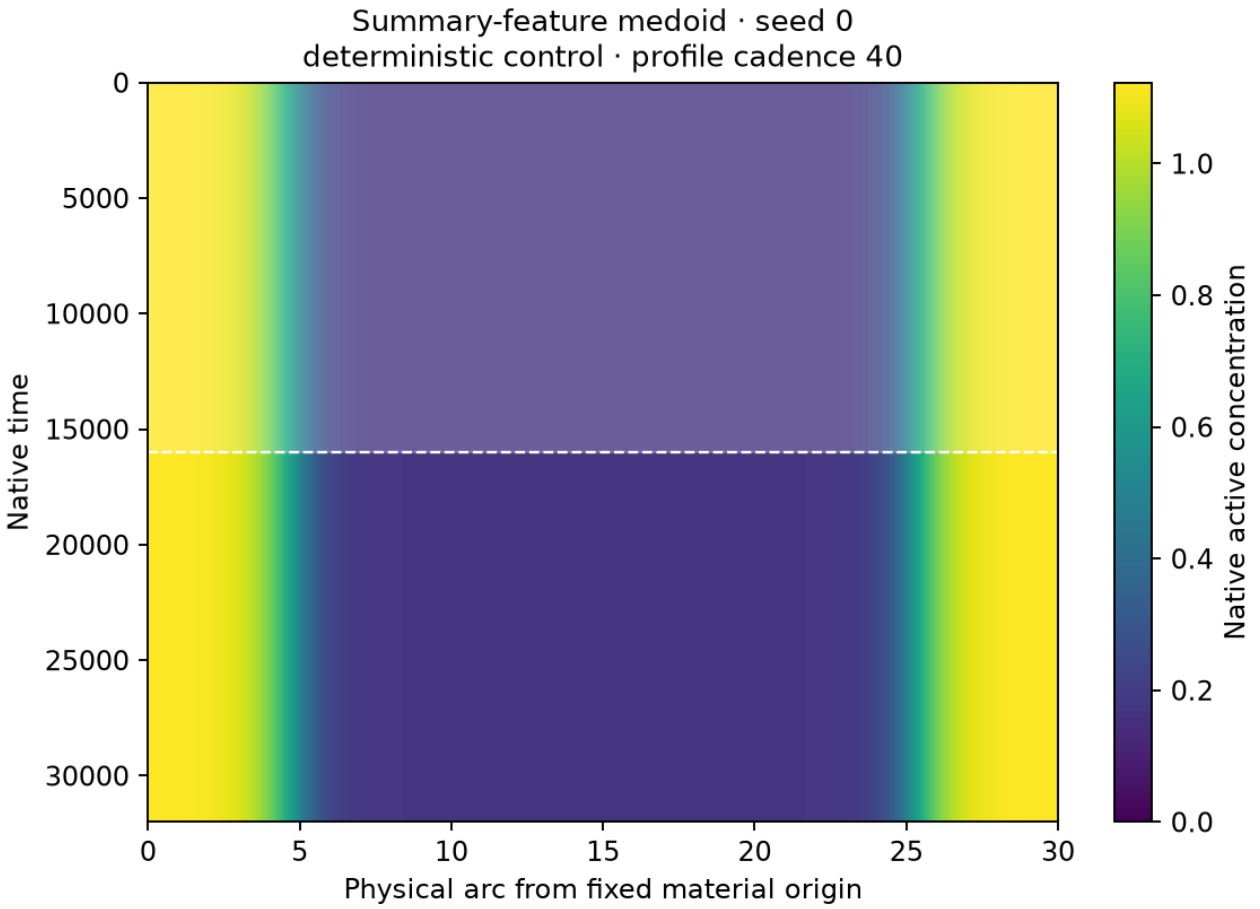

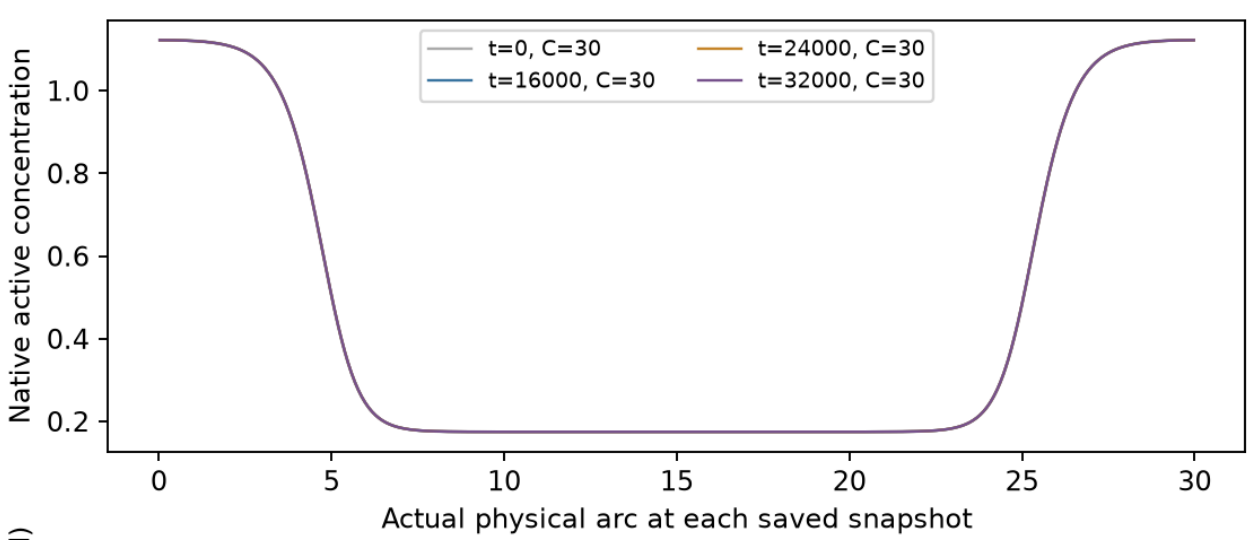

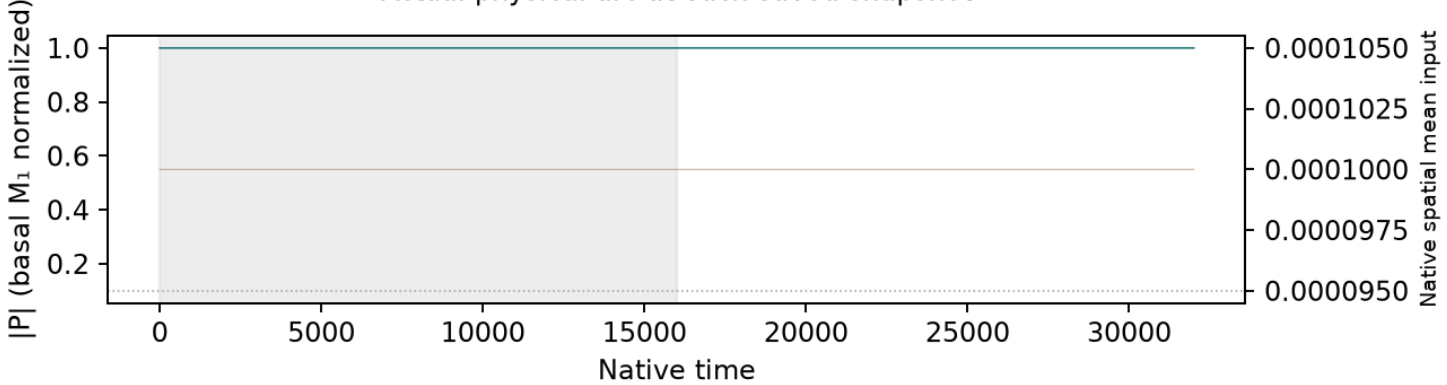

Native concentrations and every retained field frame are plotted without spatial resampling.
First half shaded: excluded from summary selection.
Spring mesh-face interpolation changes only boundary geometry; snapshots use actual saved C(t).
P uses basal M_1 normalization, distinct from instantaneous coherence.
Supplemental selection and controls; no main example is chosen.
Native NPZ/status links remain local/HPC data.

S11 · Wave-pinning · size label 30 · f=0.001 · noise
context common · σ=1 · horizon=32000 · n=12 independent noisy realizations

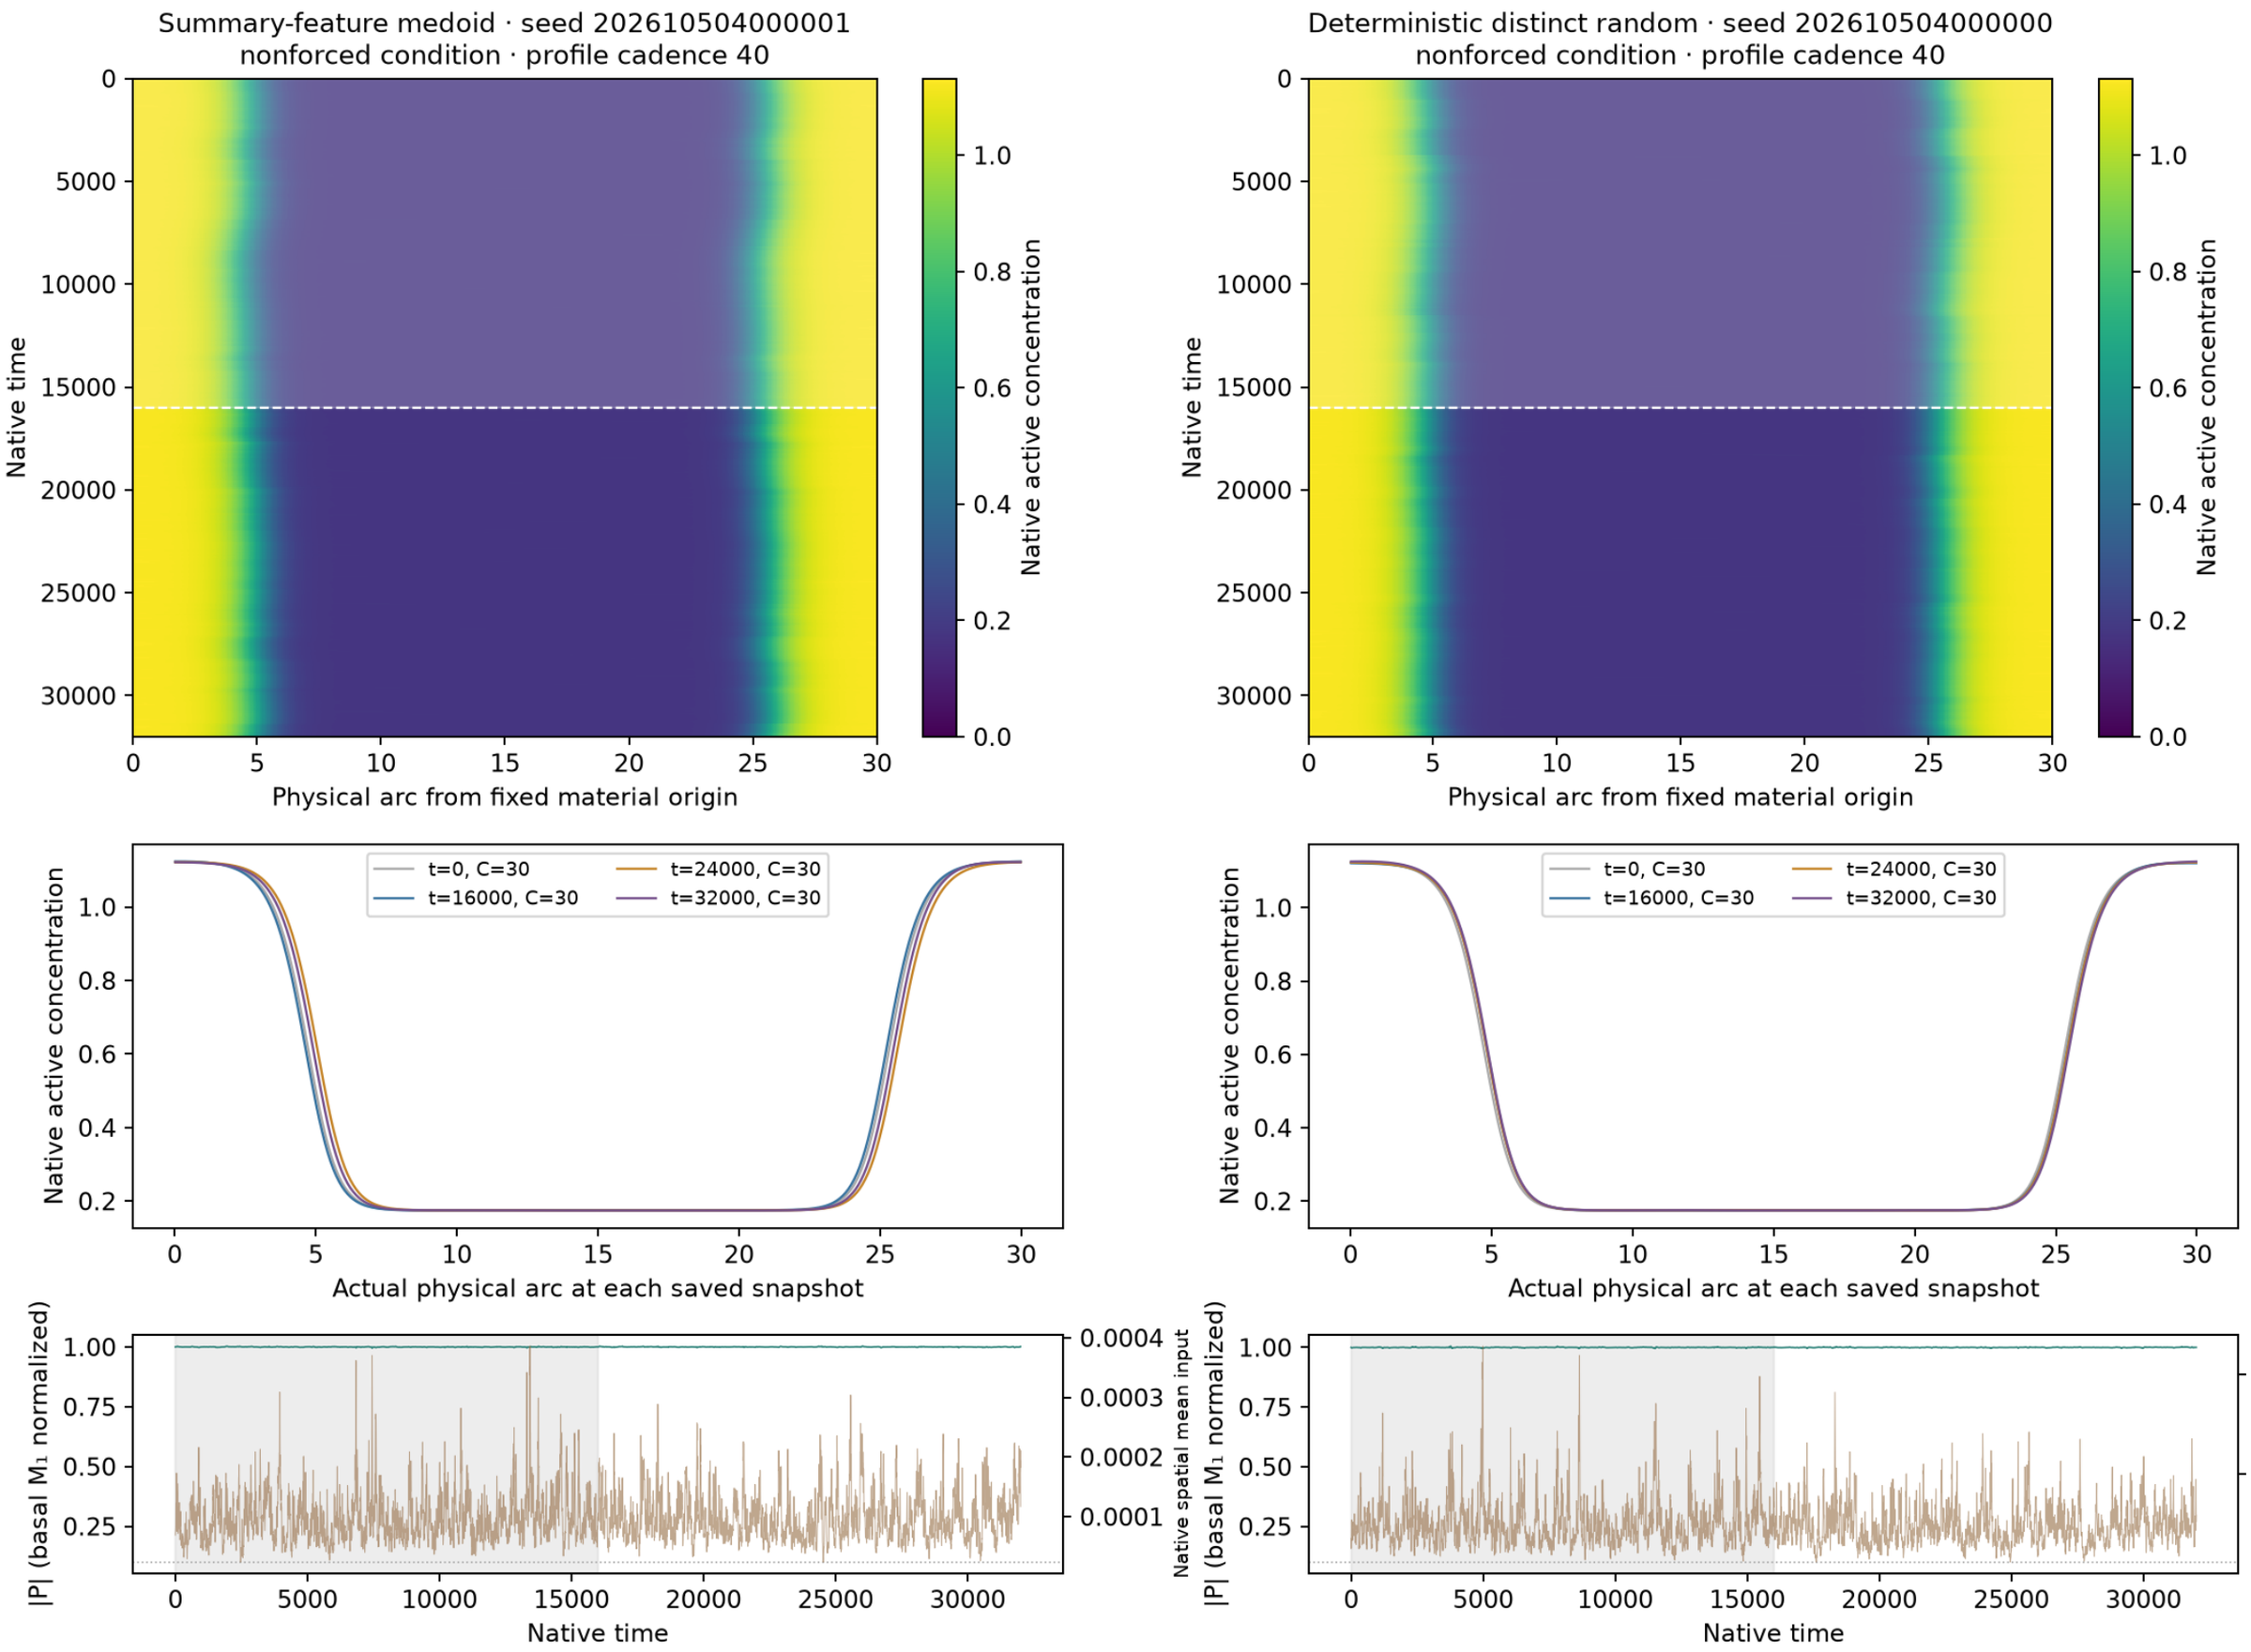

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Wave-pinning · size label 30 · f=0.003 · mean
context common · σ=0 · horizon=32000 · 1 deterministic control

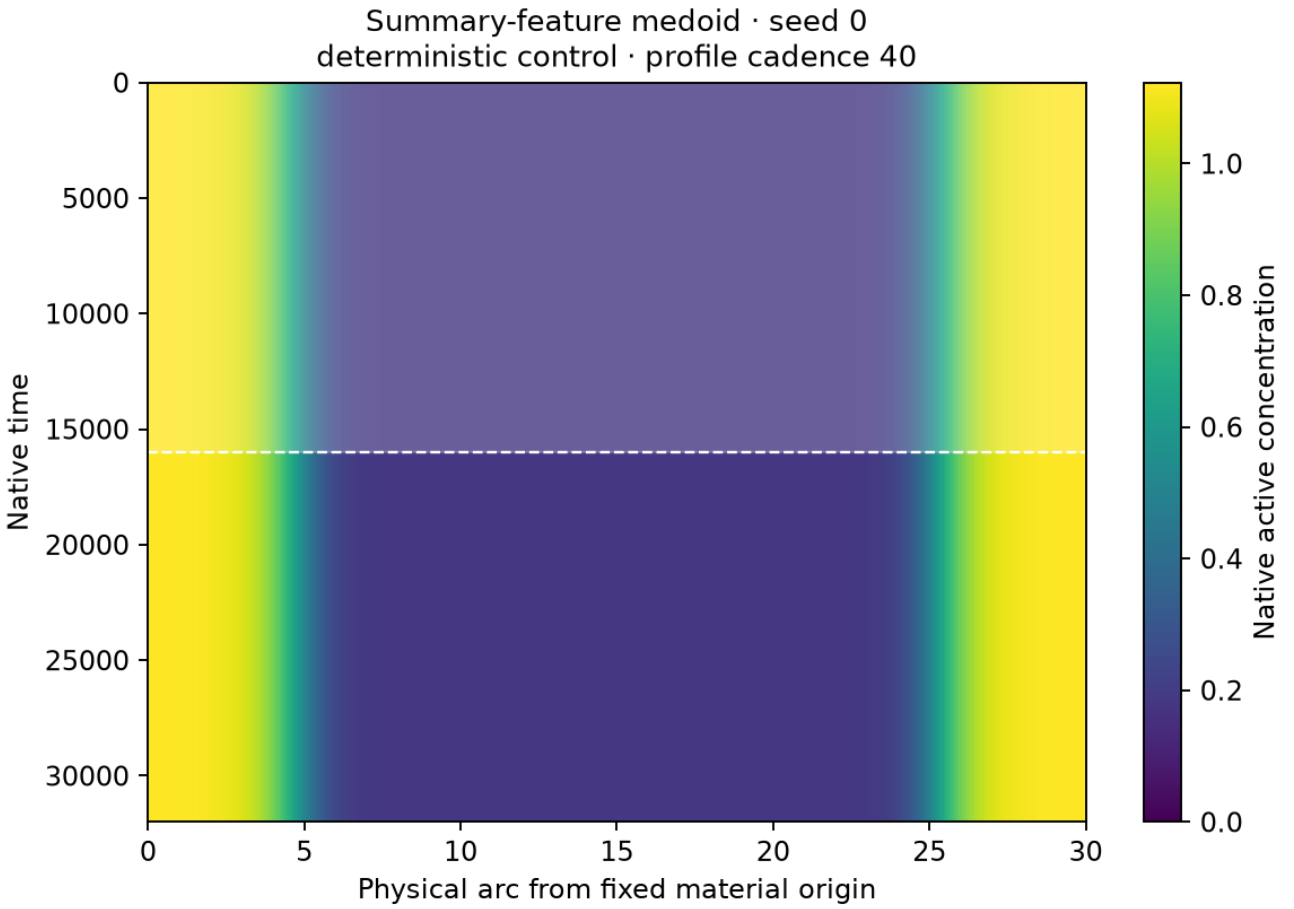

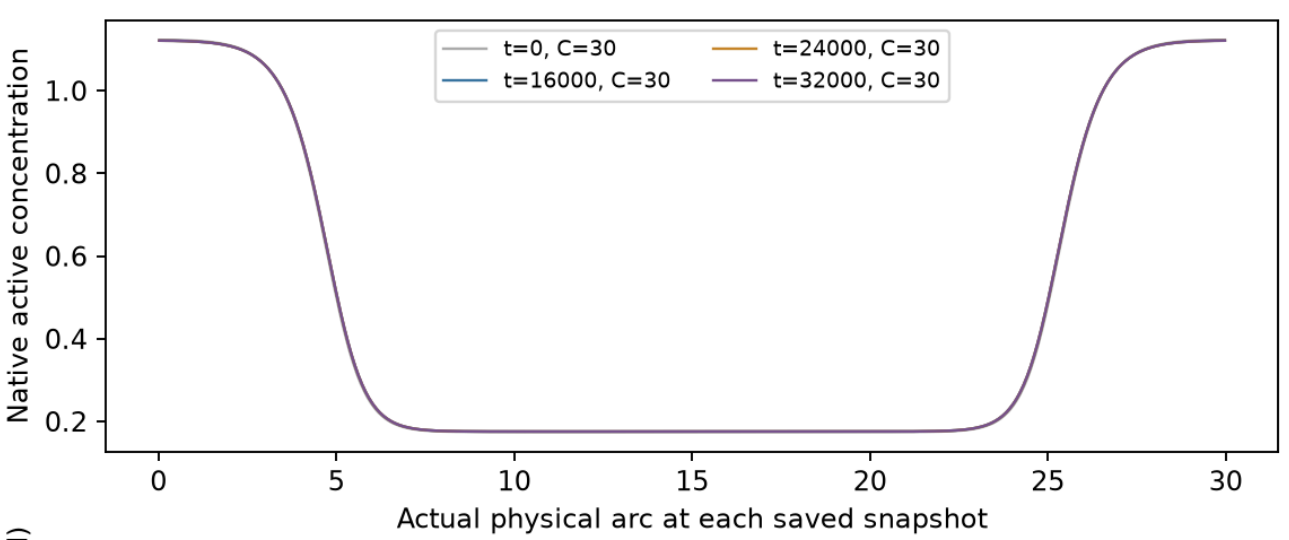

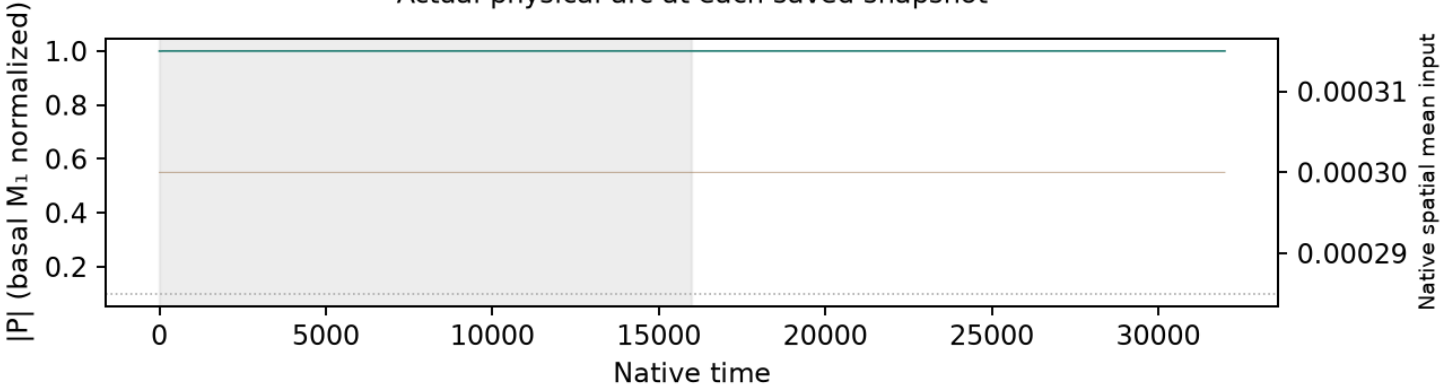

Native concentrations and every retained field frame are plotted without spatial resampling.
First half shaded: excluded from summary selection.
Spring mesh-face interpolation changes only boundary geometry; snapshots use actual saved C(t).
P uses basal M_1 normalization, distinct from instantaneous coherence.
Supplemental selection and controls; no main example is chosen.
Native NPZ/status links remain local/HPC data.

S11 · Wave-pinning · size label 30 · f=0.003 · noise
context common · σ=1 · horizon=32000 · n=12 independent noisy realizations

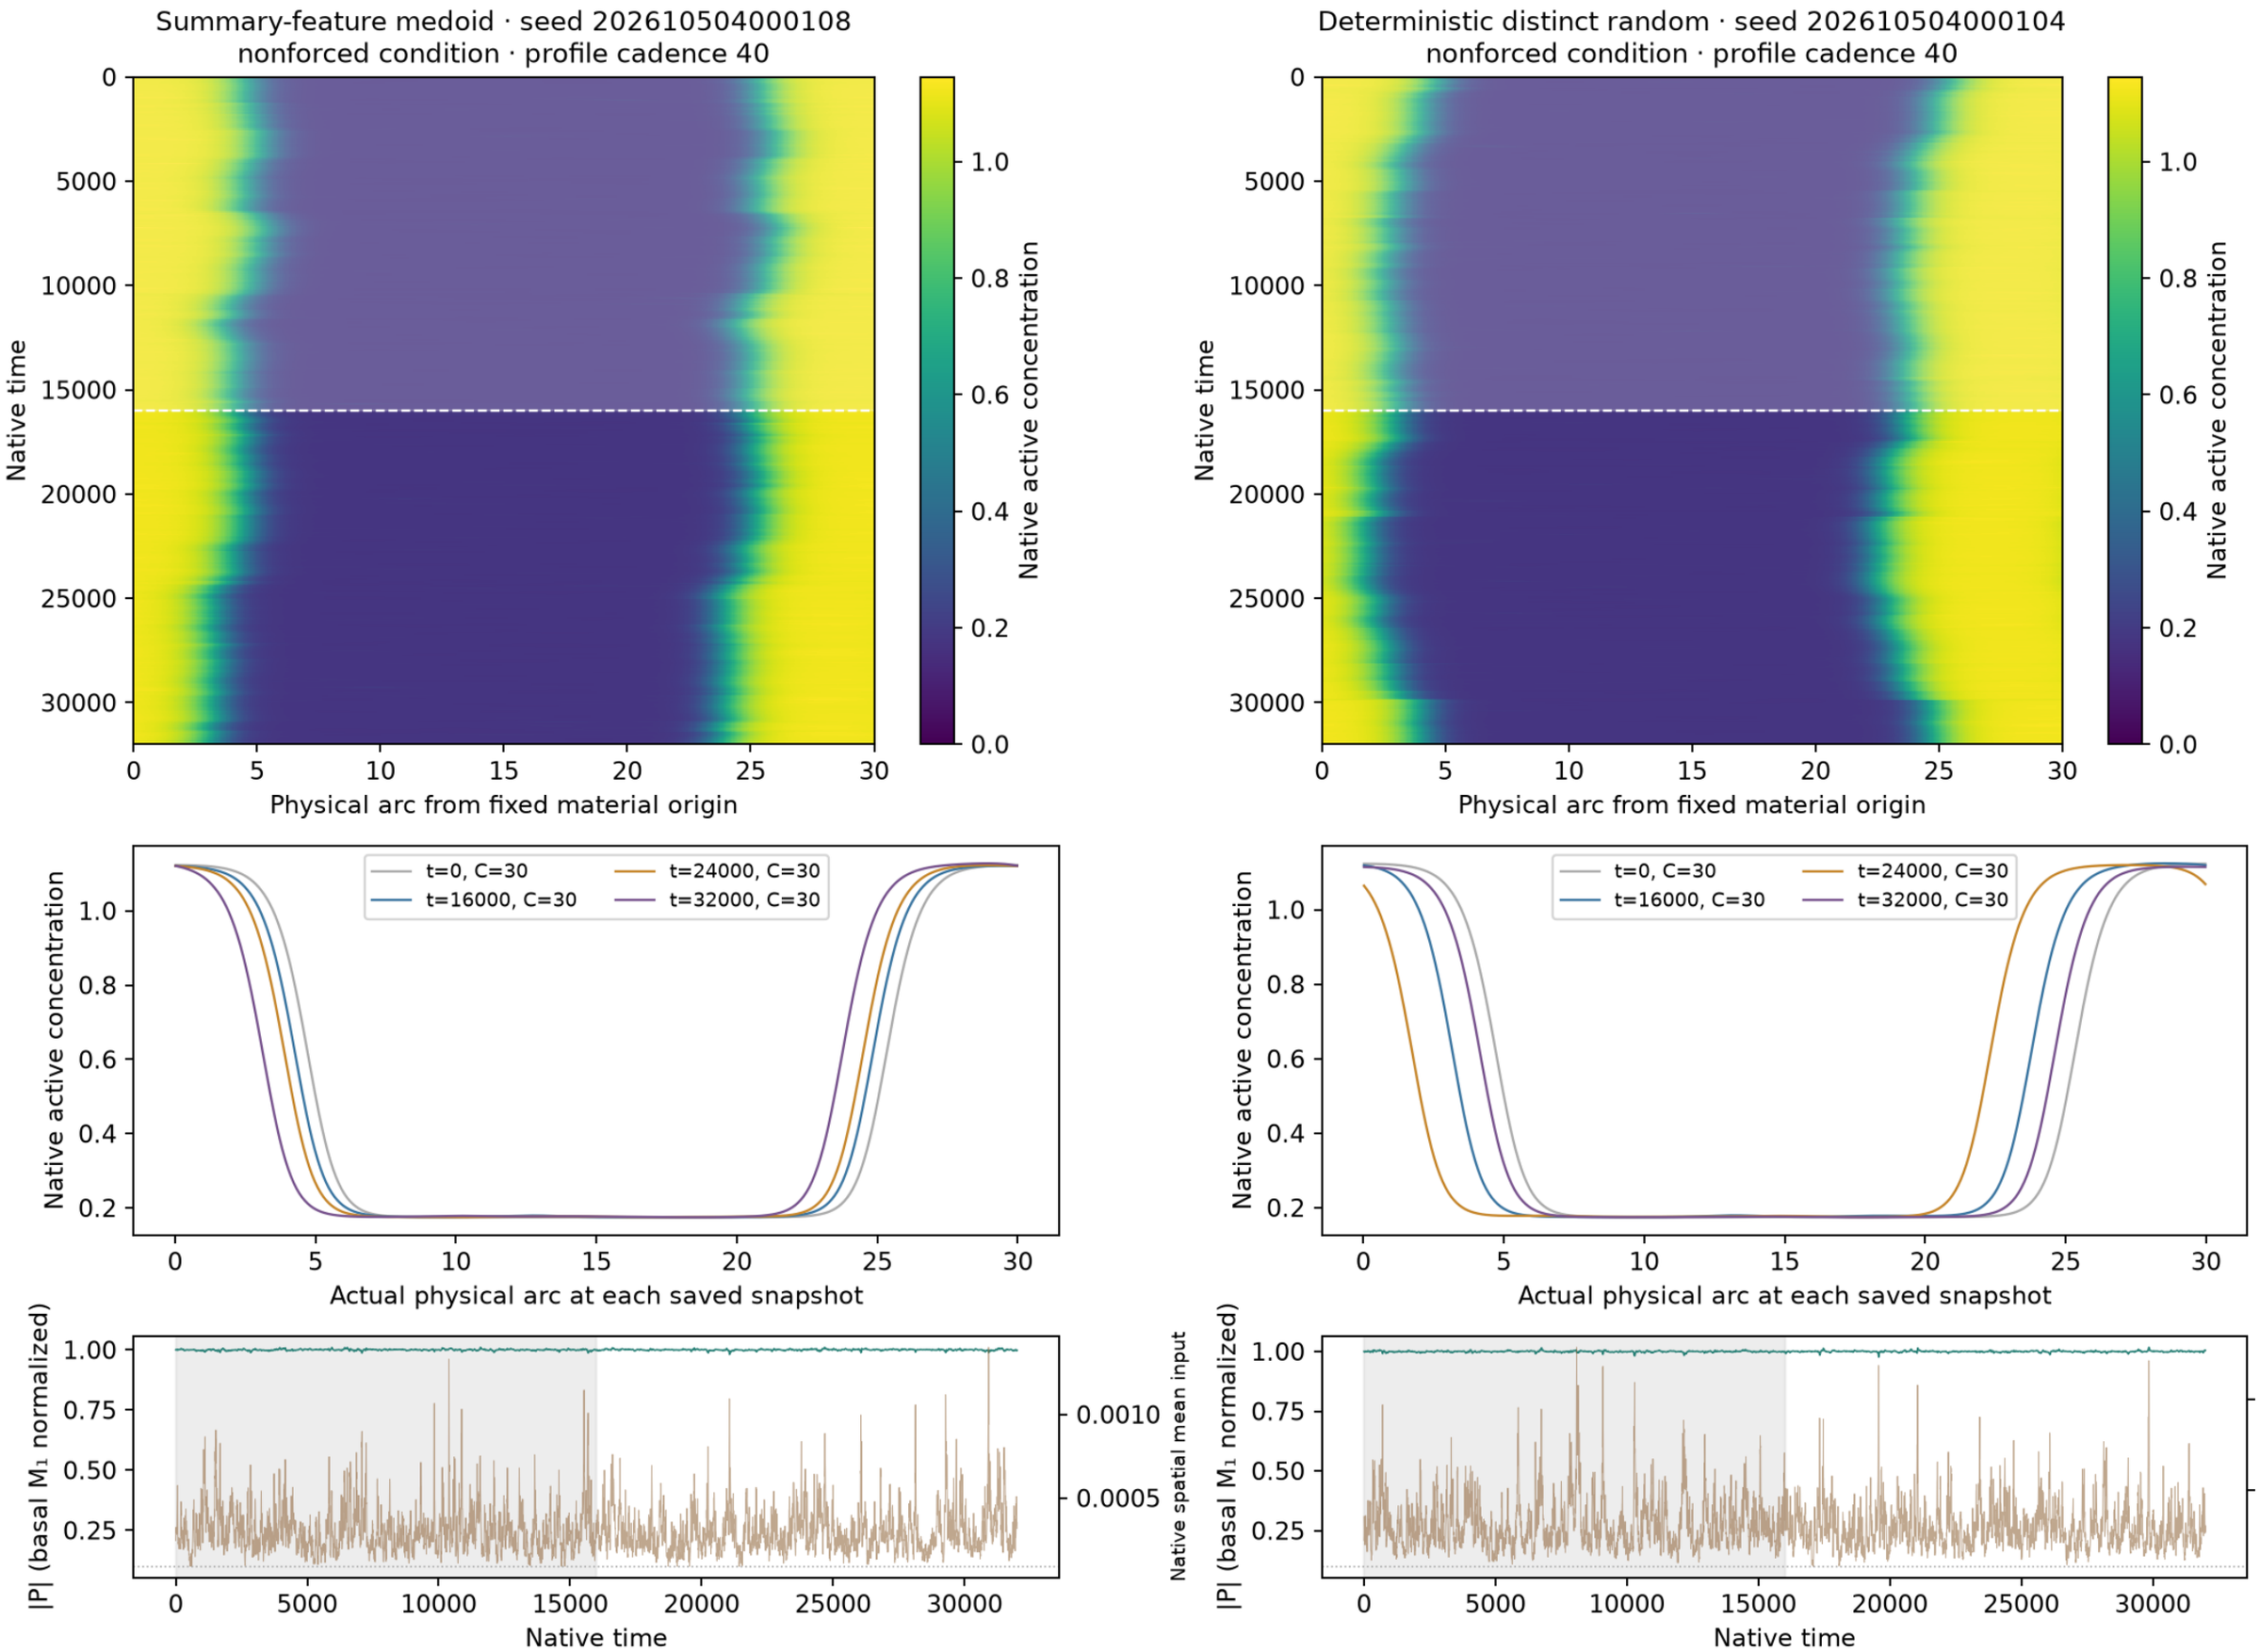

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Wave-pinning · size label 30 · f=0.01 · mean
context common · σ=0 · horizon=32000 · 1 deterministic control

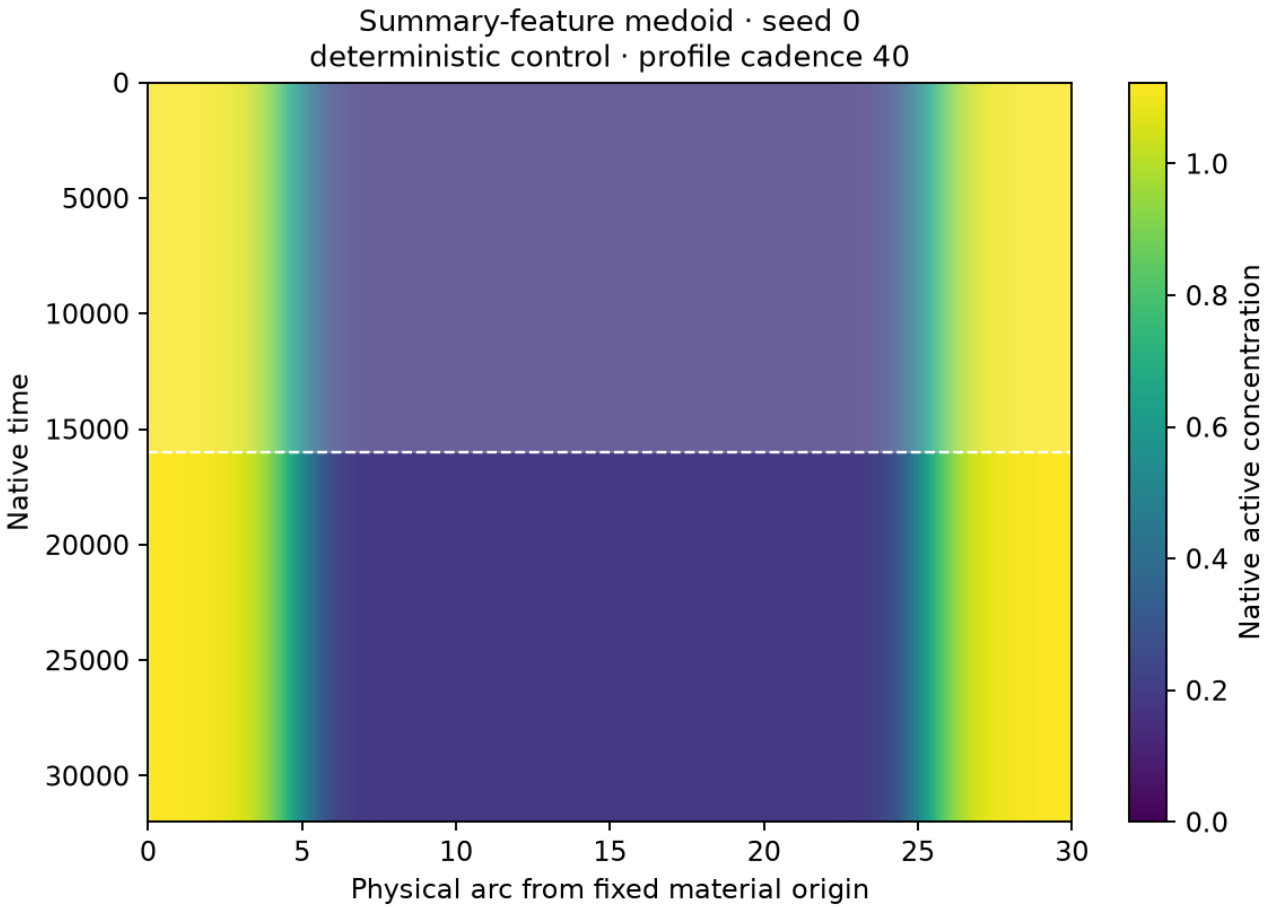

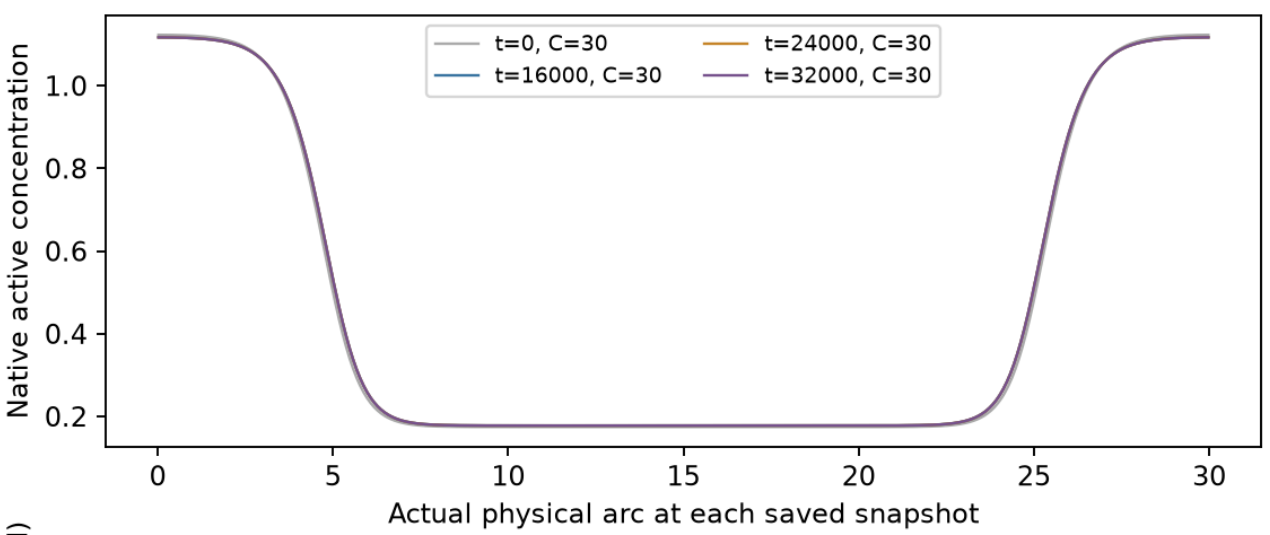

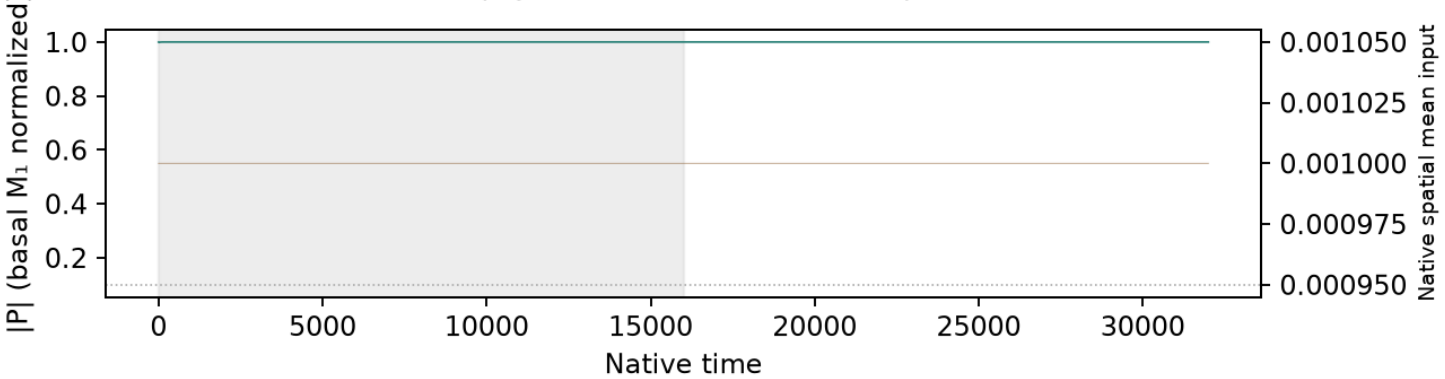

Native concentrations and every retained field frame are plotted without spatial resampling.
First half shaded: excluded from summary selection.
Spring mesh-face interpolation changes only boundary geometry; snapshots use actual saved C(t).
P uses basal M_1 normalization, distinct from instantaneous coherence.
Supplemental selection and controls; no main example is chosen.
Native NPZ/status links remain local/HPC data.

S11 · Wave-pinning · size label 30 · f=0.01 · noise
context common · σ=1 · horizon=32000 · n=12 independent noisy realizations

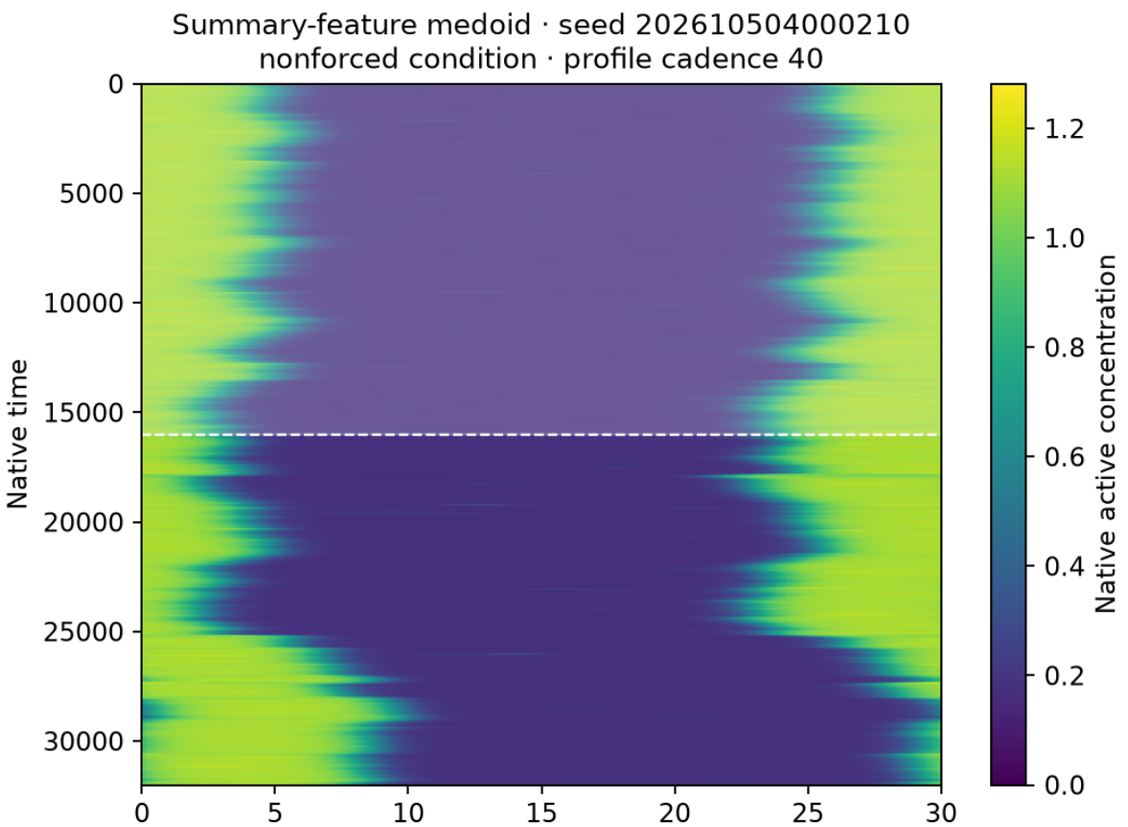

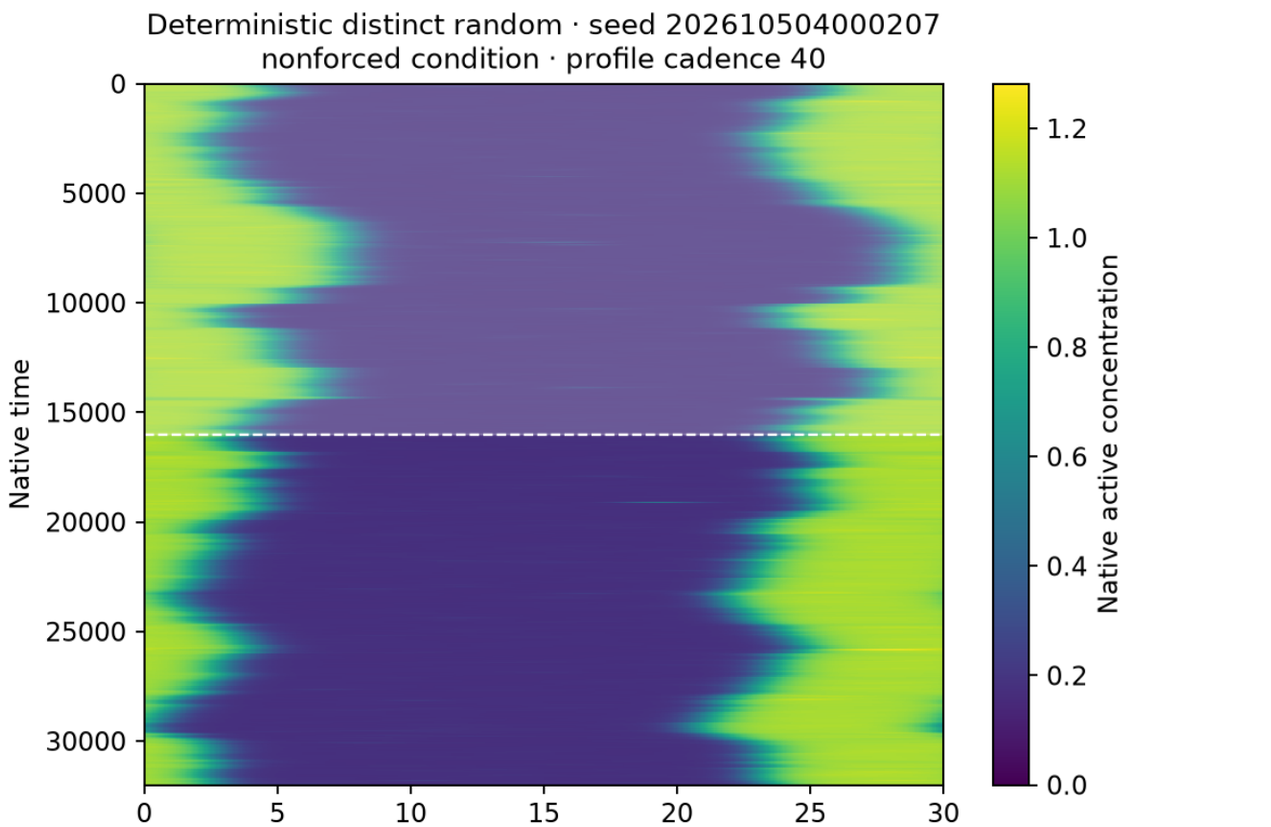

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M_1 normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Wave-pinning · size label 30 · f=0.03 · mean
context common · σ=0 · horizon=32000 · 1 deterministic control

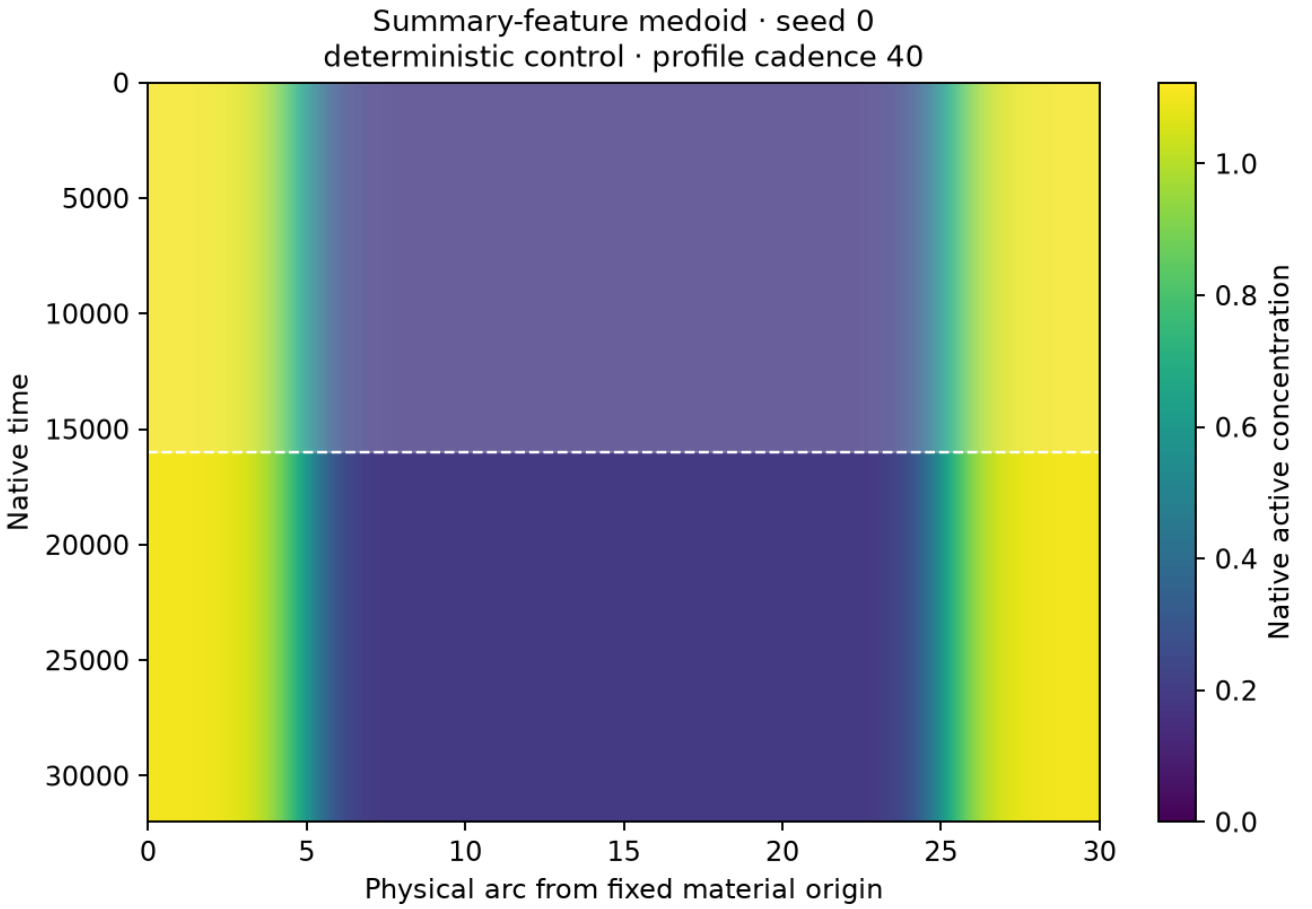

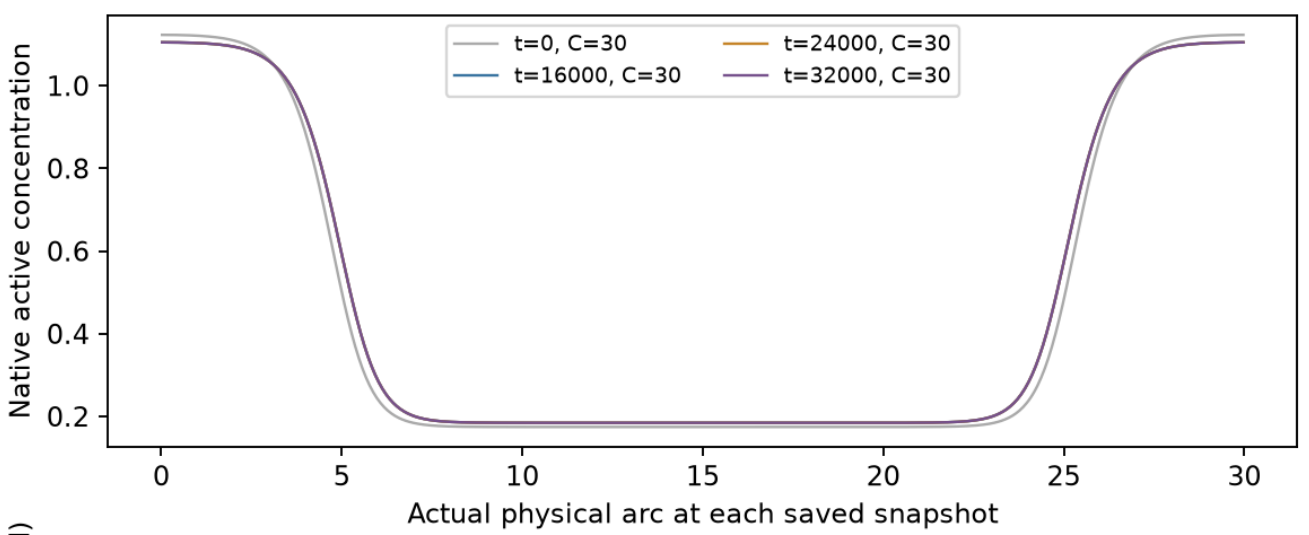

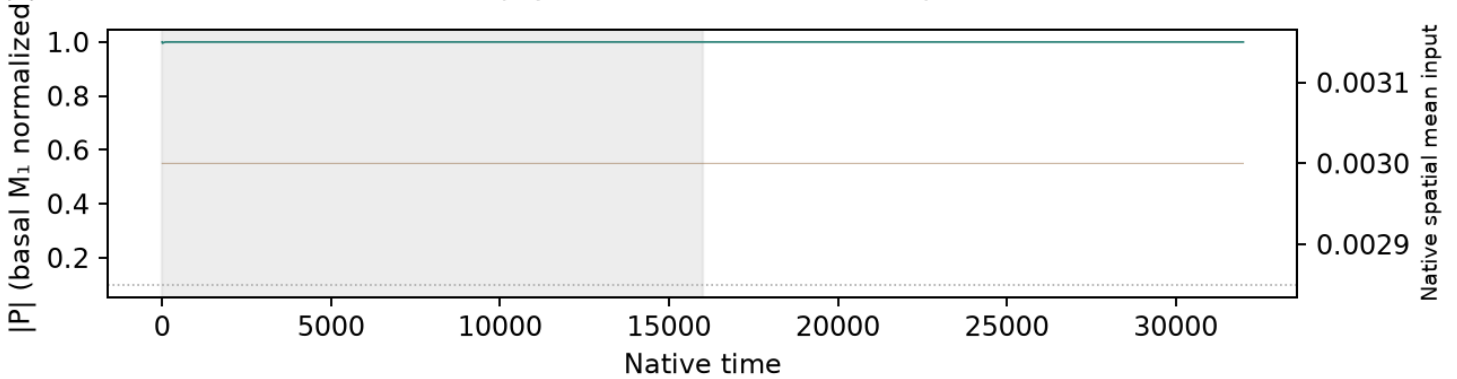

Native concentrations and every retained field frame are plotted without spatial resampling.
First half shaded: excluded from summary selection.
Spring mesh-face interpolation changes only boundary geometry; snapshots use actual saved C(t).
P uses basal M_1 normalization, distinct from instantaneous coherence.
Supplemental selection and controls; no main example is chosen.
Native NPZ/status links remain local/HPC data.

S11 · Wave-pinning · size label 30 · f=0.03 · noise
context common · σ=1 · horizon=32000 · n=12 independent noisy realizations

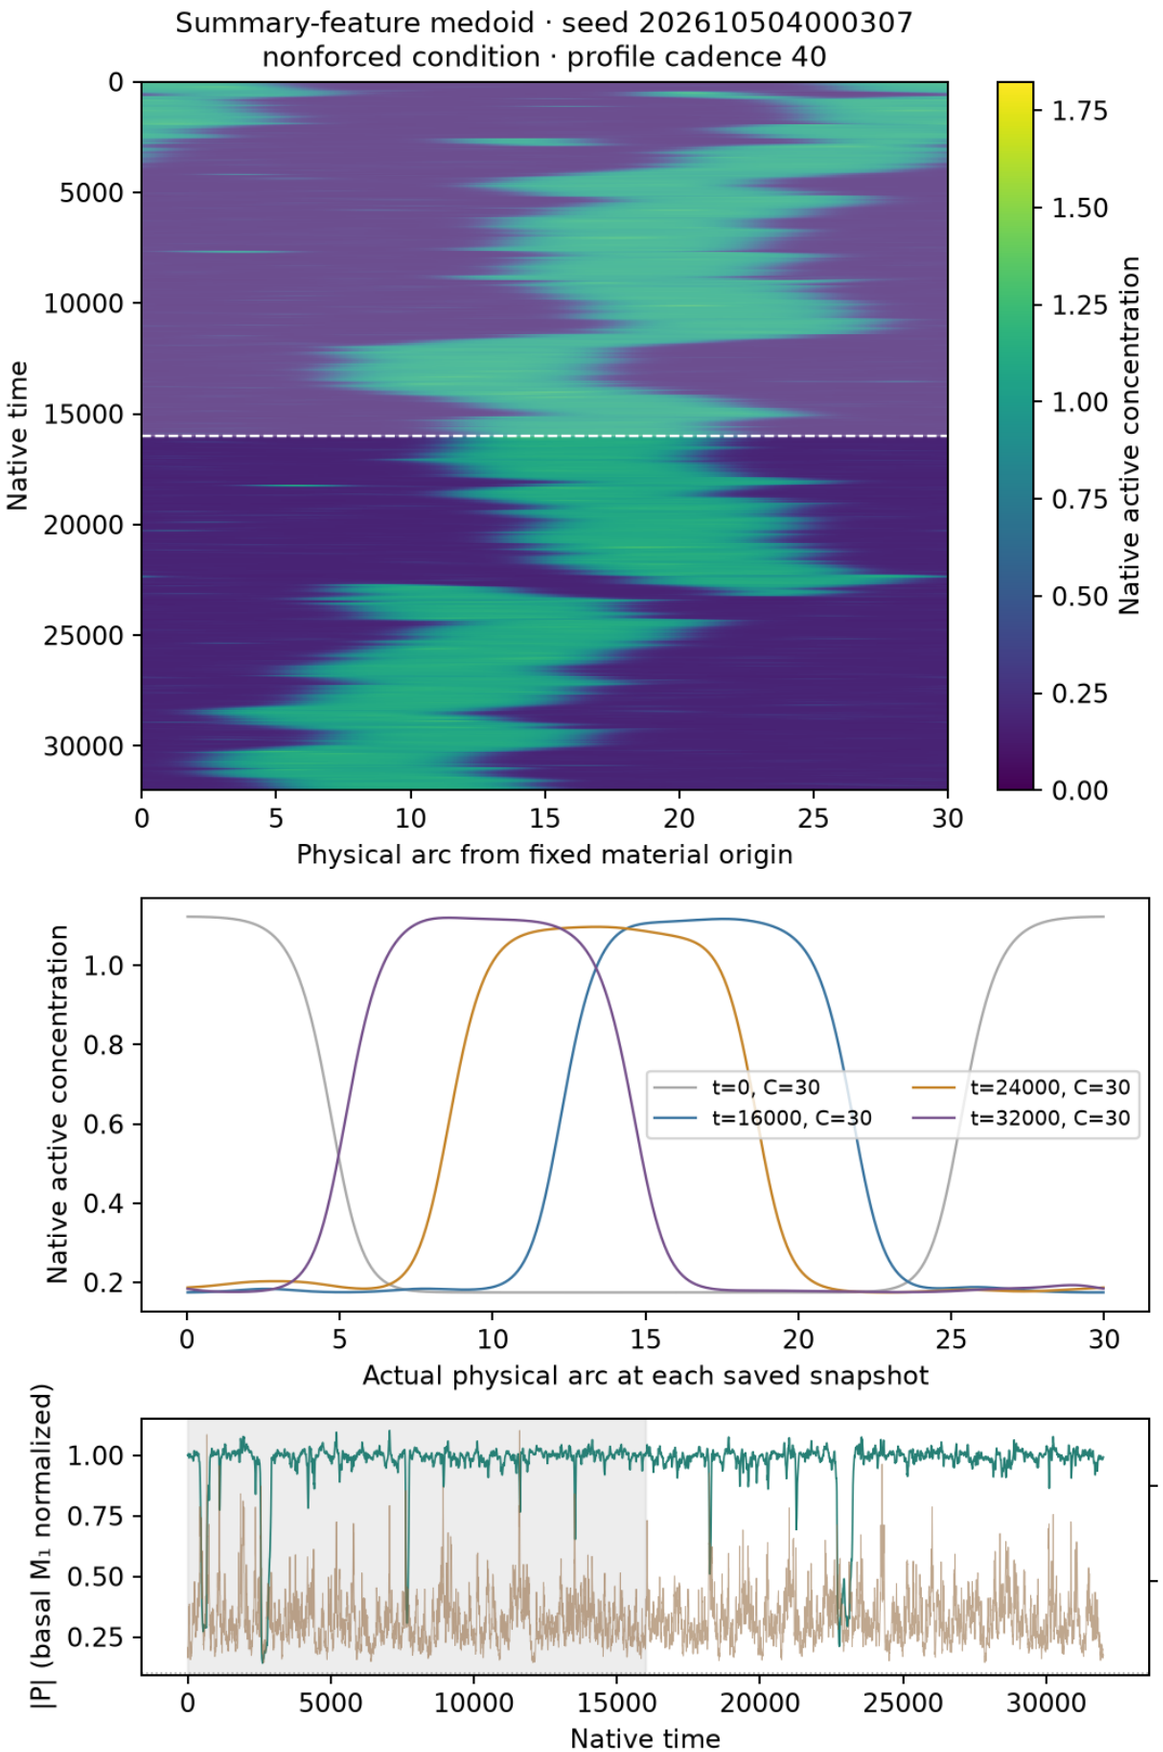

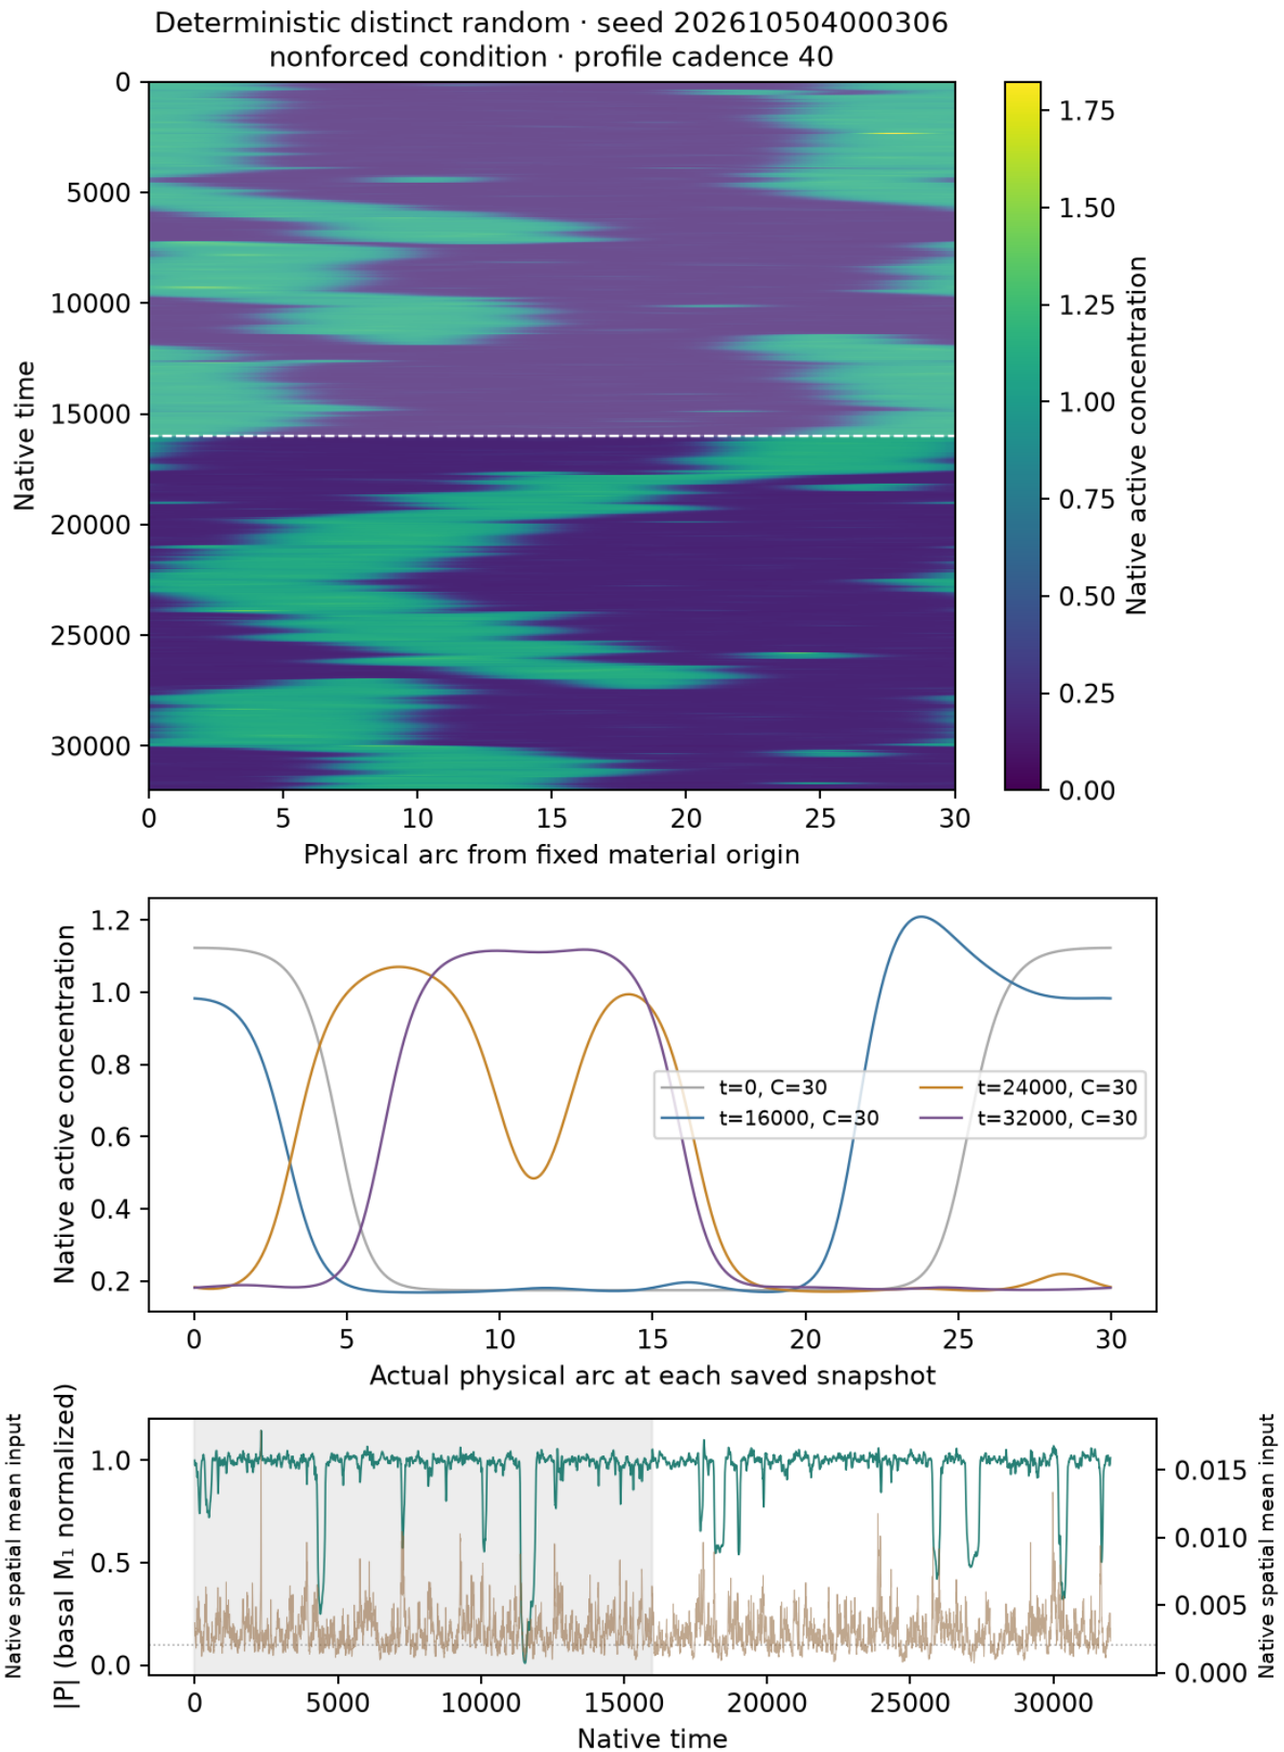

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Wave-pinning · size label 30 · f=0.1 · mean
context common · σ=0 · horizon=32000 · 1 deterministic control

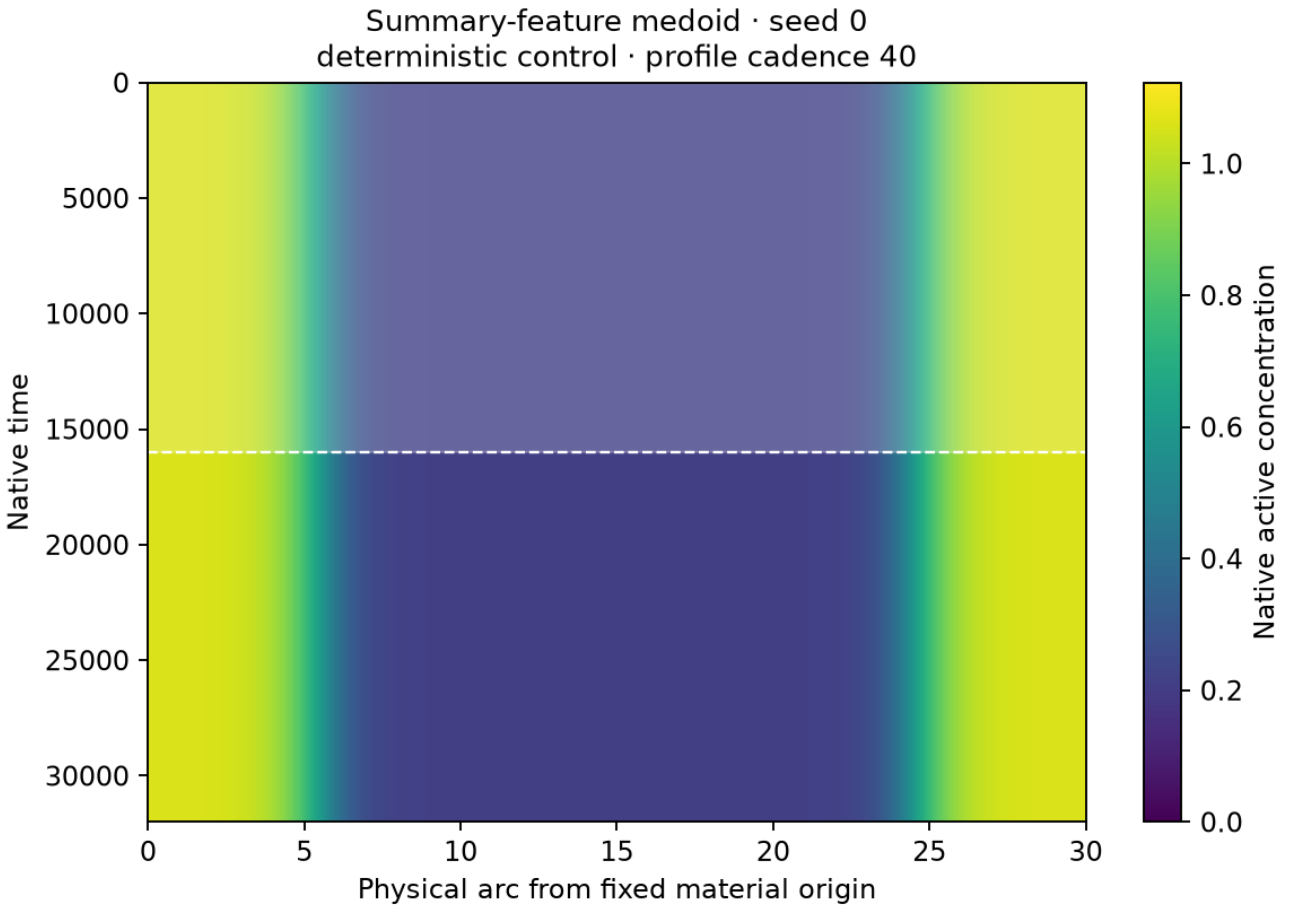

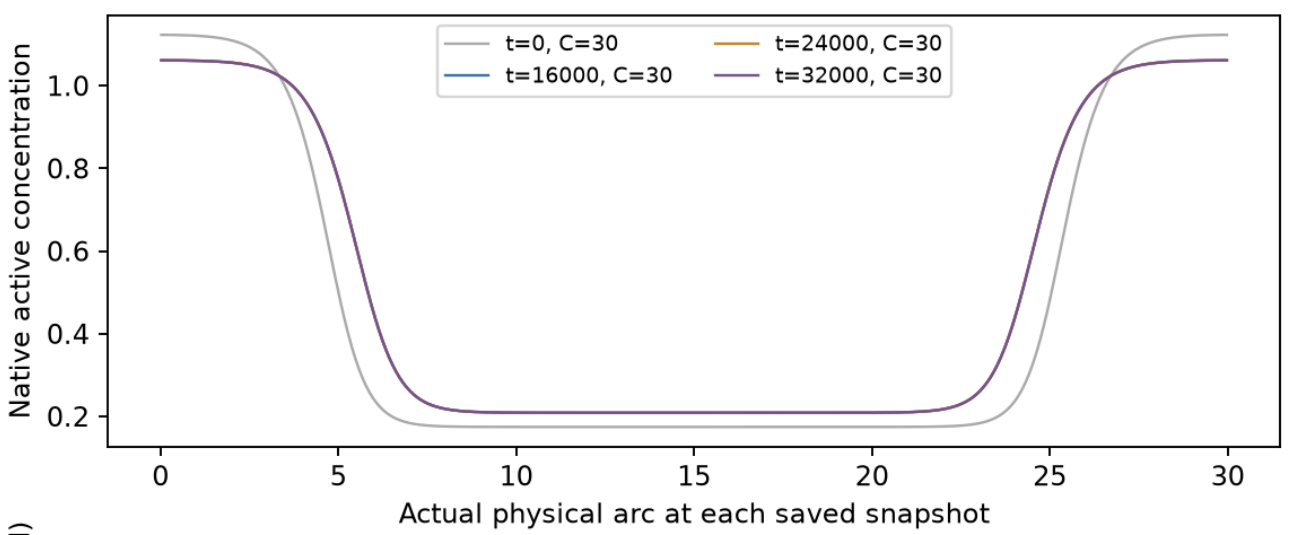

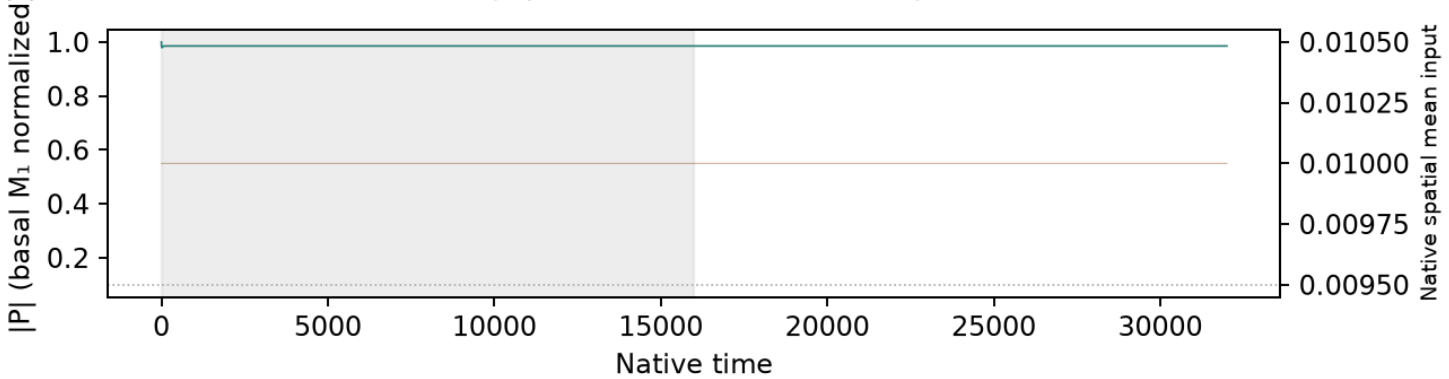

Native concentrations and every retained field frame are plotted without spatial resampling.
First half shaded: excluded from summary selection.
Spring mesh-face interpolation changes only boundary geometry; snapshots use actual saved C(t).
P uses basal M_1 normalization, distinct from instantaneous coherence.
Supplemental selection and controls; no main example is chosen.
Native NPZ/status links remain local/HPC data.

S11 · Wave-pinning · size label 30 · f=0.1 · noise
context common · σ=1 · horizon=32000 · n=12 independent noisy realizations

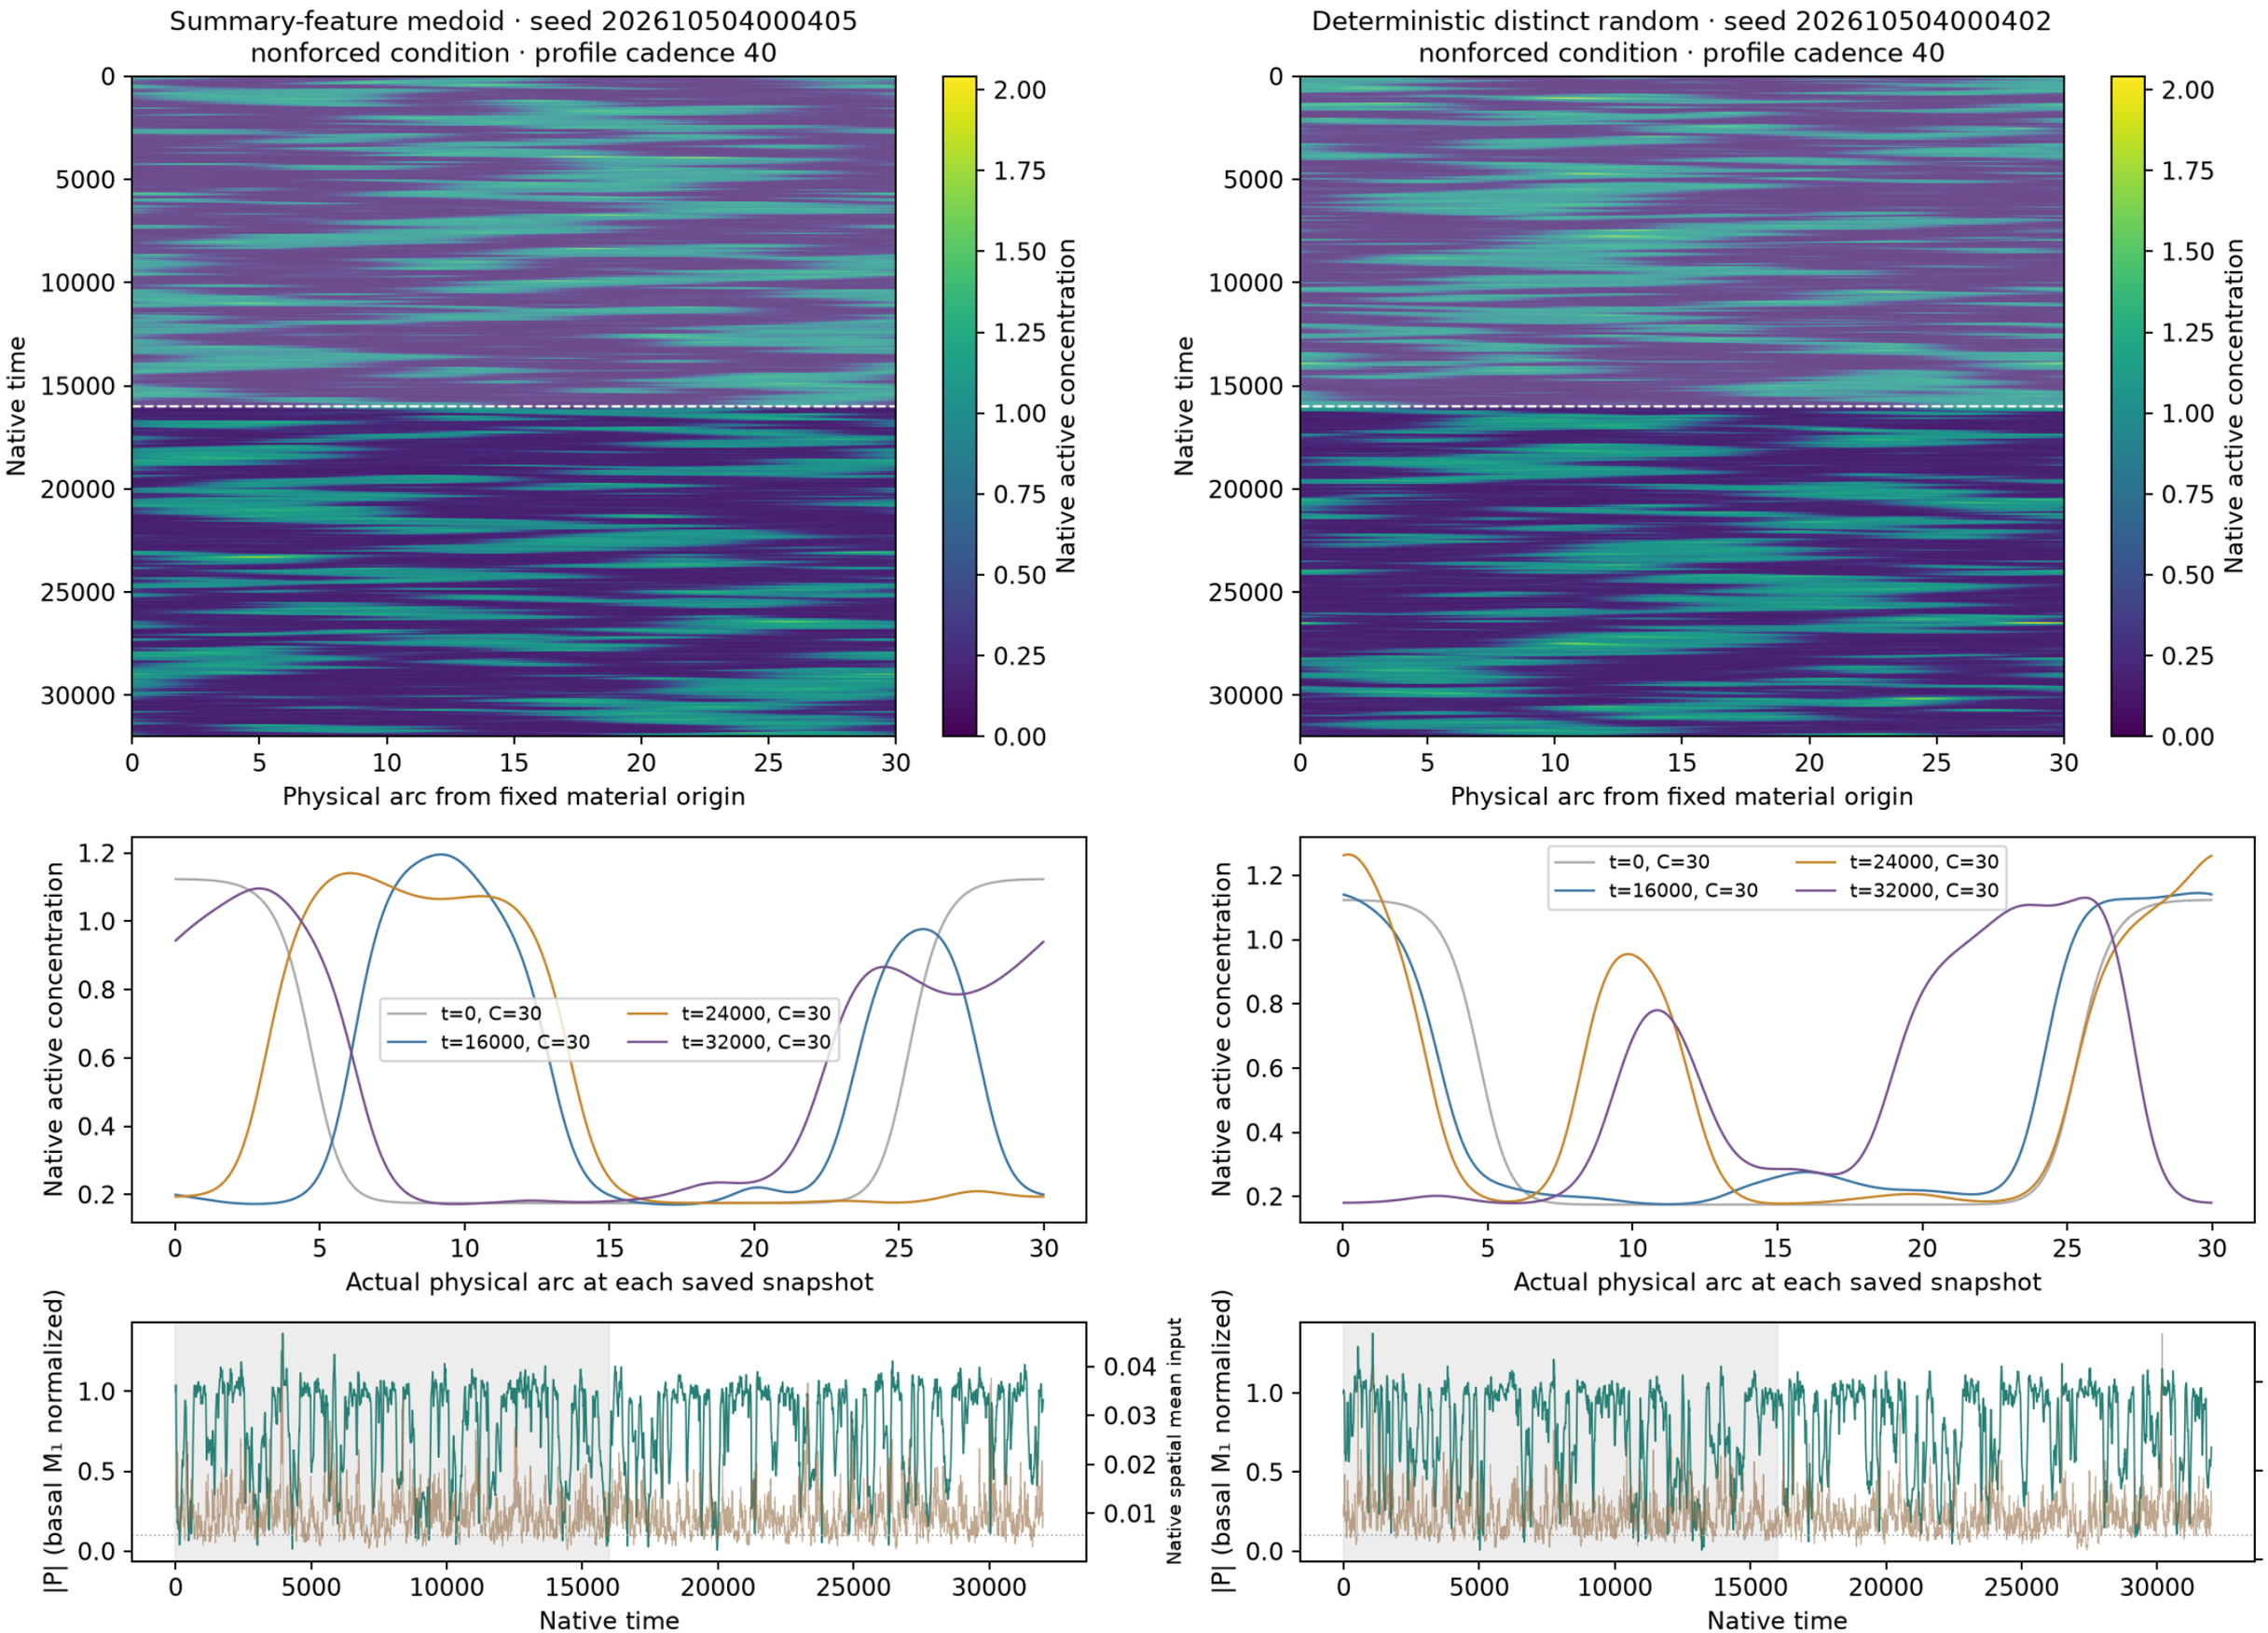

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Wave-pinning · size label 40 · f=0 · zero
context common · σ=0 · horizon=32000 · 1 deterministic control

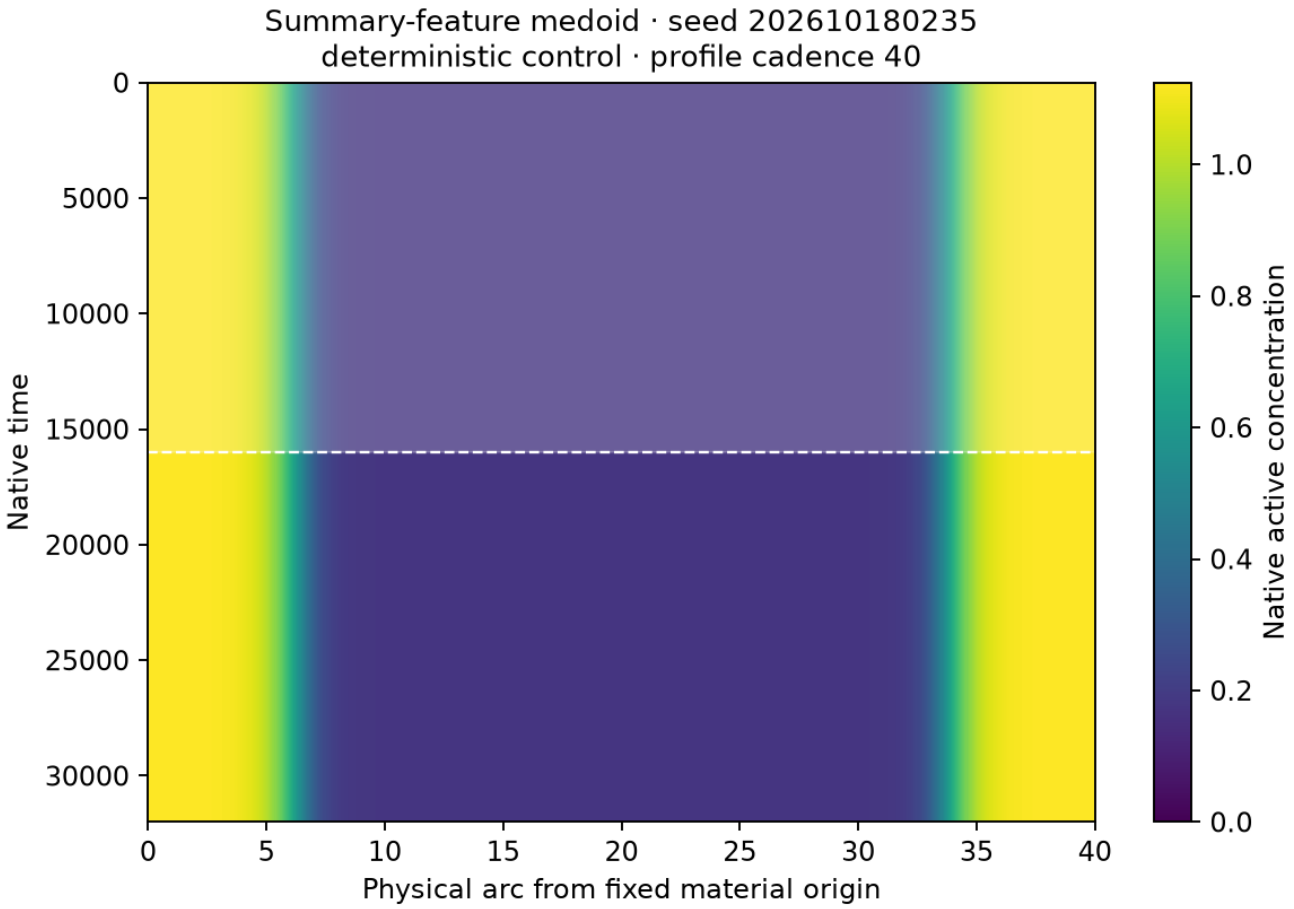

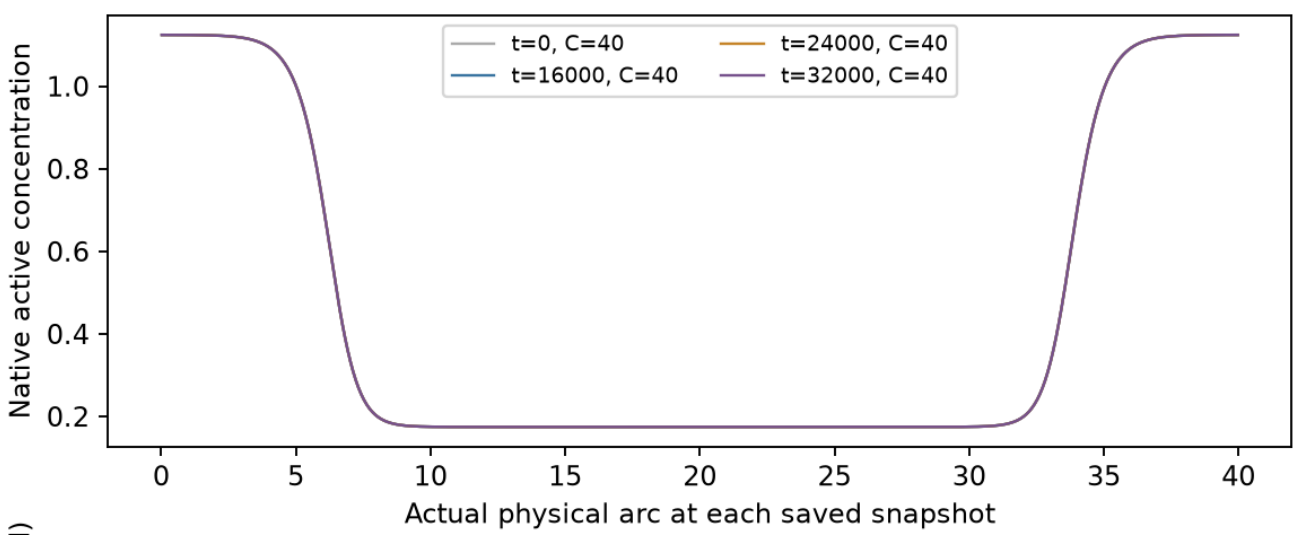

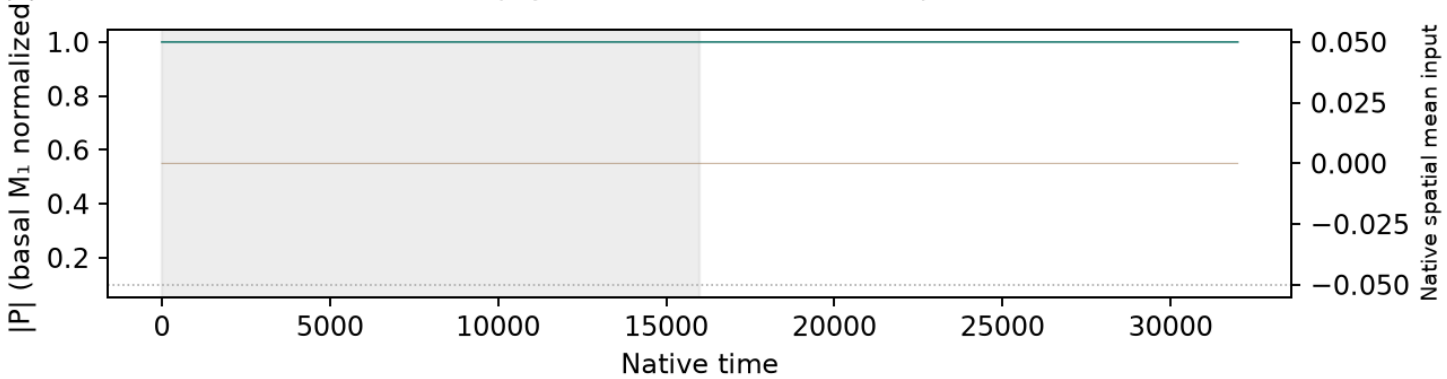

Native concentrations and every retained field frame are plotted without spatial resampling.
First half shaded: excluded from summary selection.
Spring mesh-face interpolation changes only boundary geometry; snapshots use actual saved C(t).
P uses basal M_1 normalization, distinct from instantaneous coherence.
Supplemental selection and controls; no main example is chosen.
Native NPZ/status links remain local/HPC data.

S11 · Wave-pinning · size label 40 · f=0.0001 · mean
context common · σ=0 · horizon=32000 · 1 deterministic control

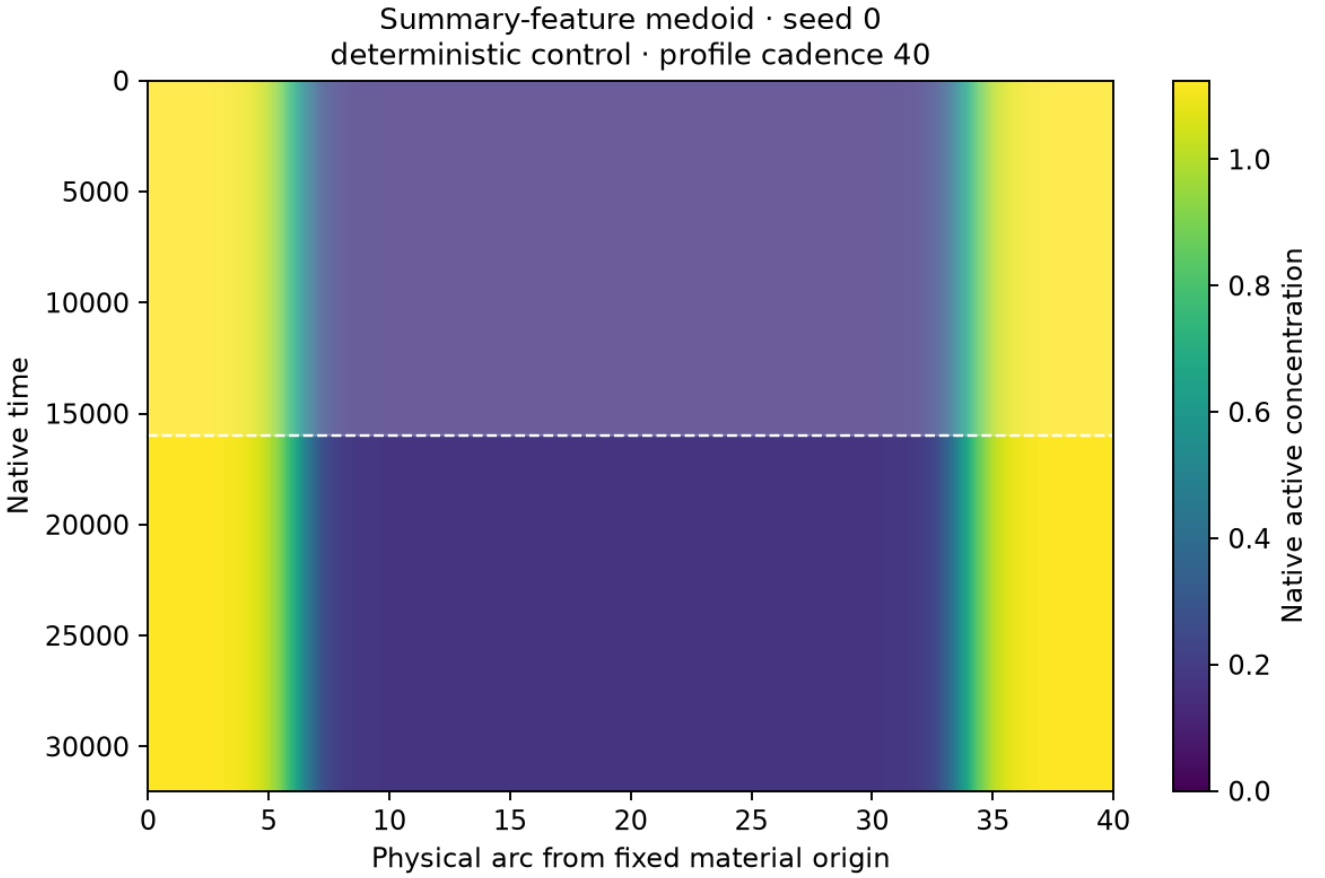

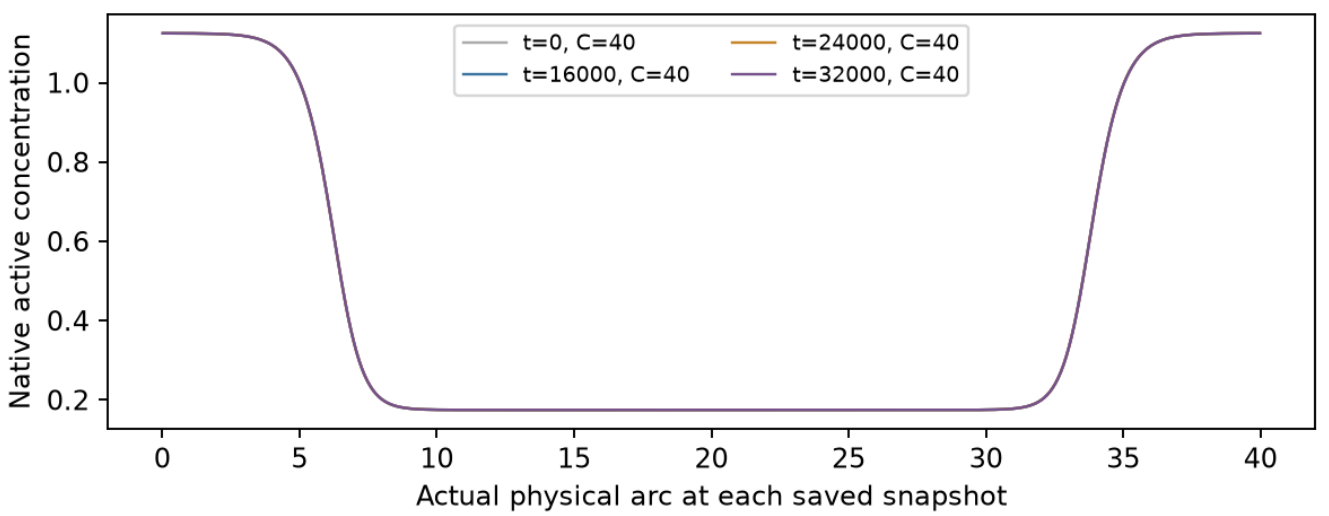

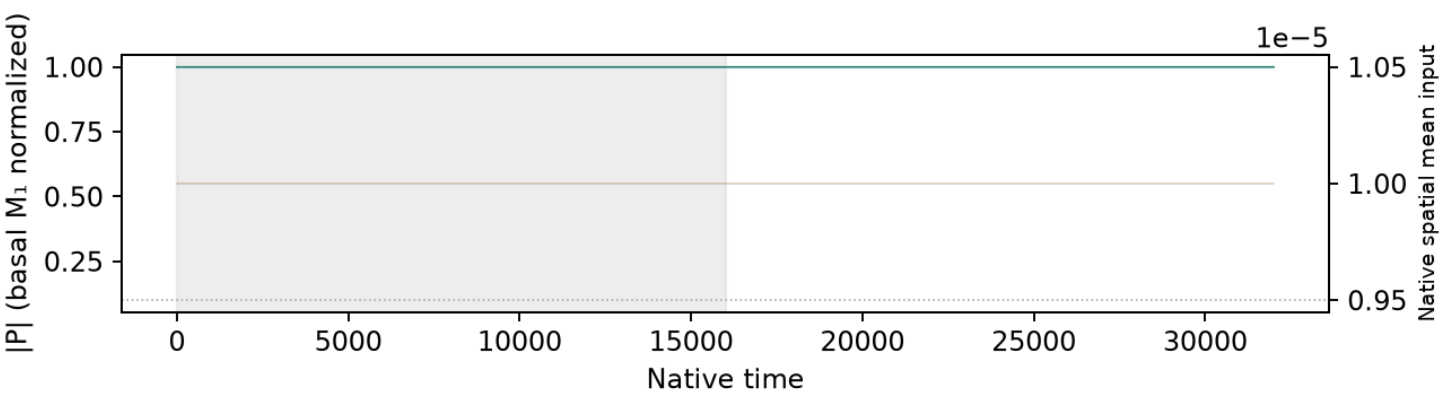

Native concentrations and every retained field frame are plotted without spatial resampling.
First half shaded: excluded from summary selection.
Spring mesh-face interpolation changes only boundary geometry; snapshots use actual saved C(t).
P uses basal M_1 normalization, distinct from instantaneous coherence.
Supplemental selection and controls; no main example is chosen.
Native NPZ/status links remain local/HPC data.

S11 · Wave-pinning · size label 40 · f=0.0001 · noise
context common · σ=1 · horizon=32000 · n=2 independent noisy realizations

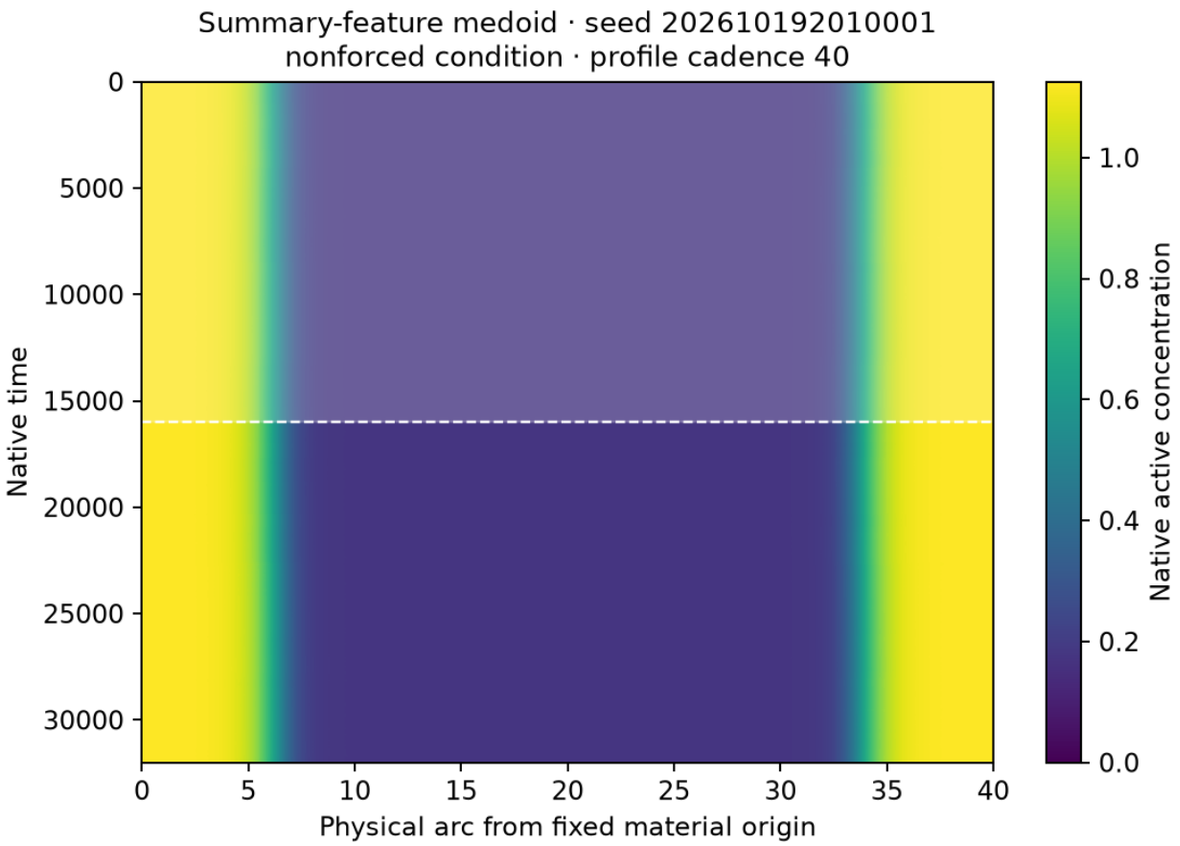

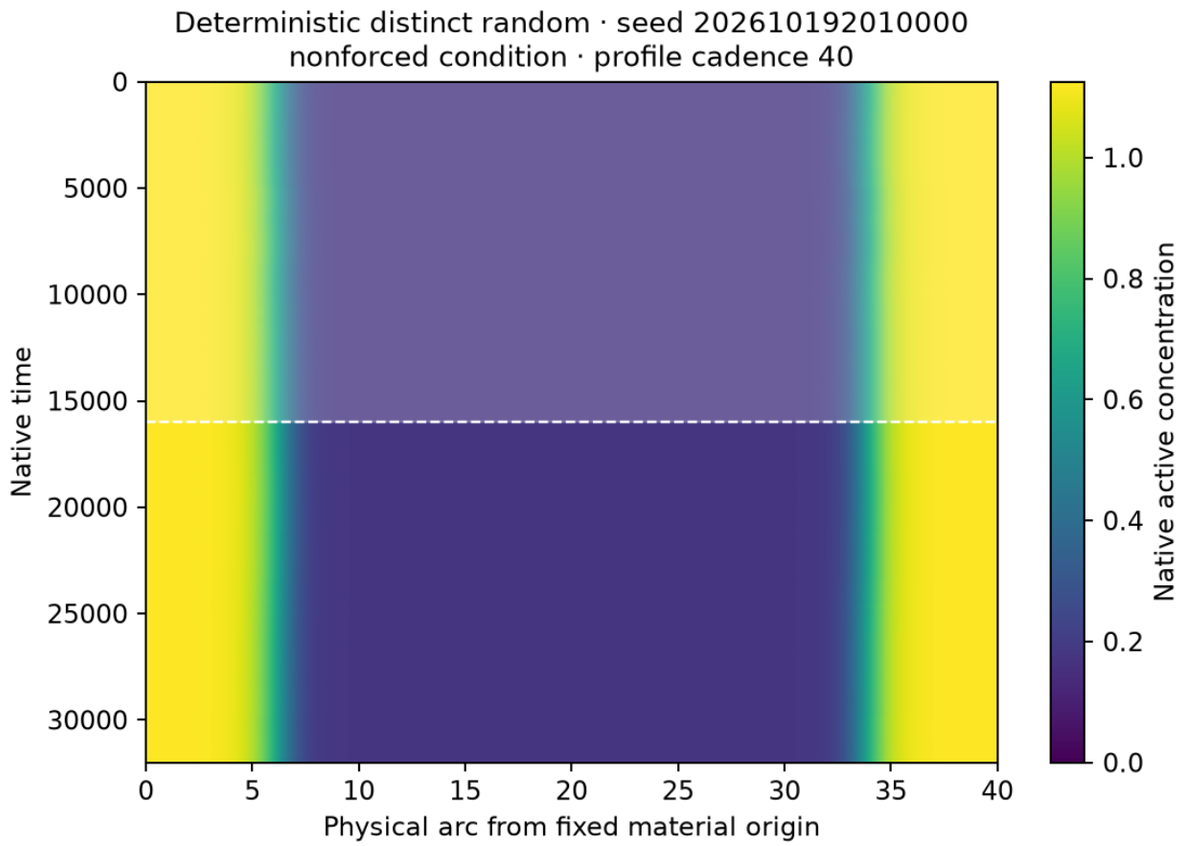

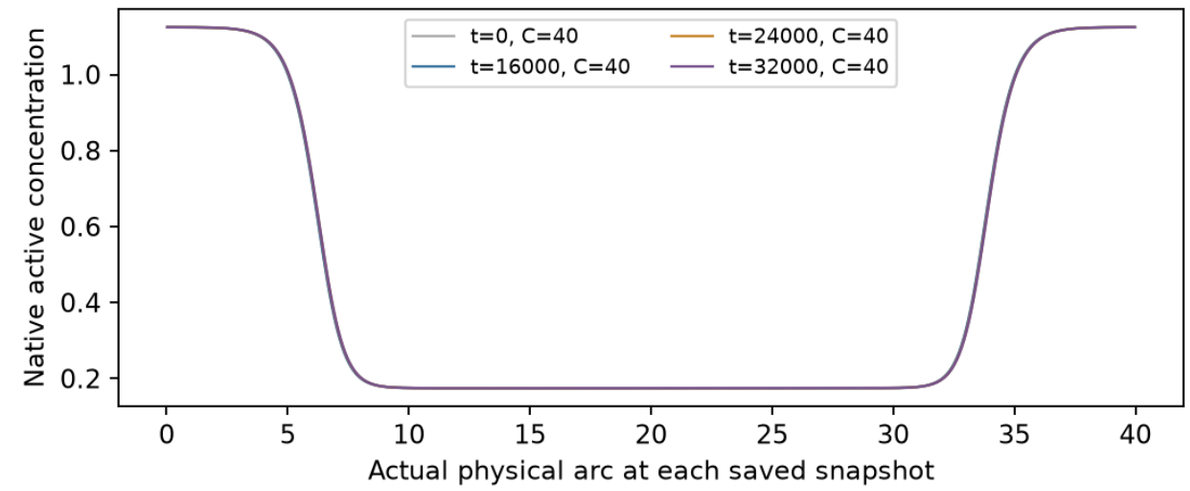

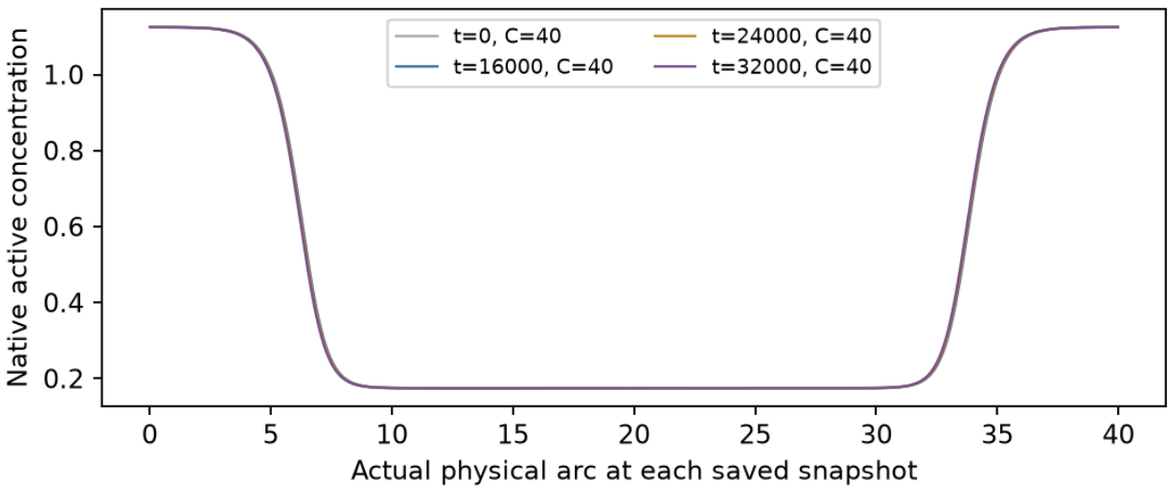

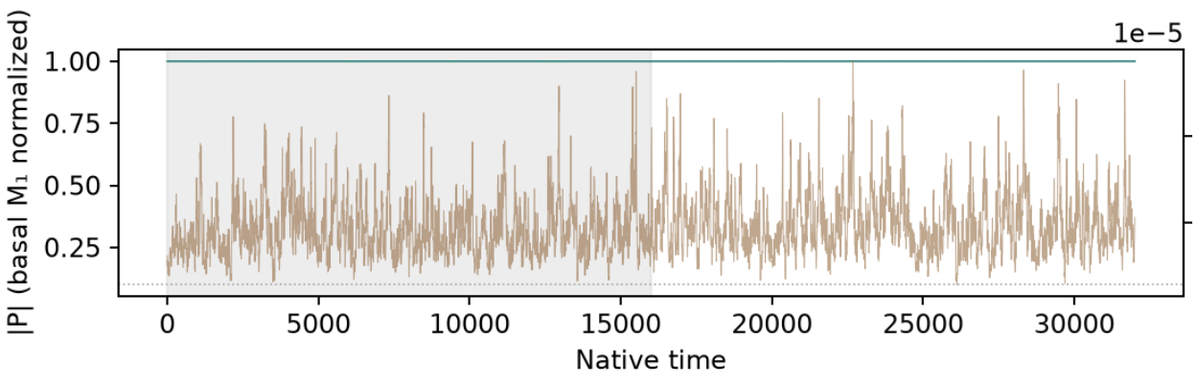

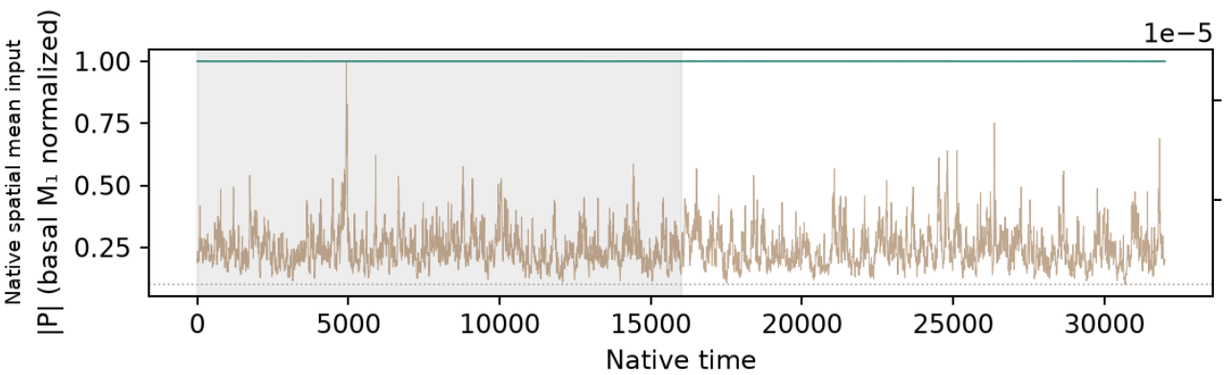

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Wave-pinning · size label 40 · f=0.0003 · mean
context common · σ=0 · horizon=32000 · 1 deterministic control

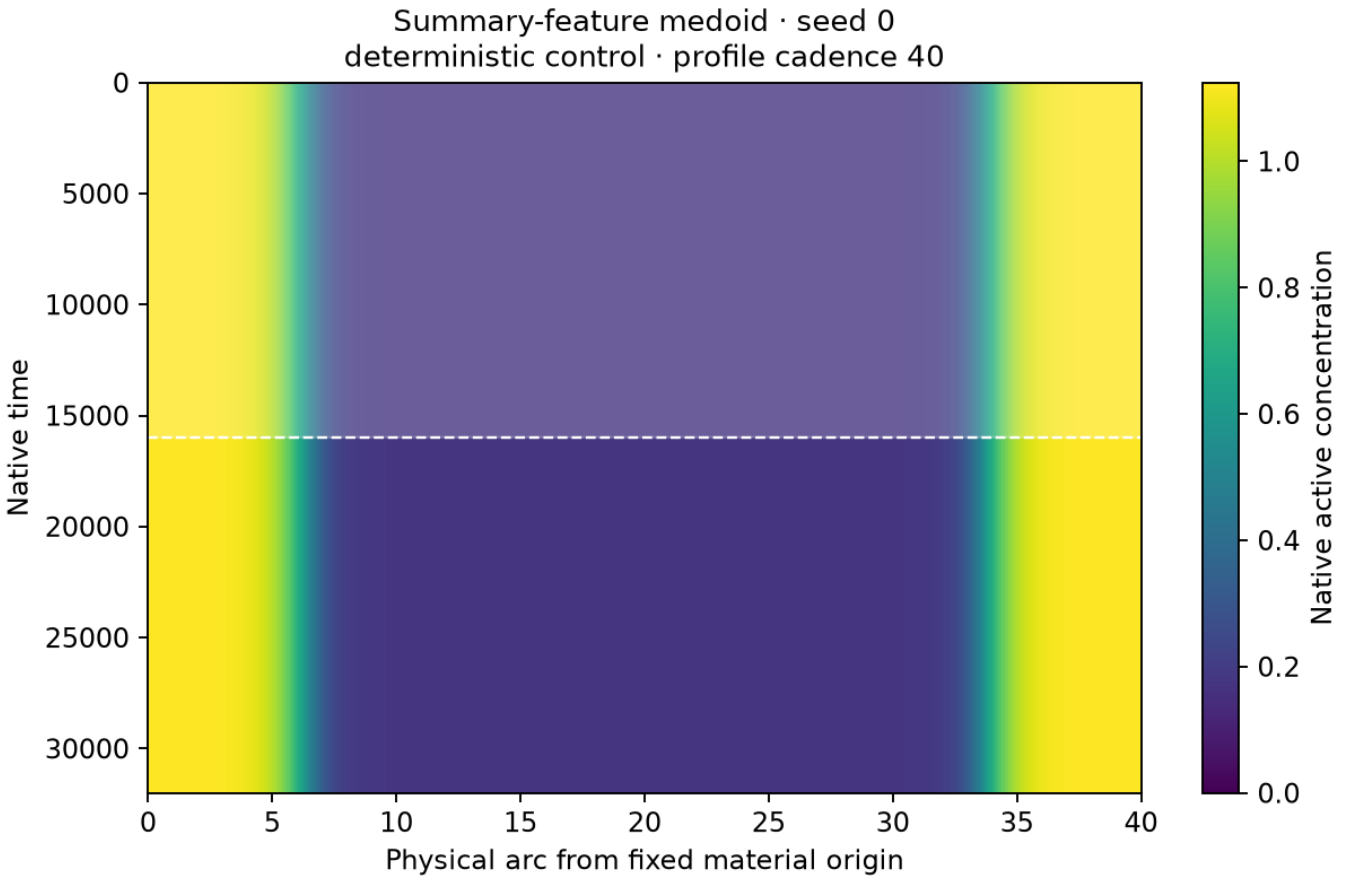

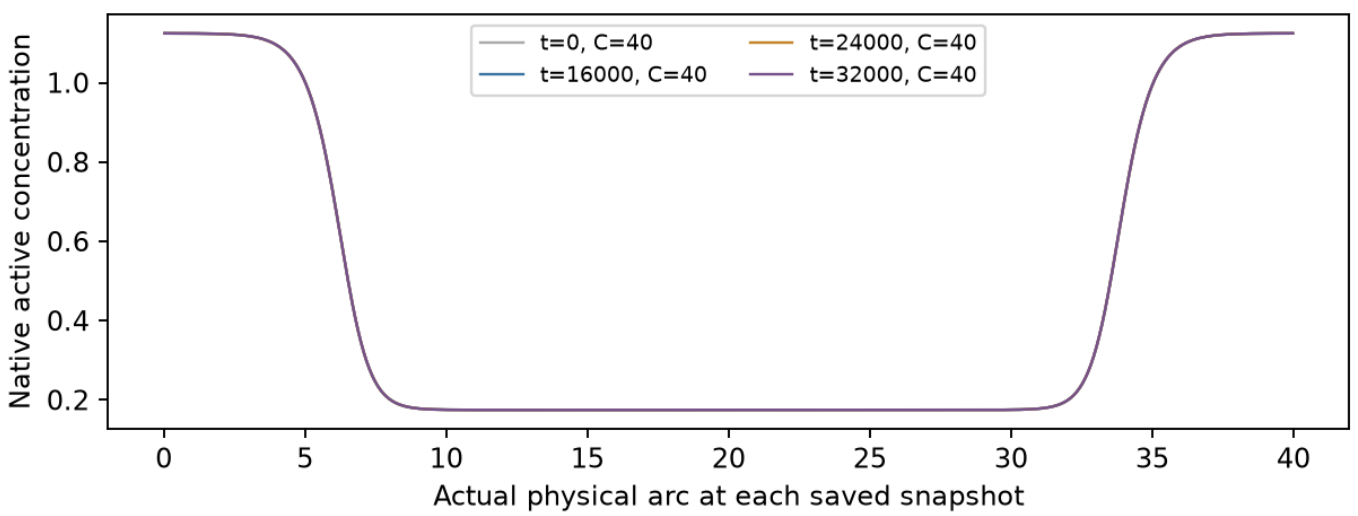

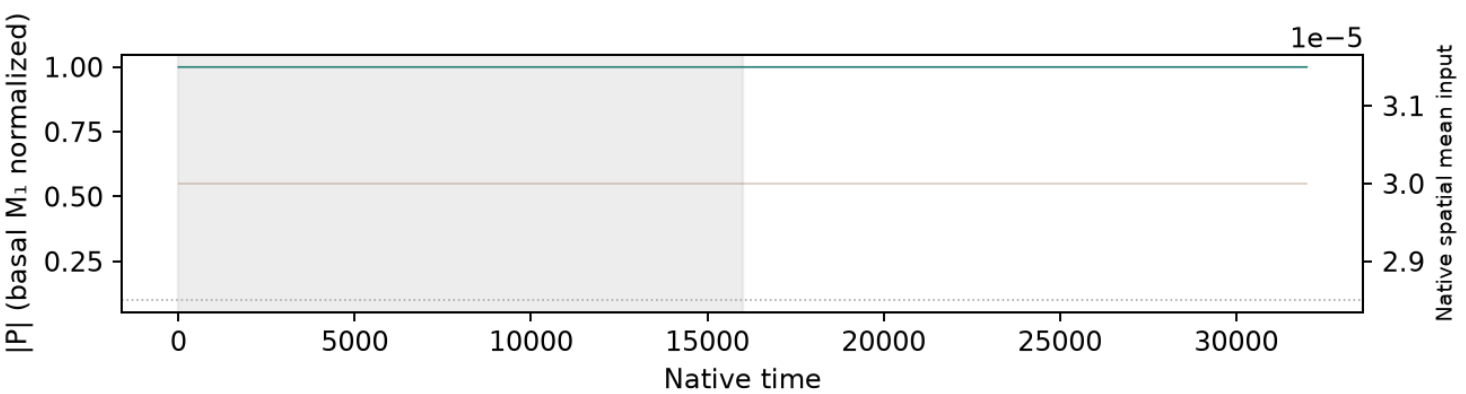

Native concentrations and every retained field frame are plotted without spatial resampling.
First half shaded: excluded from summary selection.
Spring mesh-face interpolation changes only boundary geometry; snapshots use actual saved C(t).
P uses basal M_1 normalization, distinct from instantaneous coherence.
Supplemental selection and controls; no main example is chosen.
Native NPZ/status links remain local/HPC data.

S11 · Wave-pinning · size label 40 · f=0.0003 · noise
context common · σ=1 · horizon=32000 · n=2 independent noisy realizations

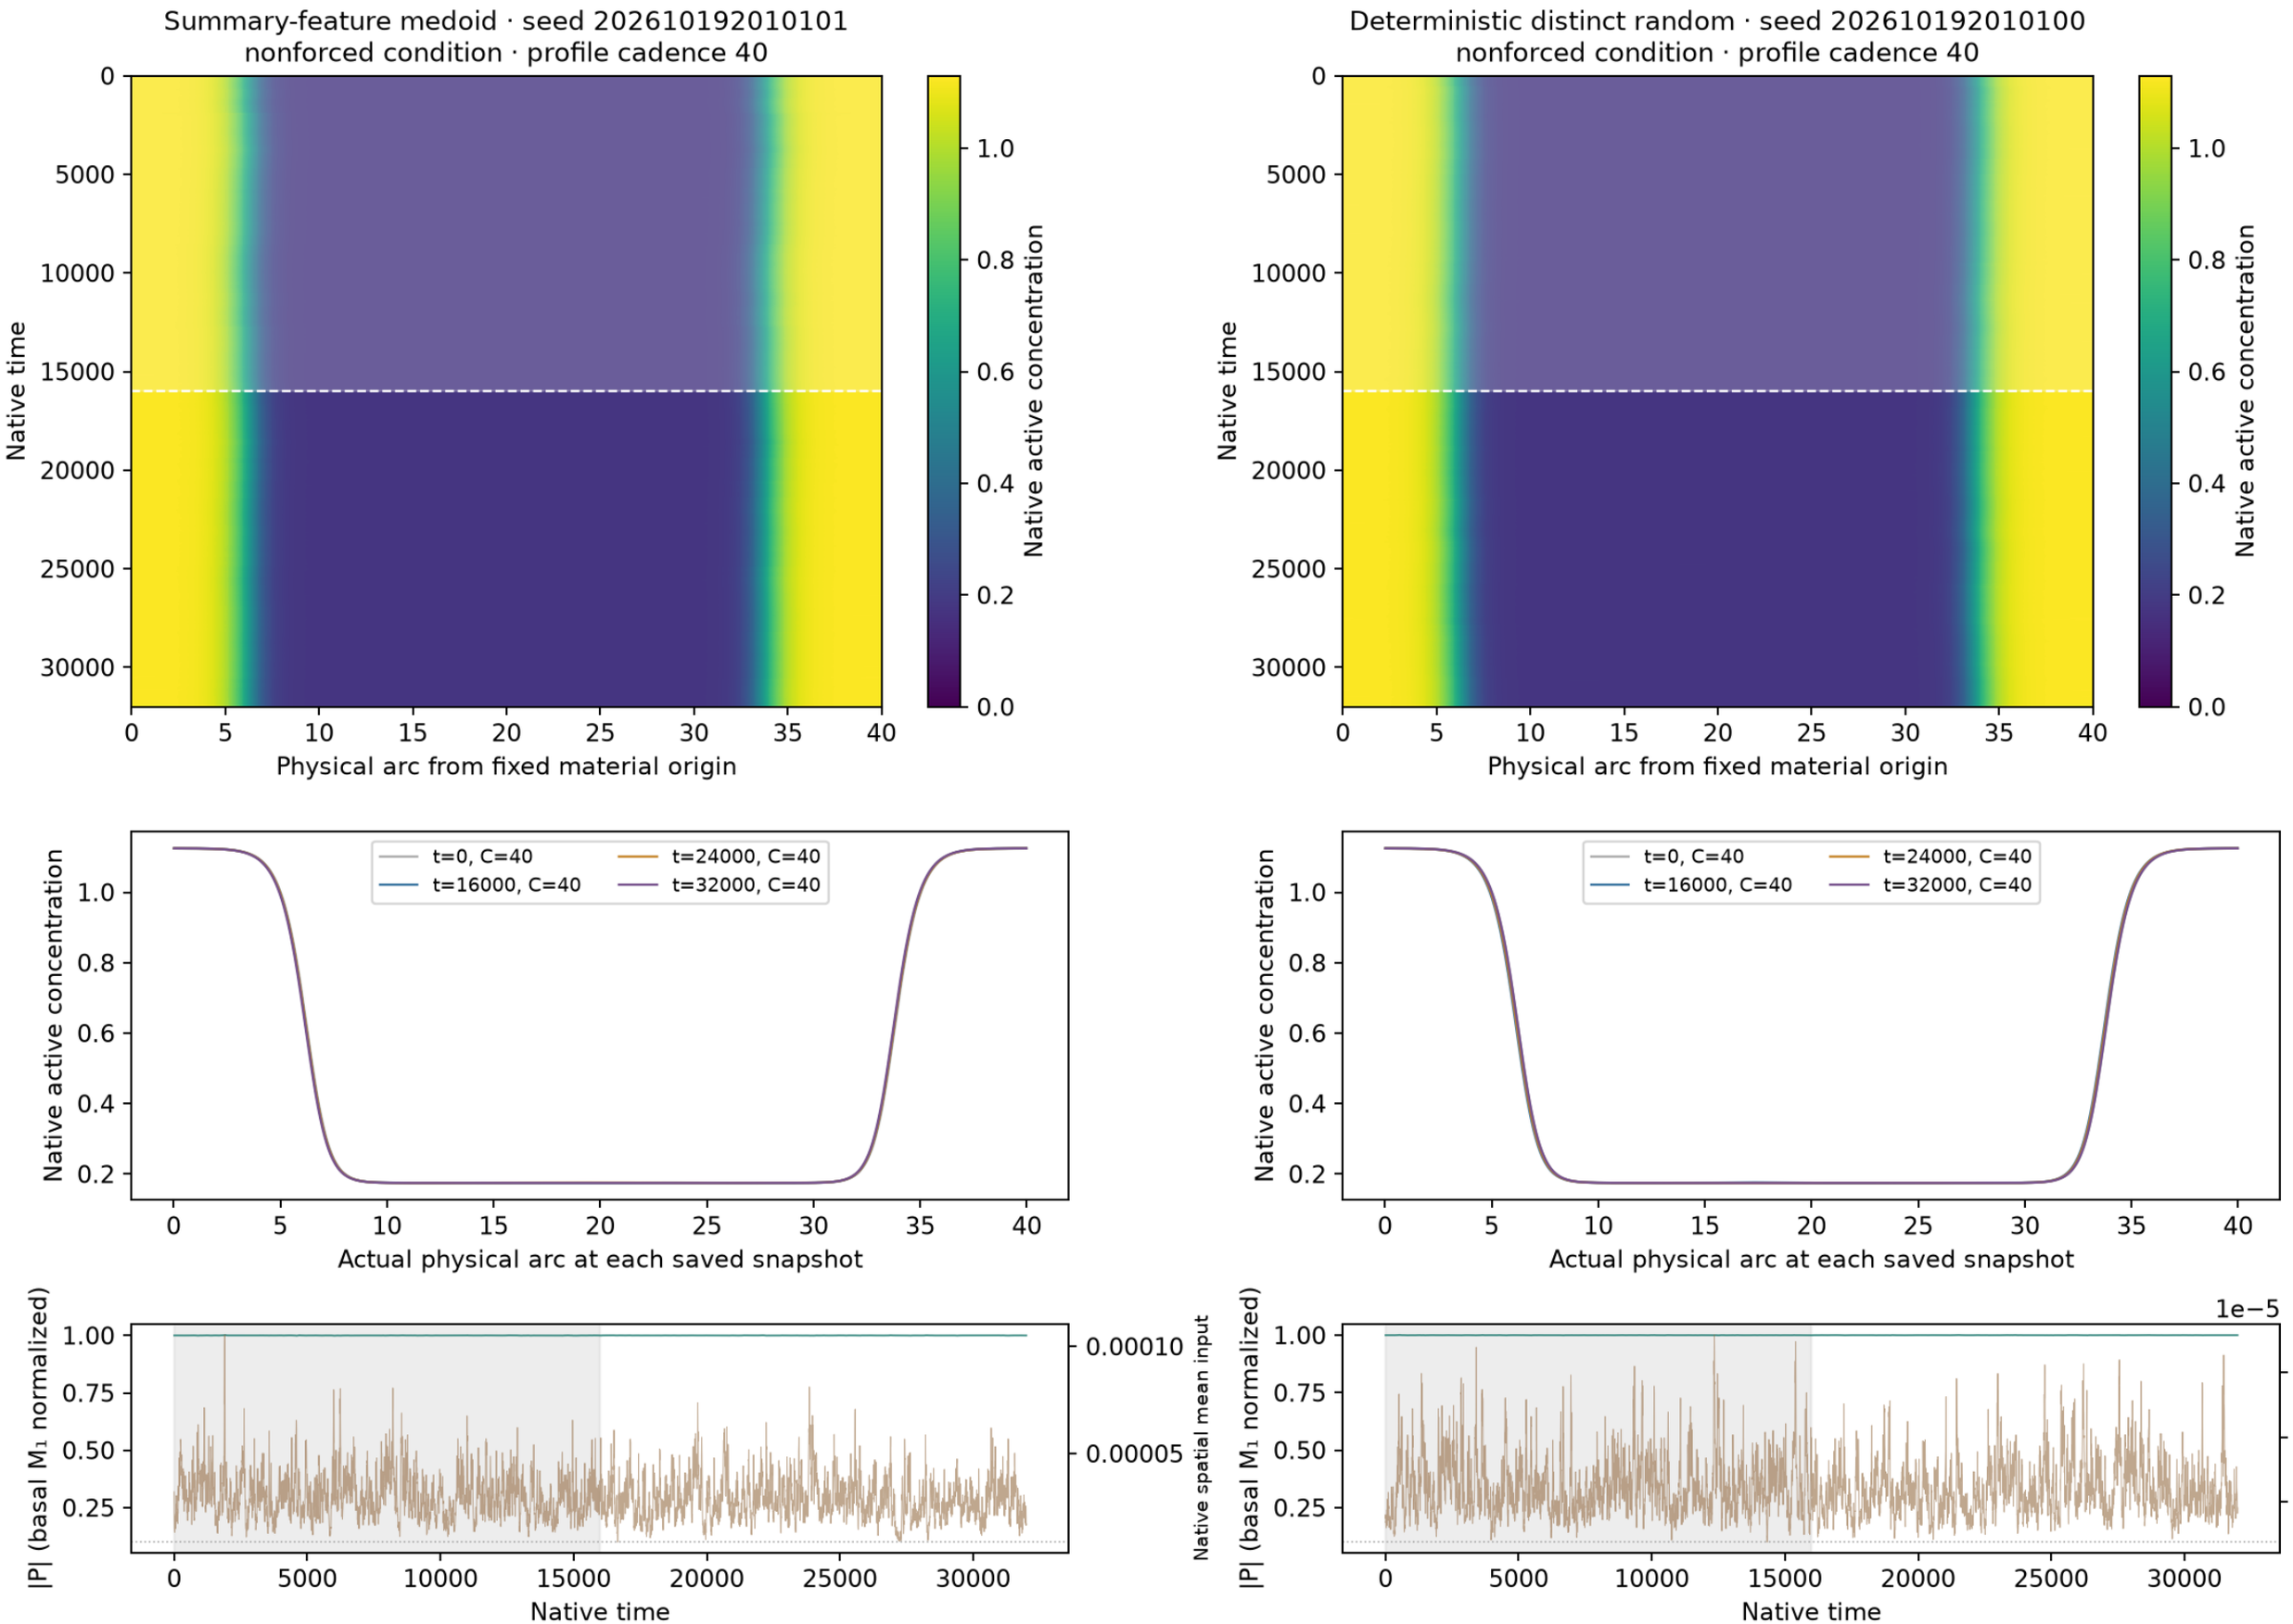

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Wave-pinning · size label 40 · f=0.001 · mean
context common · σ=0 · horizon=32000 · 1 deterministic control

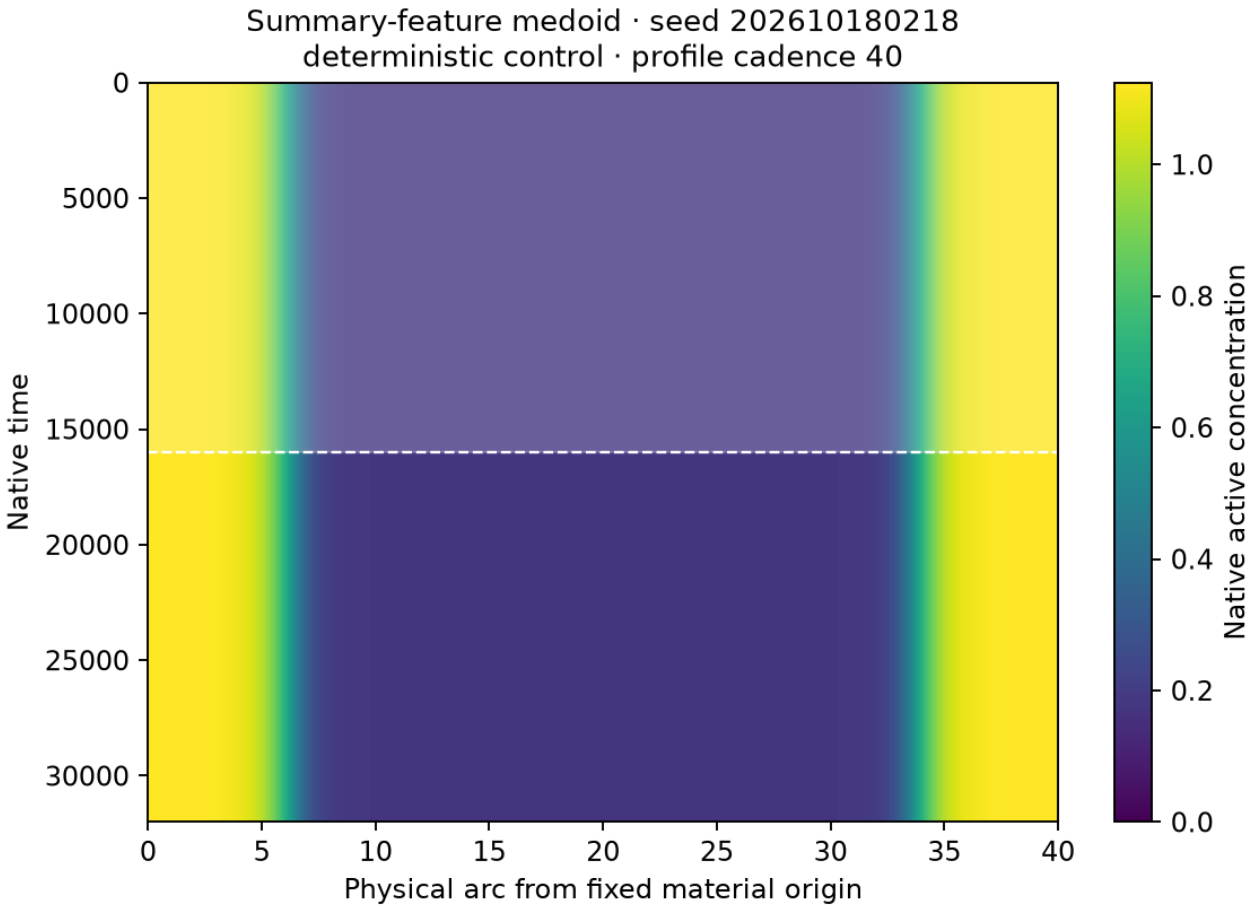

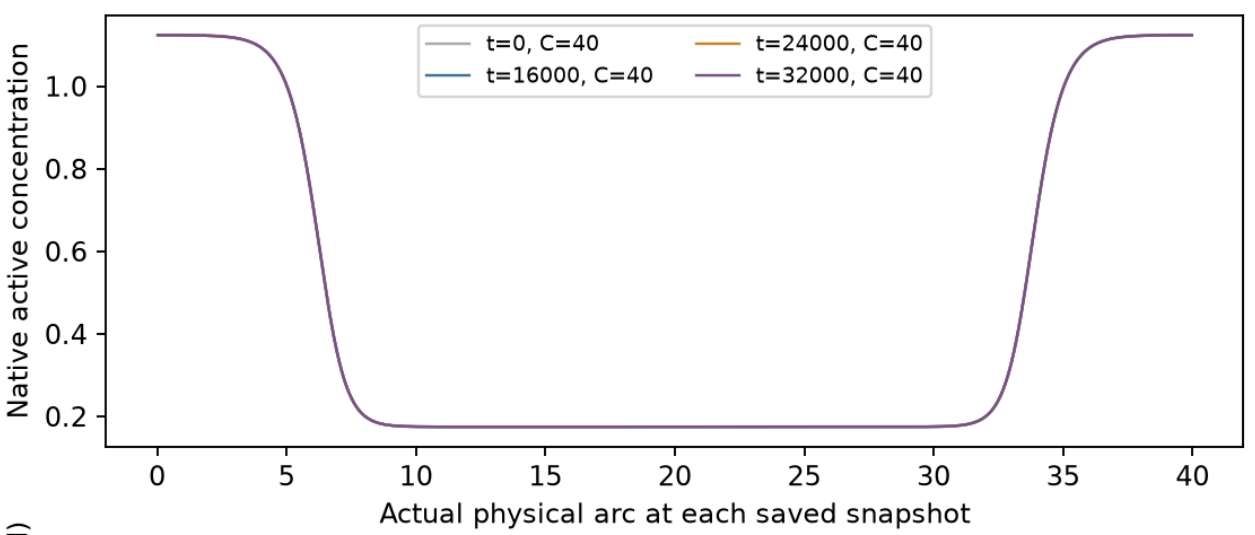

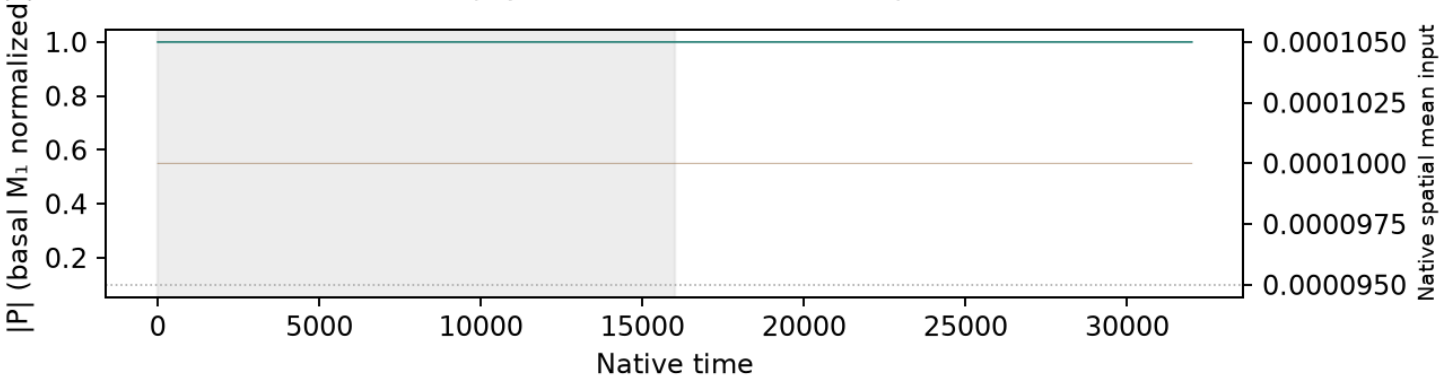

Native concentrations and every retained field frame are plotted without spatial resampling.
First half shaded: excluded from summary selection.
Spring mesh-face interpolation changes only boundary geometry; snapshots use actual saved C(t).
P uses basal M_1 normalization, distinct from instantaneous coherence.
Supplemental selection and controls; no main example is chosen.
Native NPZ/status links remain local/HPC data.

S11 · Wave-pinning · size label 40 · f=0.001 · noise
context common · σ=1 · horizon=32000 · n=12 independent noisy realizations

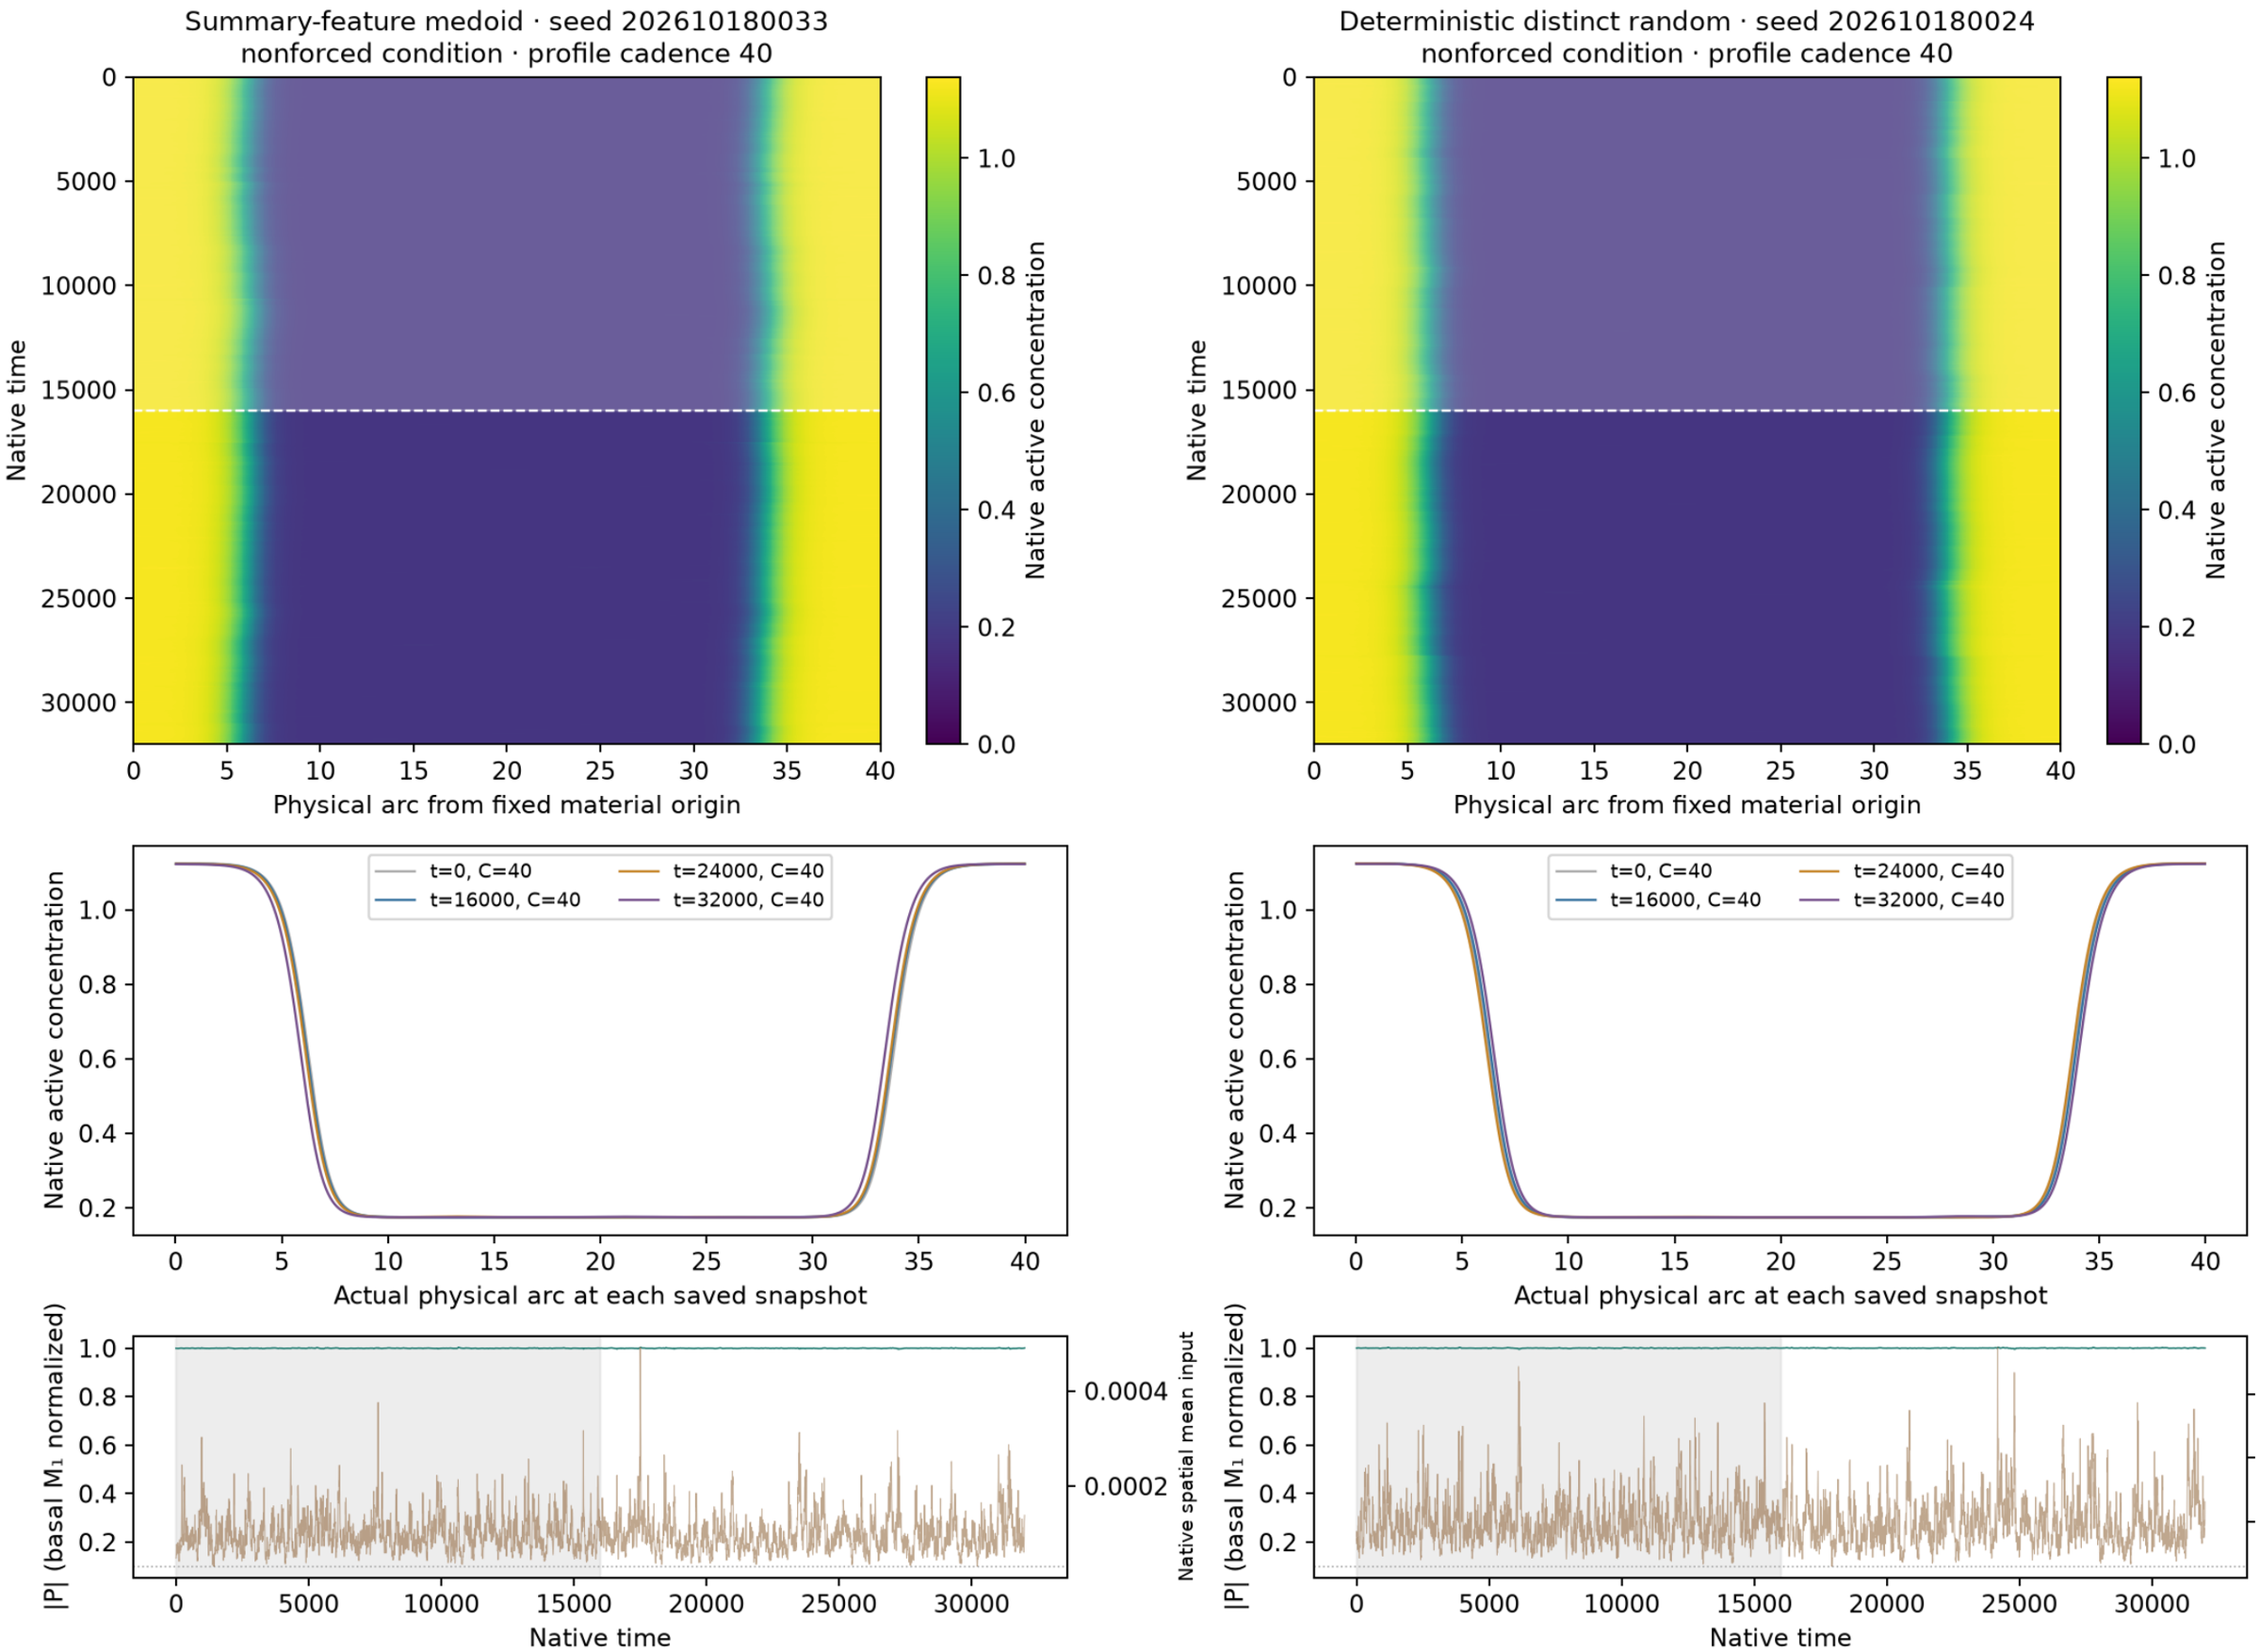

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Wave-pinning · size label 40 · f=0.003 · mean
context common · σ=0 · horizon=32000 · 1 deterministic control

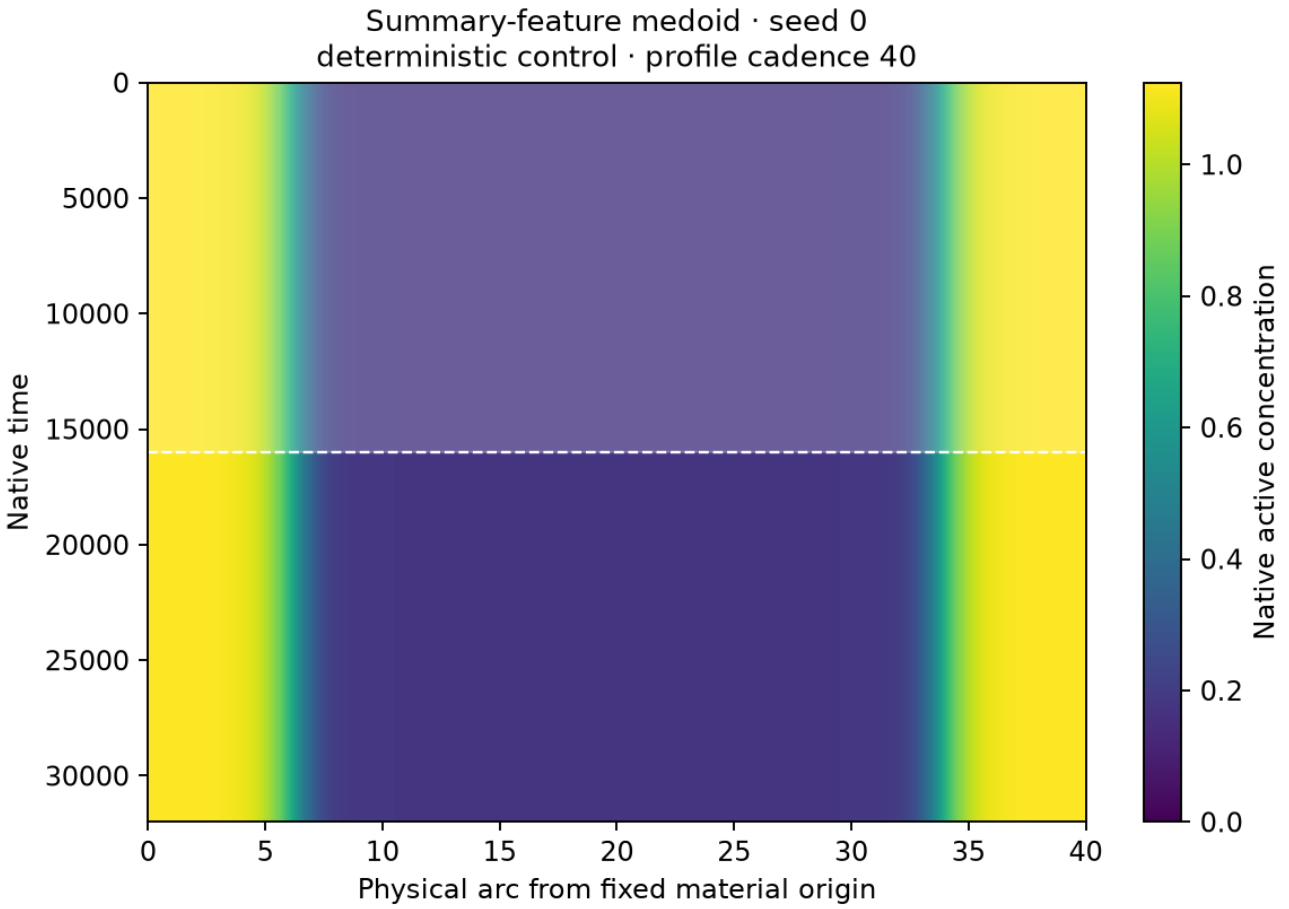

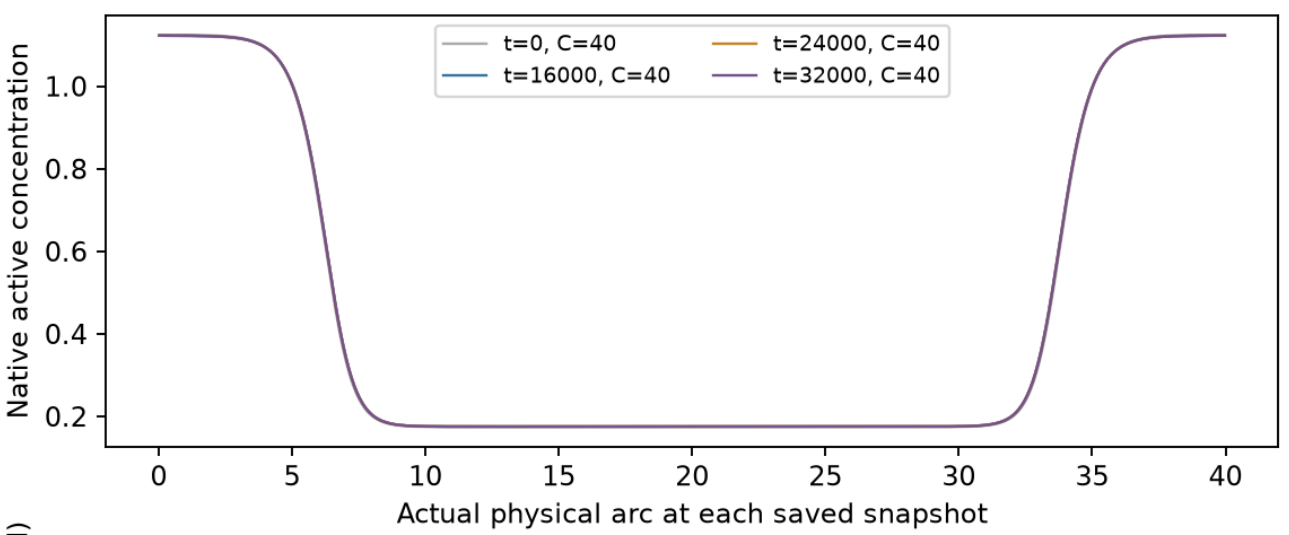

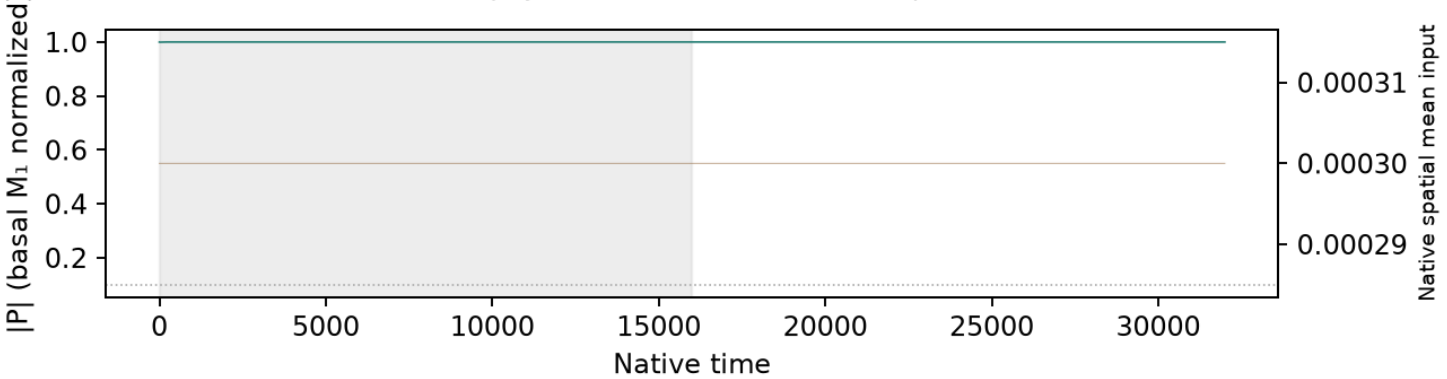

Native concentrations and every retained field frame are plotted without spatial resampling.
First half shaded: excluded from summary selection.
Spring mesh-face interpolation changes only boundary geometry; snapshots use actual saved C(t).
P uses basal M_1 normalization, distinct from instantaneous coherence.
Supplemental selection and controls; no main example is chosen.
Native NPZ/status links remain local/HPC data.

S11 · Wave-pinning · size label 40 · f=0.003 · noise
context common · σ=1 · horizon=32000 · n=12 independent noisy realizations

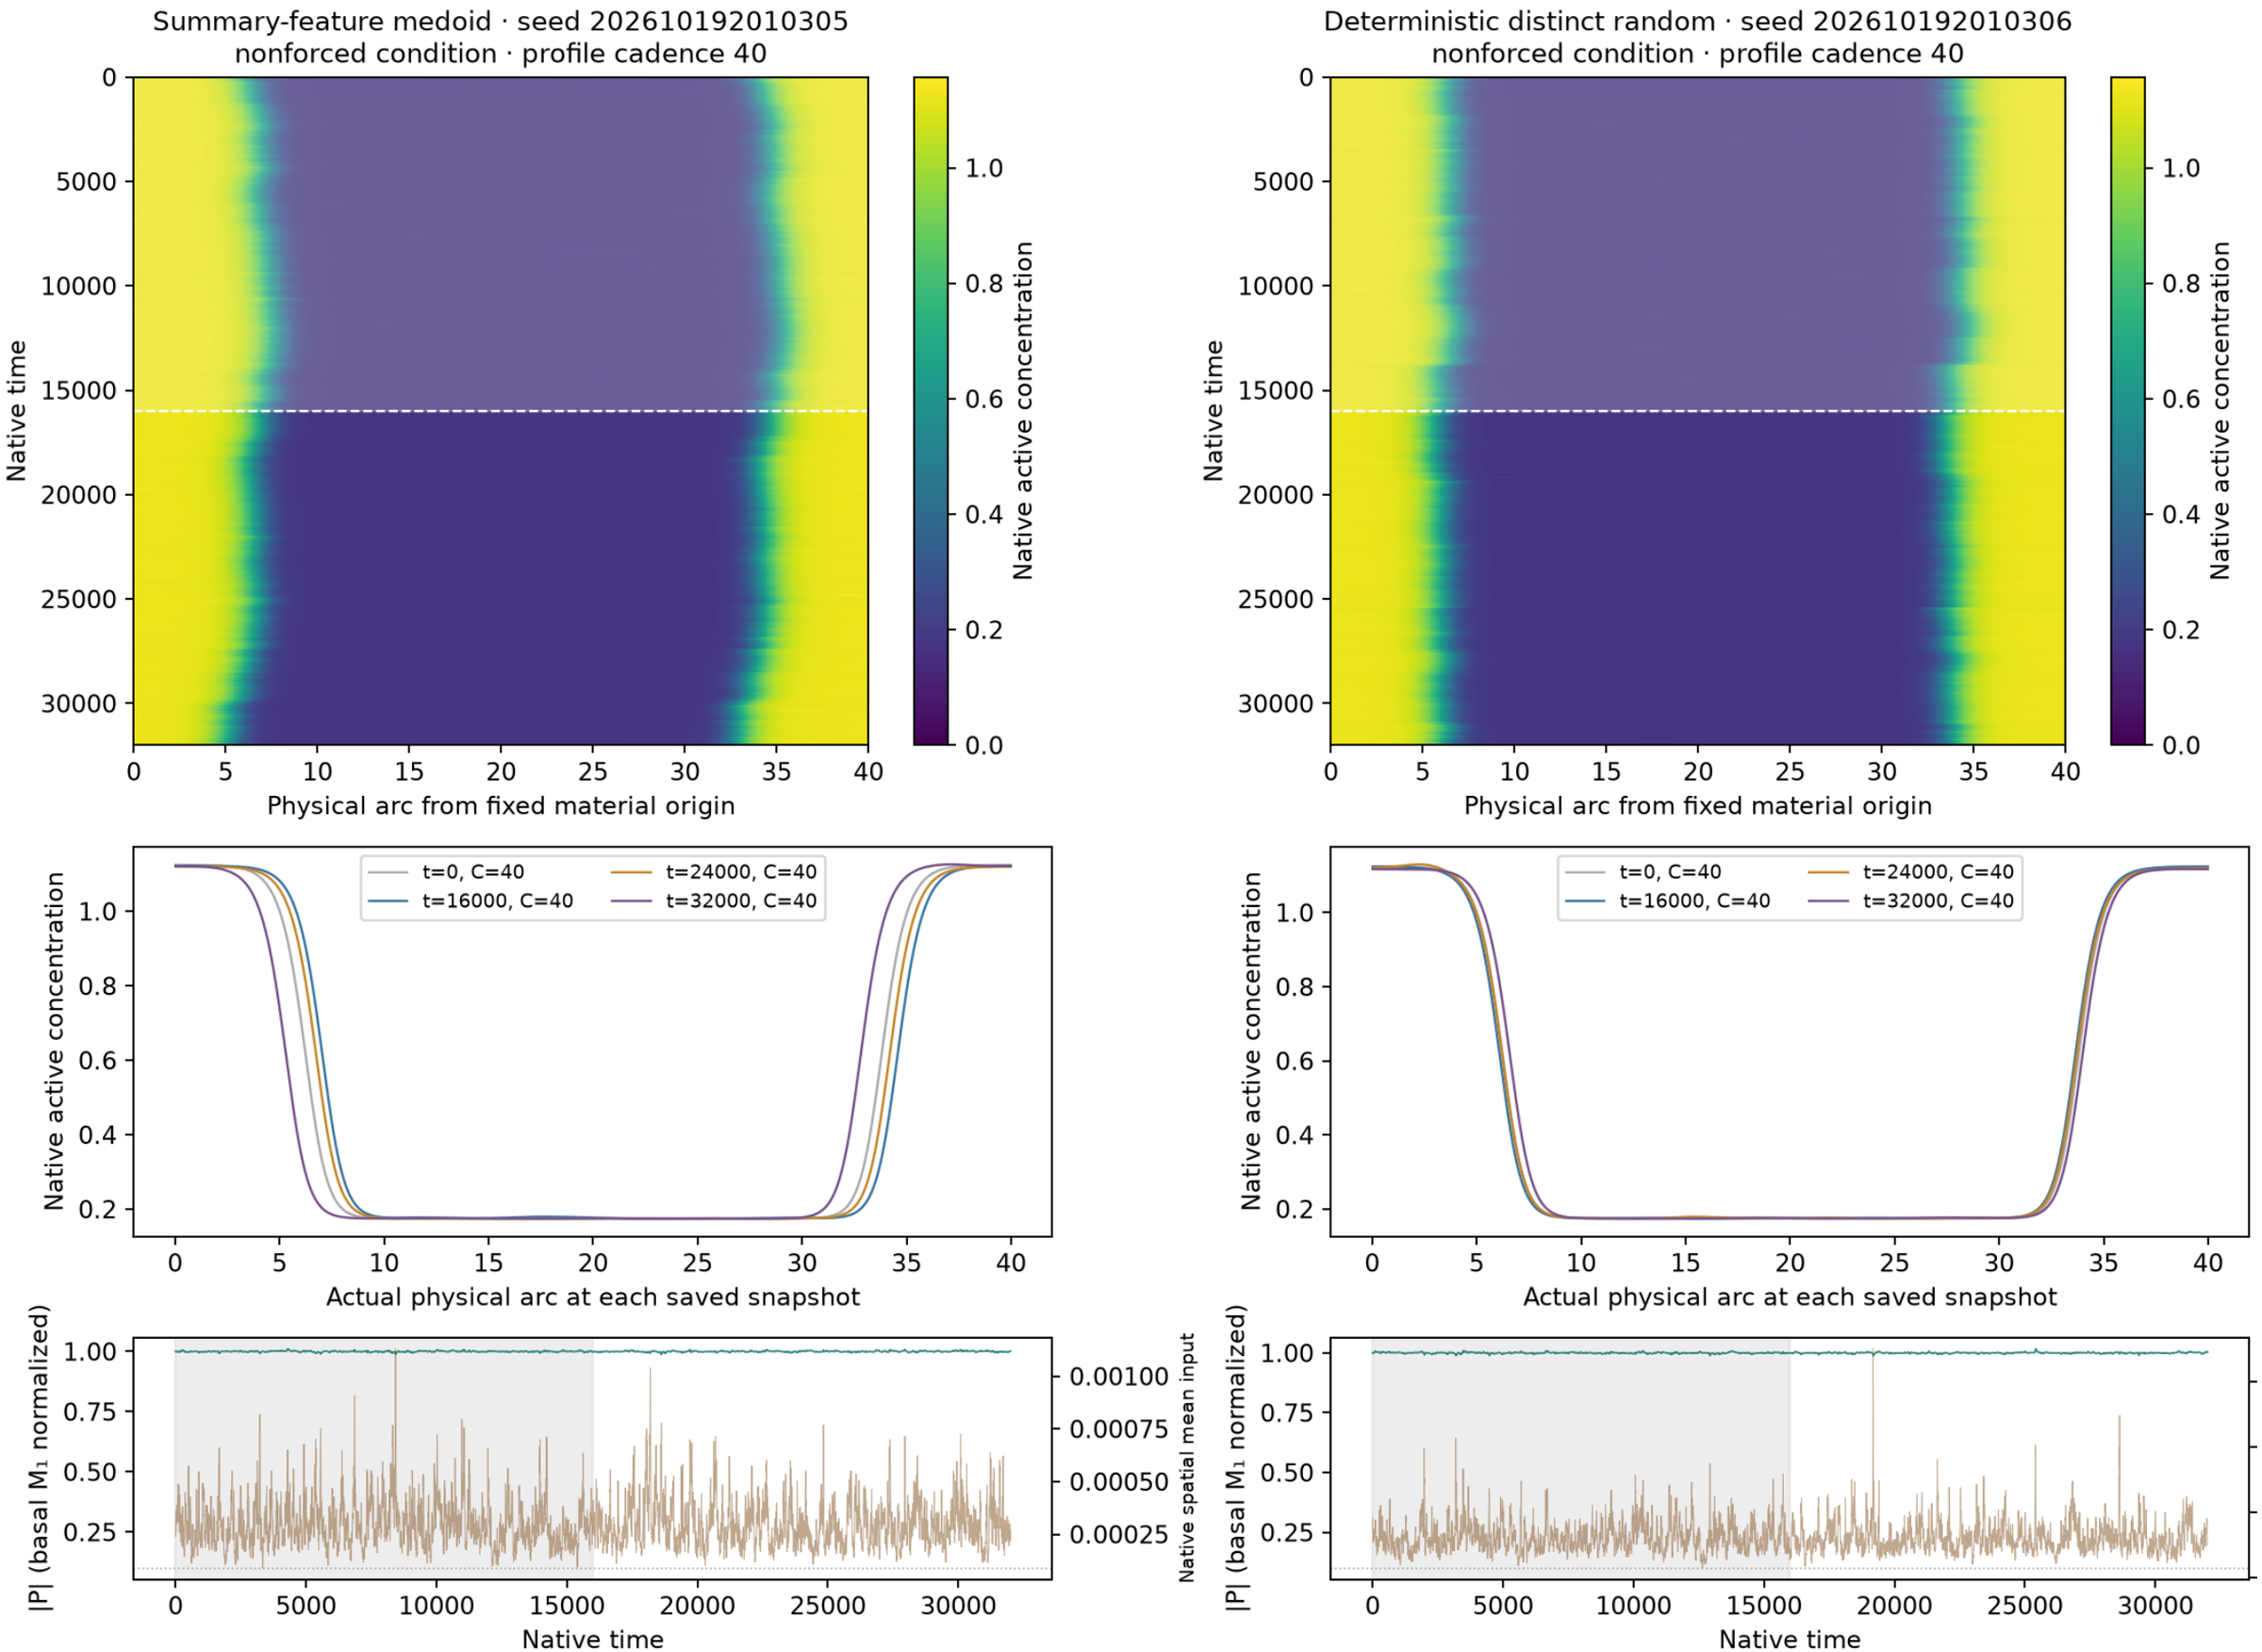

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Wave-pinning · size label 40 · f=0.005 · mean
context common · σ=0 · horizon=32000 · 1 deterministic control

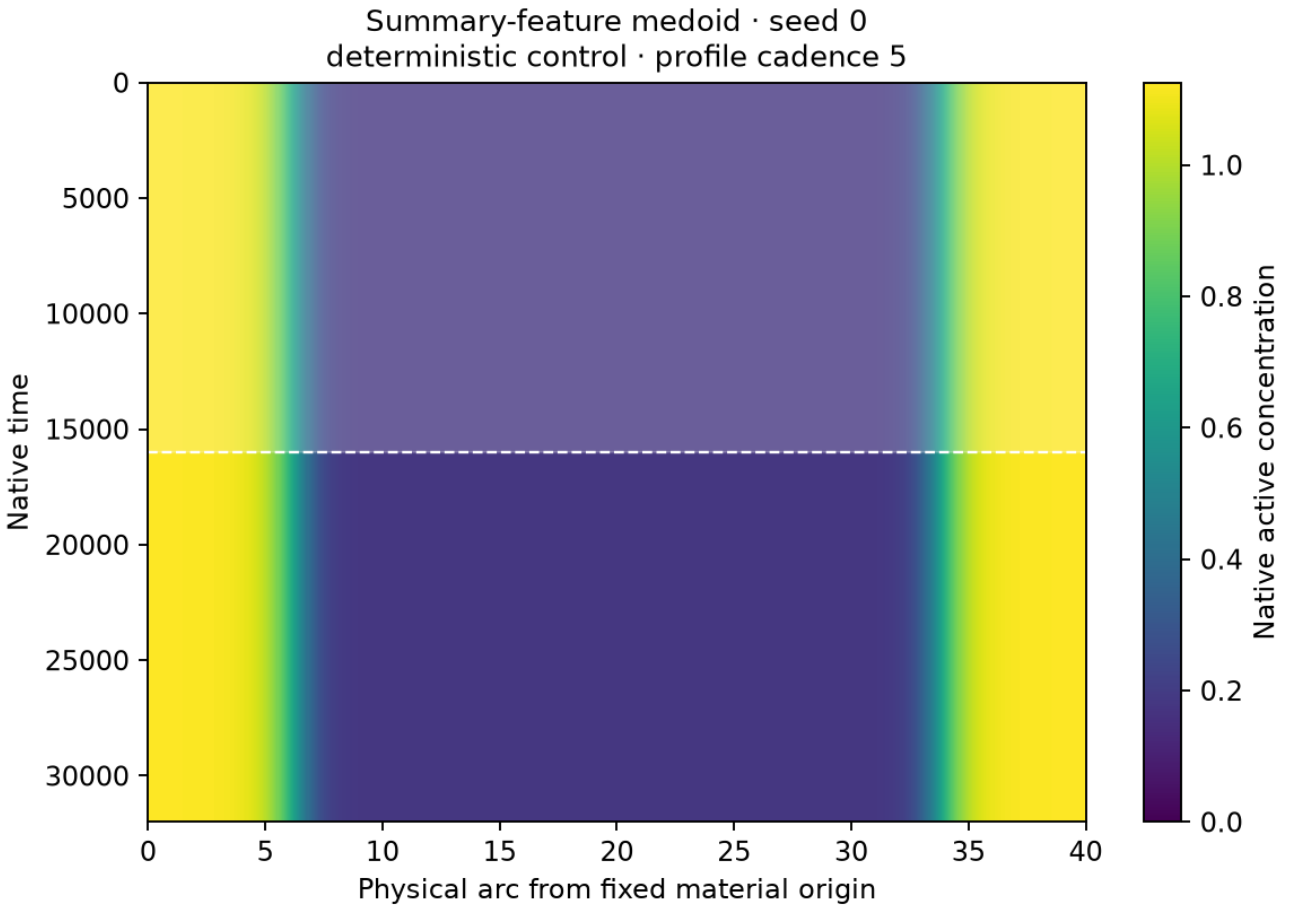

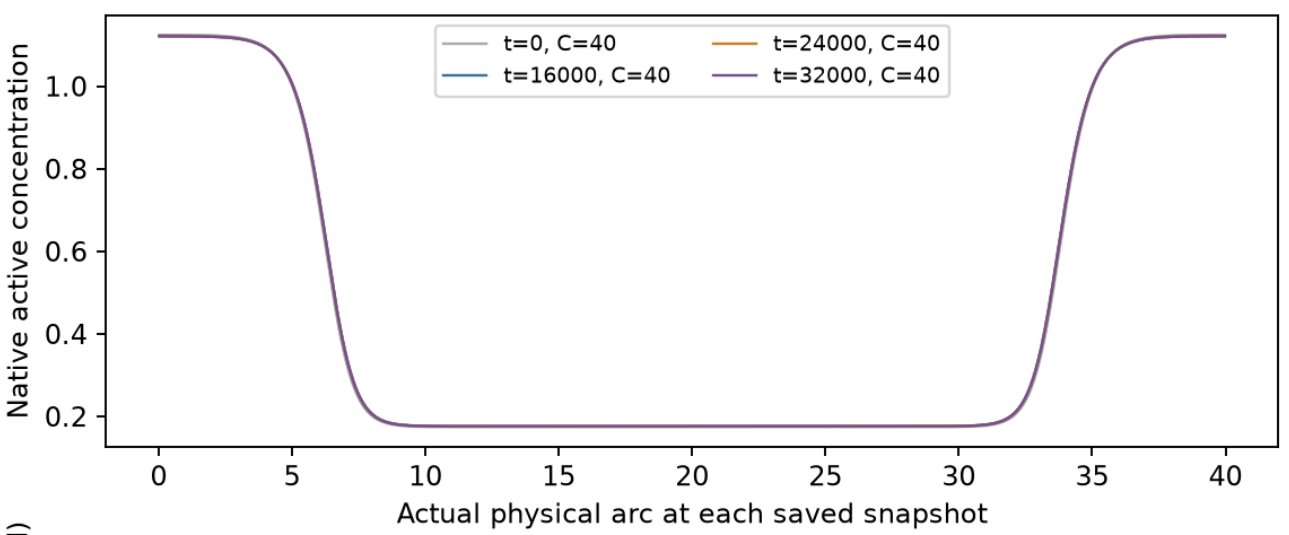

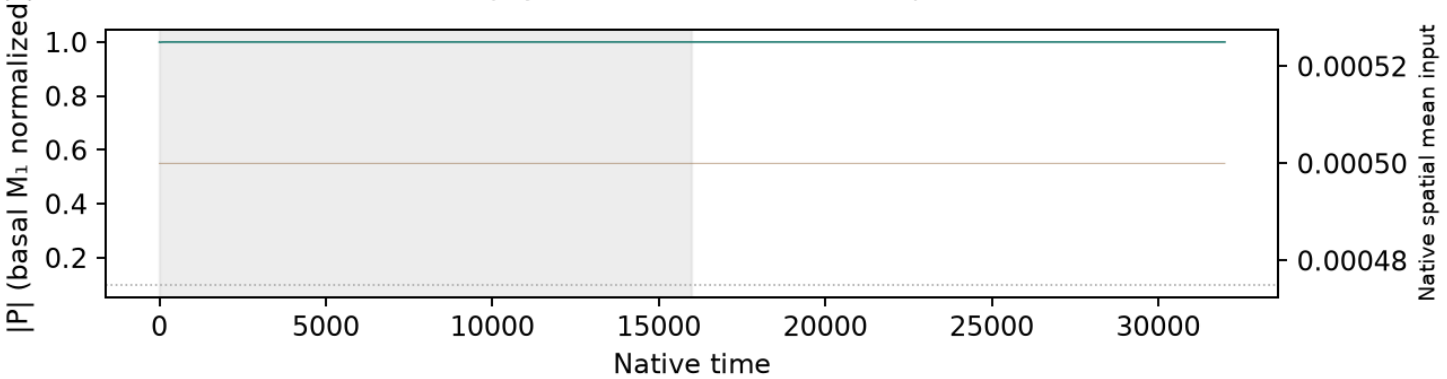

Native concentrations and every retained field frame are plotted without spatial resampling.
First half shaded: excluded from summary selection.
Spring mesh-face interpolation changes only boundary geometry; snapshots use actual saved C(t).
P uses basal M_1 normalization, distinct from instantaneous coherence.
Supplemental selection and controls; no main example is chosen.
Native NPZ/status links remain local/HPC data.

S11 · Wave-pinning · size label 40 · f=0.005 · noise
context common · σ=1 · horizon=32000 · n=12 independent noisy realizations

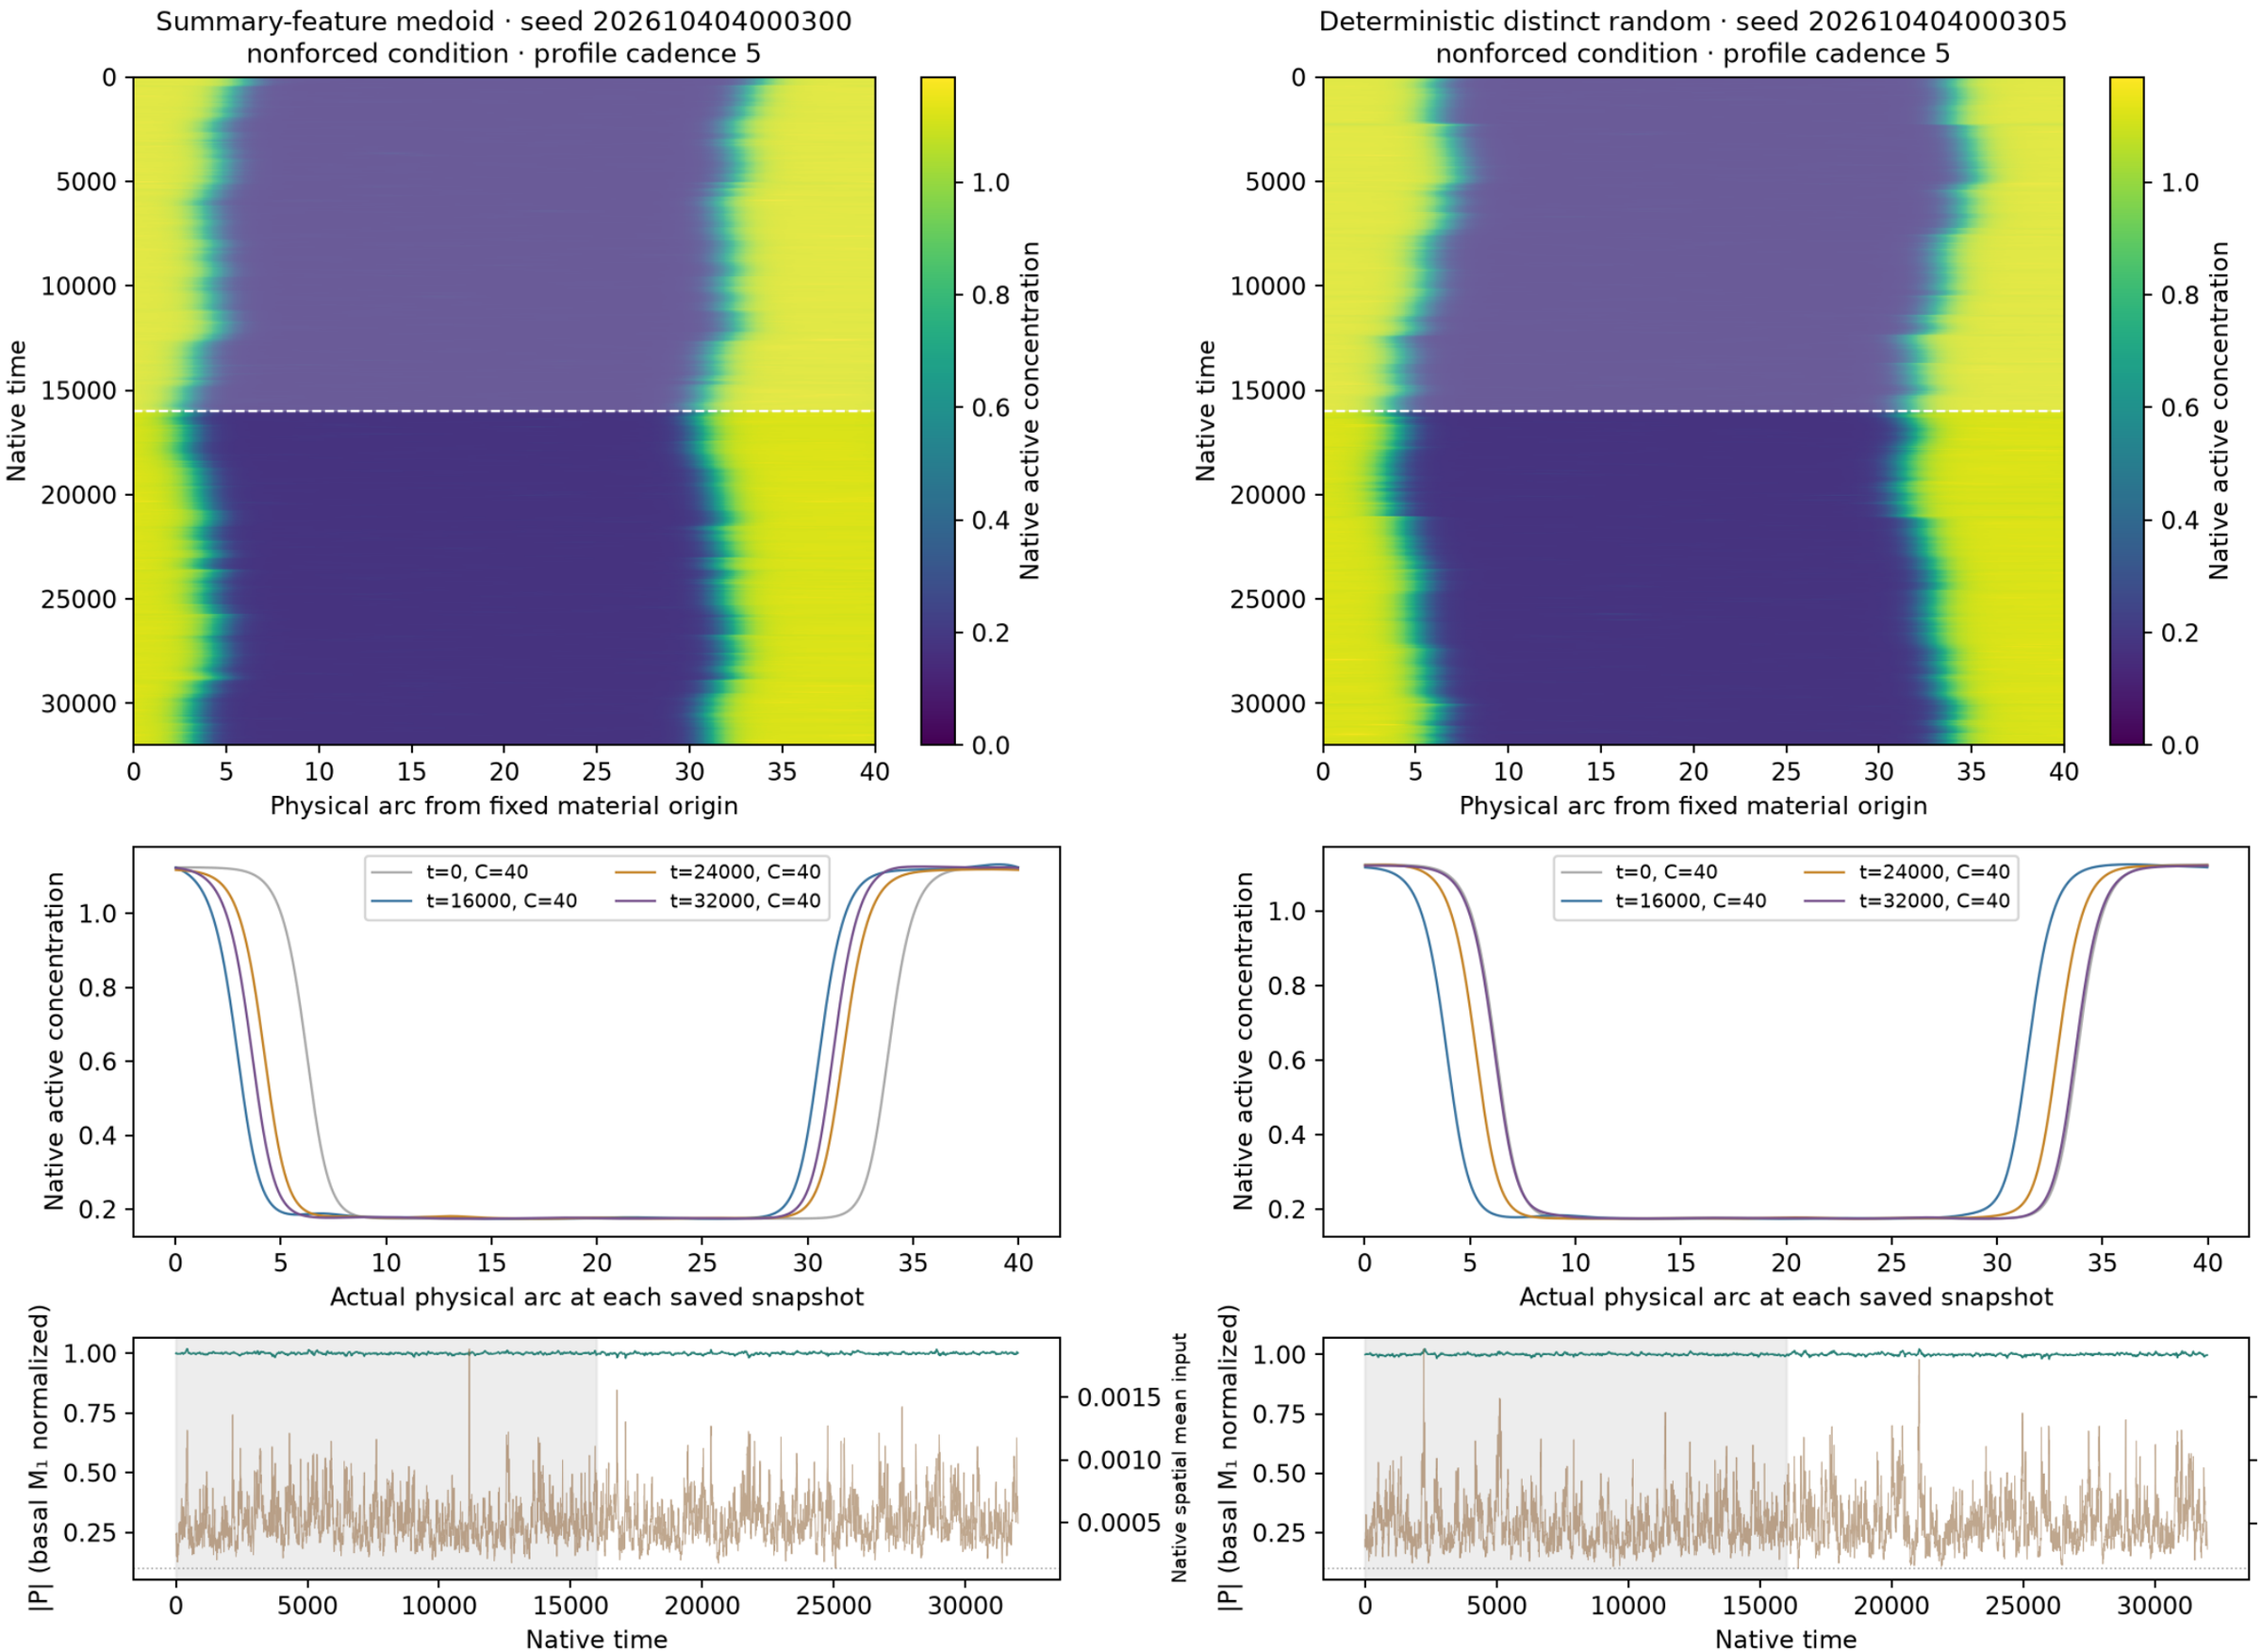

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Wave-pinning · size label 40 · f=0.01 · mean
context common · σ=0 · horizon=32000 · 1 deterministic control

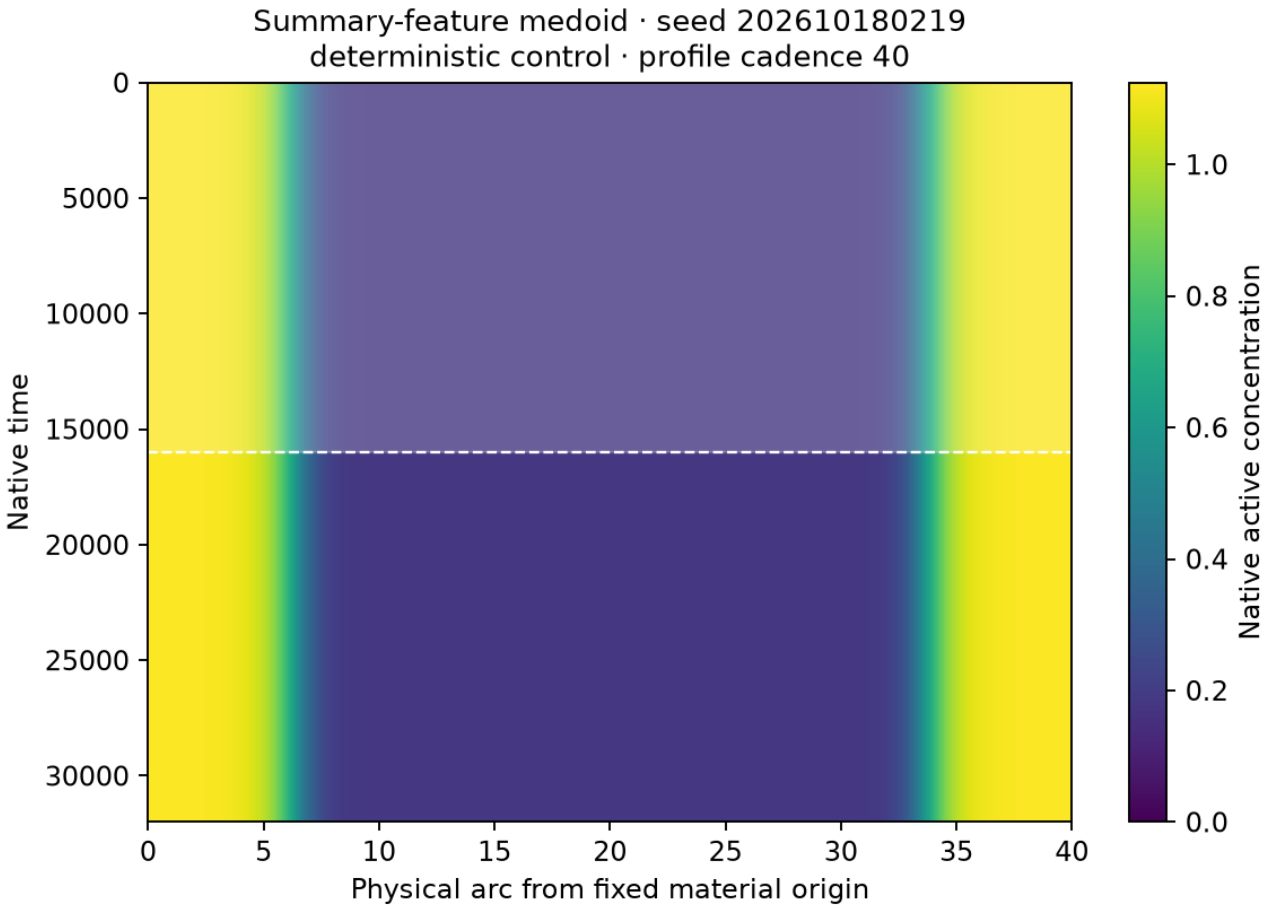

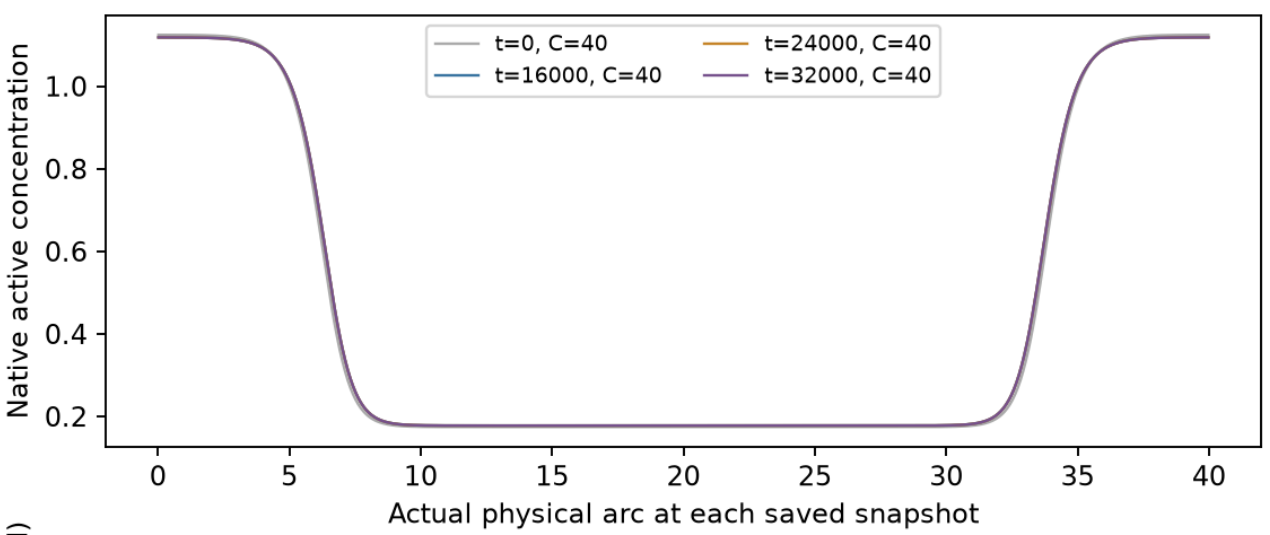

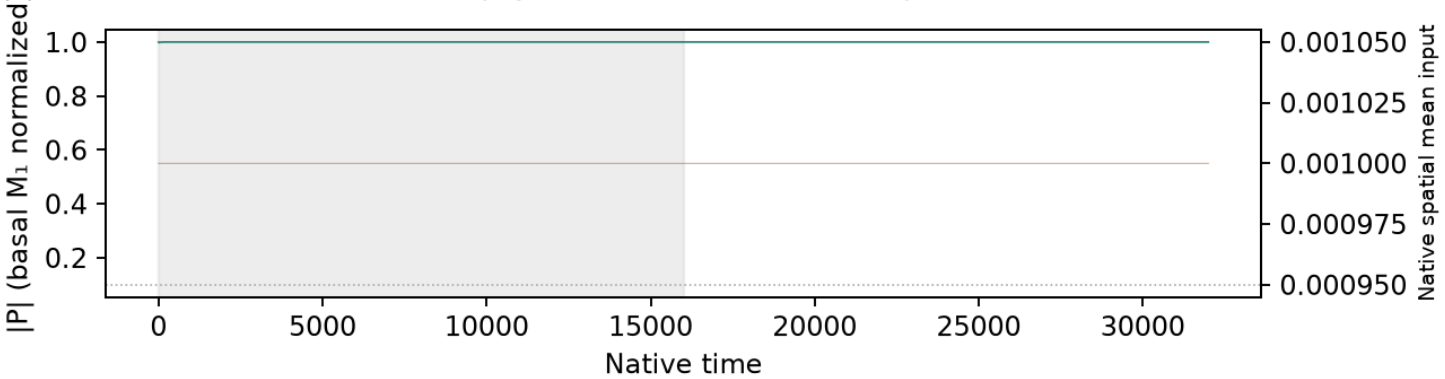

Native concentrations and every retained field frame are plotted without spatial resampling.
First half shaded: excluded from summary selection.
Spring mesh-face interpolation changes only boundary geometry; snapshots use actual saved C(t).
P uses basal M_1 normalization, distinct from instantaneous coherence.
Supplemental selection and controls; no main example is chosen.
Native NPZ/status links remain local/HPC data.

S11 · Wave-pinning · size label 40 · f=0.01 · noise
context common · σ=1 · horizon=32000 · n=12 independent noisy realizations

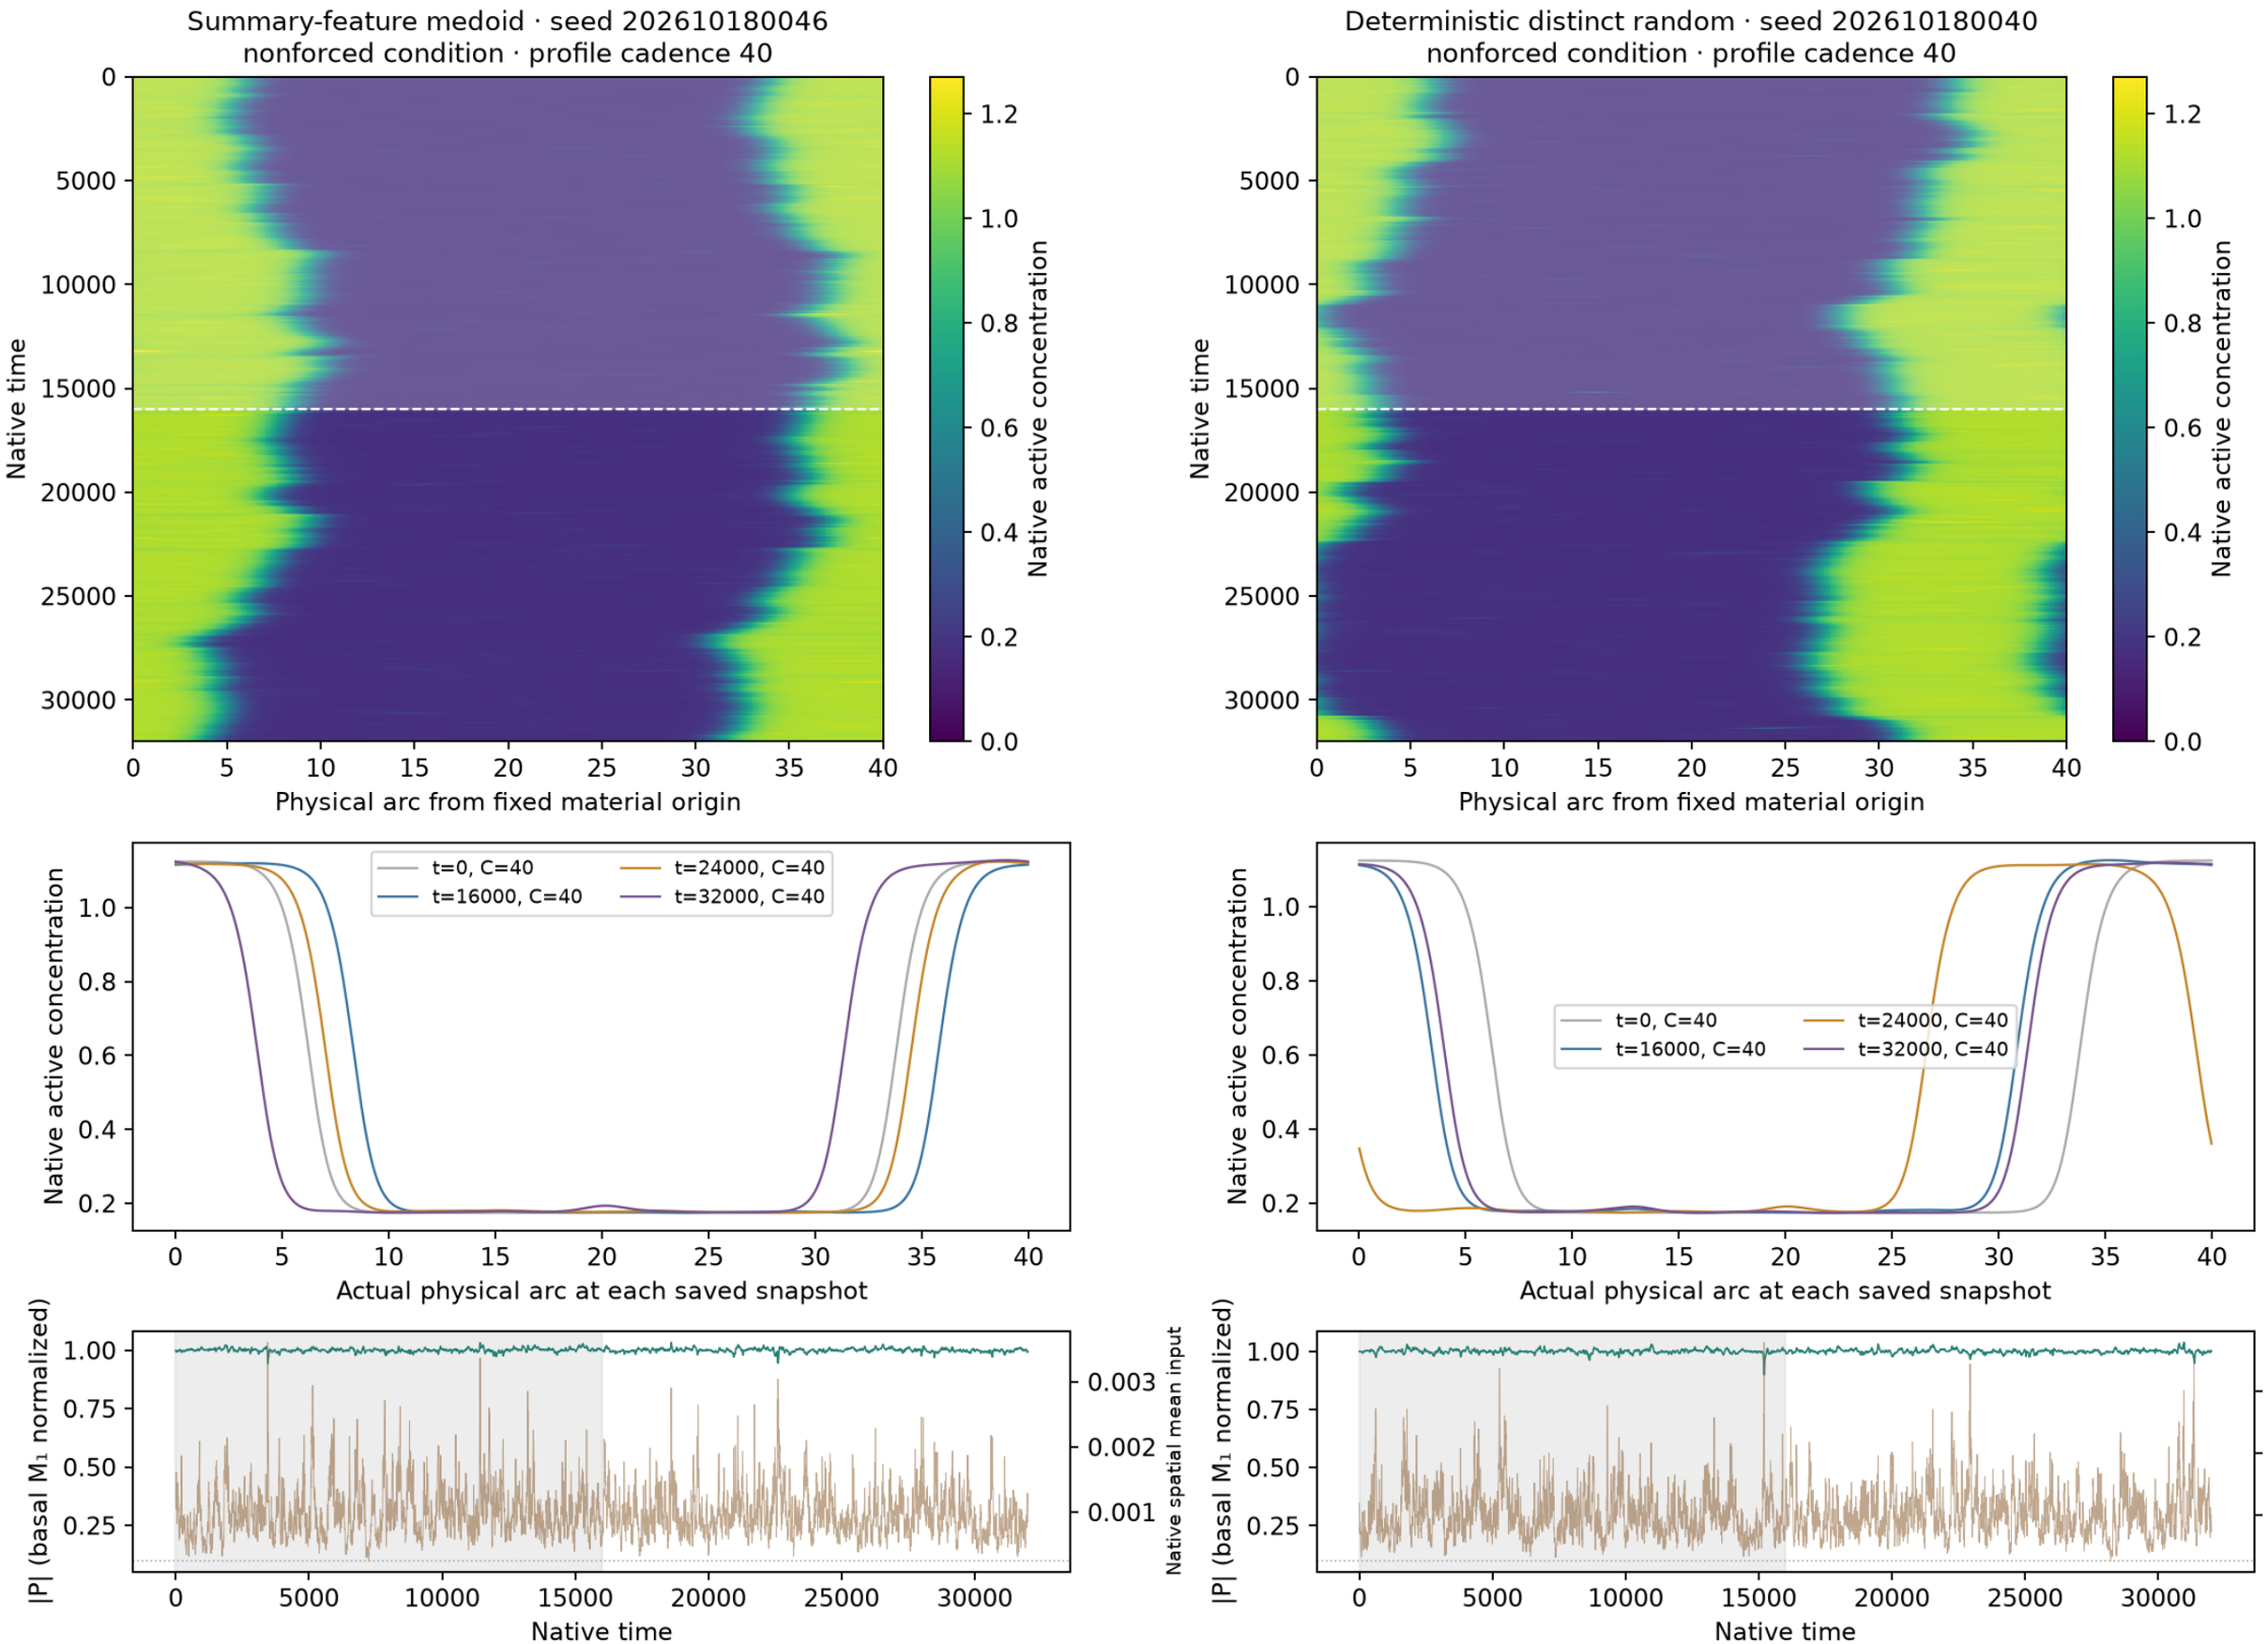

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Wave-pinning · size label 40 · f=0.02 · mean
context common · σ=0 · horizon=32000 · 1 deterministic control

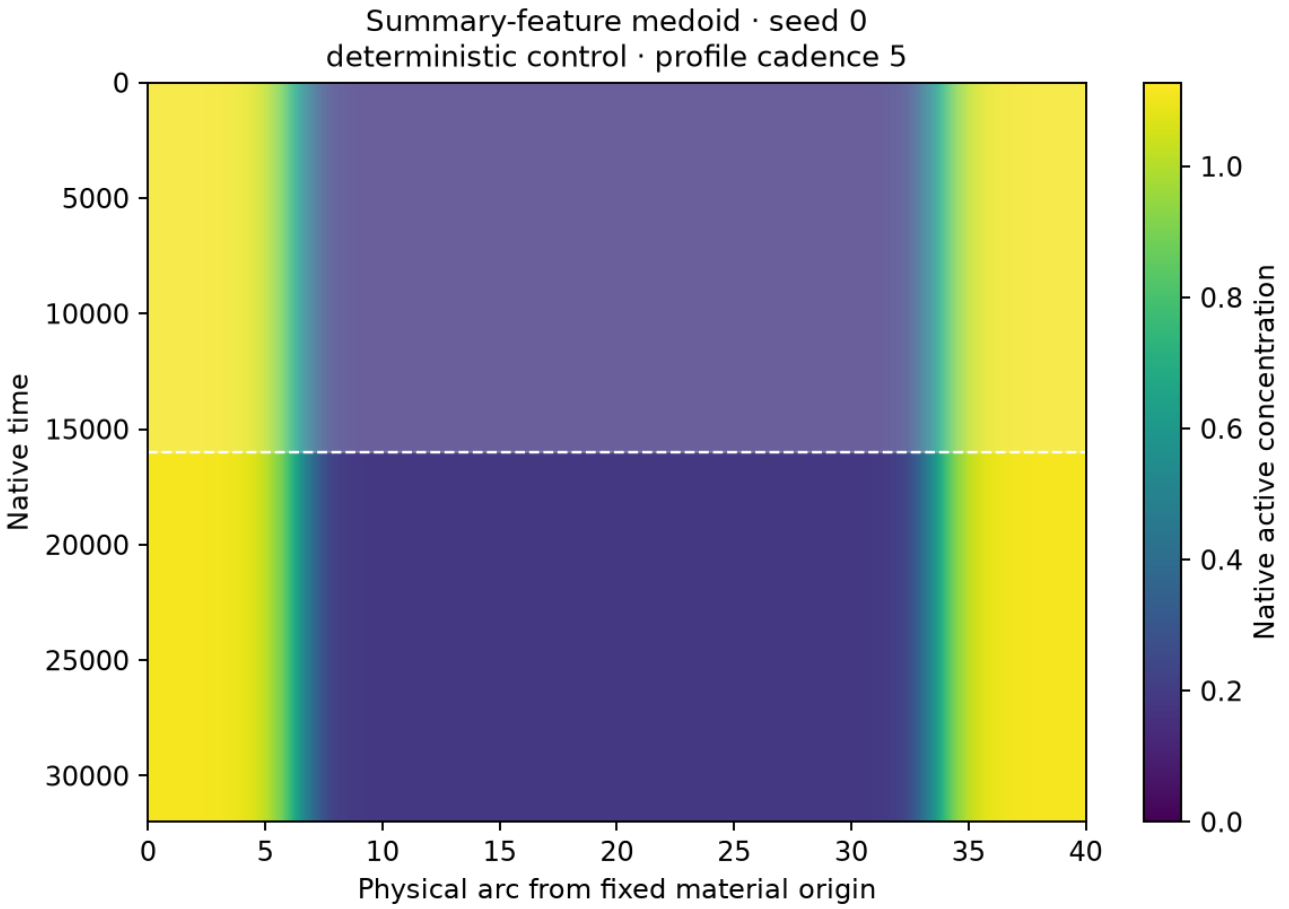

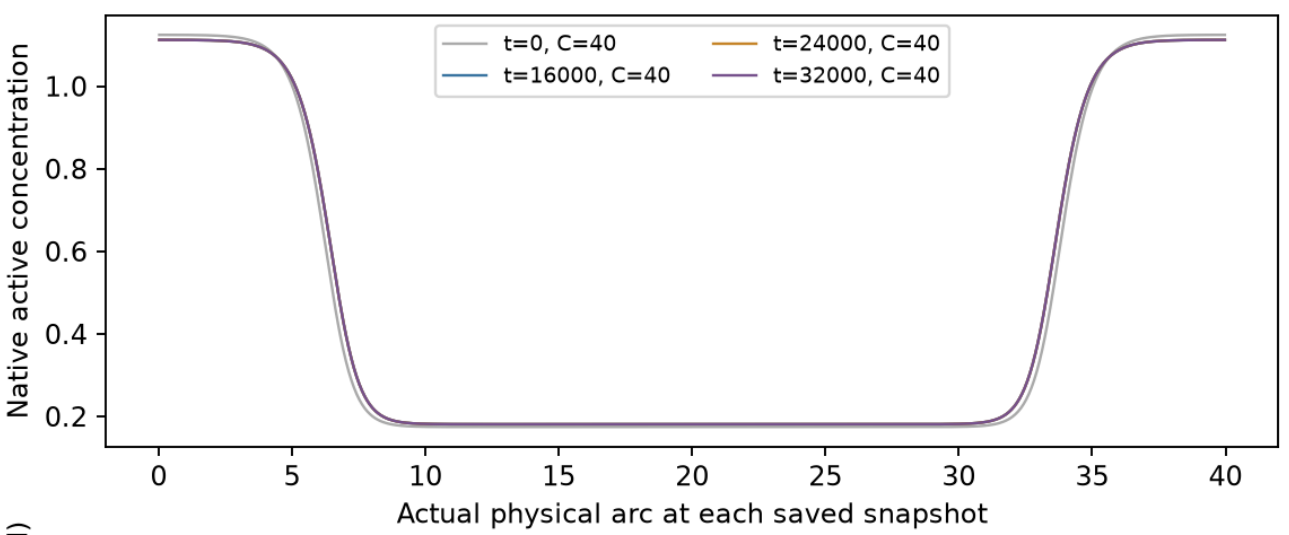

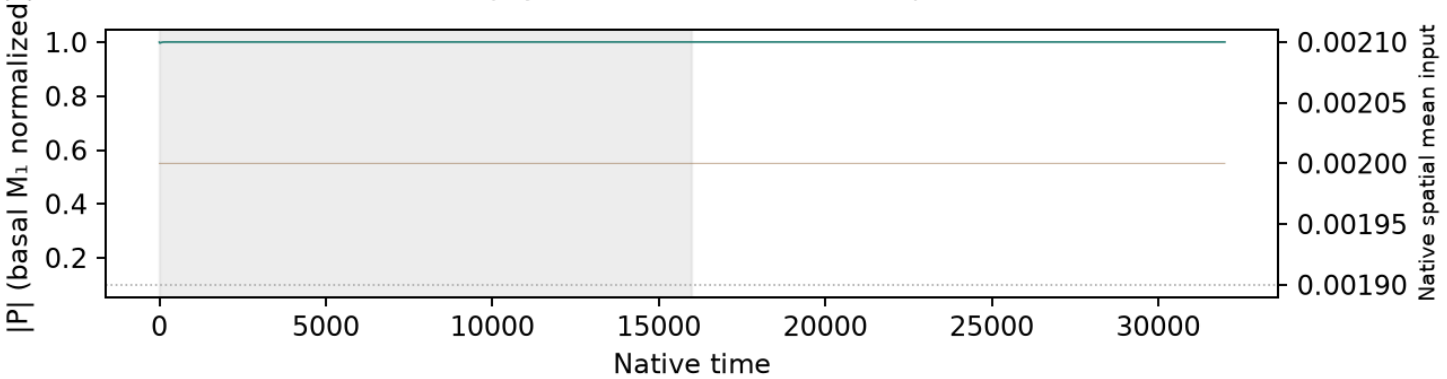

Native concentrations and every retained field frame are plotted without spatial resampling.
First half shaded: excluded from summary selection.
Spring mesh-face interpolation changes only boundary geometry; snapshots use actual saved C(t).
P uses basal M_1 normalization, distinct from instantaneous coherence.
Supplemental selection and controls; no main example is chosen.
Native NPZ/status links remain local/HPC data.

S11 · Wave-pinning · size label 40 · f=0.02 · noise
context common · σ=1 · horizon=32000 · n=12 independent noisy realizations

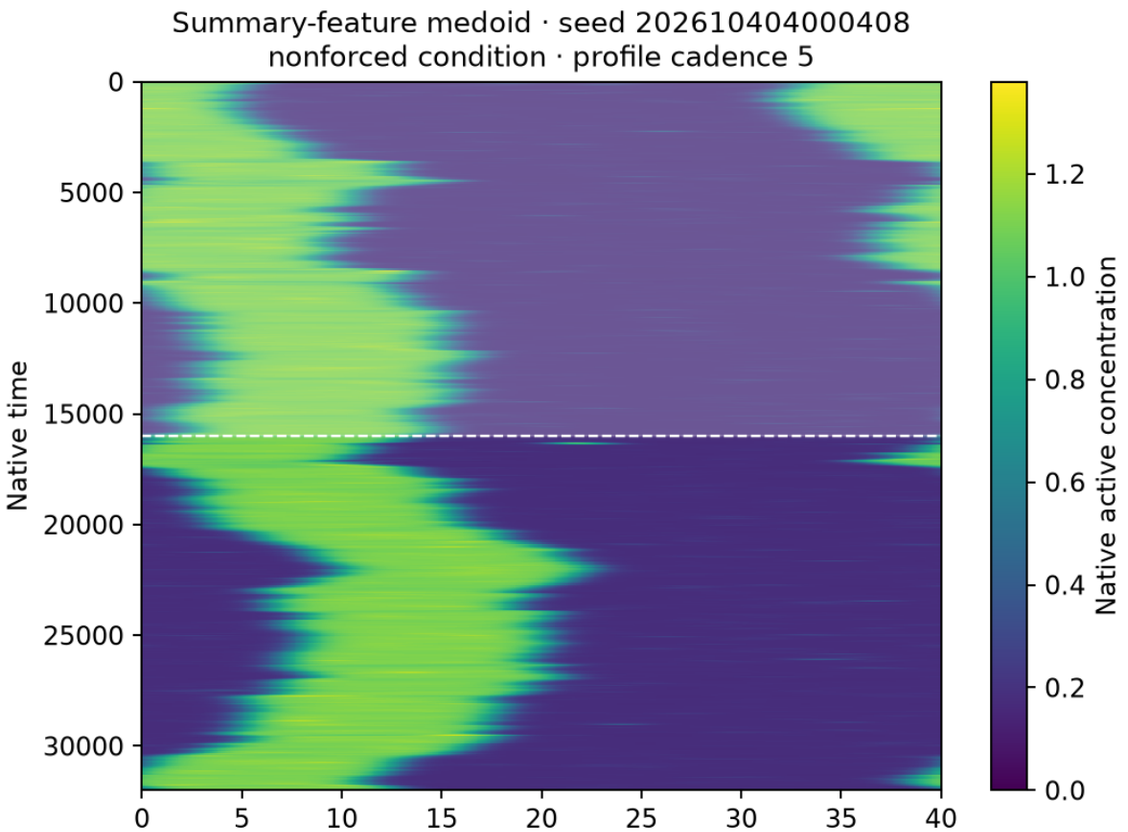

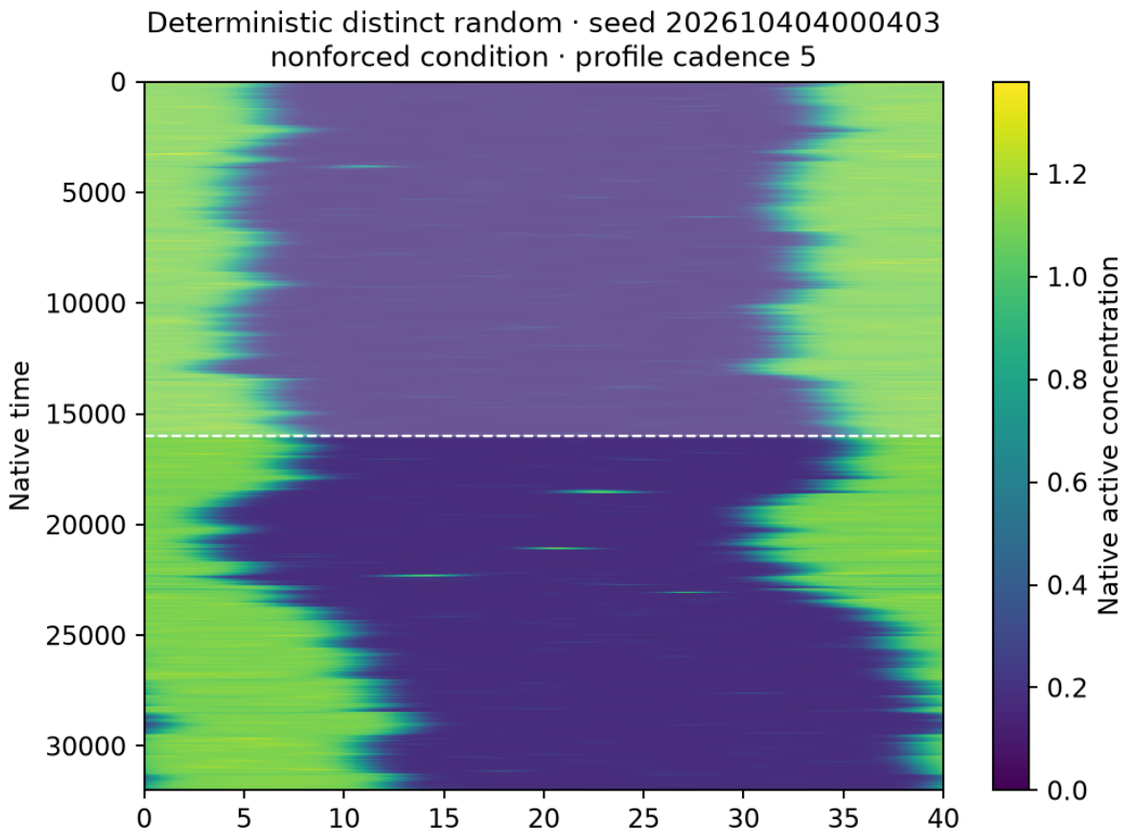

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M_1 normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Wave-pinning · size label 40 · f=0.03 · mean
context common · σ=0 · horizon=32000 · 1 deterministic control

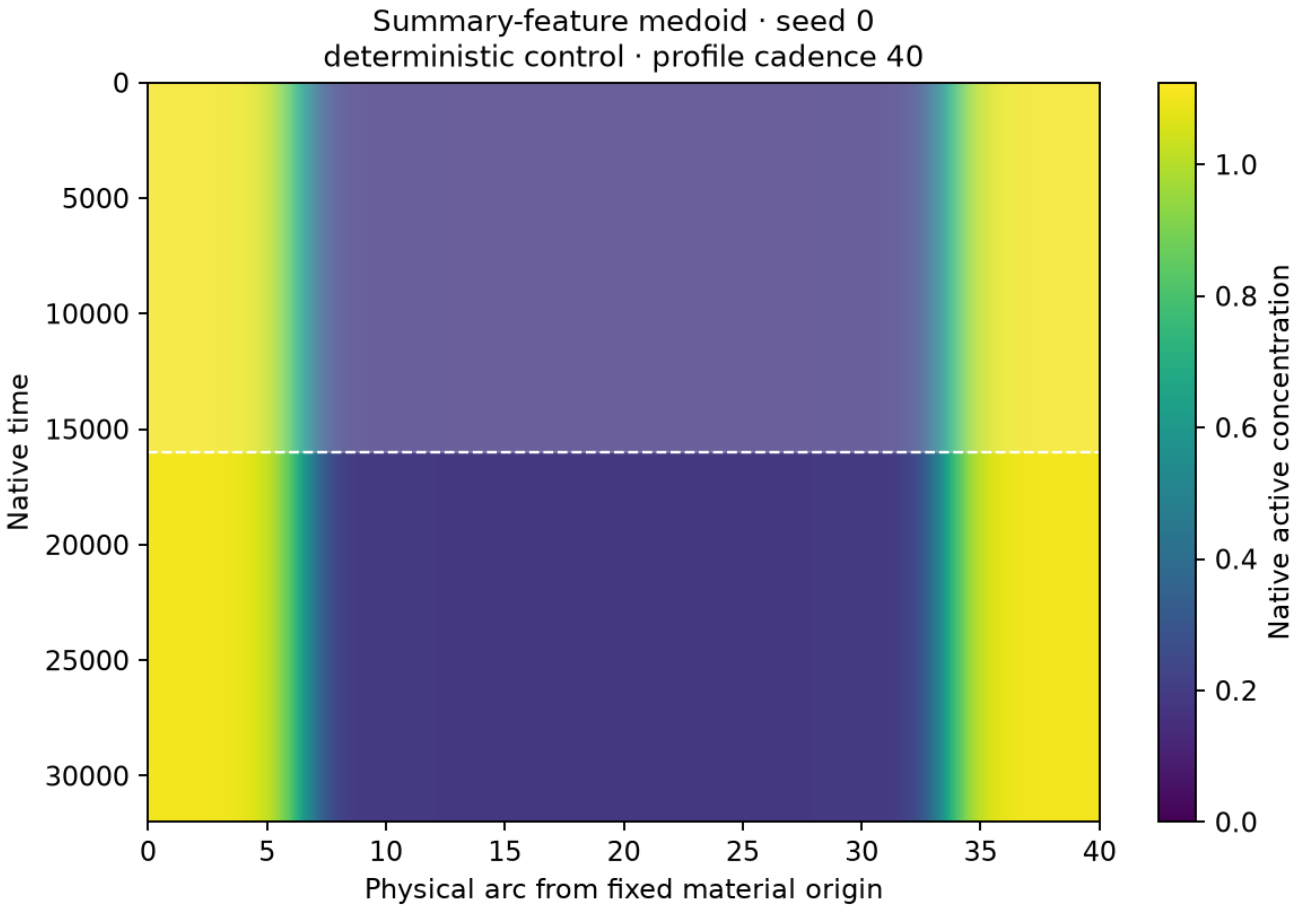

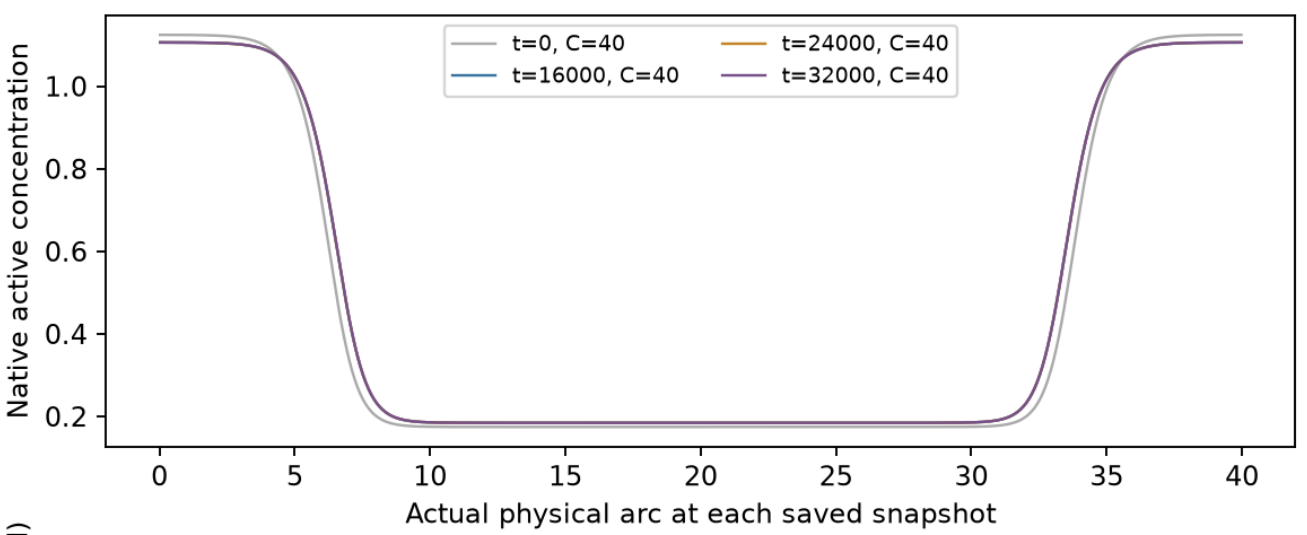

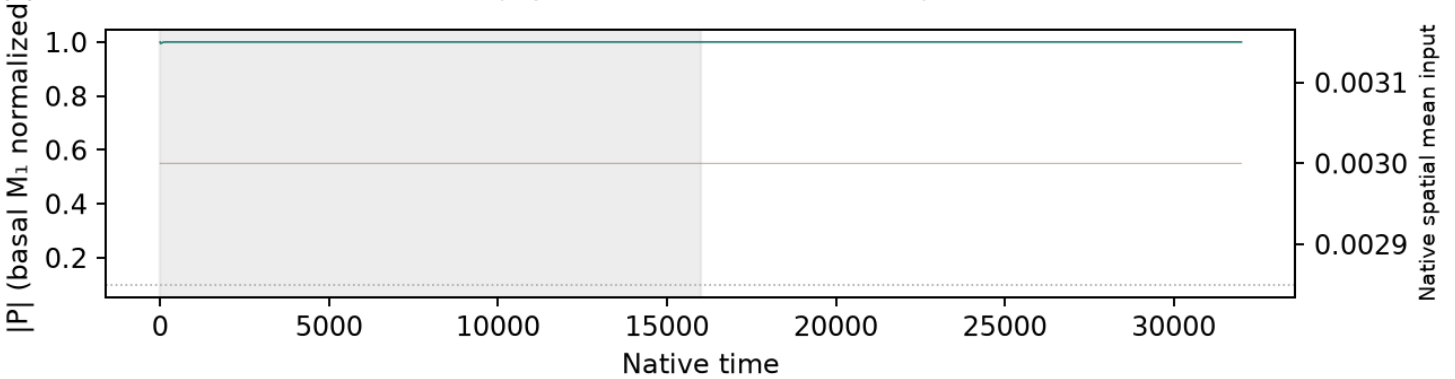

Native concentrations and every retained field frame are plotted without spatial resampling.
First half shaded: excluded from summary selection.
Spring mesh-face interpolation changes only boundary geometry; snapshots use actual saved C(t).
P uses basal M_1 normalization, distinct from instantaneous coherence.
Supplemental selection and controls; no main example is chosen.
Native NPZ/status links remain local/HPC data.

S11 · Wave-pinning · size label 40 · f=0.03 · noise
context common · σ=1 · horizon=32000 · n=12 independent noisy realizations

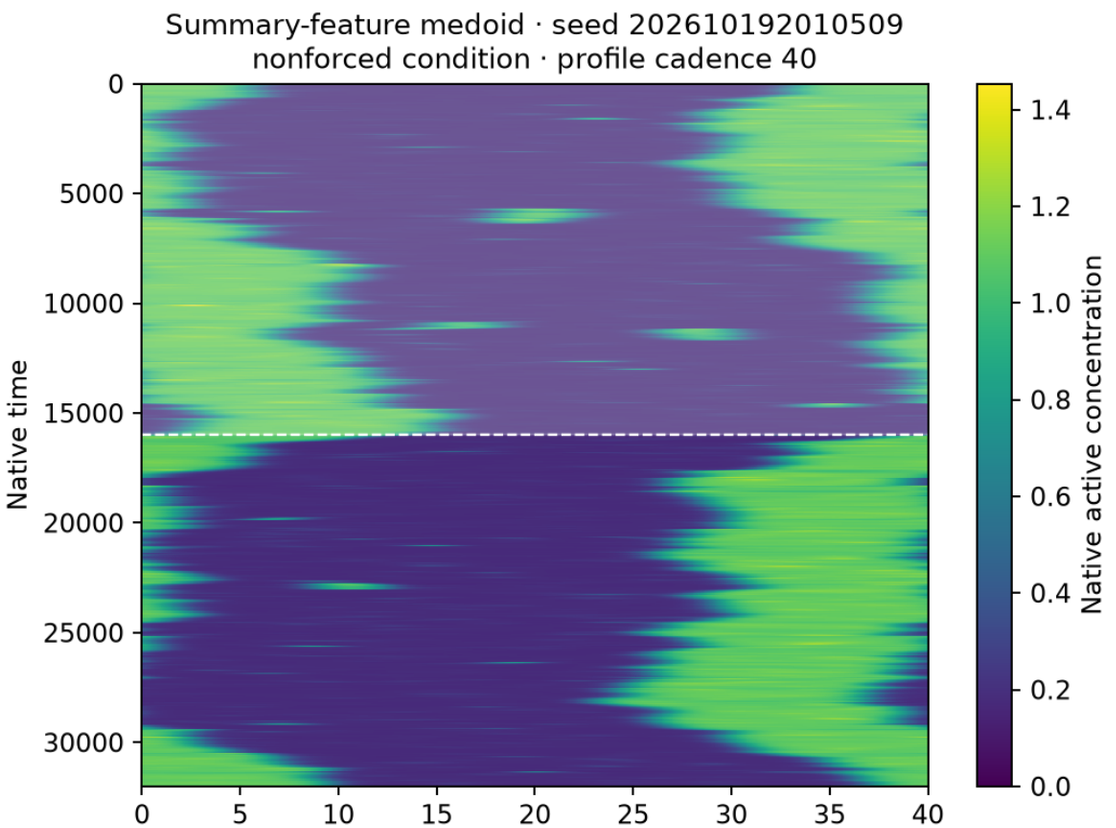

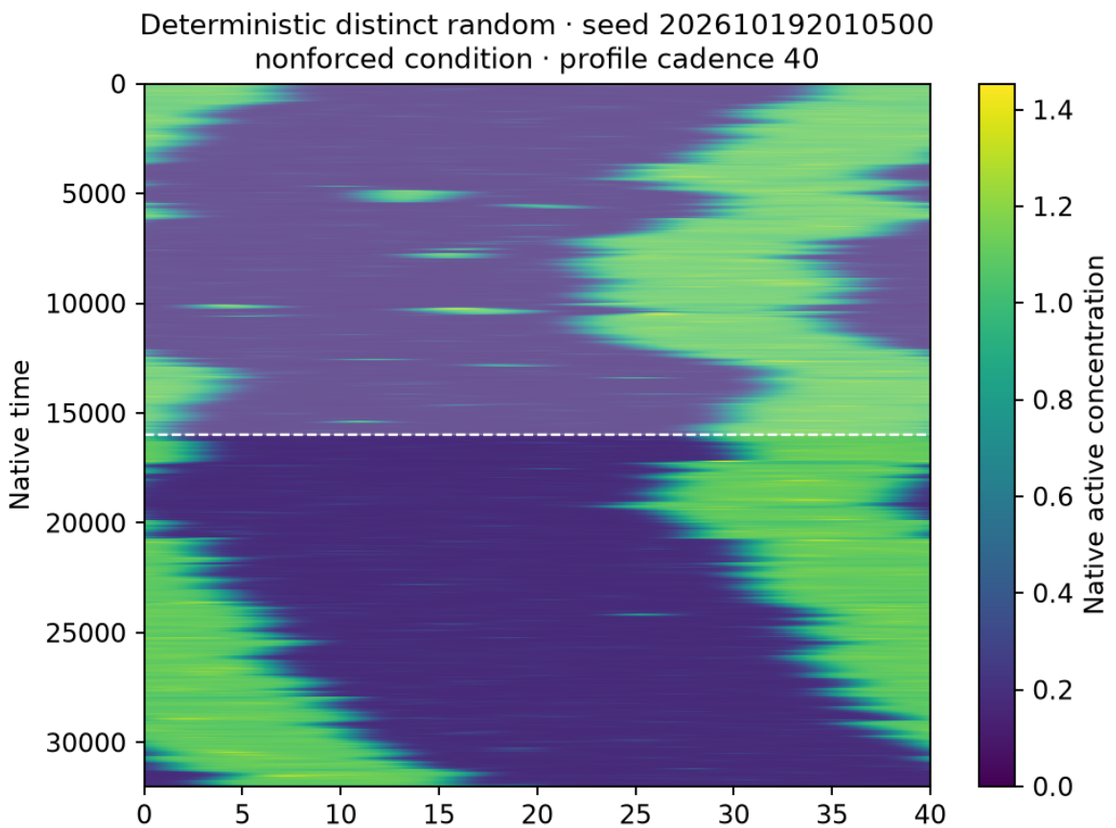

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M_1 normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Wave-pinning · size label 40 · f=0.05 · mean
context common · σ=0 · horizon=32000 · 1 deterministic control

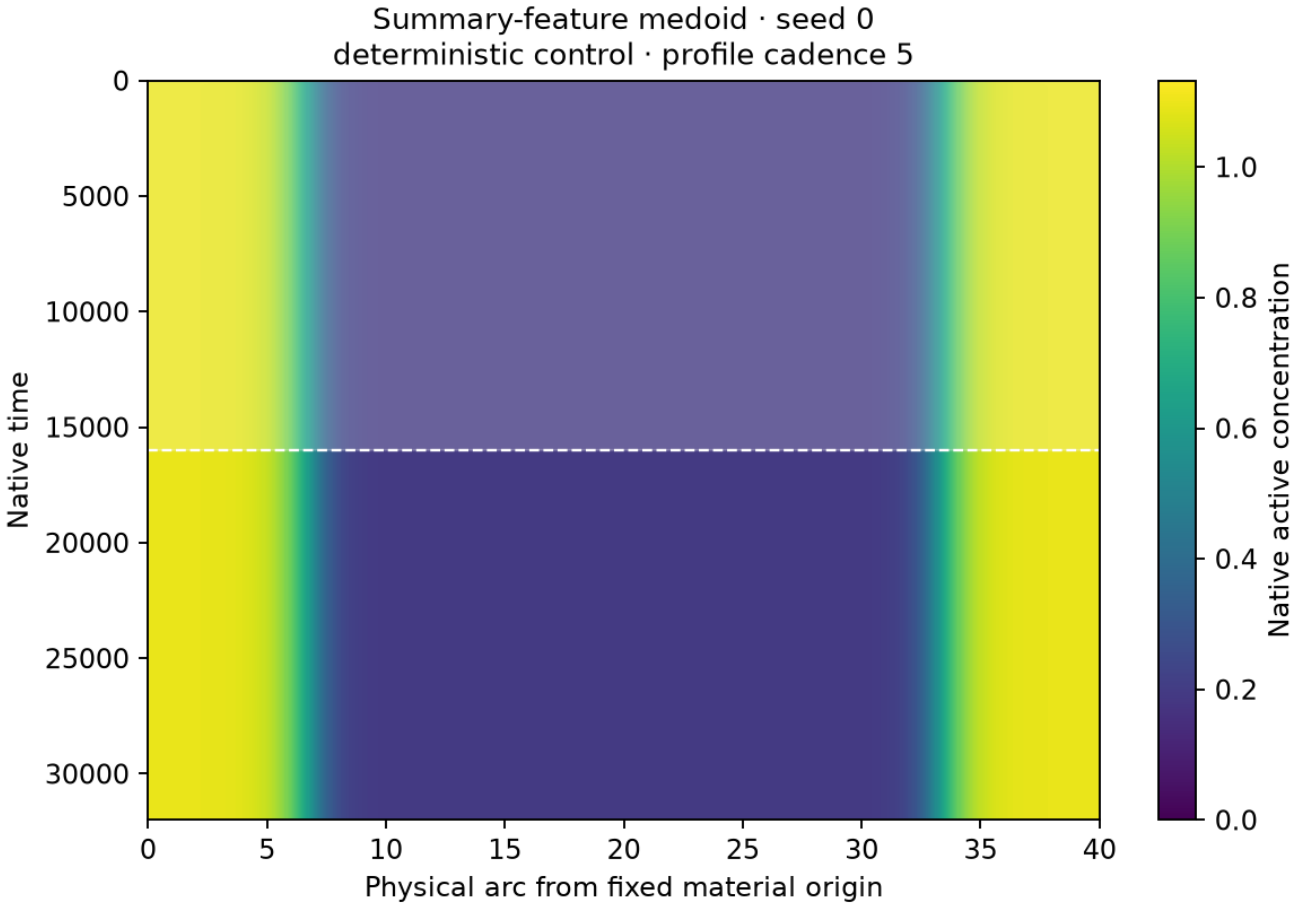

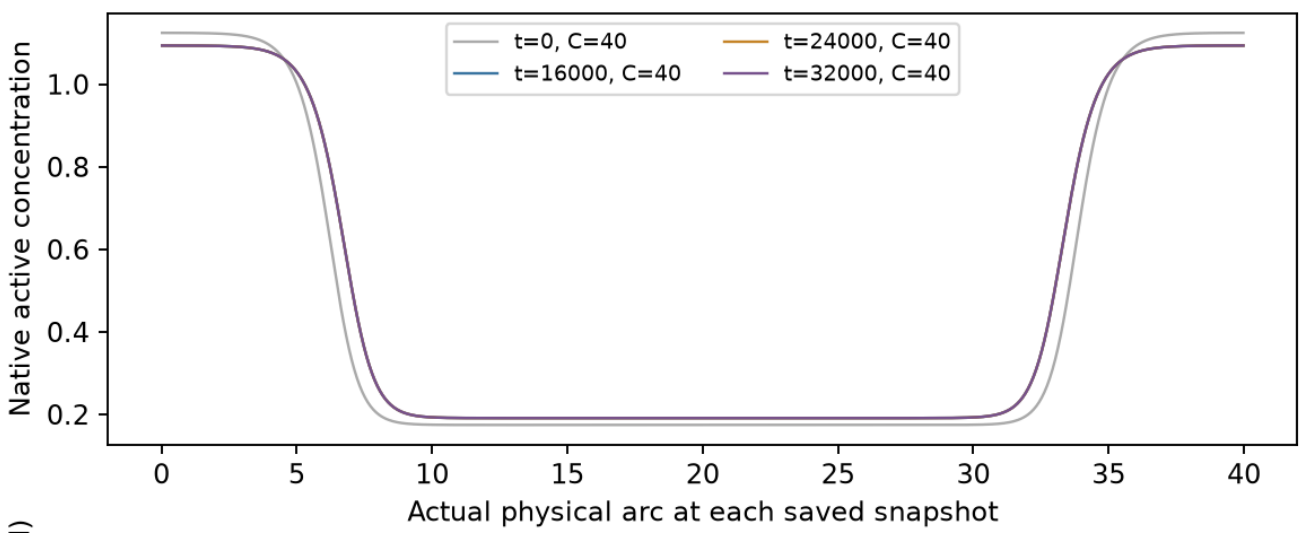

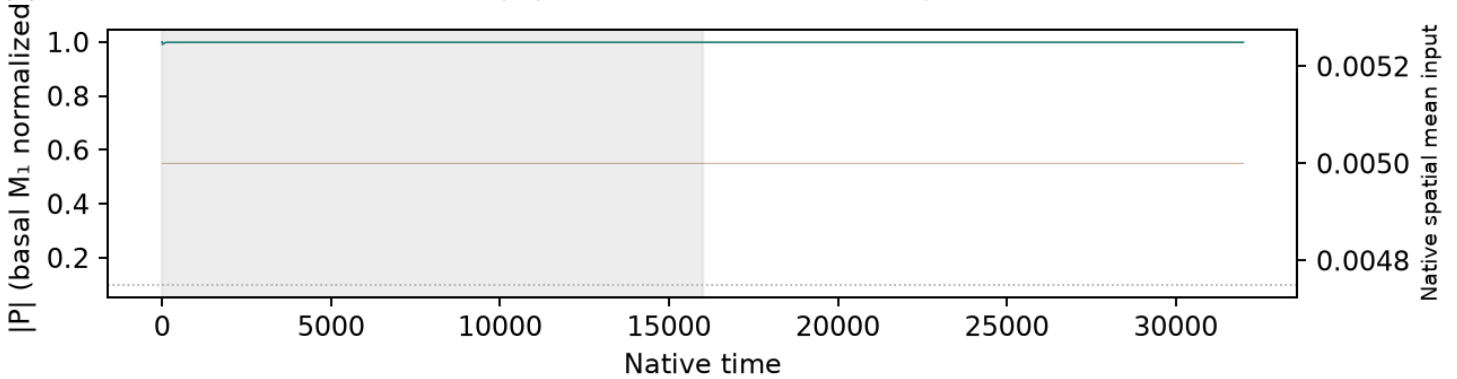

Native concentrations and every retained field frame are plotted without spatial resampling.
First half shaded: excluded from summary selection.
Spring mesh-face interpolation changes only boundary geometry; snapshots use actual saved C(t).
P uses basal M_1 normalization, distinct from instantaneous coherence.
Supplemental selection and controls; no main example is chosen.
Native NPZ/status links remain local/HPC data.

S11 · Wave-pinning · size label 40 · f=0.05 · noise
context common · σ=1 · horizon=32000 · n=12 independent noisy realizations

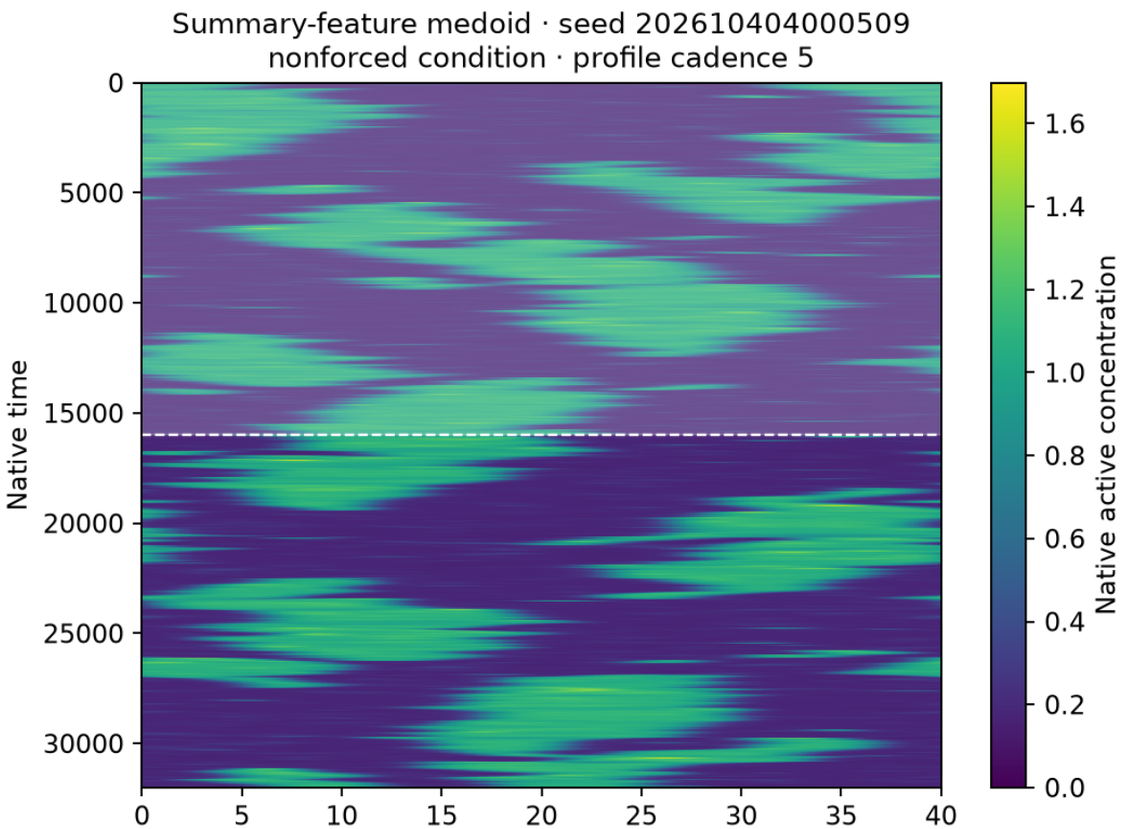

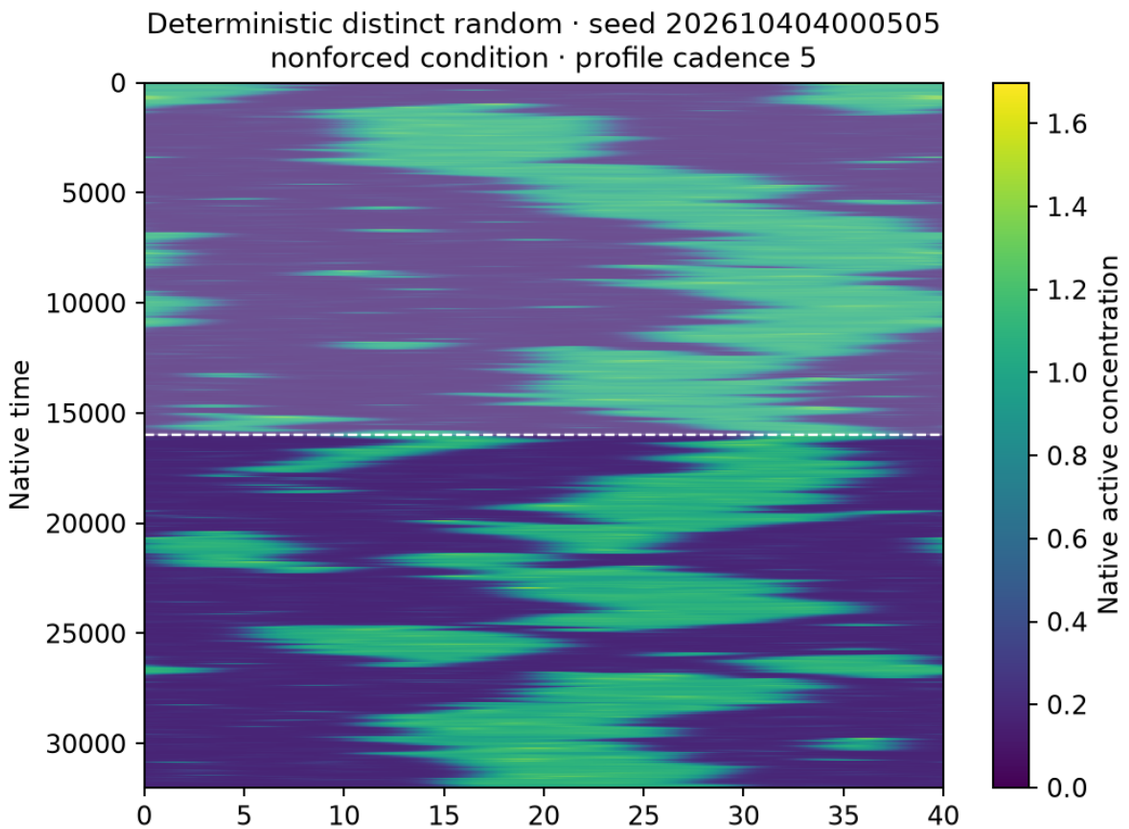

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M_1 normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Wave-pinning · size label 40 · f=0.1 · mean
context common · σ=0 · horizon=32000 · 1 deterministic control

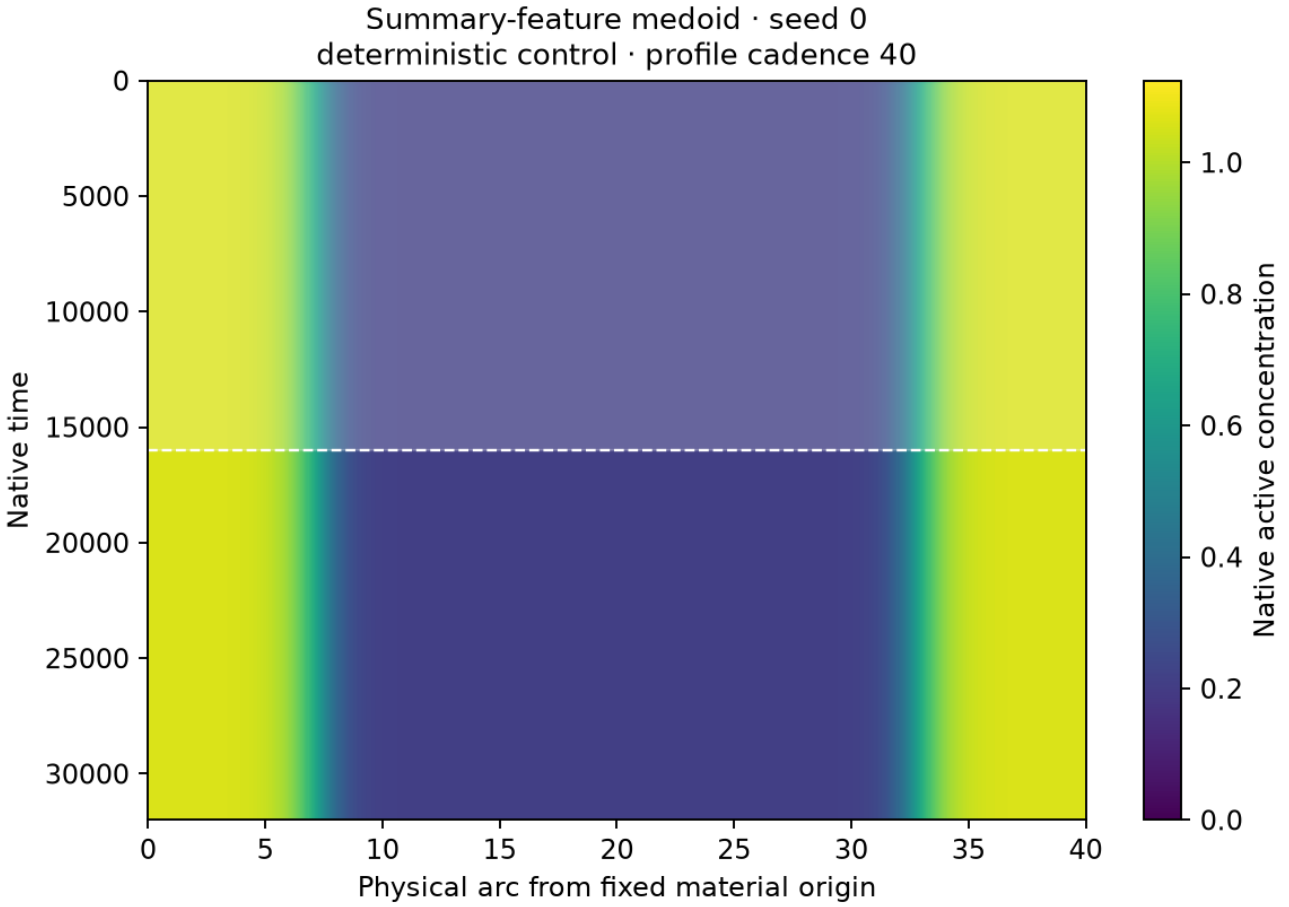

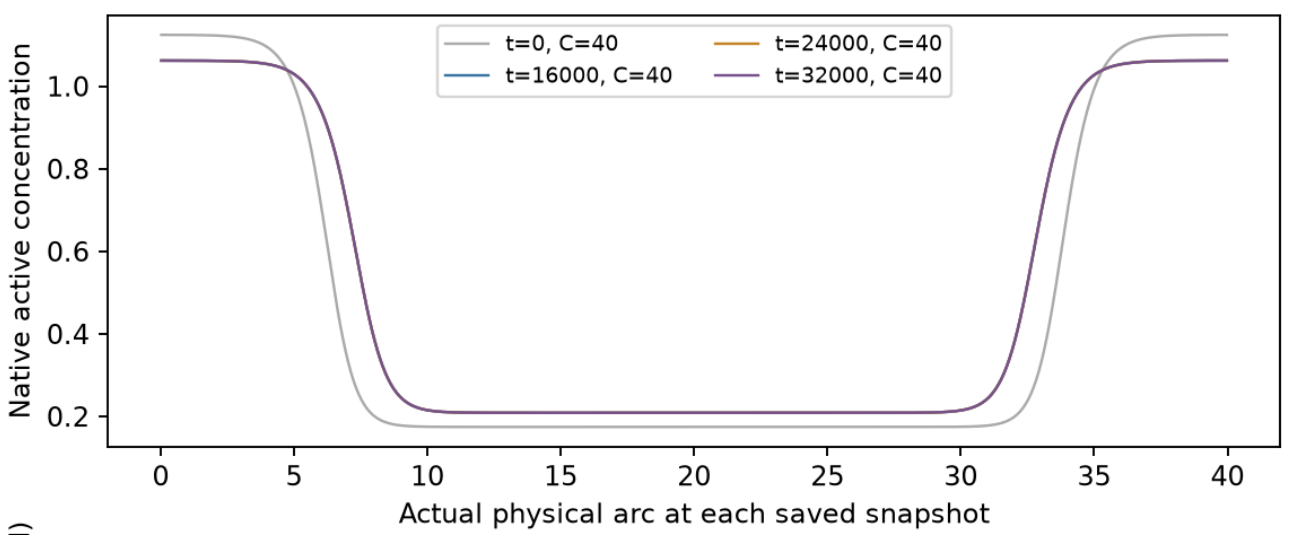

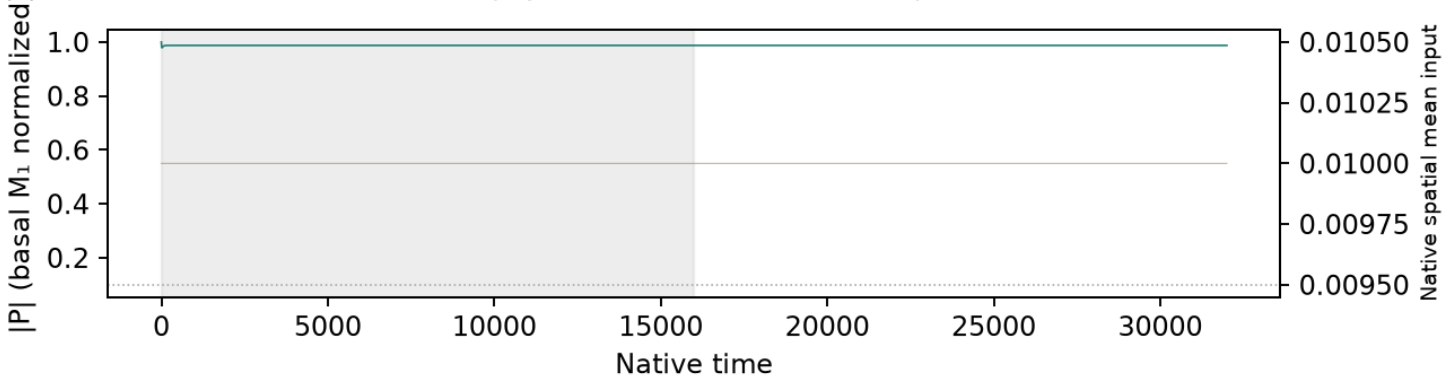

Native concentrations and every retained field frame are plotted without spatial resampling.
First half shaded: excluded from summary selection.
Spring mesh-face interpolation changes only boundary geometry; snapshots use actual saved C(t).
P uses basal M_1 normalization, distinct from instantaneous coherence.
Supplemental selection and controls; no main example is chosen.
Native NPZ/status links remain local/HPC data.

S11 · Wave-pinning · size label 40 · f=0.1 · noise
context common · σ=1 · horizon=32000 · n=12 independent noisy realizations

Summary-feature medoid · seed 202610192010610
nonforced condition · profile cadence 40

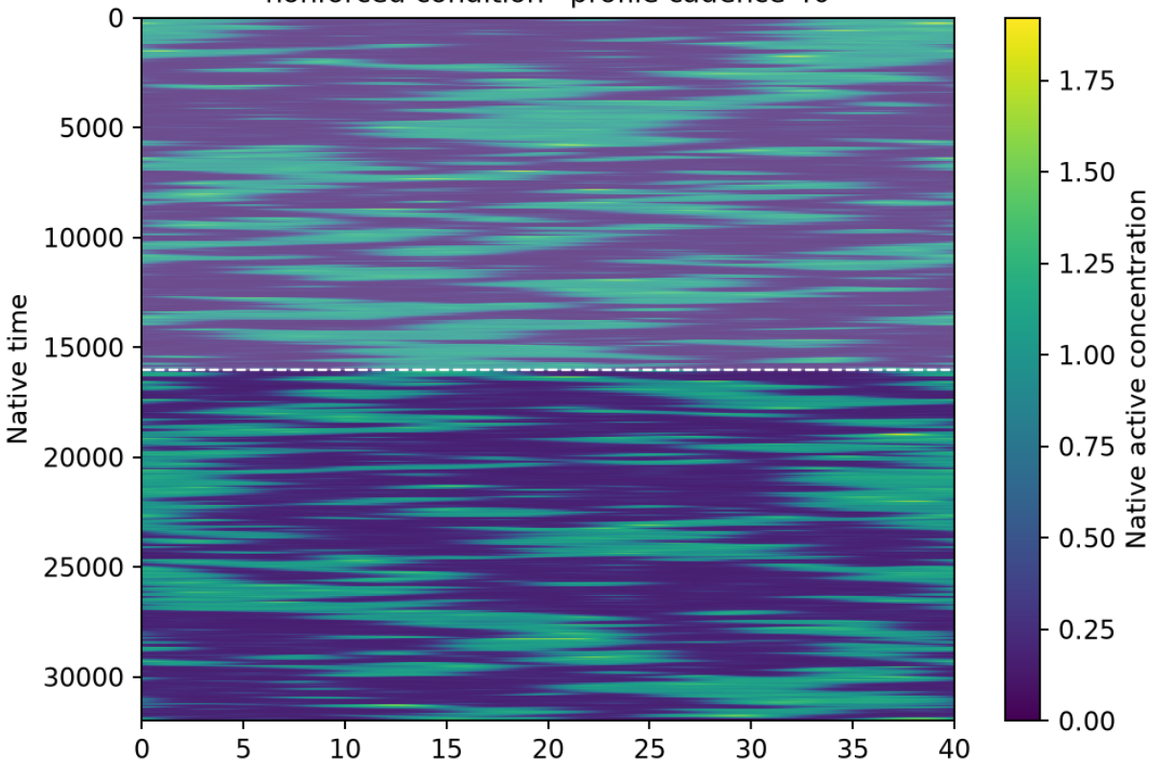

Deterministic distinct random · seed 202610192010600
nonforced condition · profile cadence 40

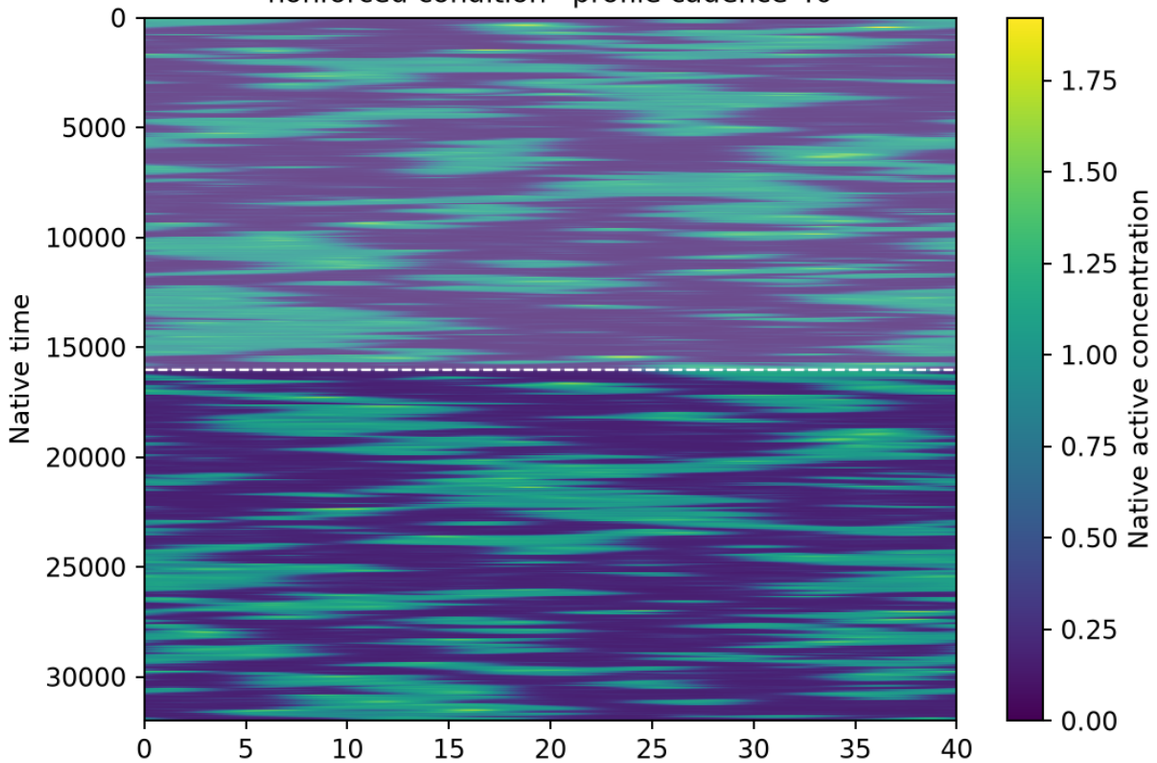

Physical arc from fixed material origin

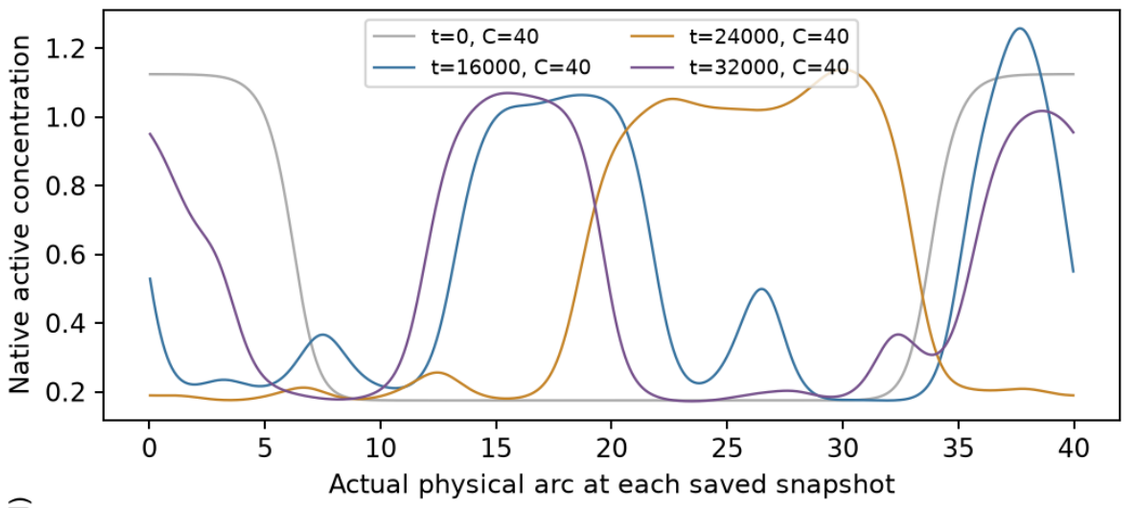

Physical arc from fixed material origin

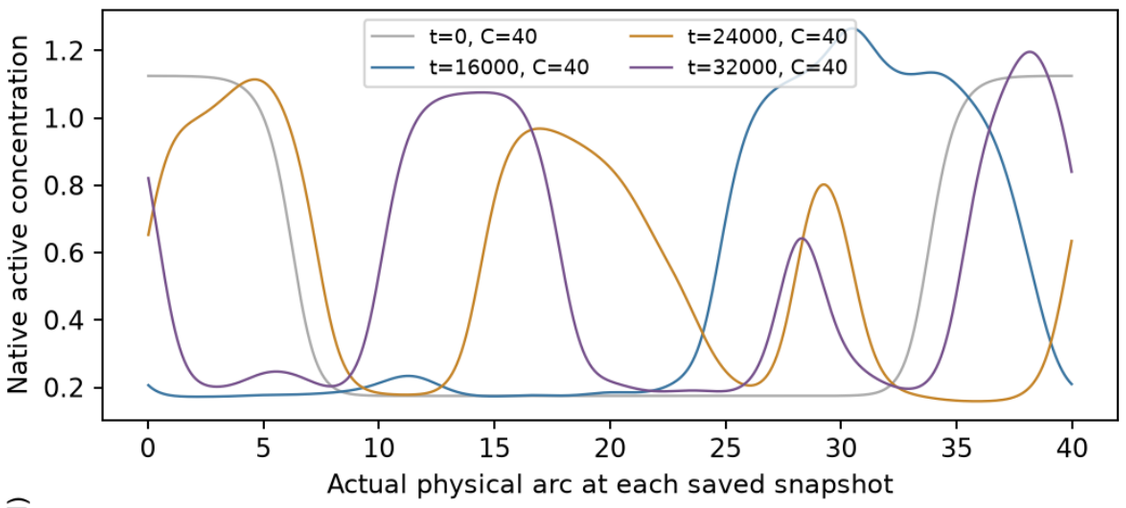

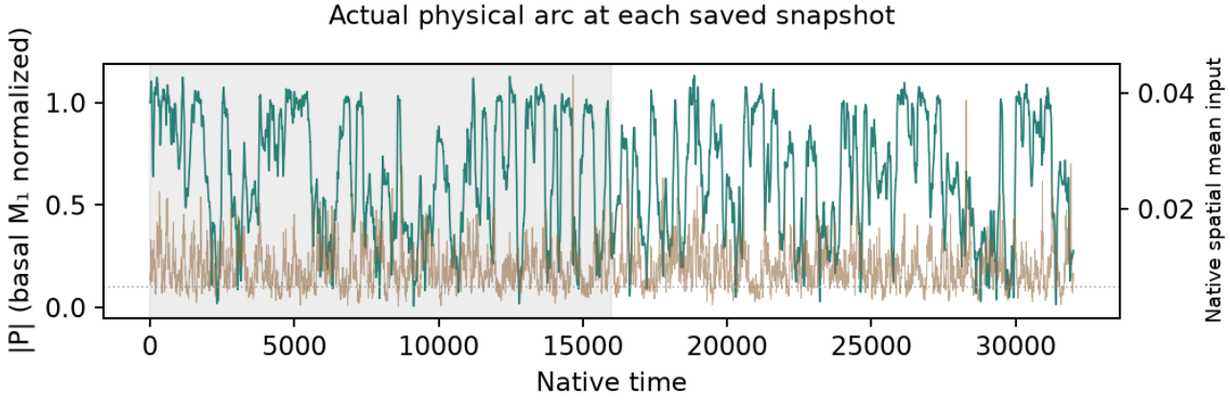

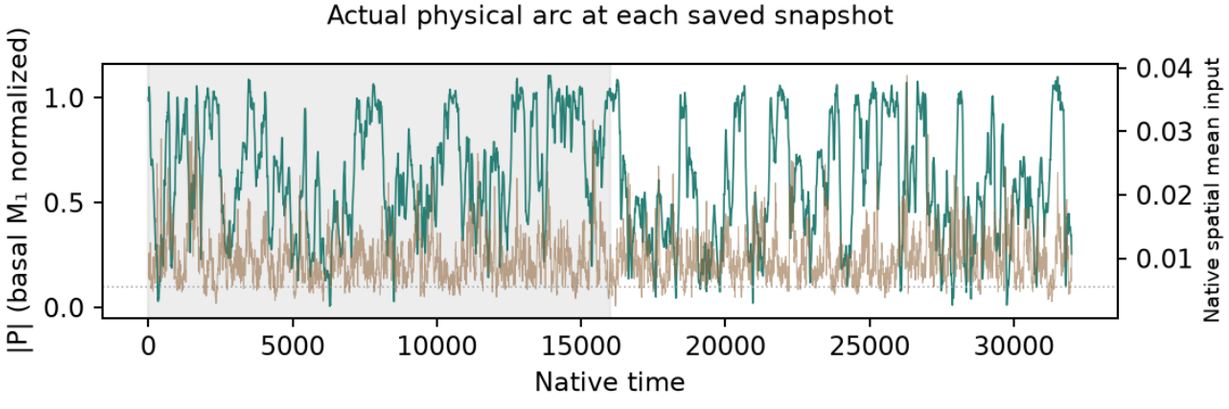

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M_1 normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.