S11 · Goryachev · size label 20 · f=0.02 · noise
context E1_extra · σ=0.25 · horizon=32000 · n=12 independent noisy realizations

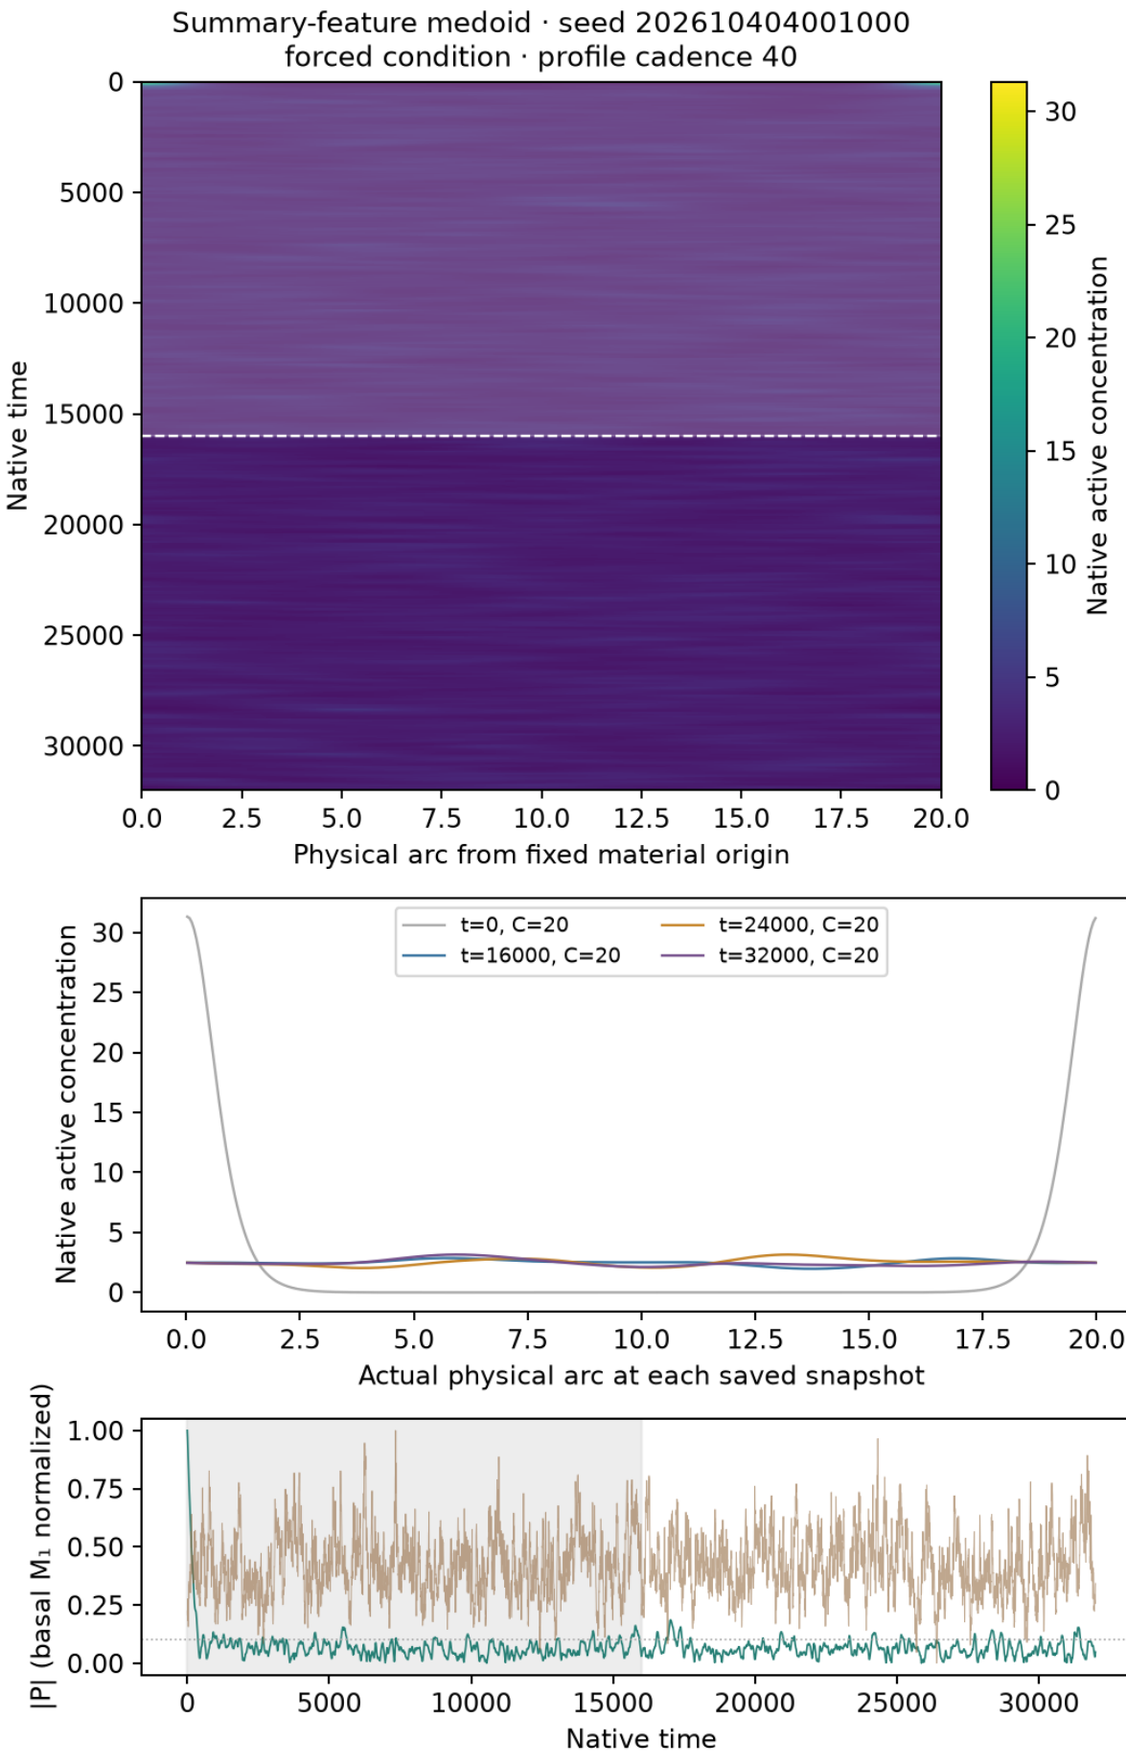

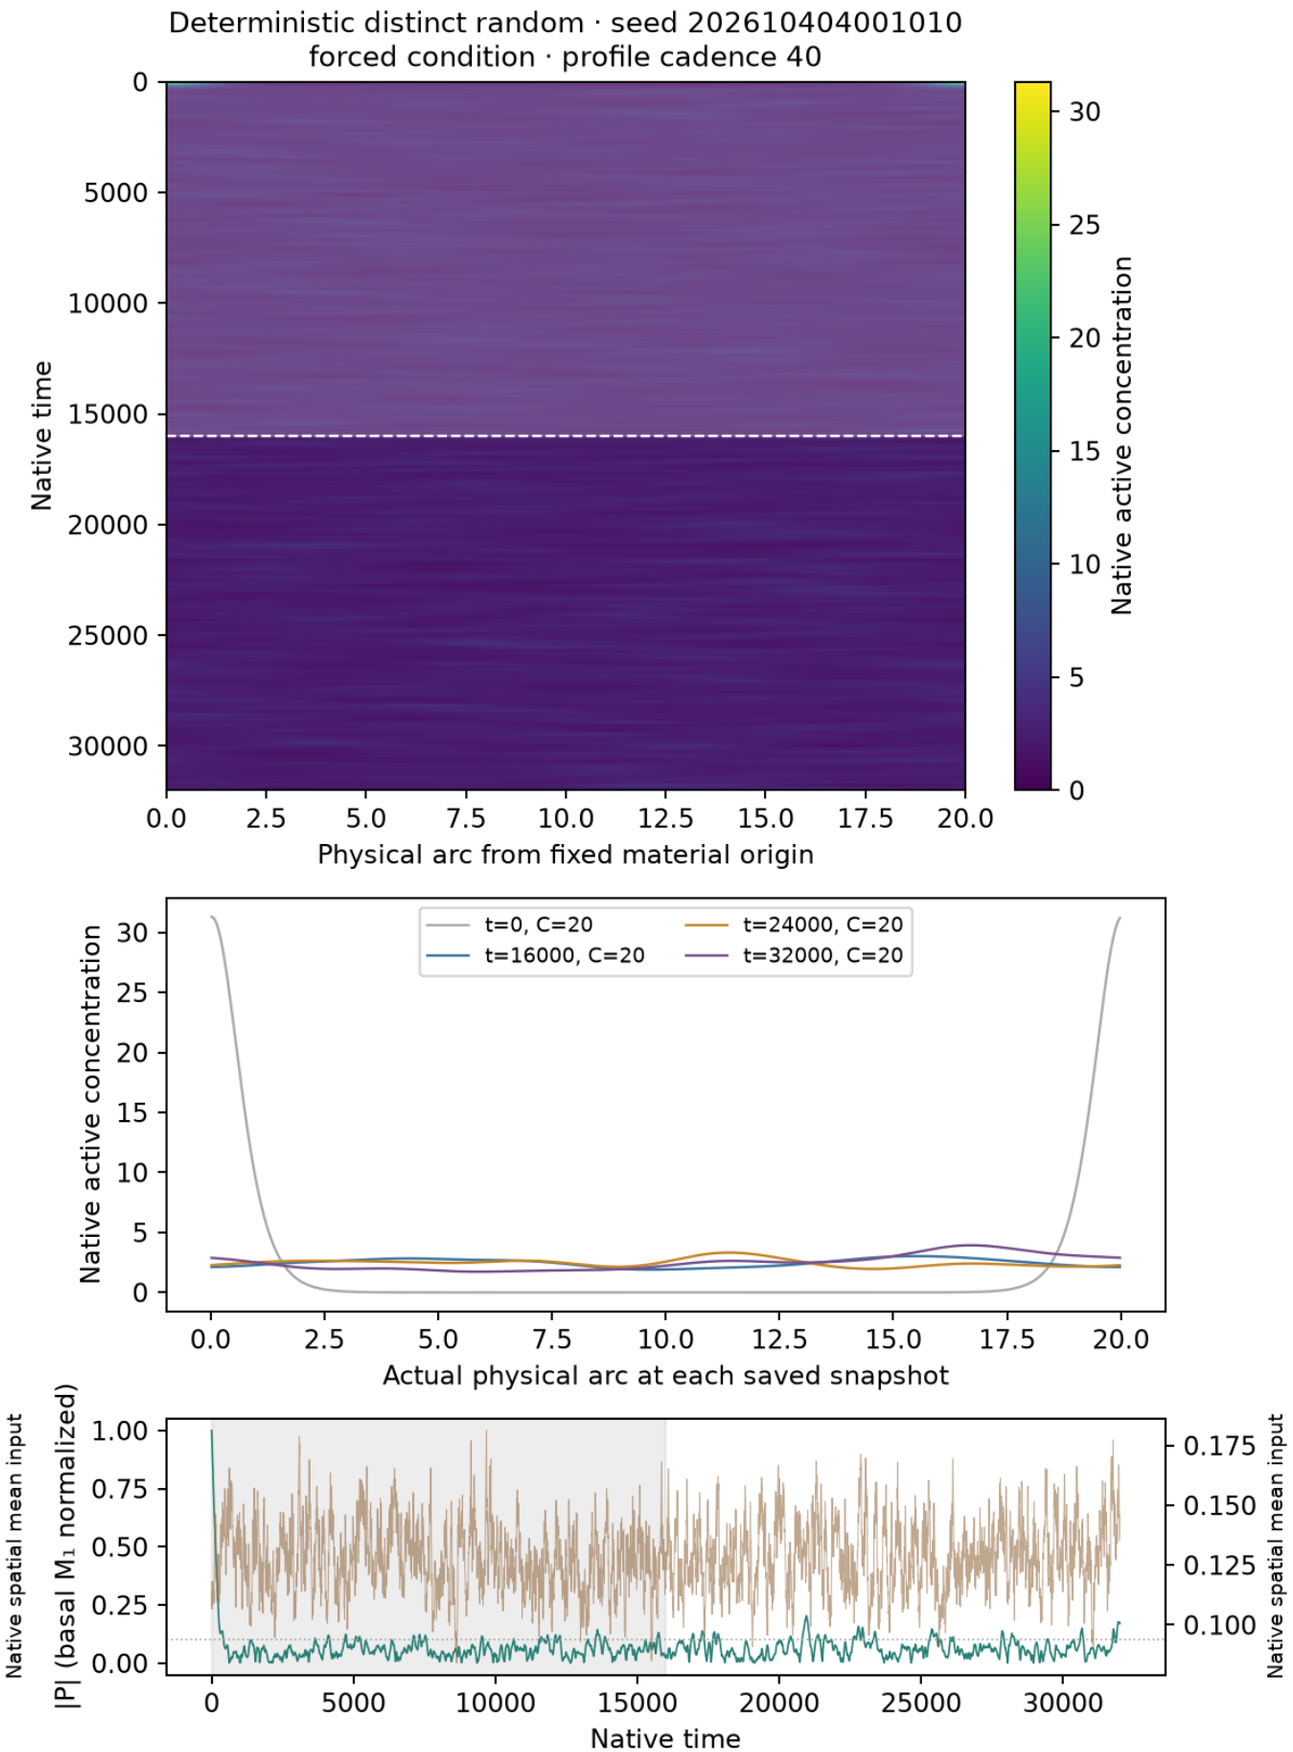

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Goryachev · size label 20 · f=0.02 · noise
context E1_extra · σ=0.5 · horizon=32000 · n=12 independent noisy realizations

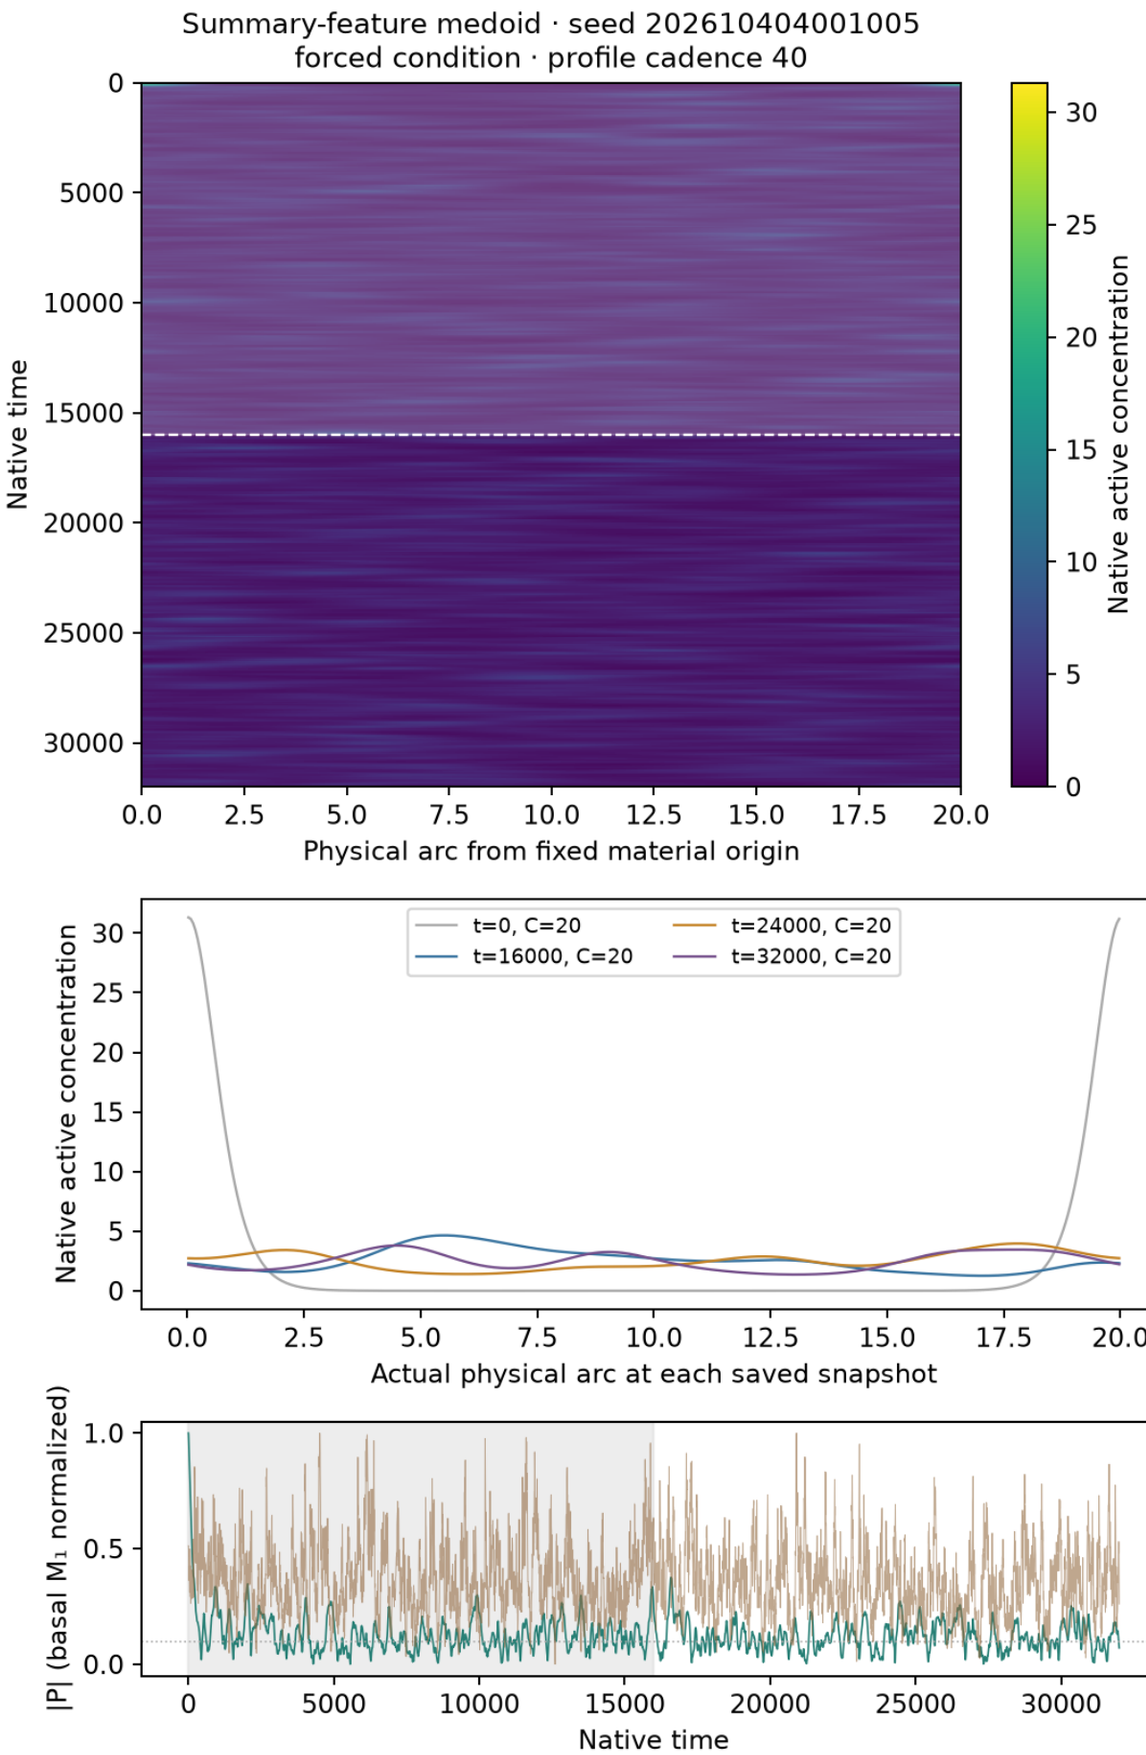

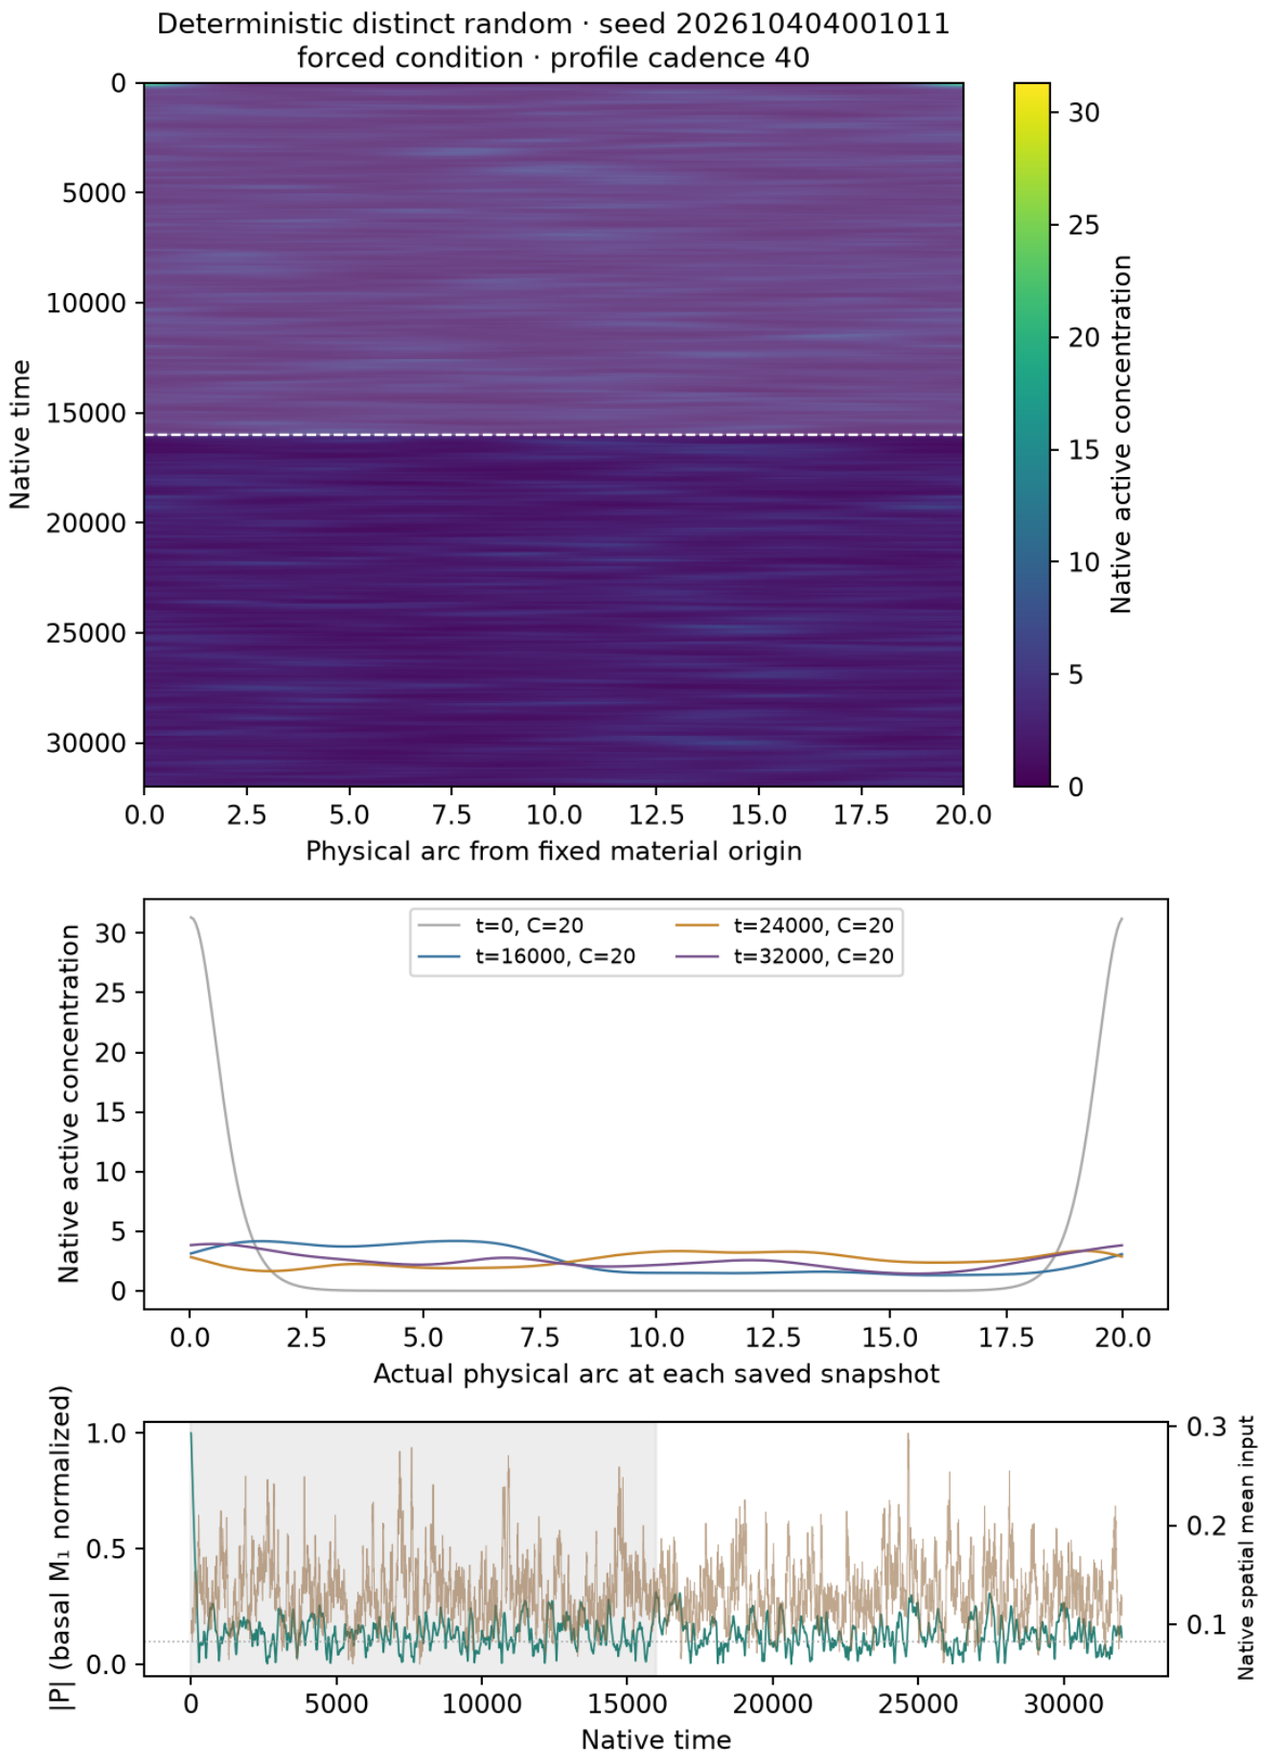

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Goryachev · size label 20 · f=0.02 · noise
context E1_extra · σ=2 · horizon=32000 · n=12 independent noisy realizations

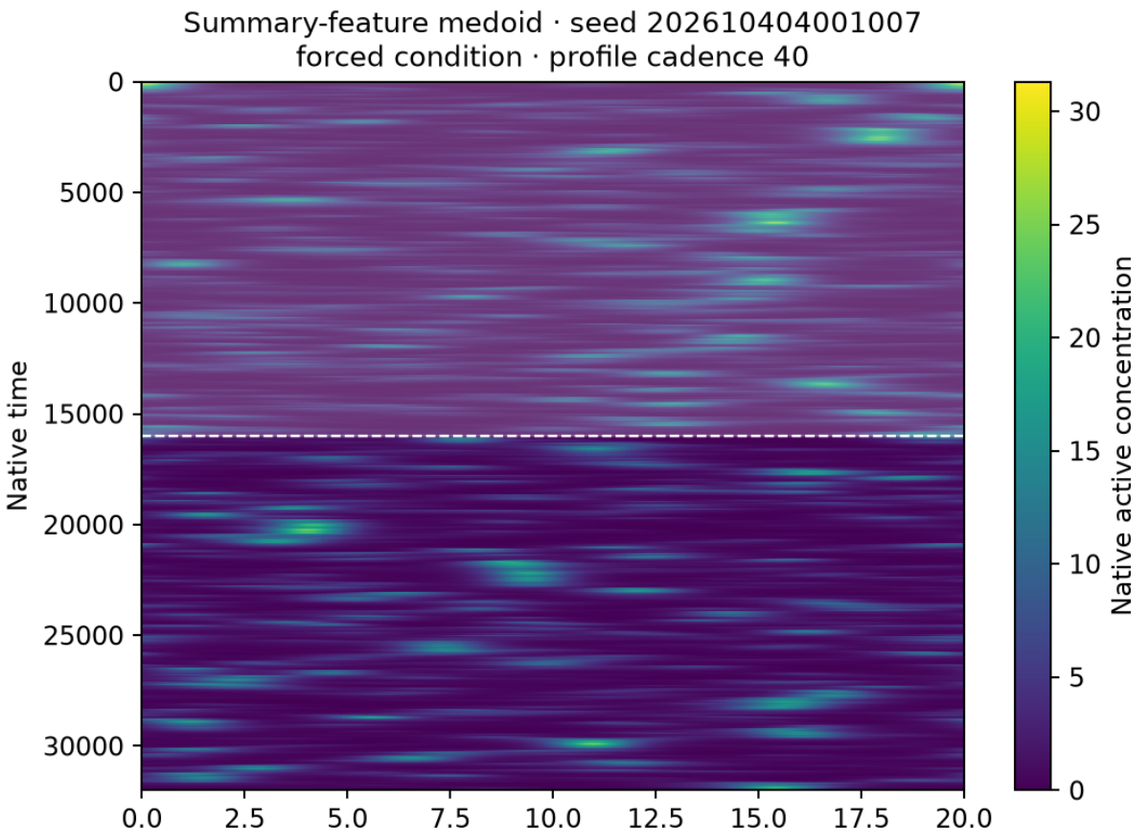

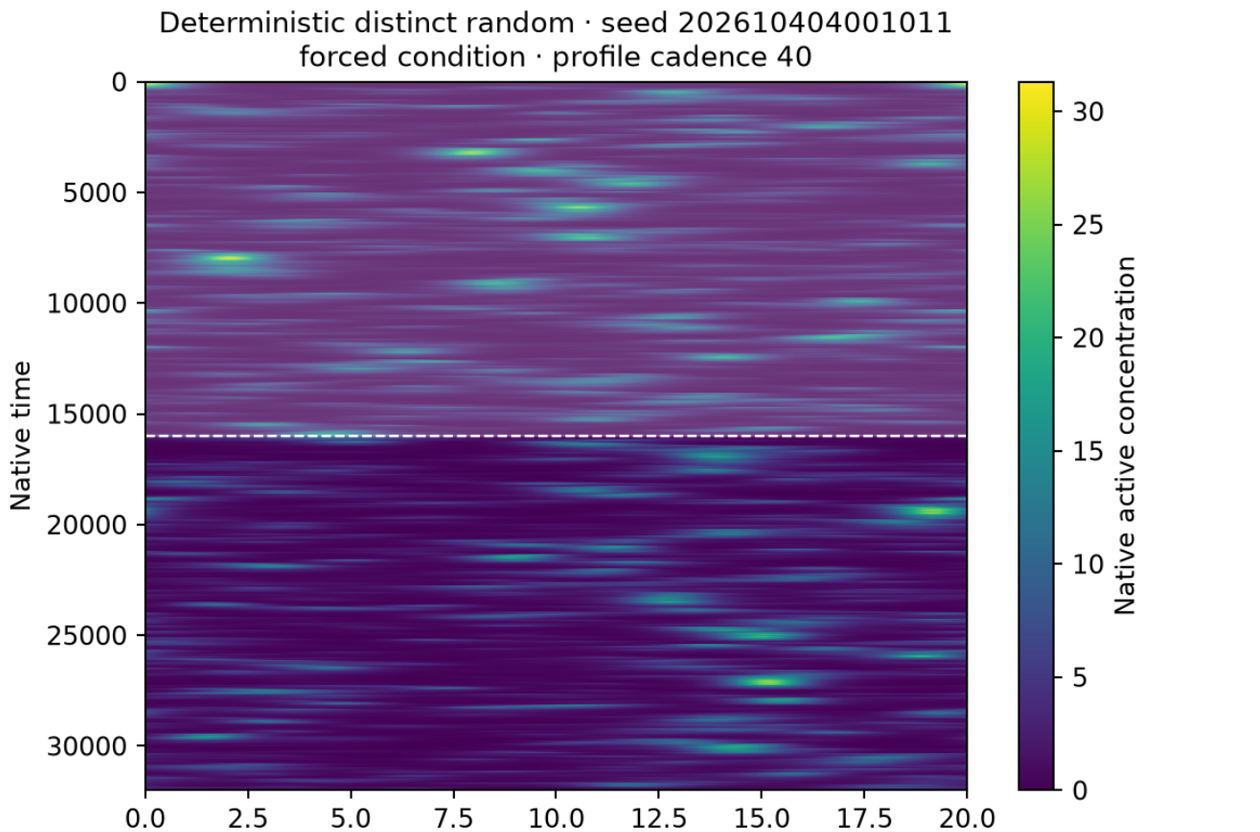

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Goryachev · size label 20 · f=0.03 · noise
context E1_extra · σ=0.25 · horizon=32000 · n=12 independent noisy realizations

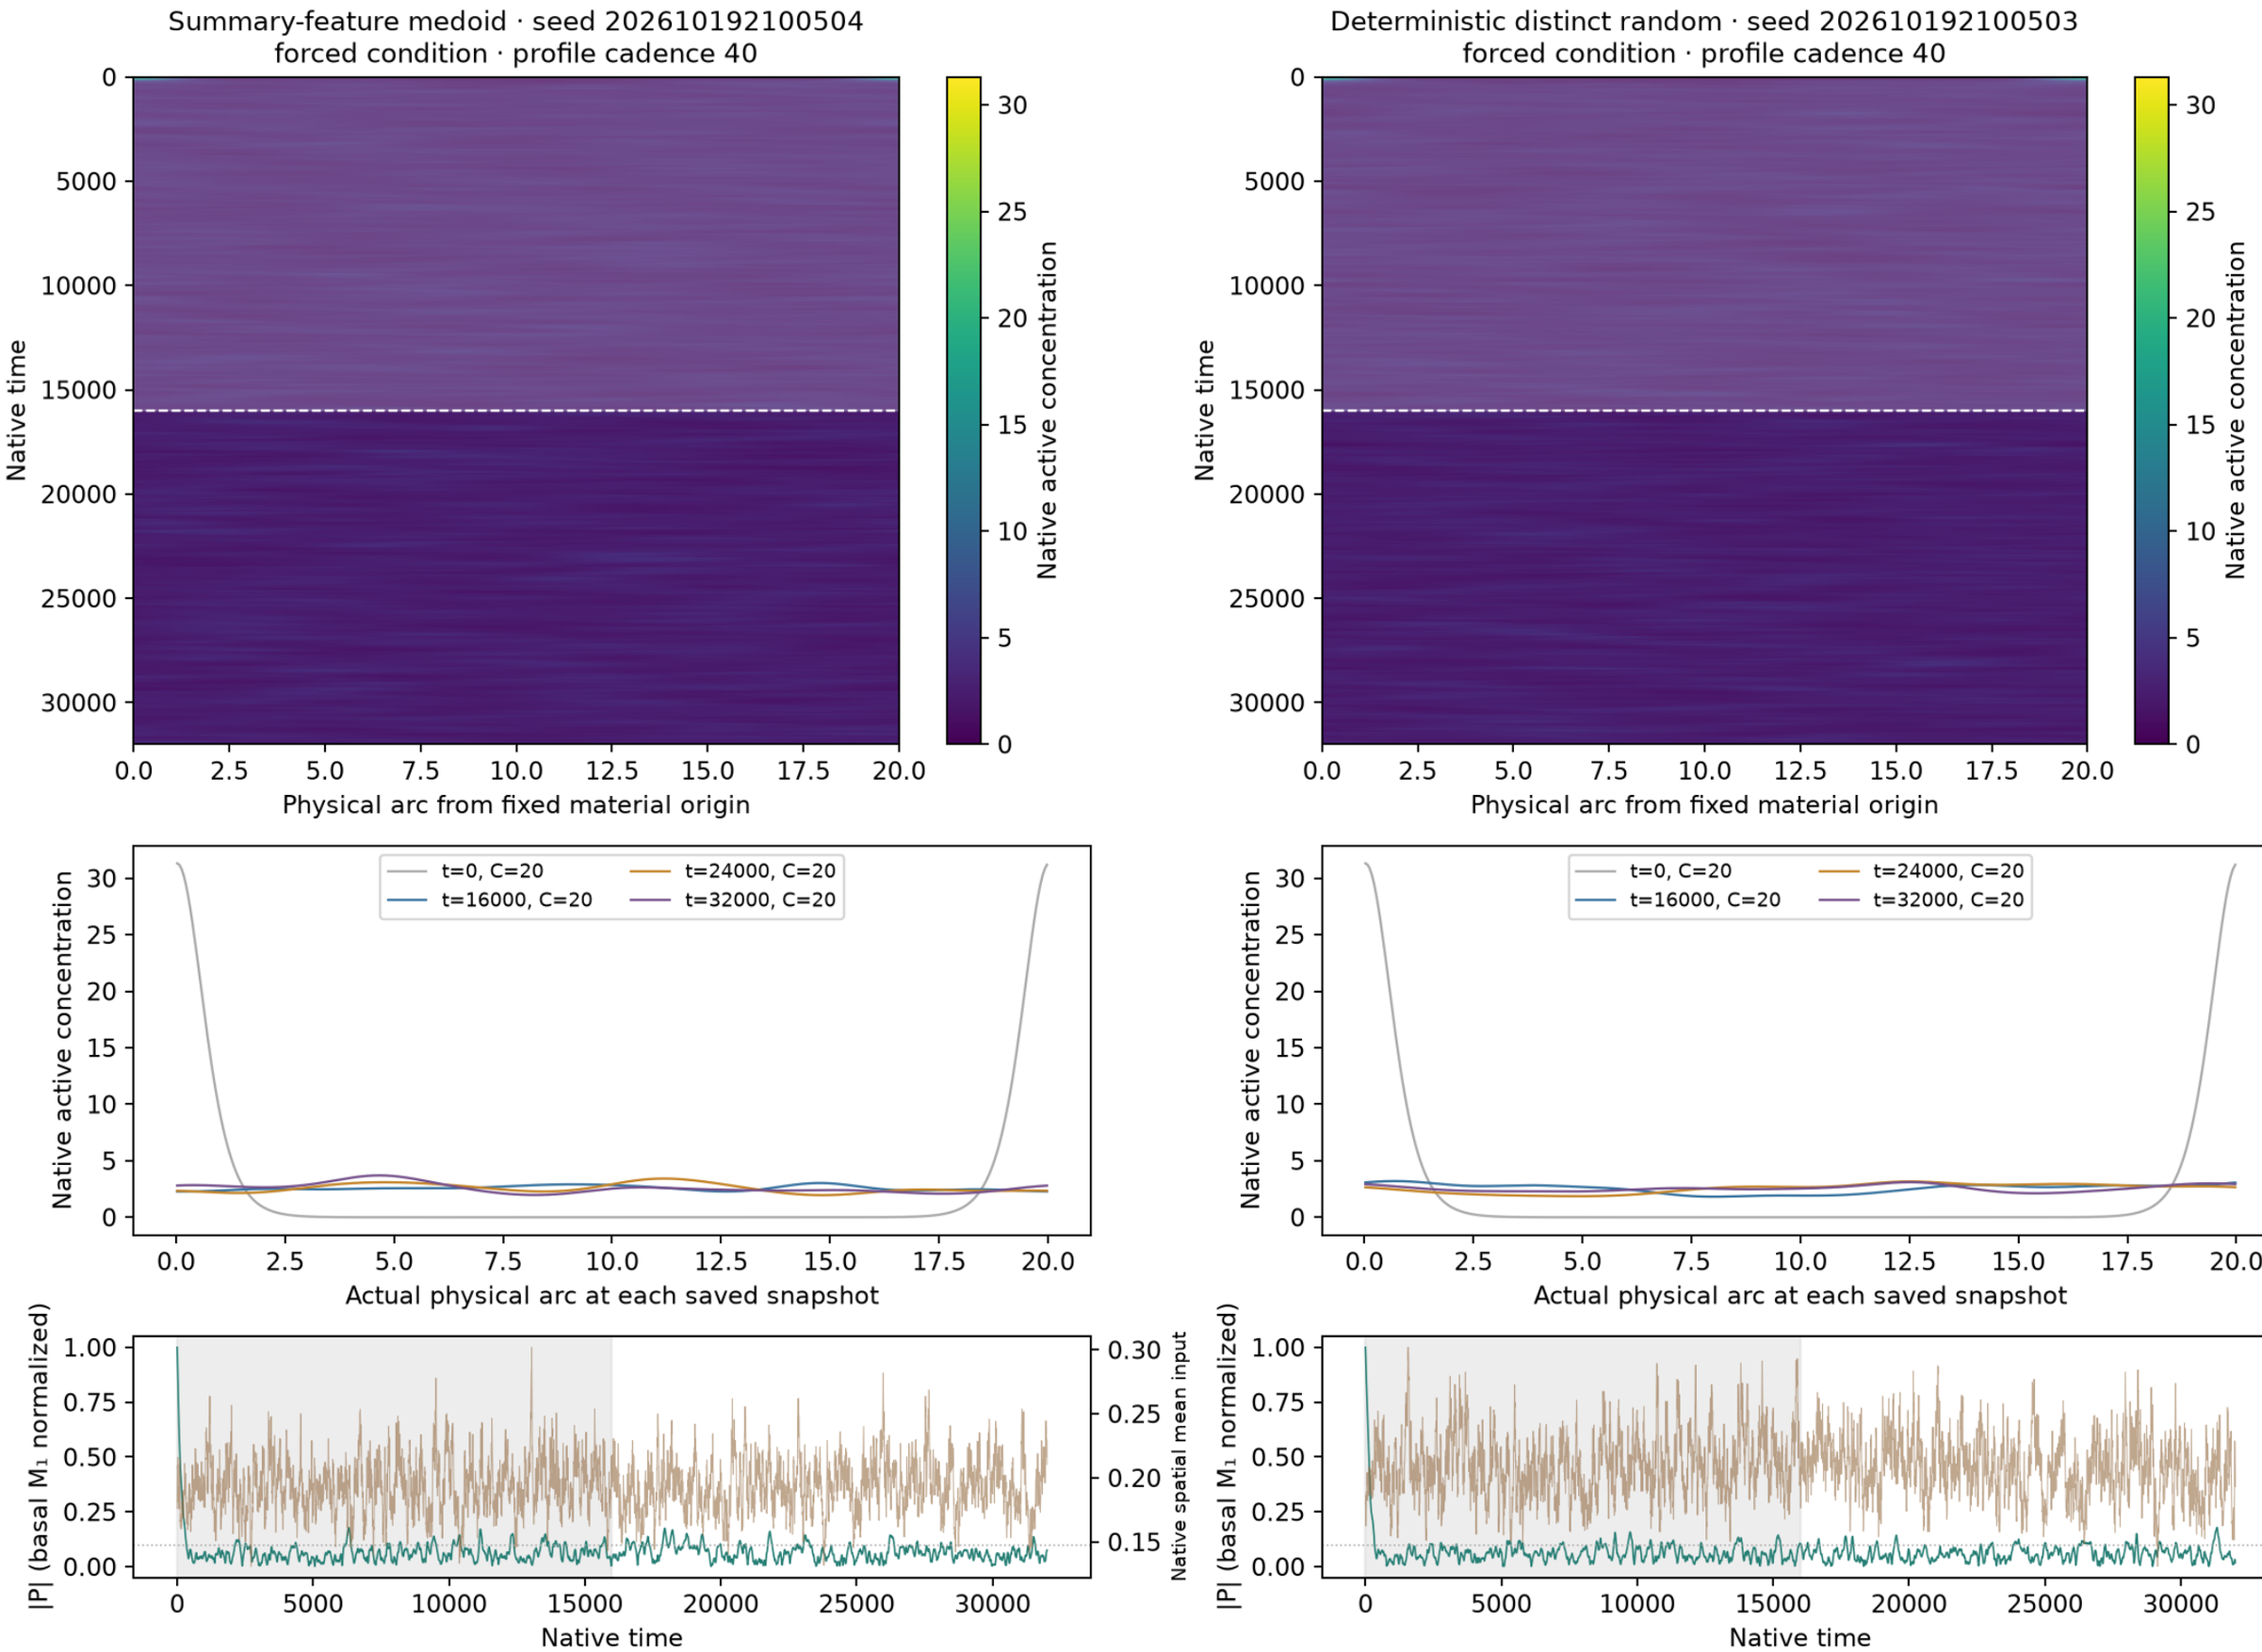

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Goryachev · size label 20 · f=0.03 · noise
context E1_extra · σ=0.5 · horizon=32000 · n=12 independent noisy realizations

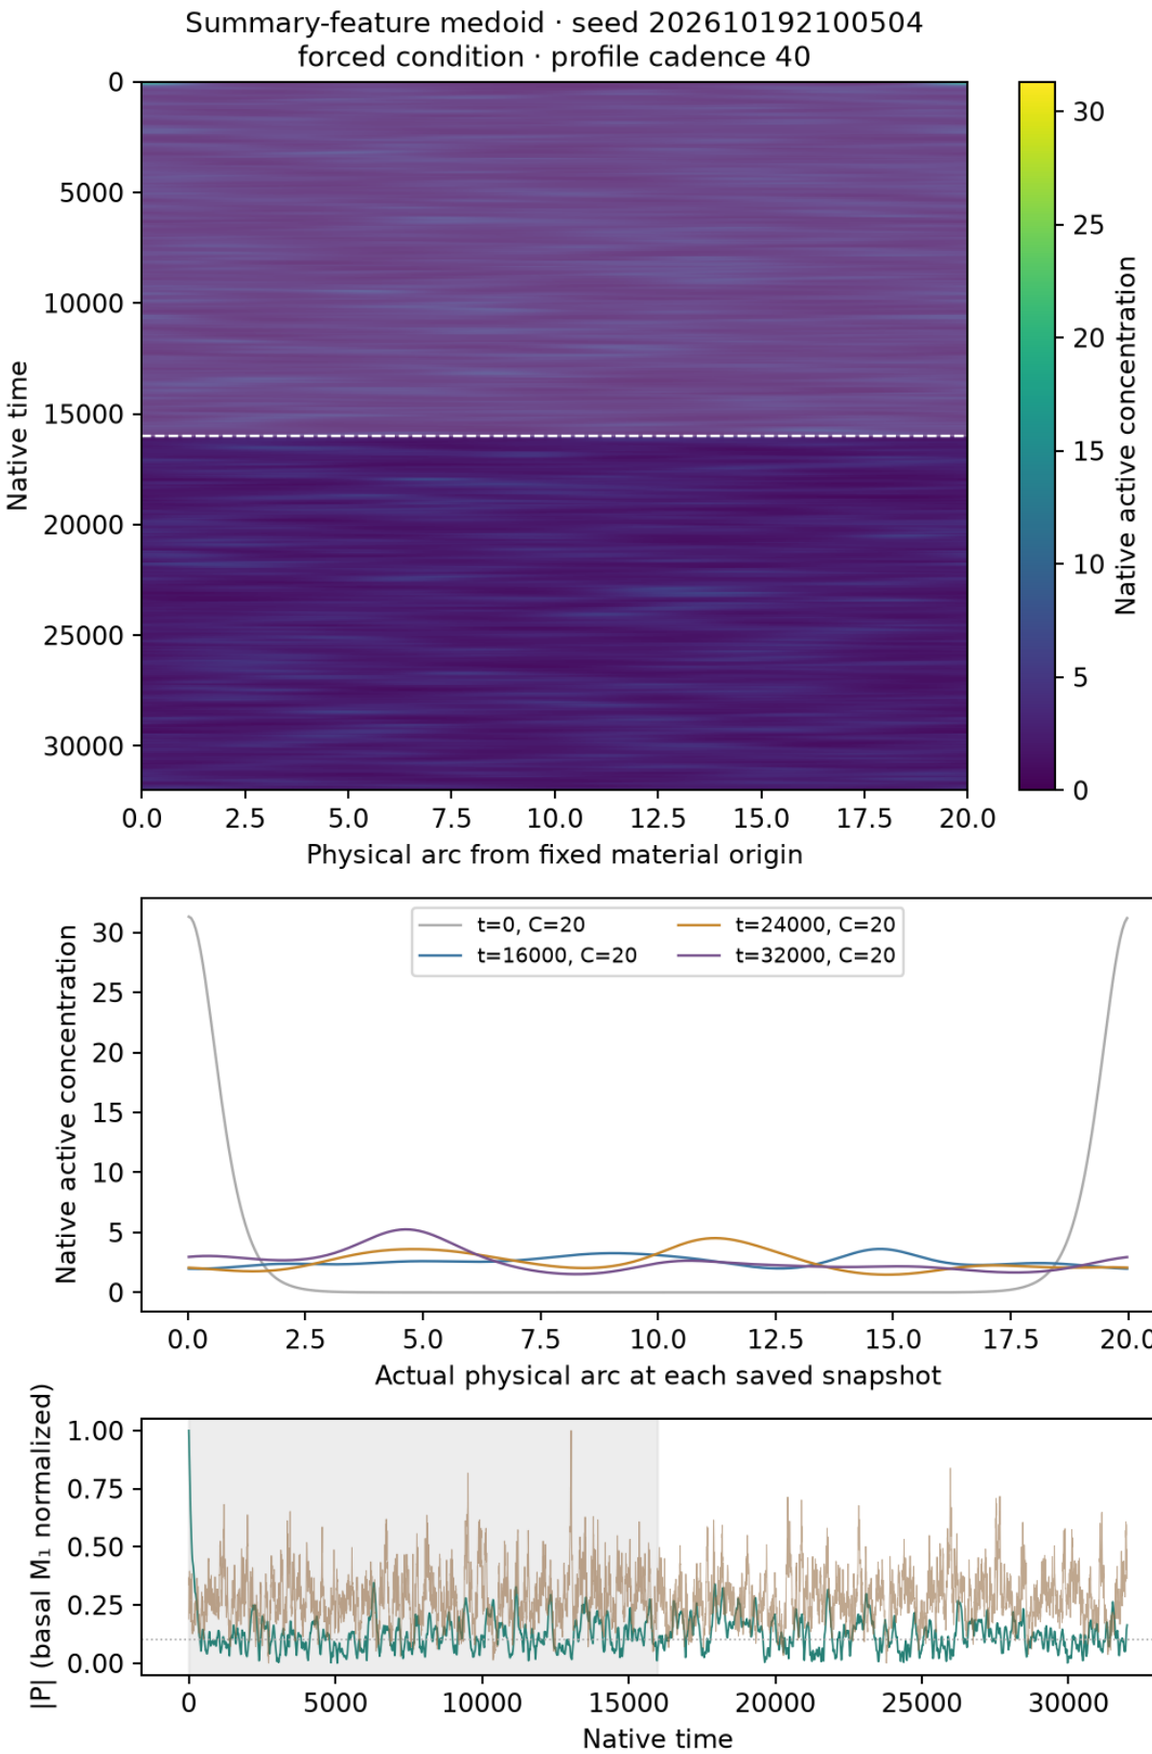

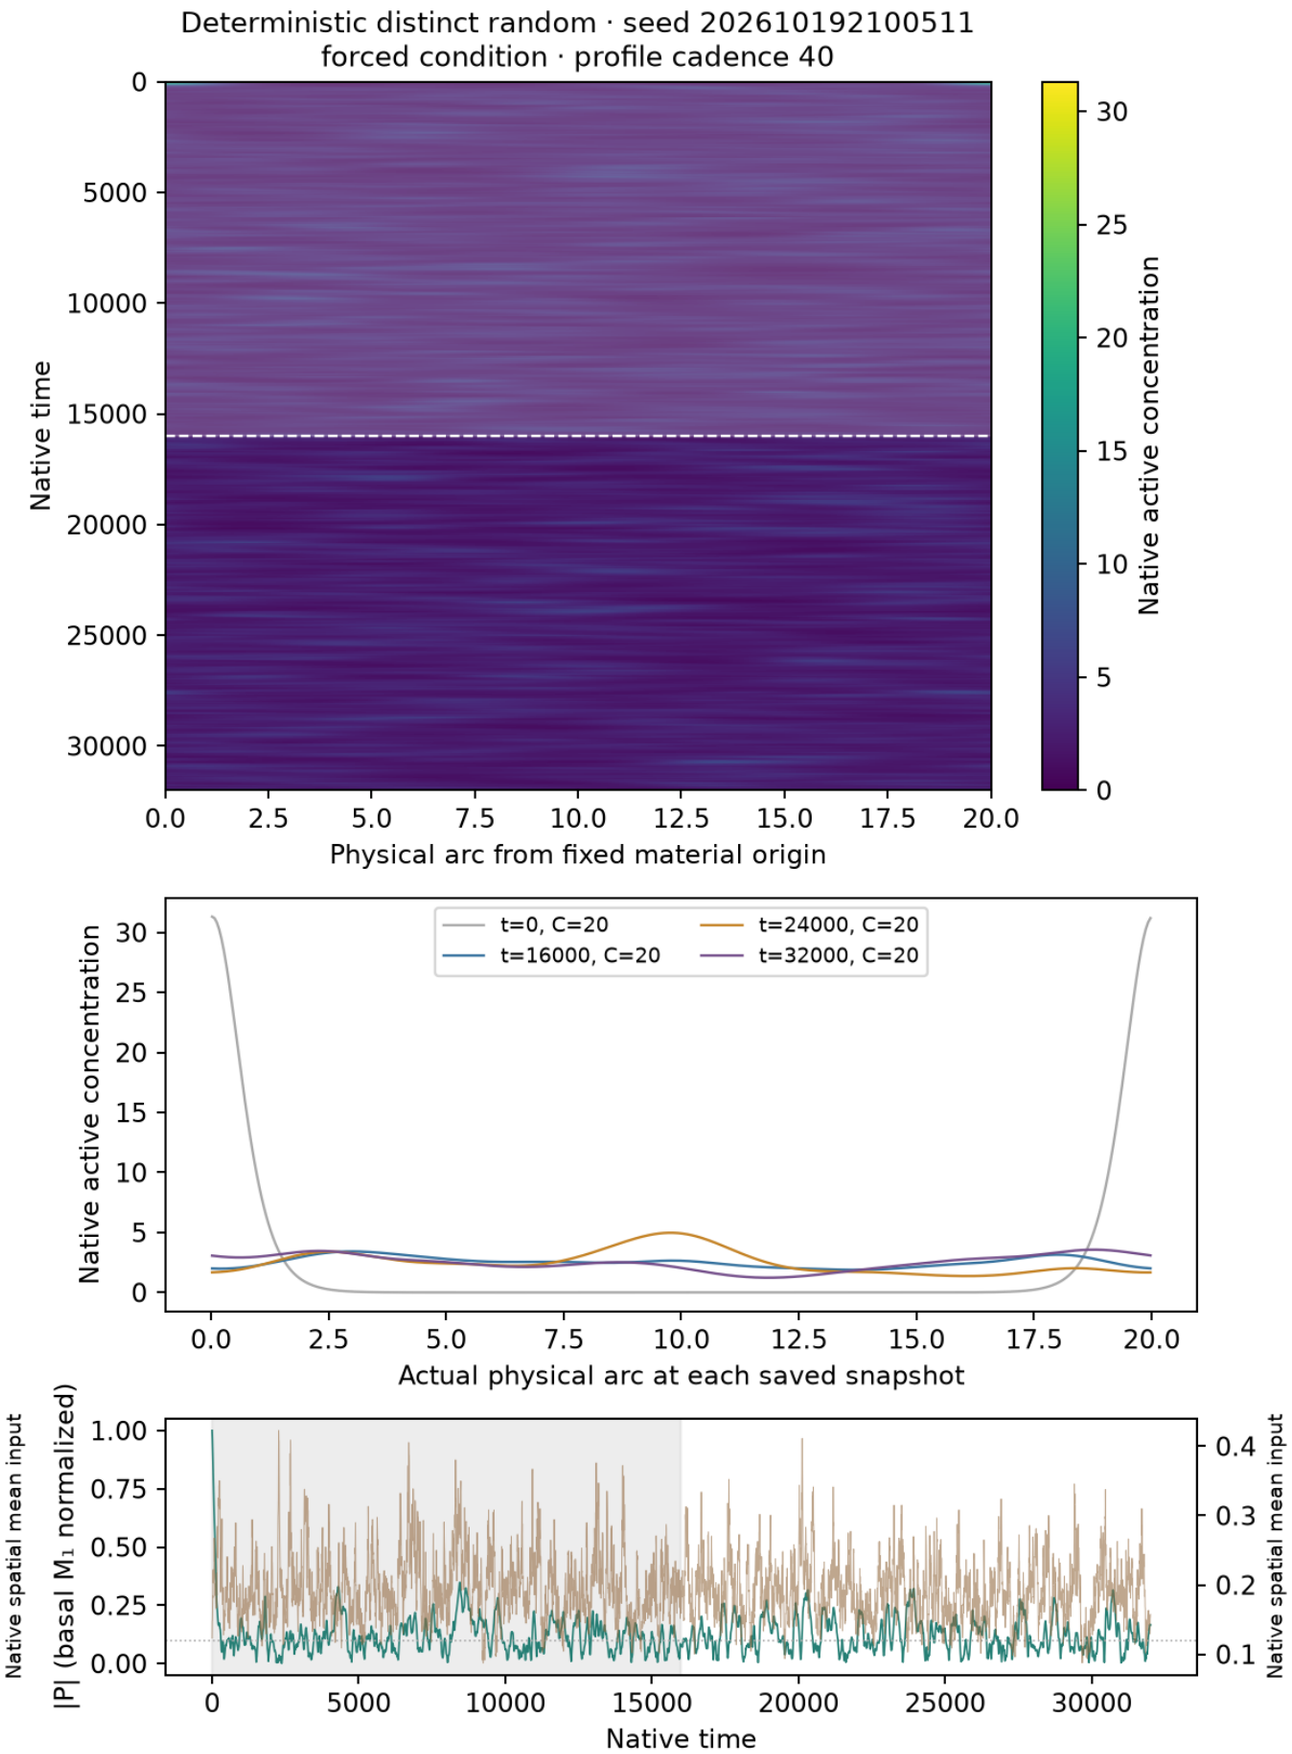

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Goryachev · size label 20 · f=0.03 · noise
context E1_extra · σ=2 · horizon=32000 · n=12 independent noisy realizations

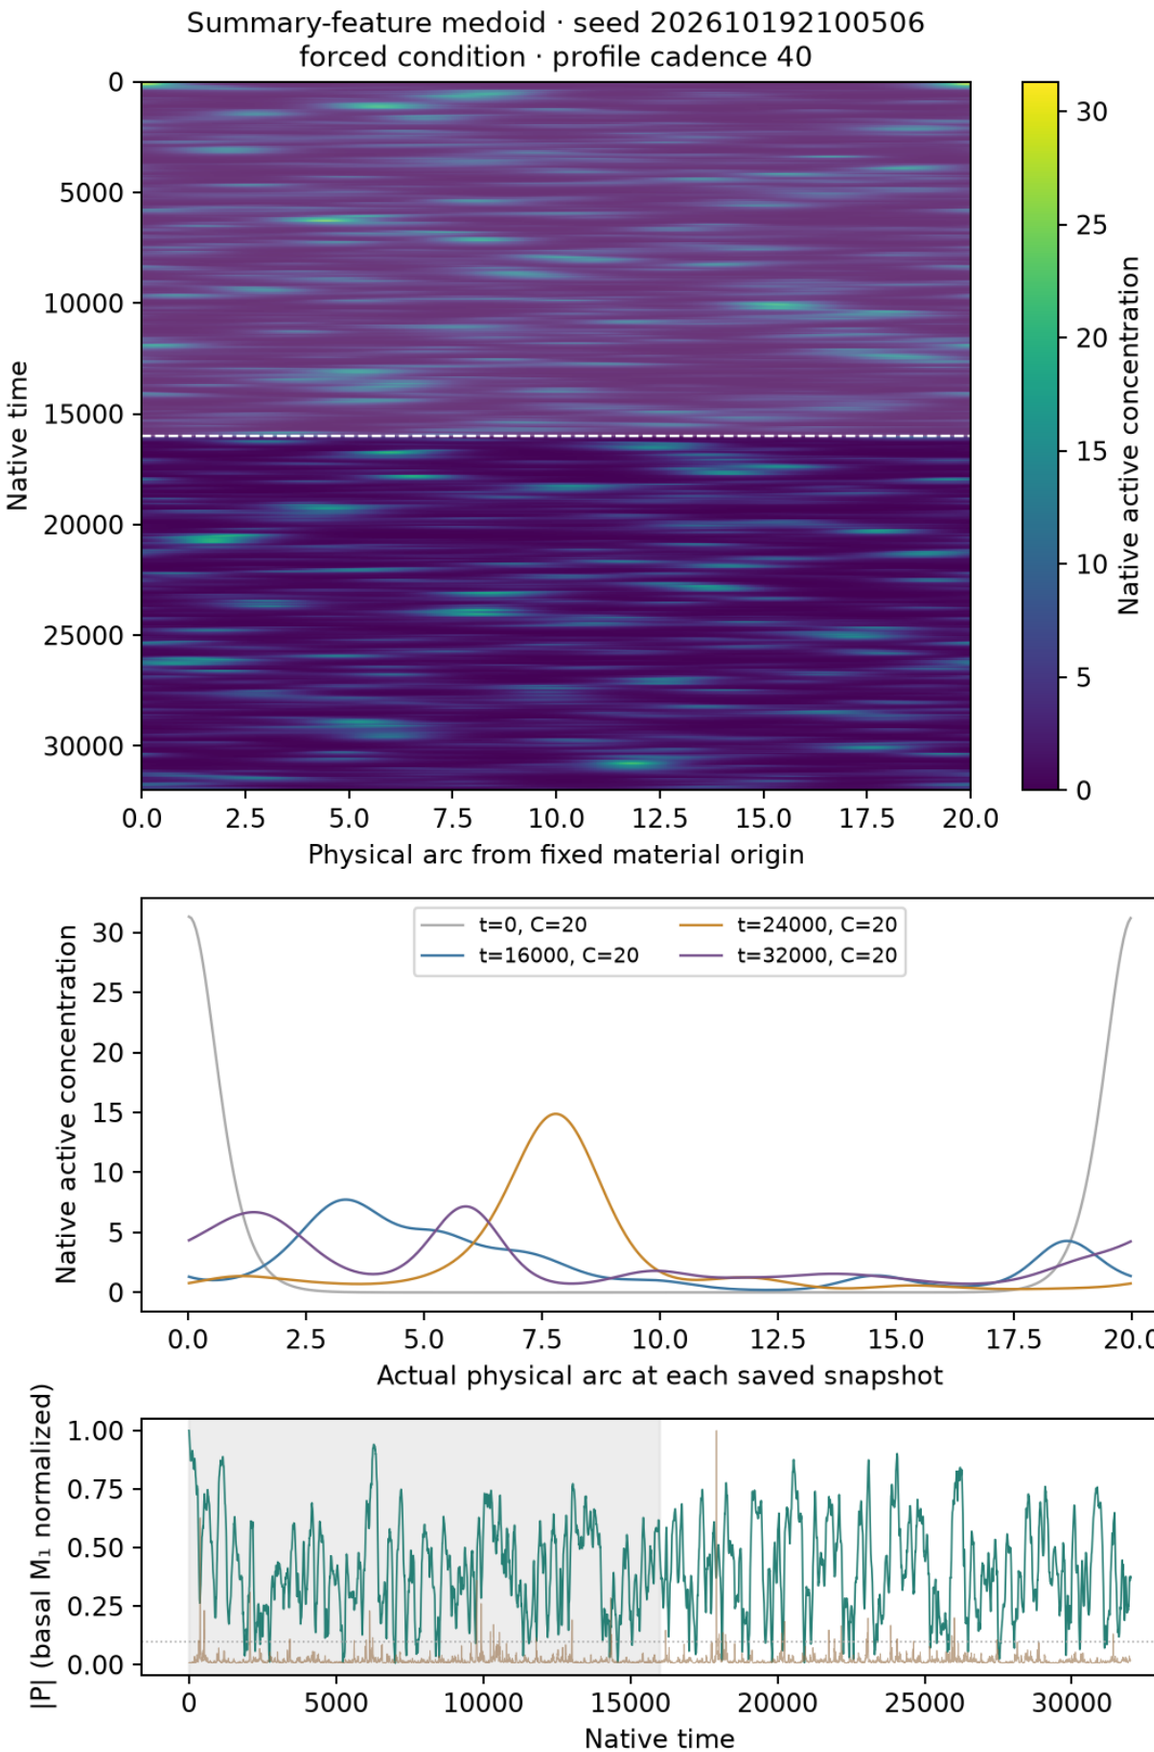

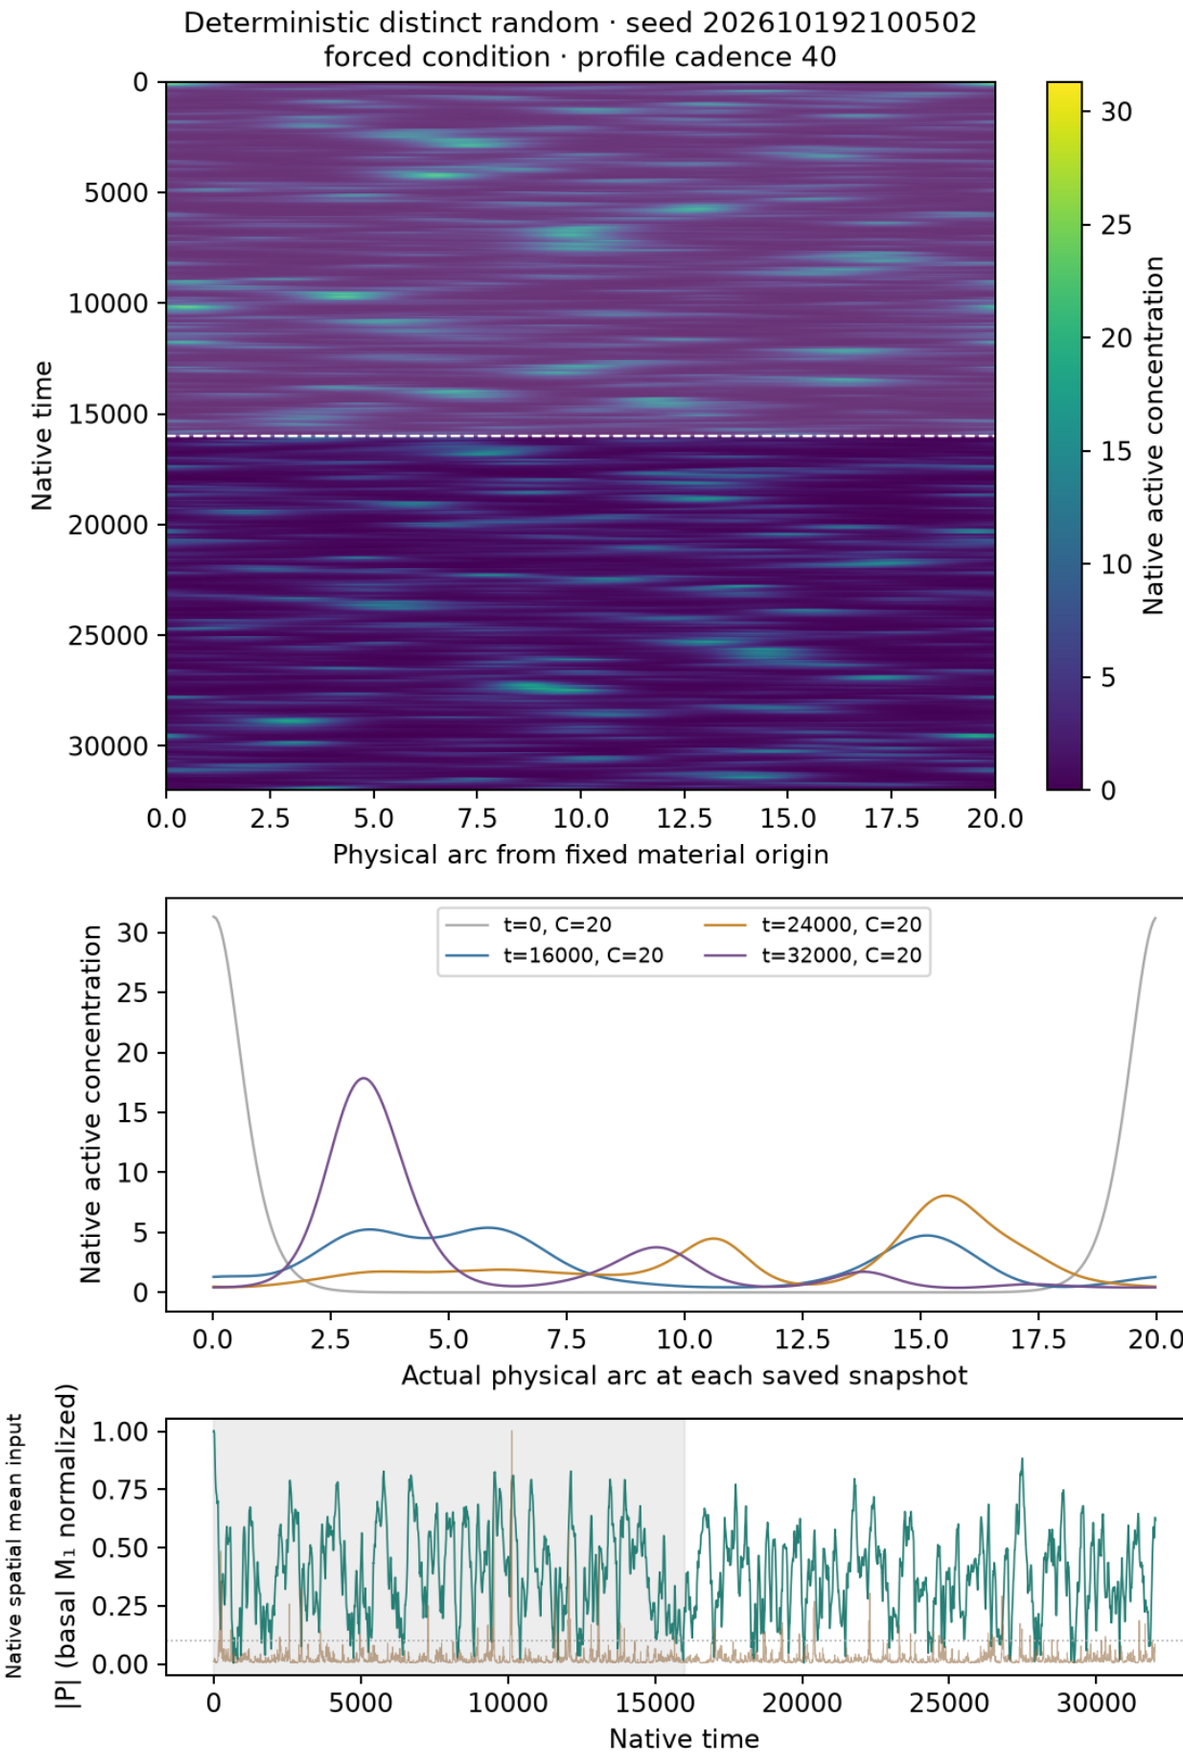

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Goryachev · size label 40 · f=0.02 · noise
context E1_extra · σ=0.25 · horizon=32000 · n=12 independent noisy realizations

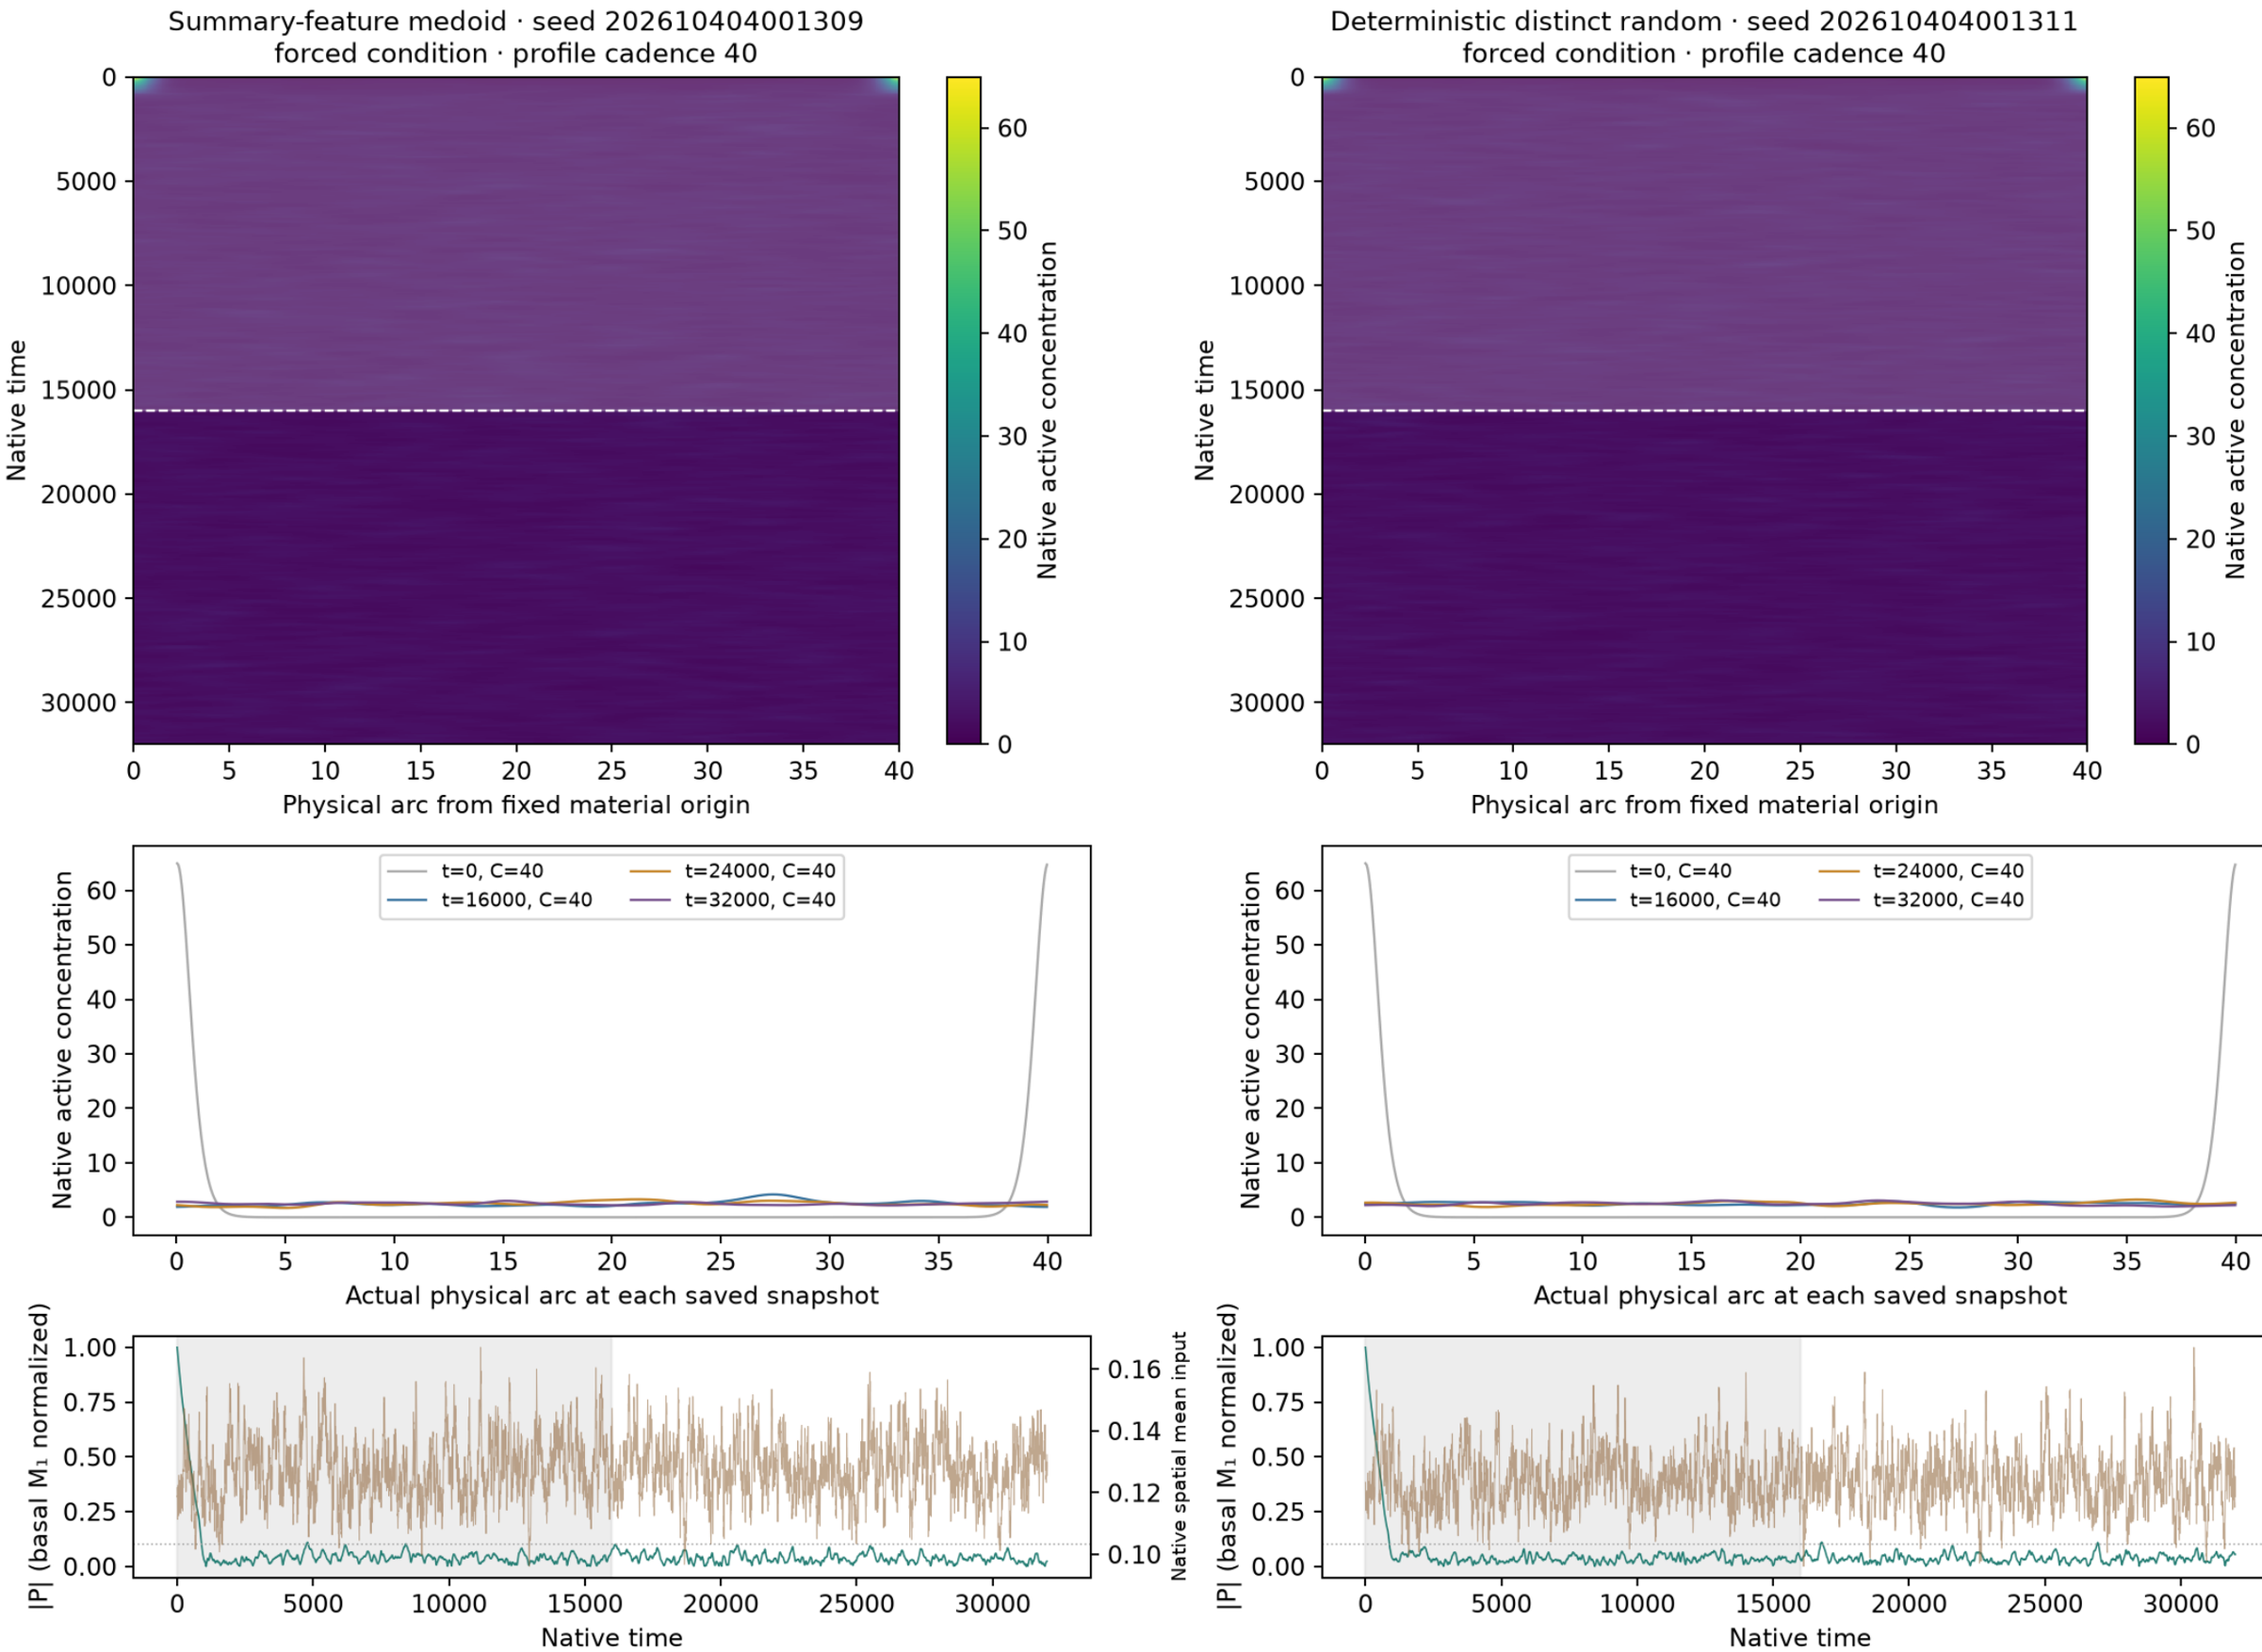

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Goryachev · size label 40 · f=0.02 · noise
context E1_extra · σ=0.5 · horizon=32000 · n=12 independent noisy realizations

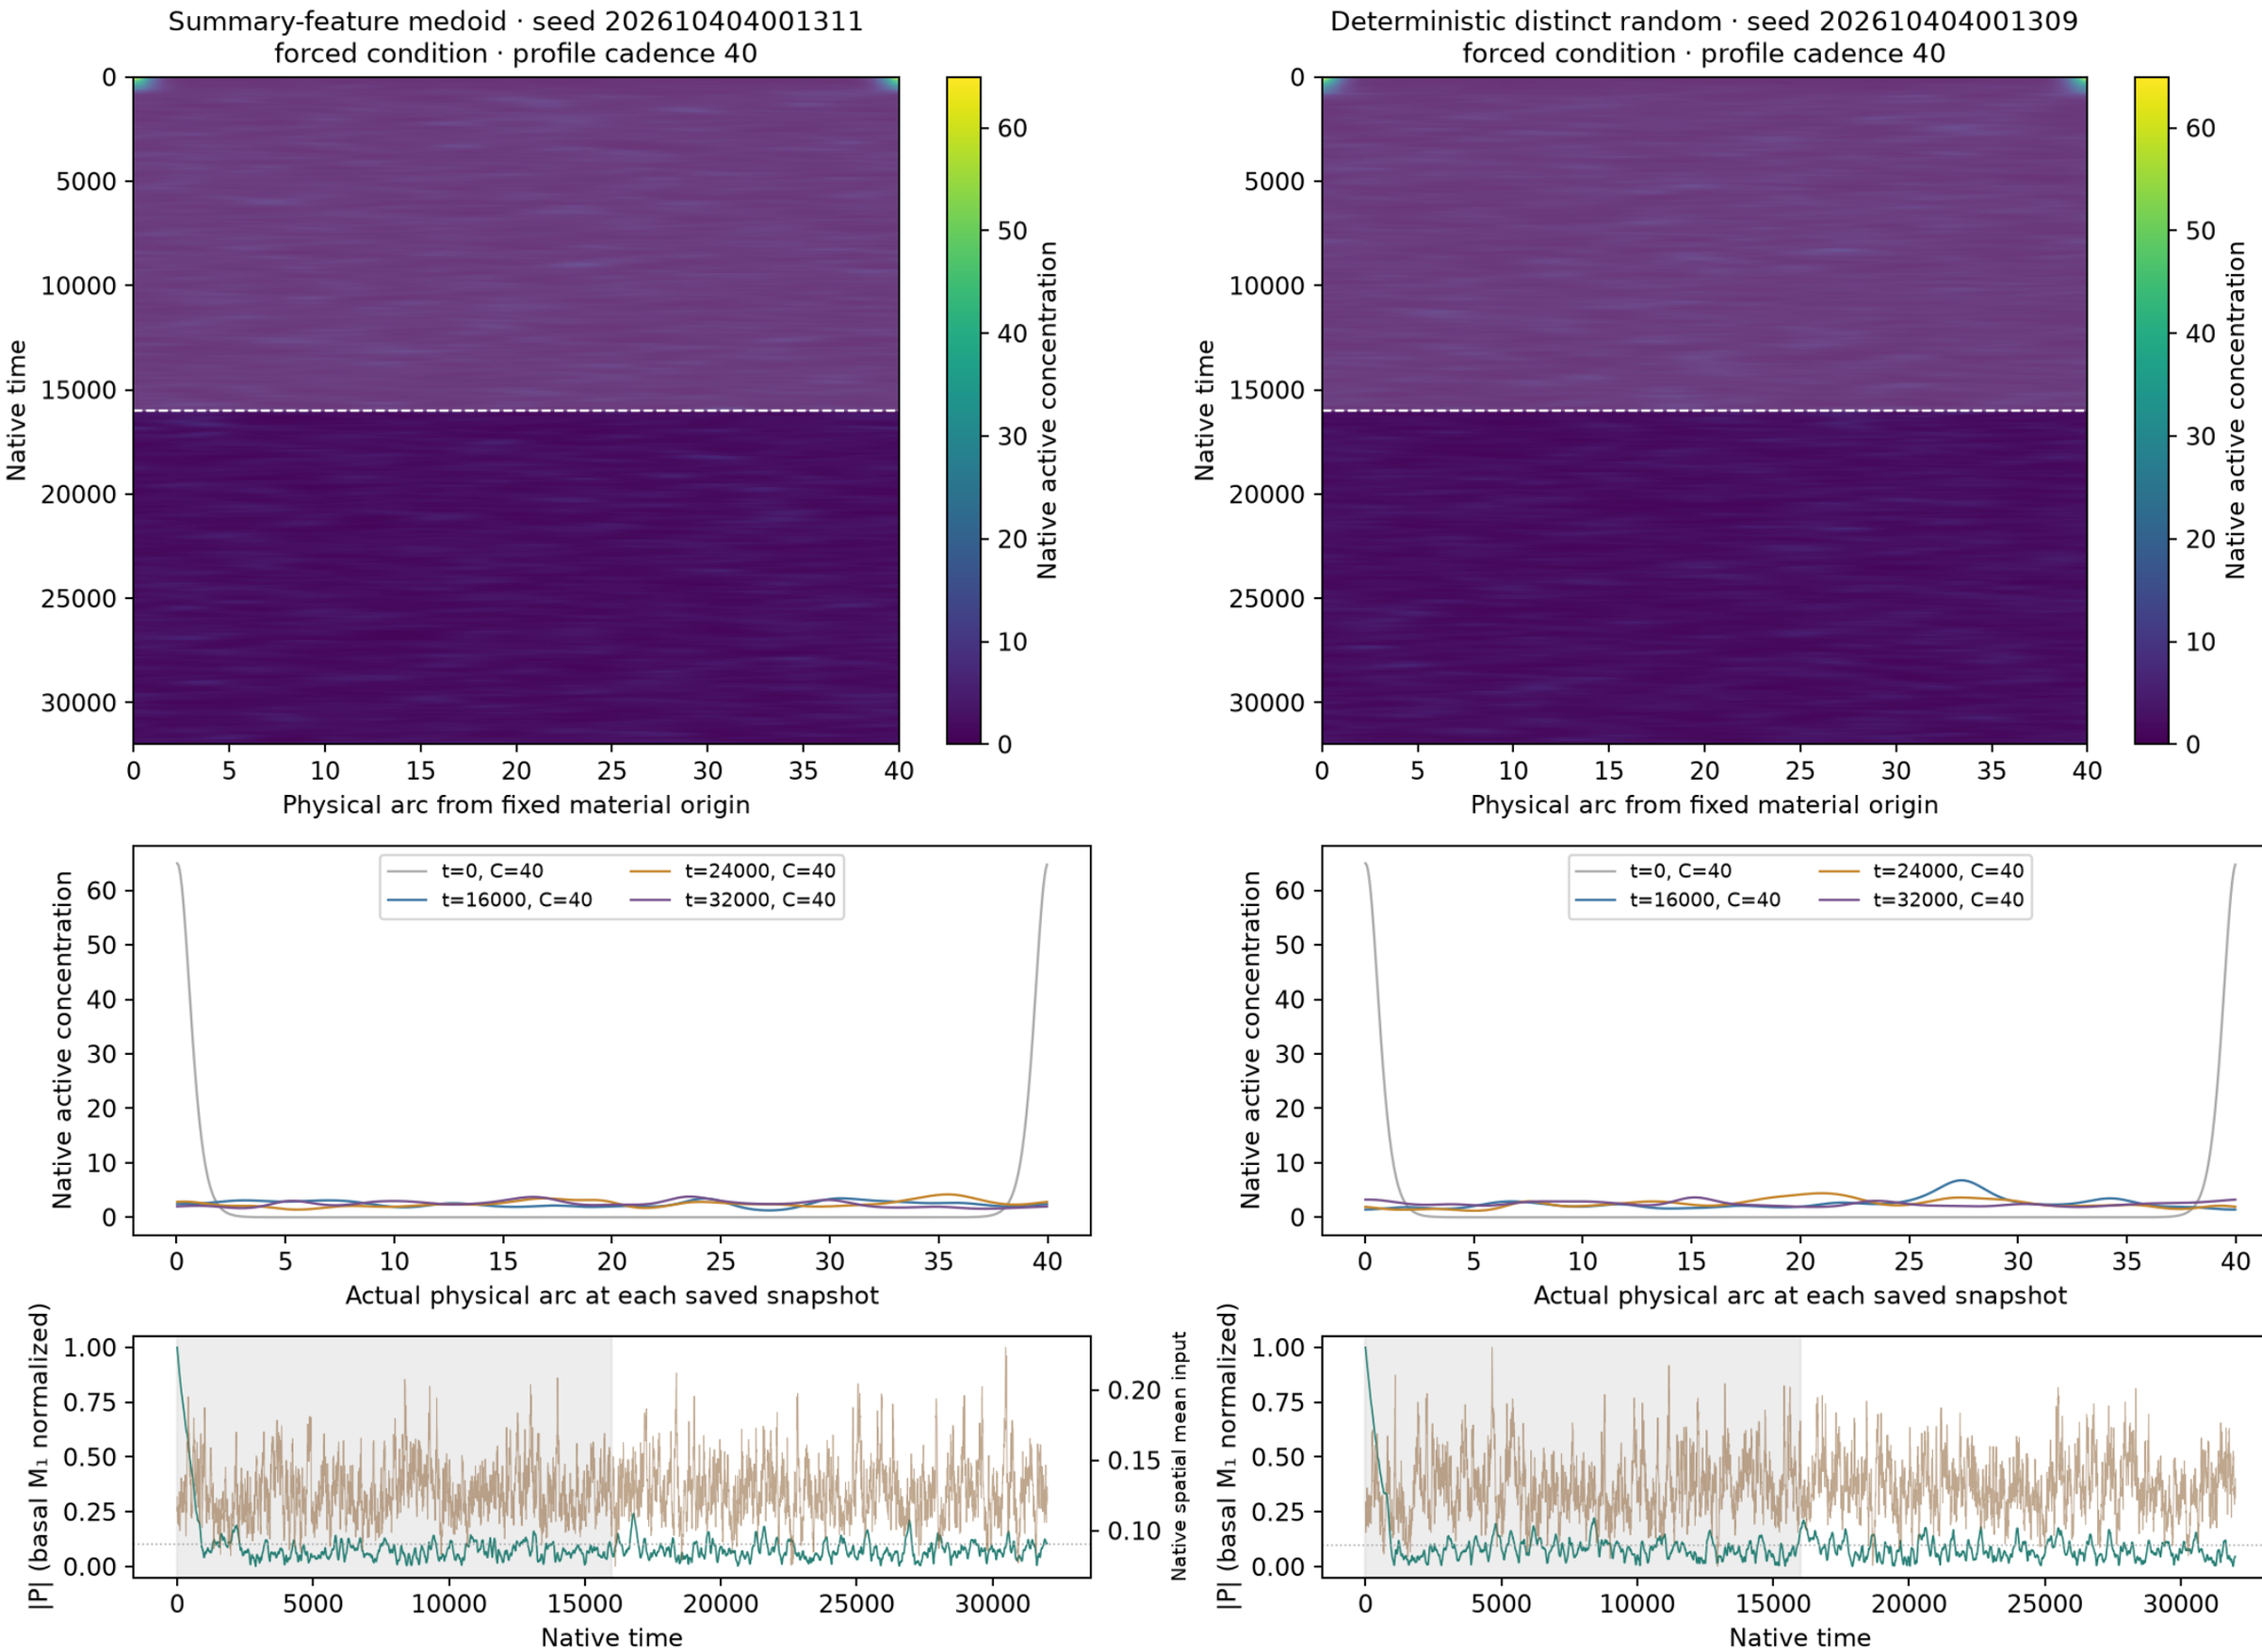

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Goryachev · size label 40 · f=0.02 · noise
context E1_extra · σ=2 · horizon=32000 · n=12 independent noisy realizations

Summary-feature medoid · seed 202610404001308
forced condition · profile cadence 40

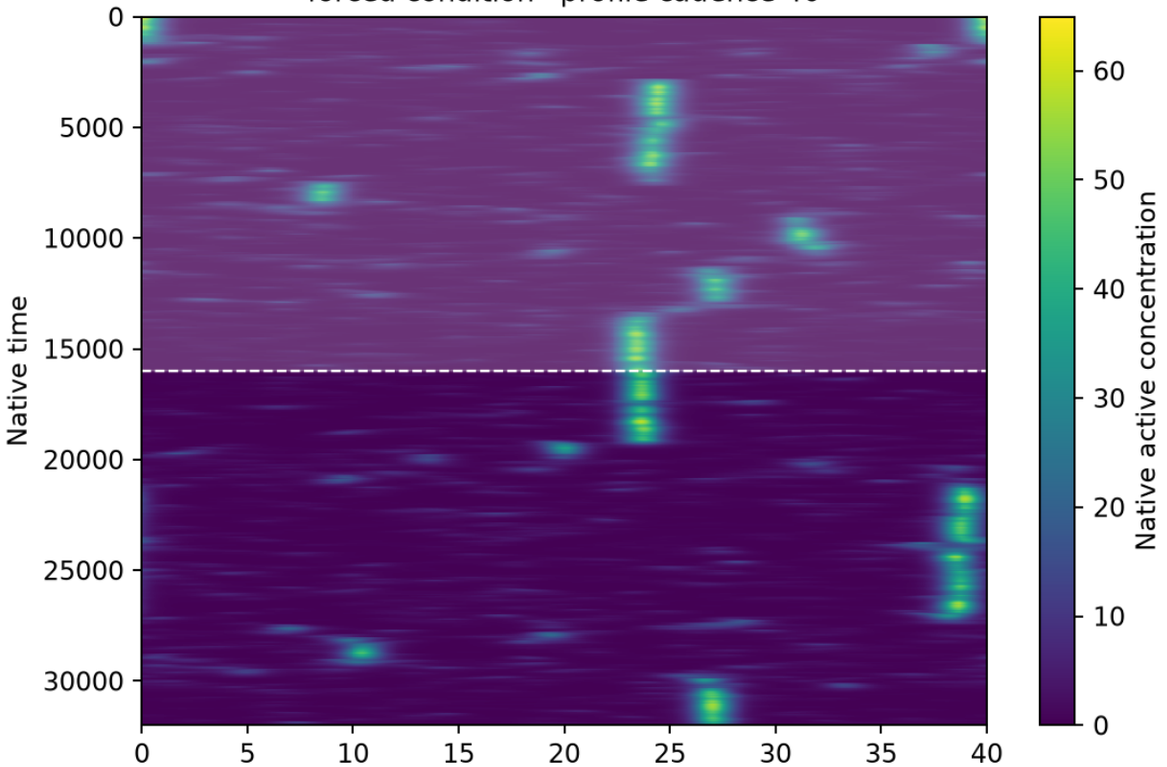

Deterministic distinct random · seed 202610404001301
forced condition · profile cadence 40

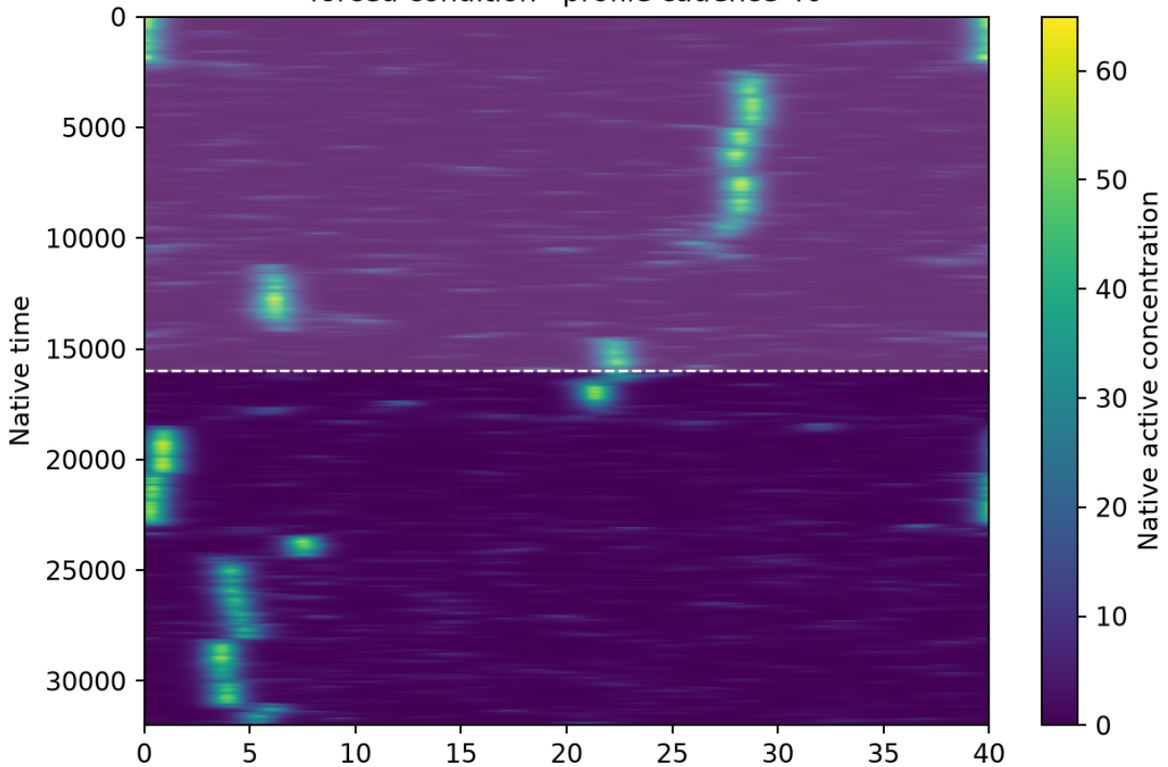

Physical arc from fixed material origin

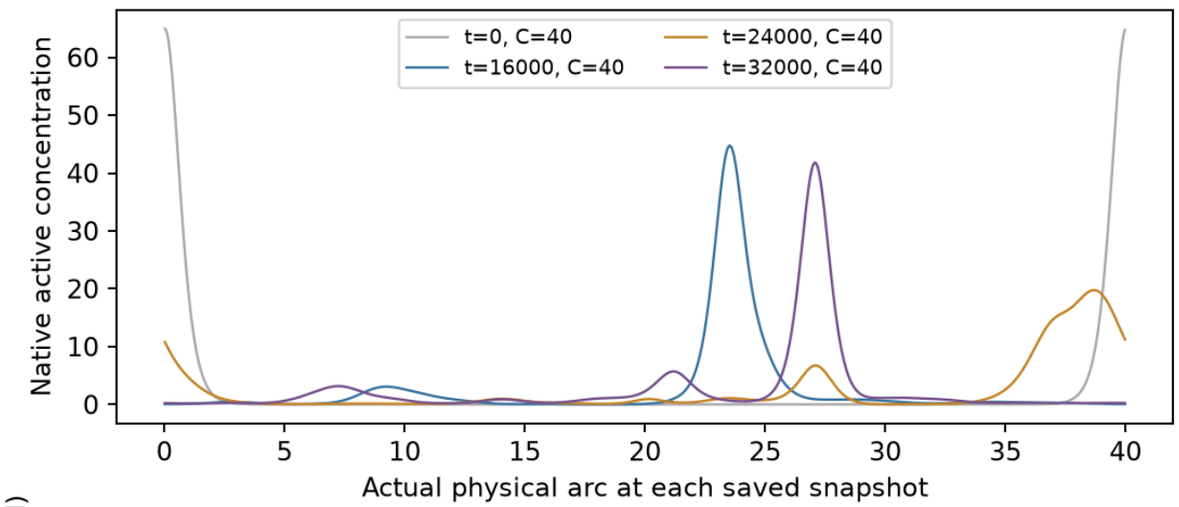

Physical arc from fixed material origin

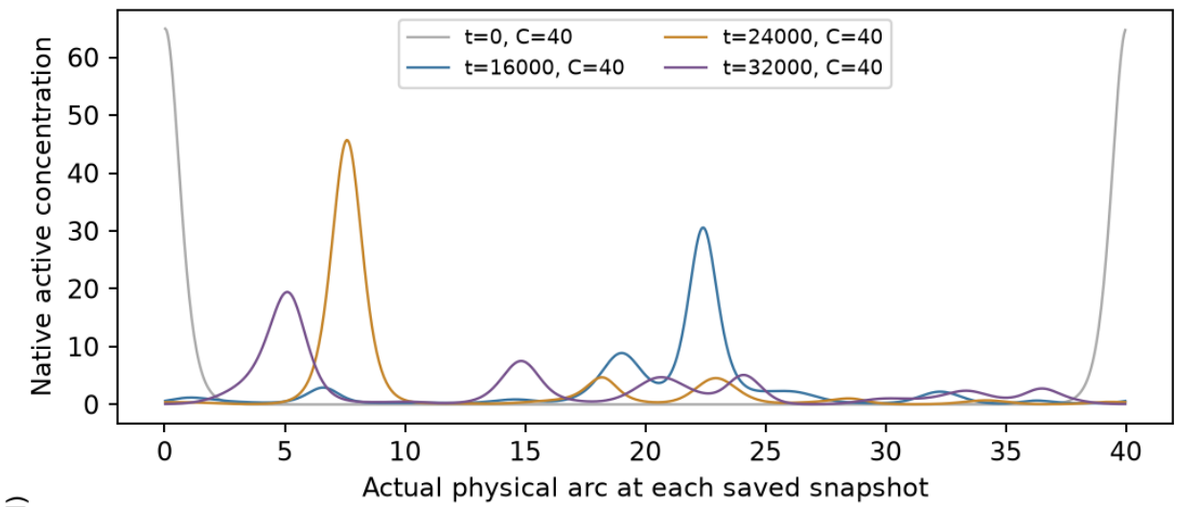

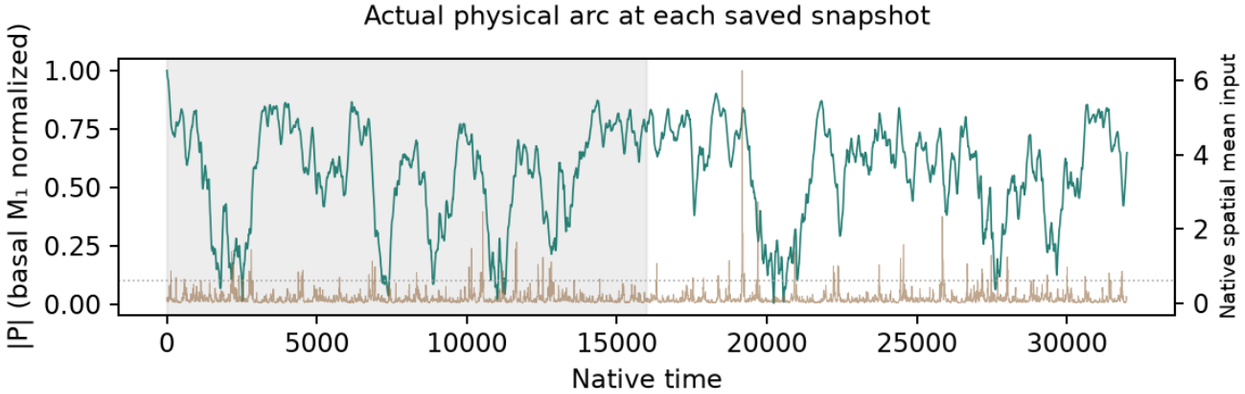

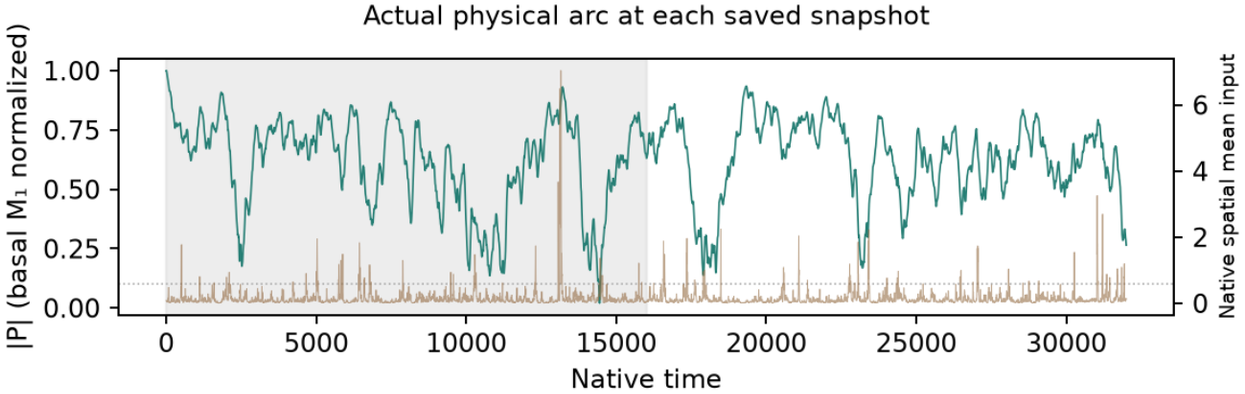

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Goryachev · size label 40 · f=0.03 · noise
context E1_extra · σ=0.25 · horizon=32000 · n=12 independent noisy realizations

Summary-feature medoid · seed 202610192110505
forced condition · profile cadence 40

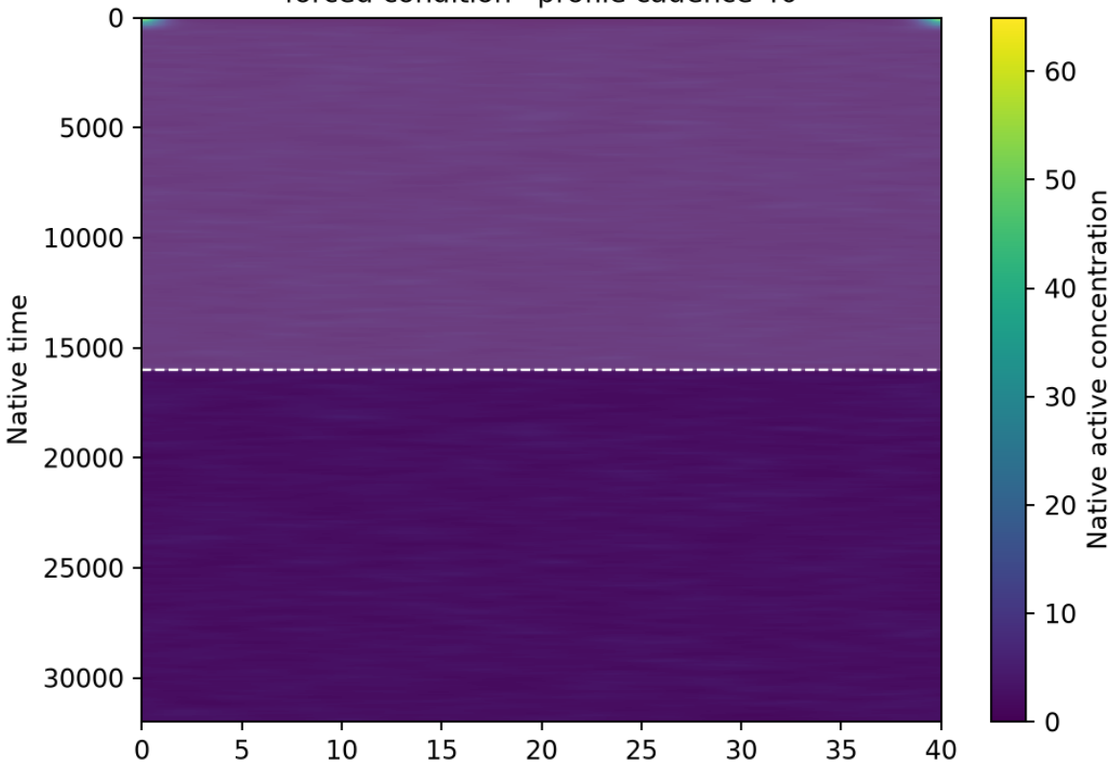

Deterministic distinct random · seed 202610192110502
forced condition · profile cadence 40

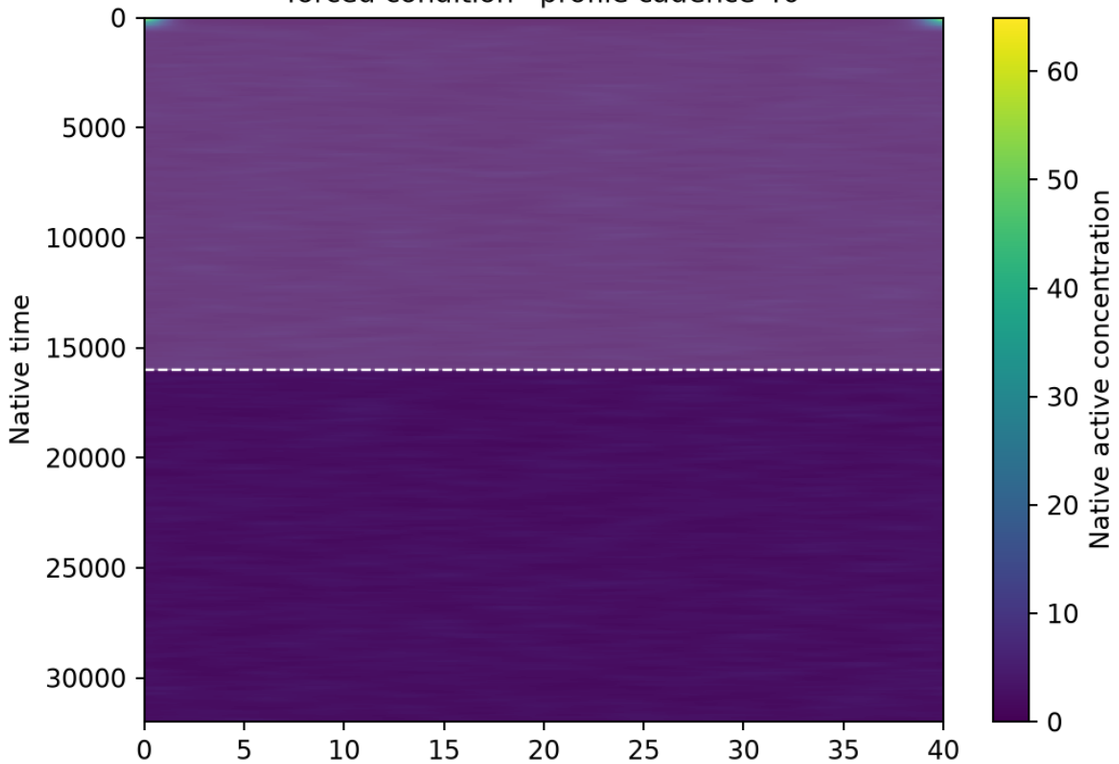

Physical arc from fixed material origin

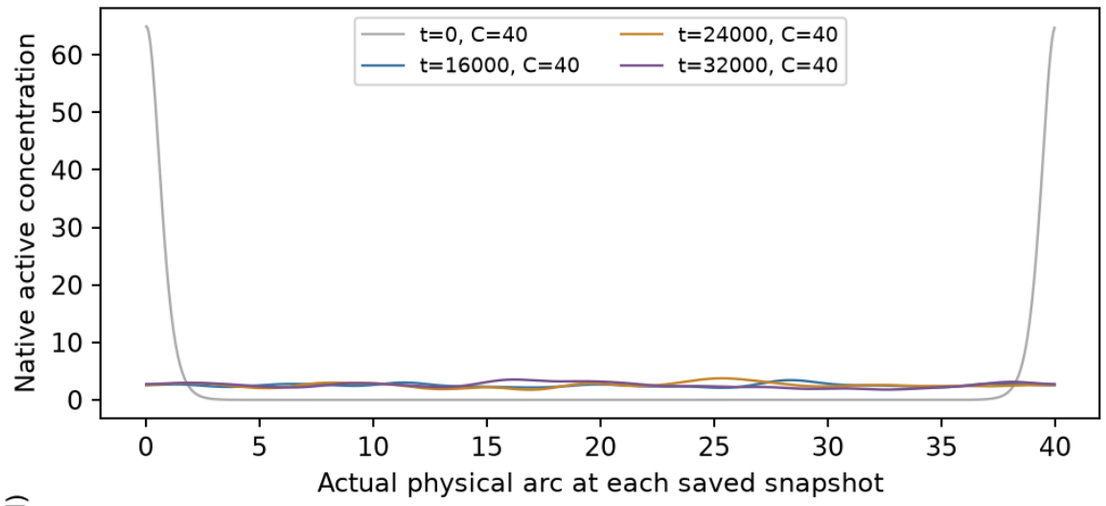

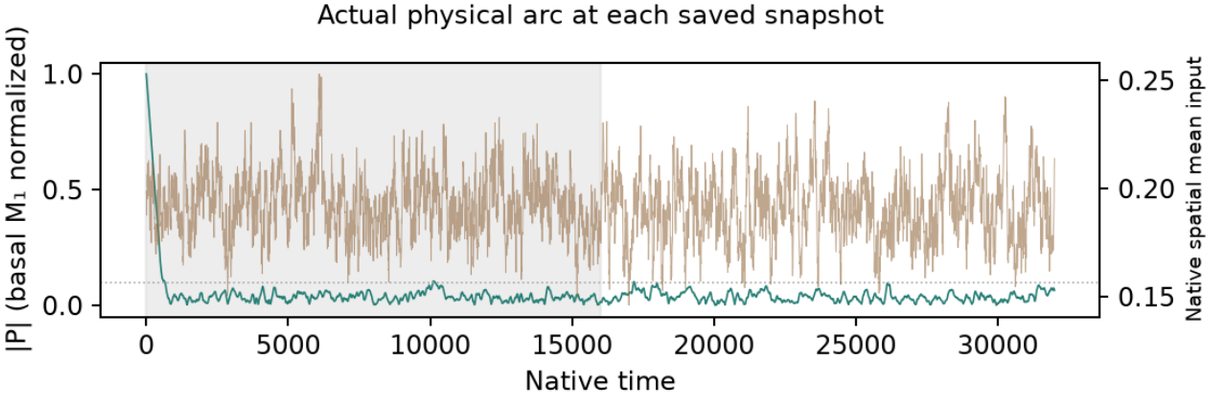

Physical arc from fixed material origin

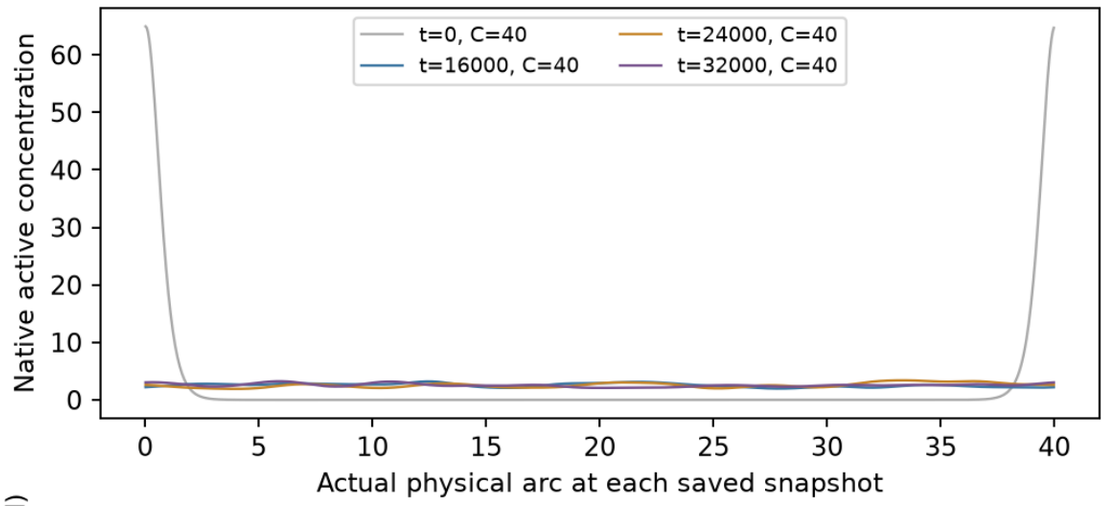

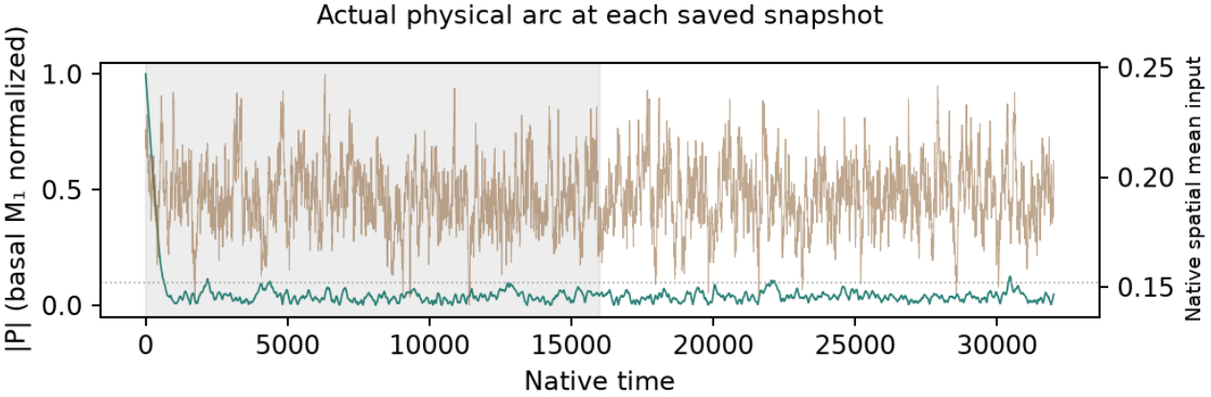

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Goryachev · size label 40 · f=0.03 · noise
context E1_extra · σ=0.5 · horizon=32000 · n=12 independent noisy realizations

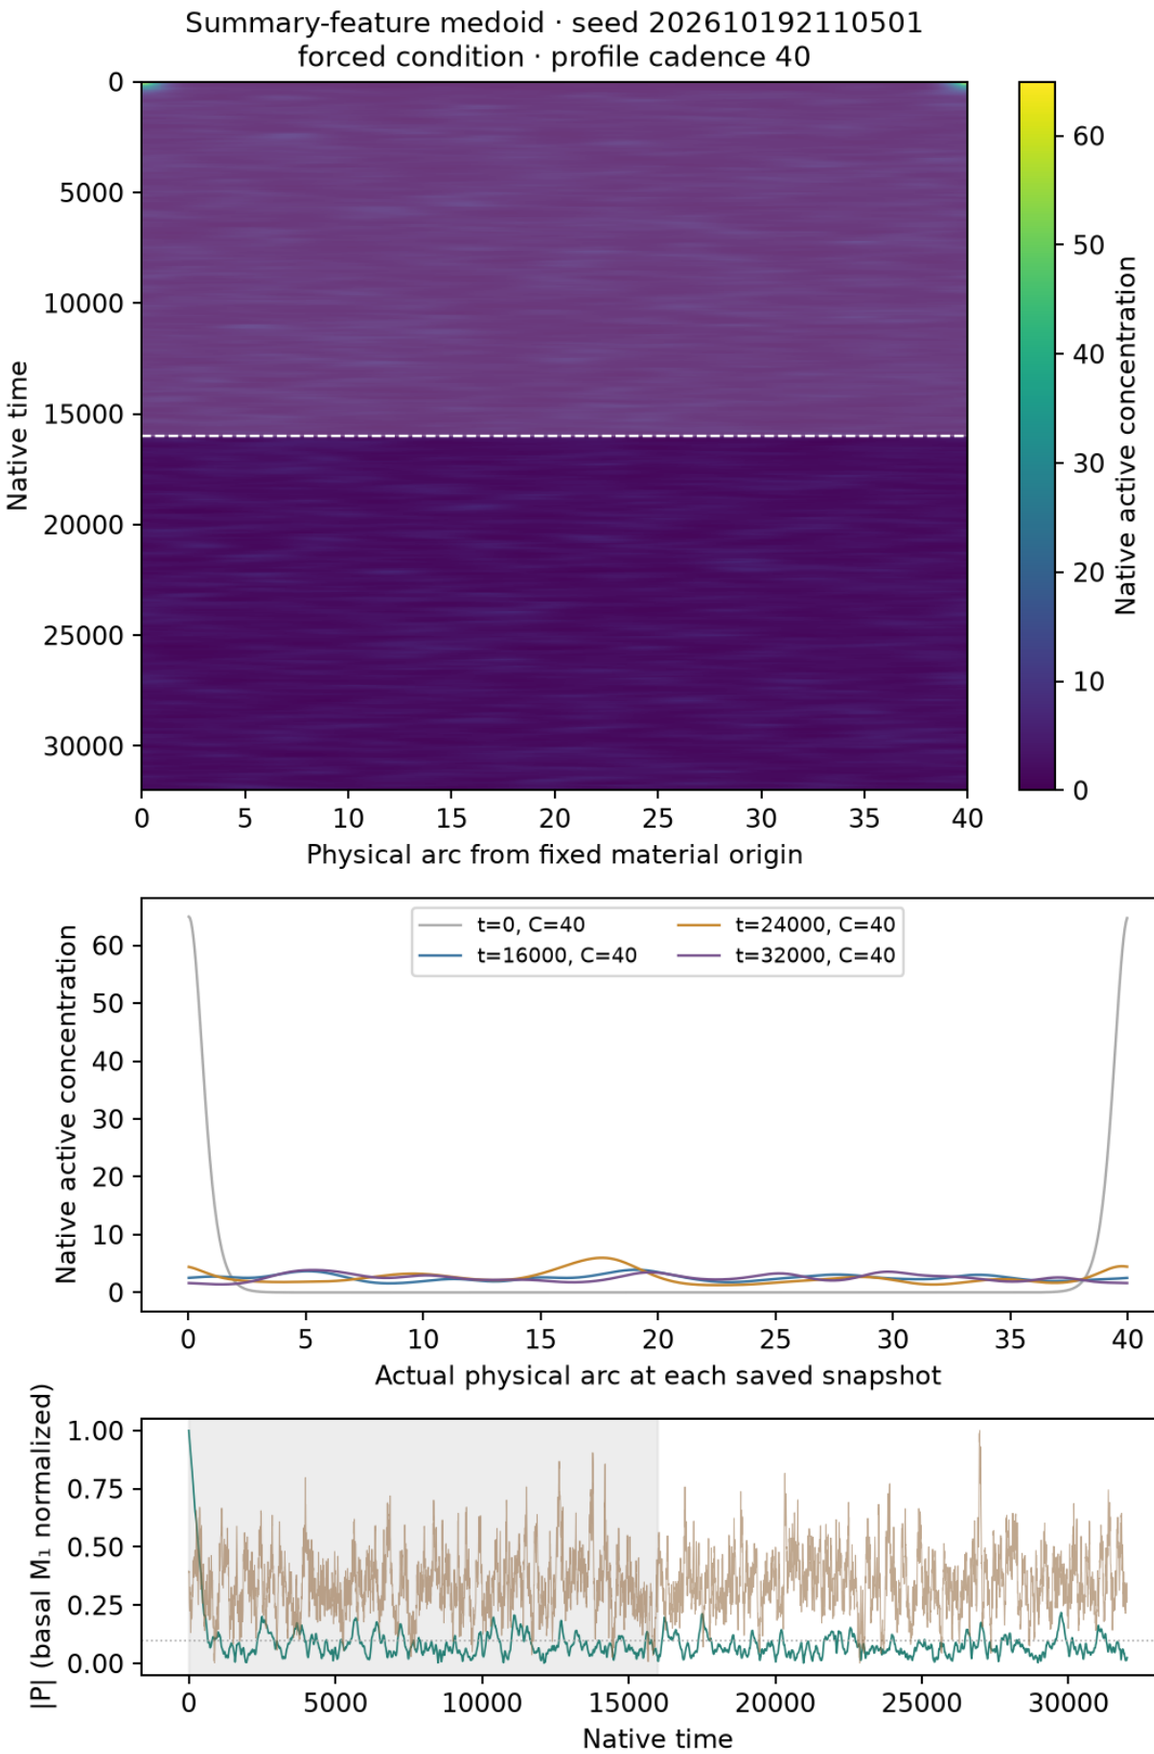

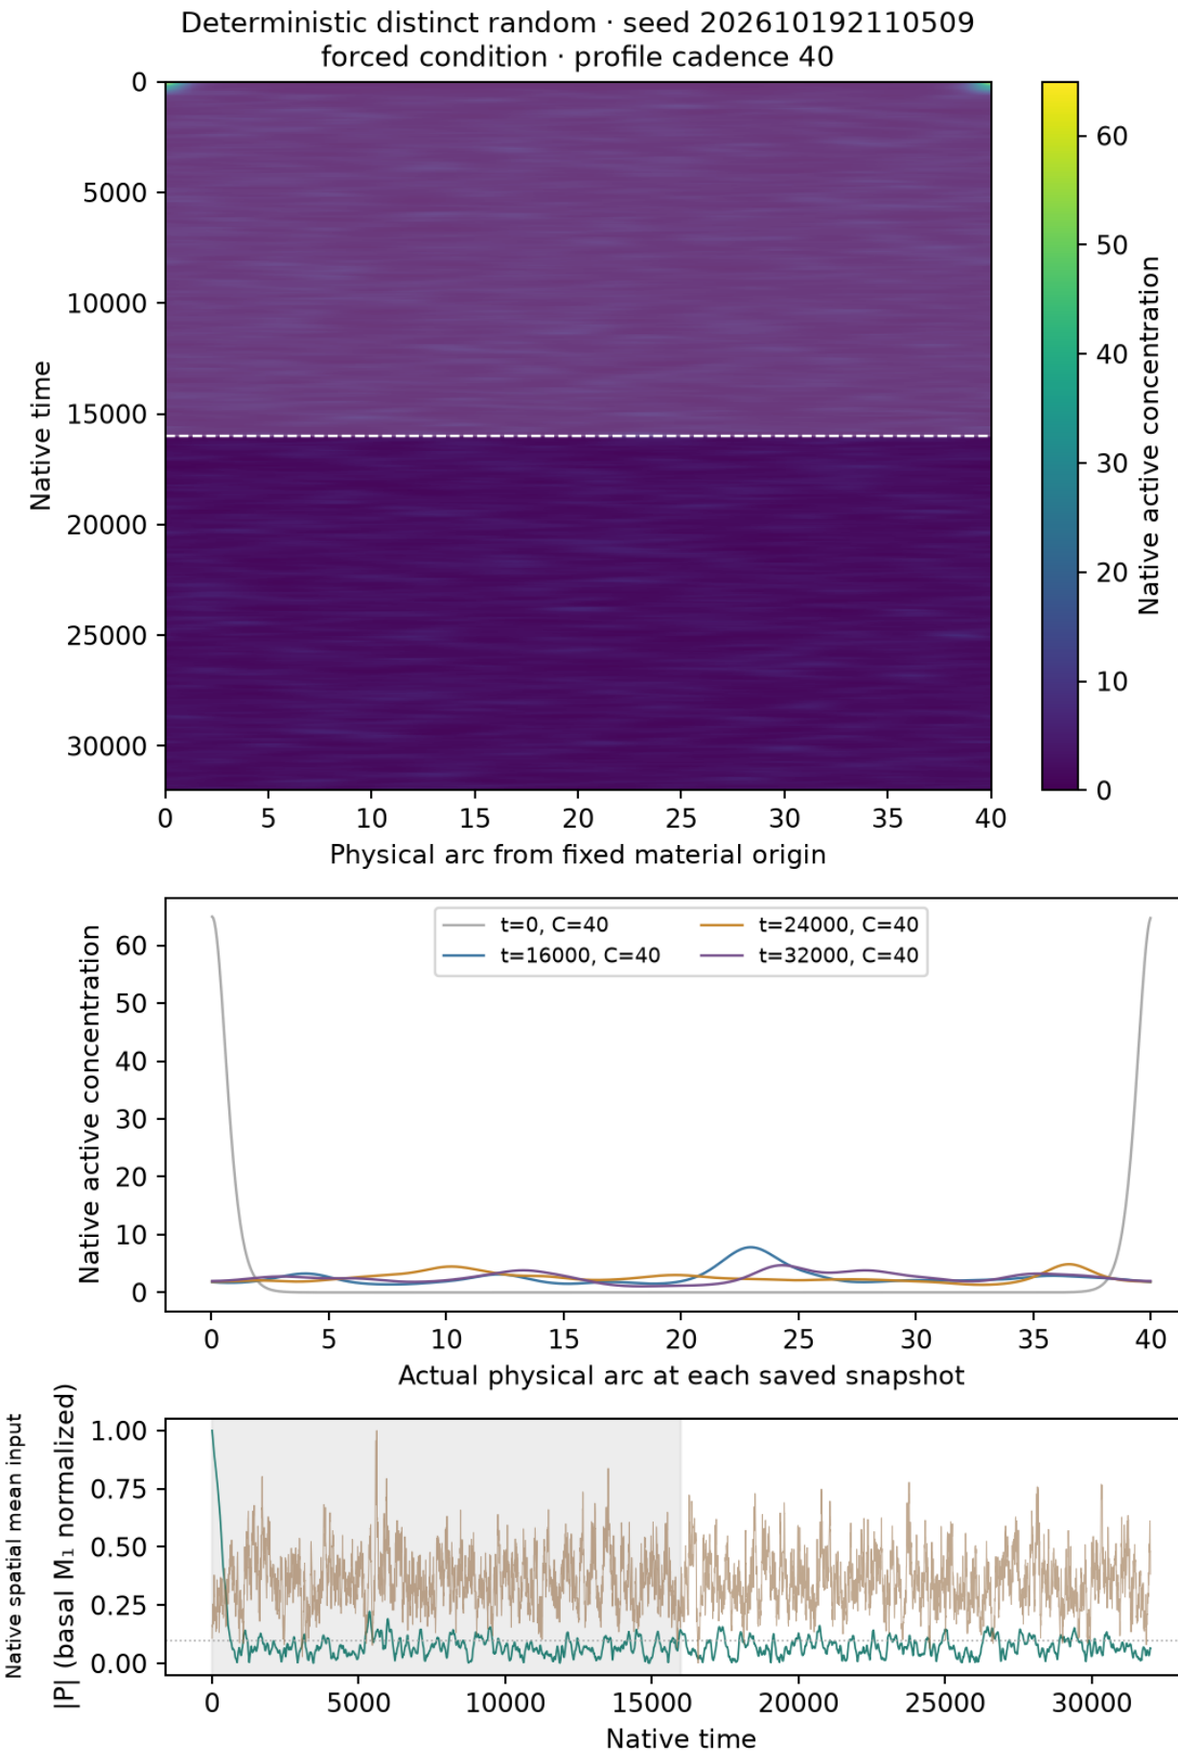

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Goryachev · size label 40 · f=0.03 · noise
context E1_extra · σ=2 · horizon=32000 · n=12 independent noisy realizations

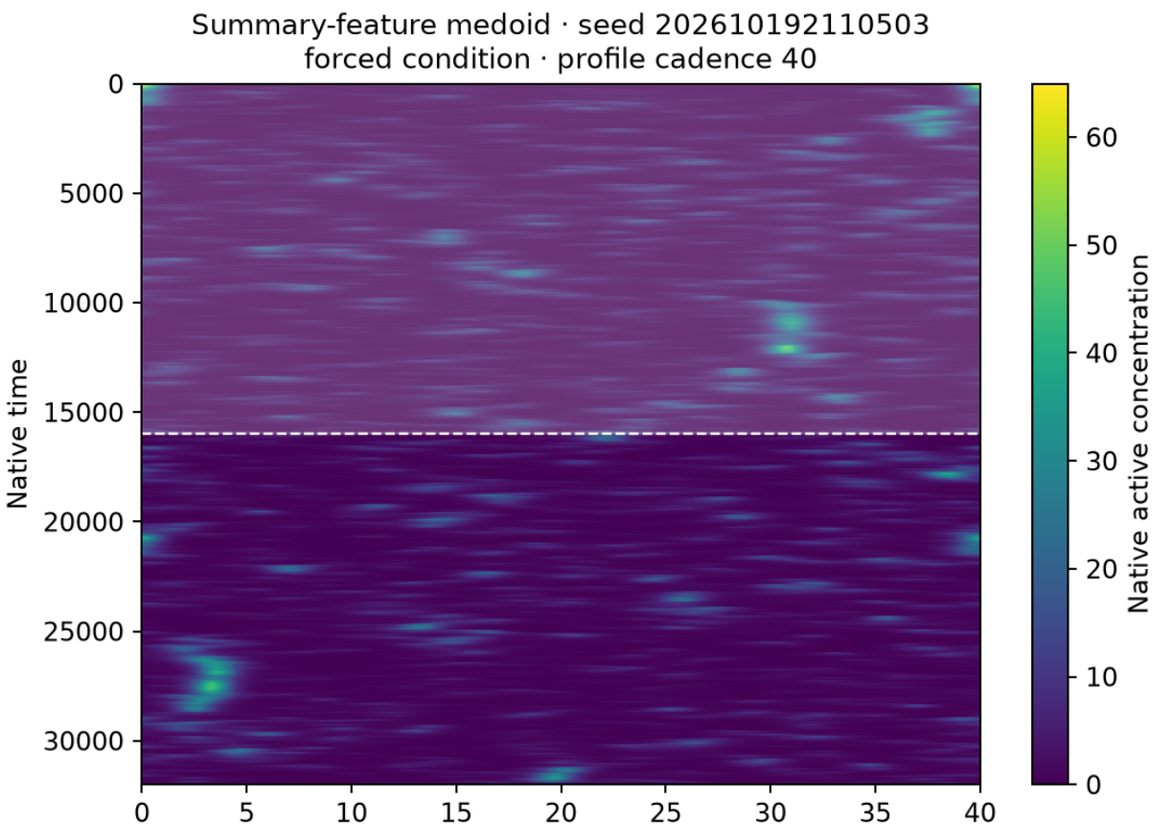

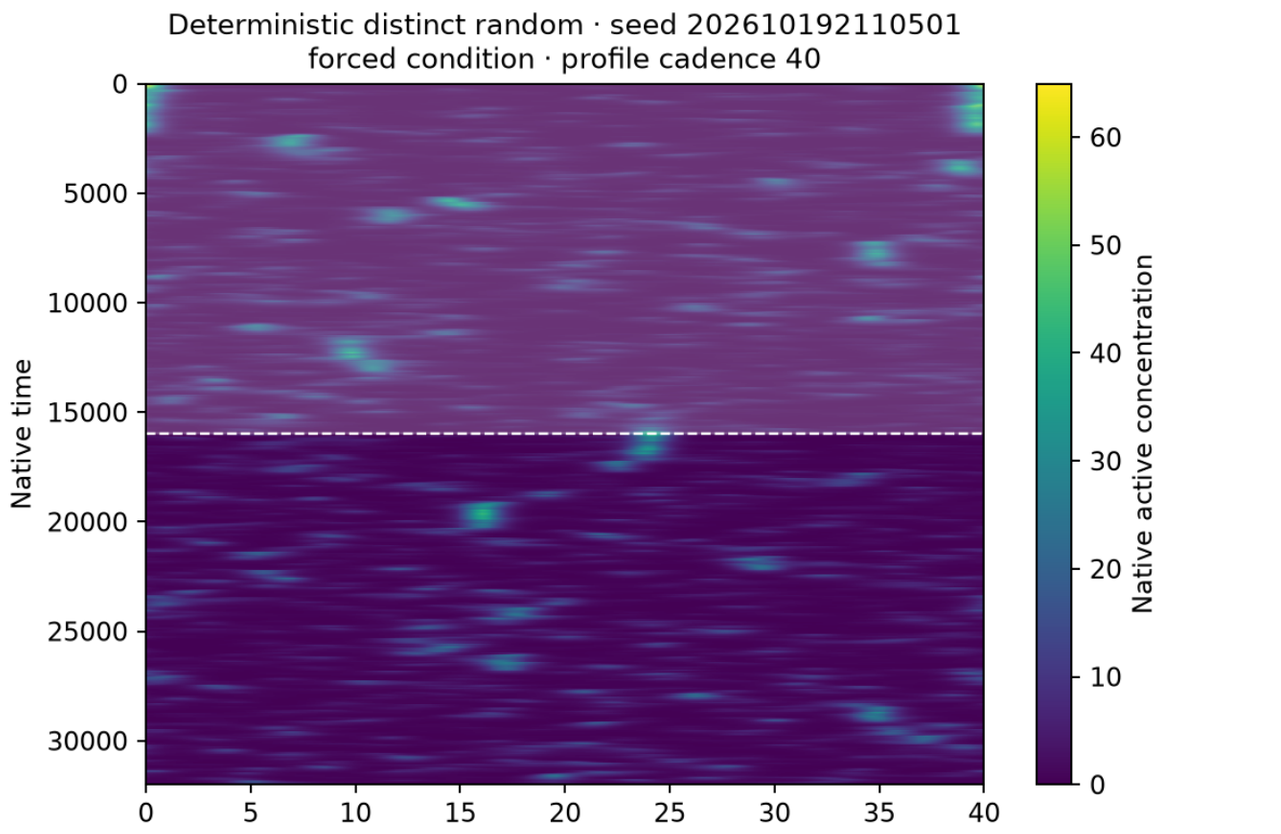

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Goryachev · size label 60 · f=0.02 · noise
context E1_extra · σ=0.25 · horizon=32000 · n=12 independent noisy realizations

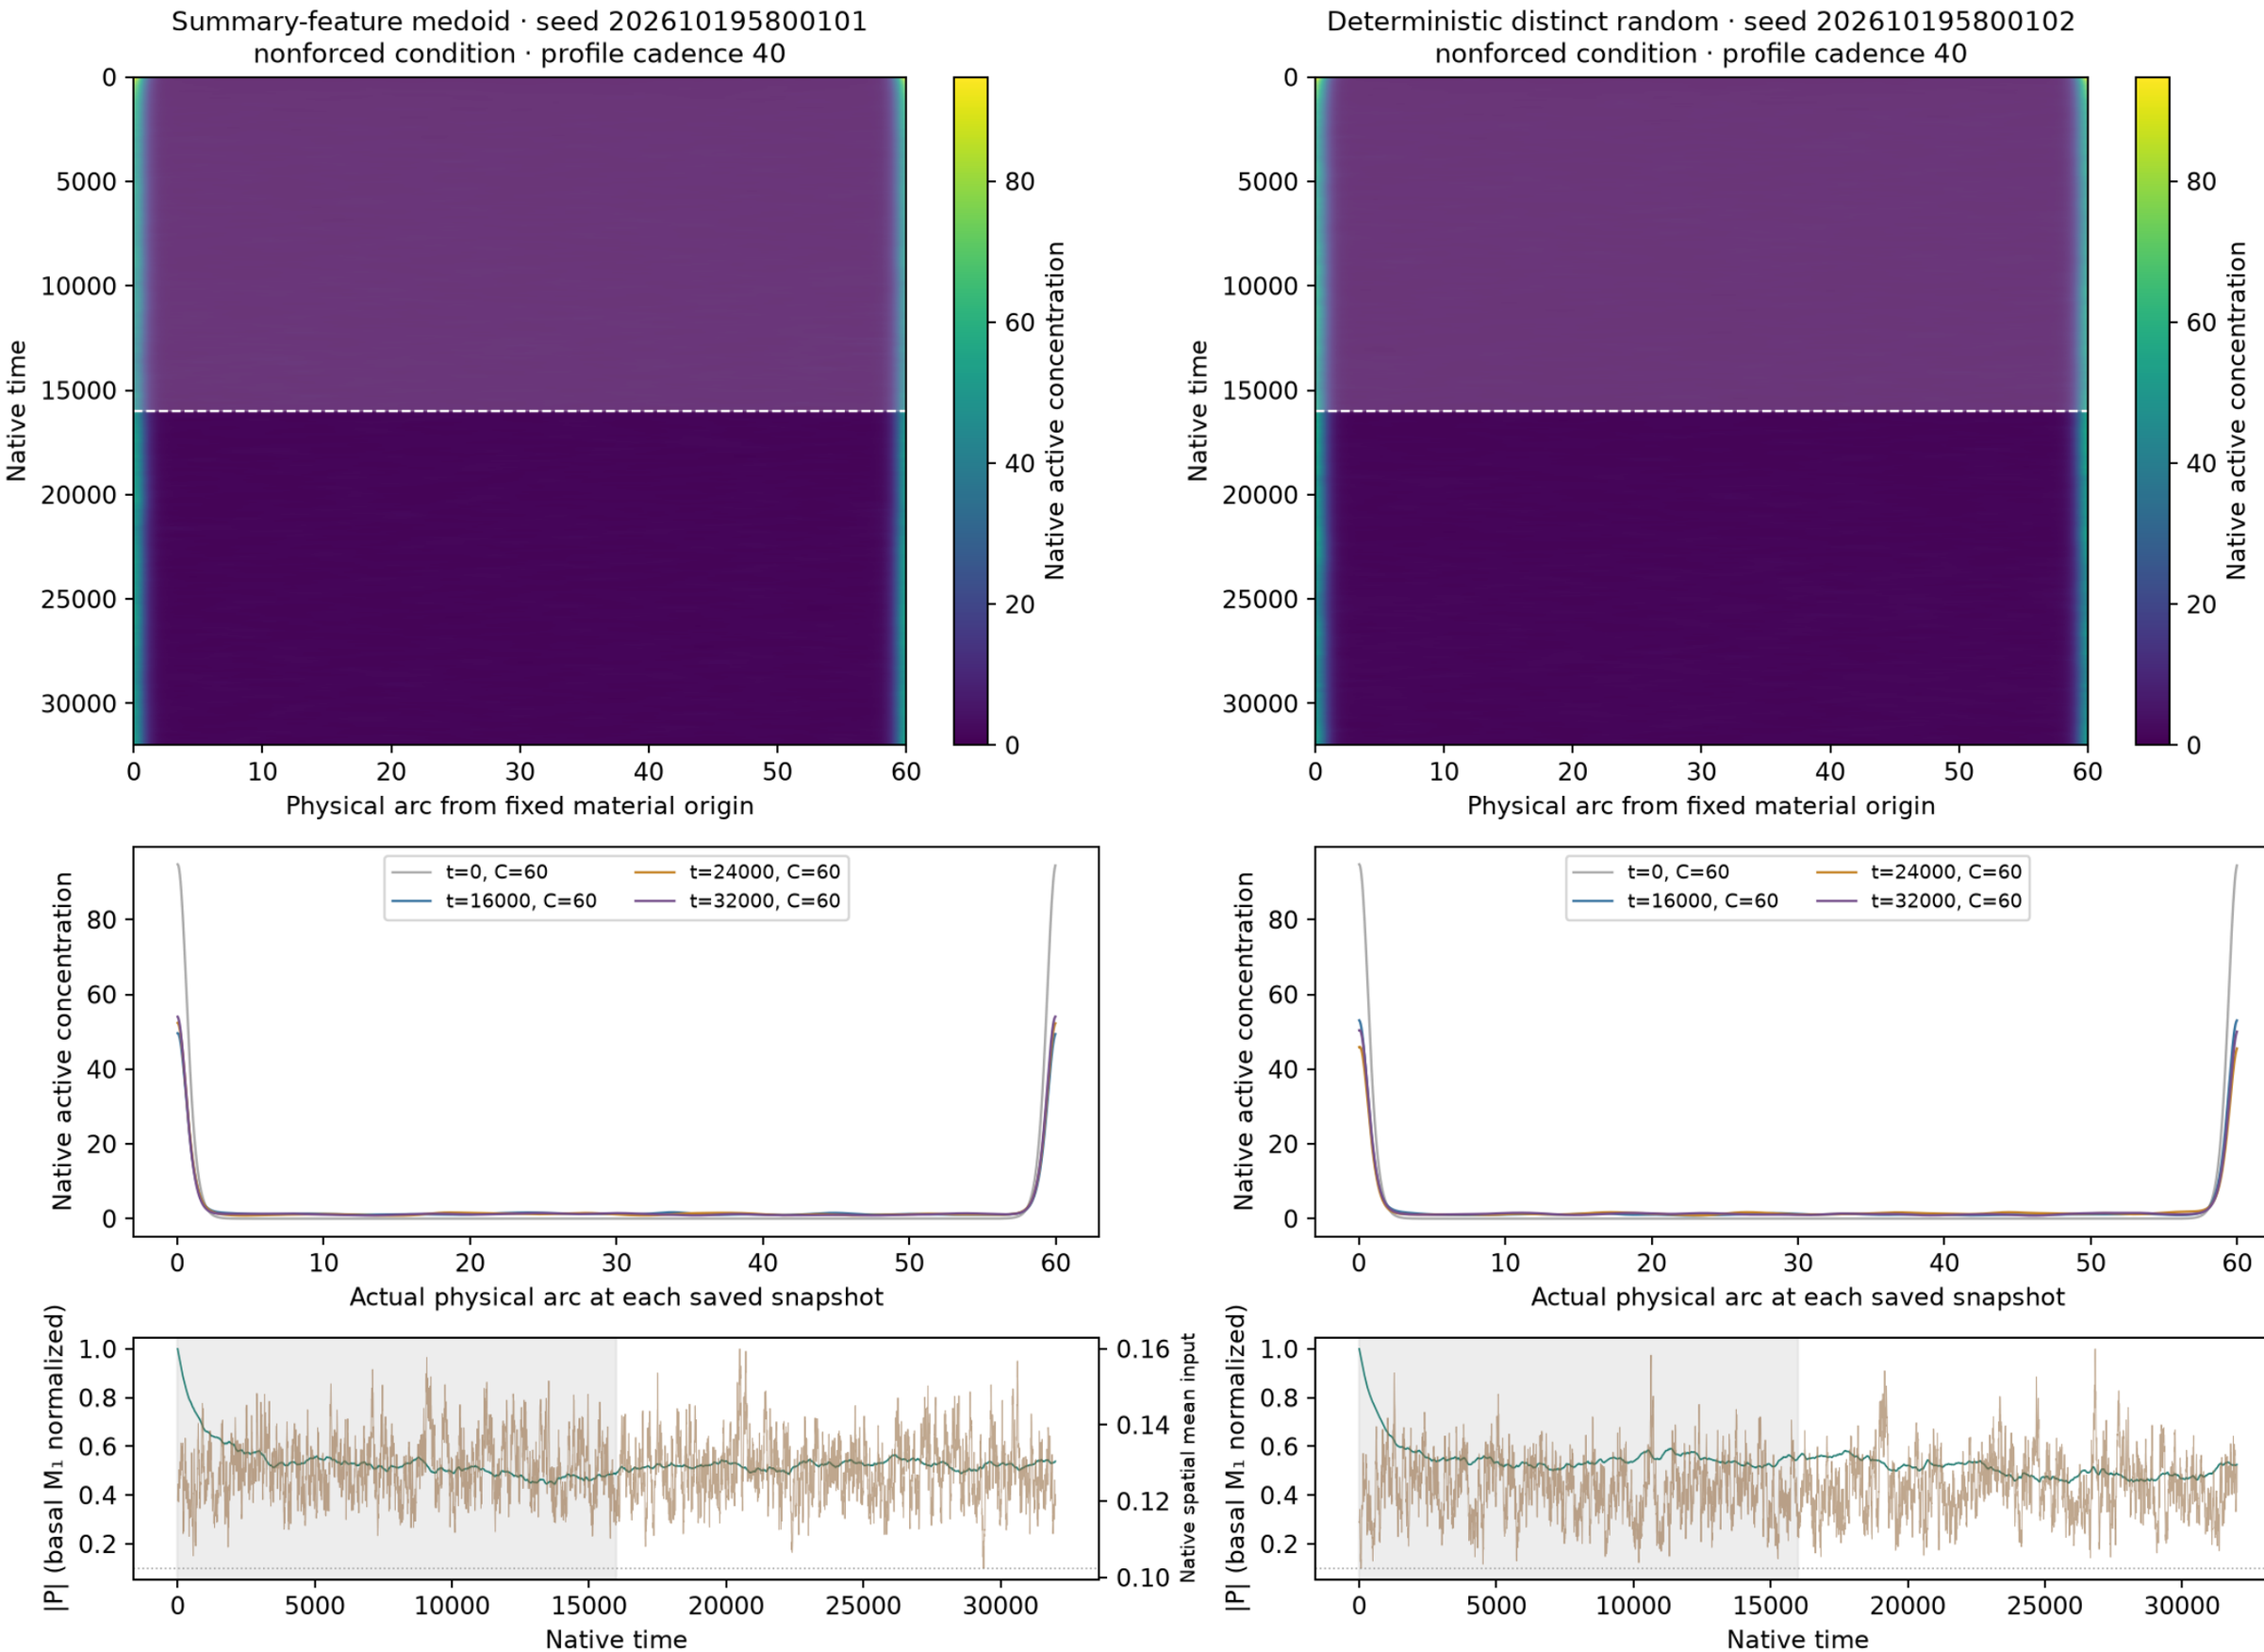

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Goryachev · size label 60 · f=0.02 · noise
context E1_extra · σ=0.5 · horizon=32000 · n=12 independent noisy realizations

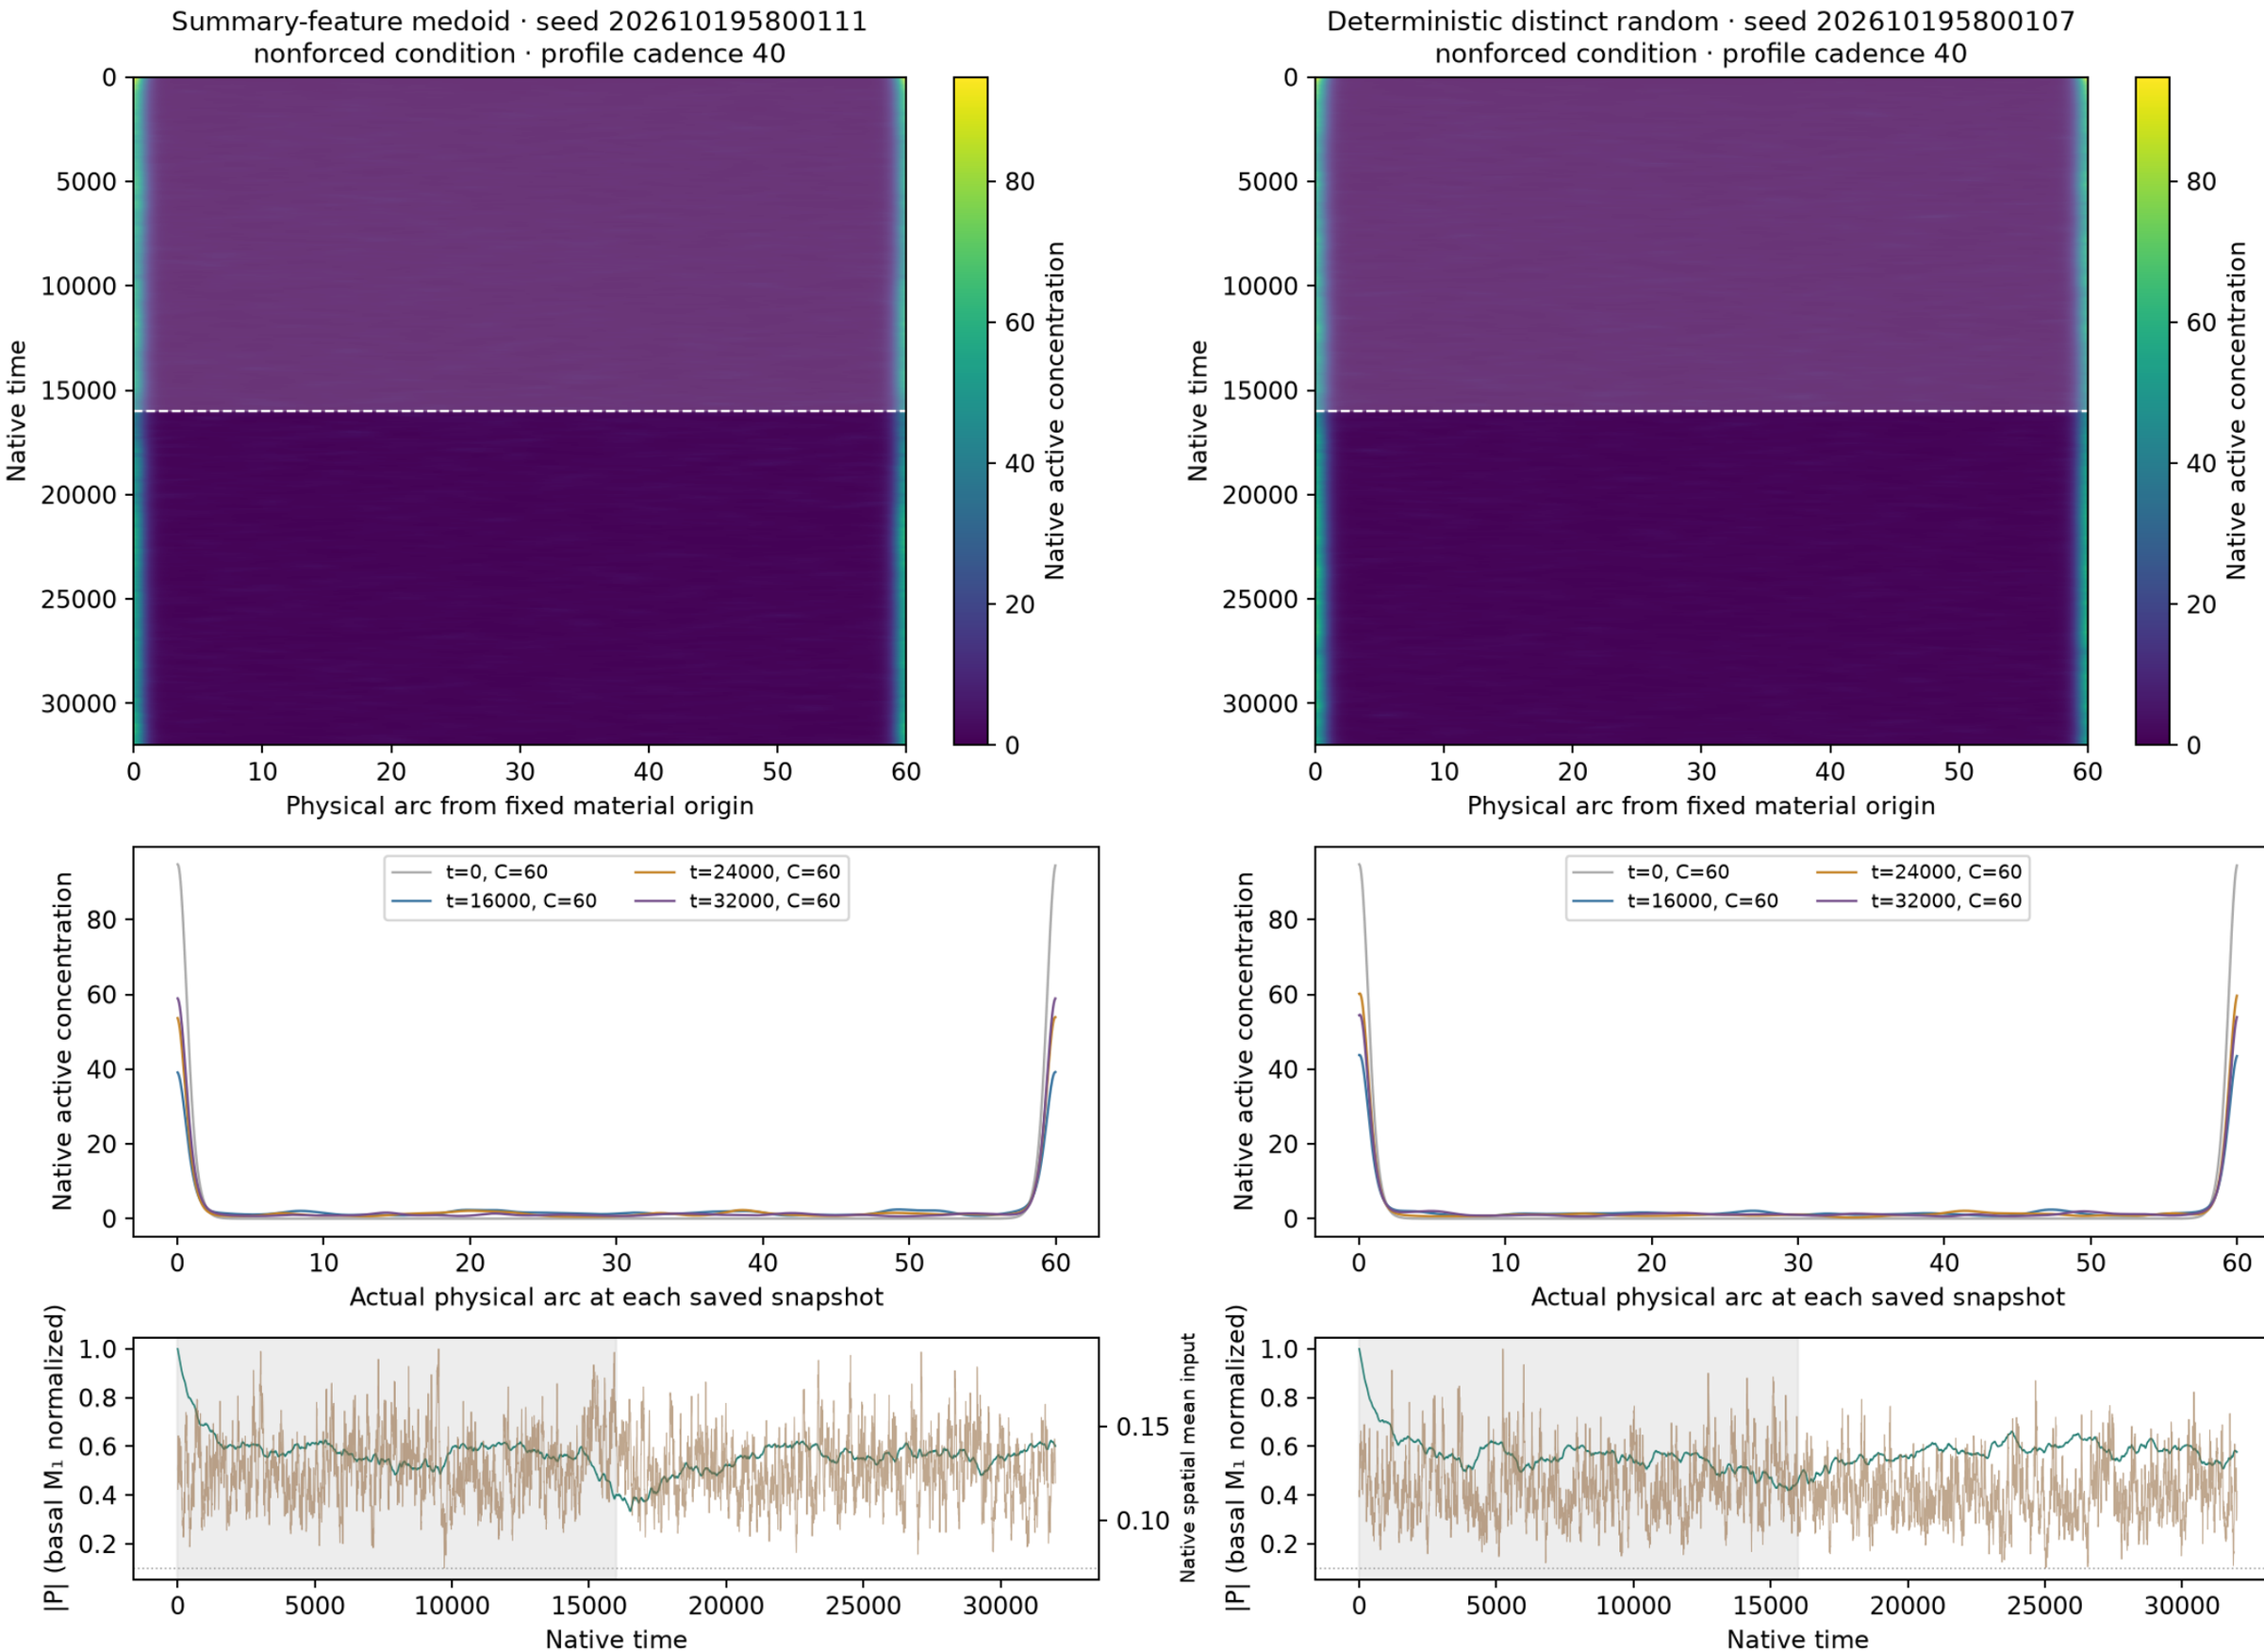

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Goryachev · size label 60 · f=0.02 · noise
context E1_extra · σ=2 · horizon=32000 · n=12 independent noisy realizations

Summary-feature medoid · seed 202610195800109
nonforced condition · profile cadence 40

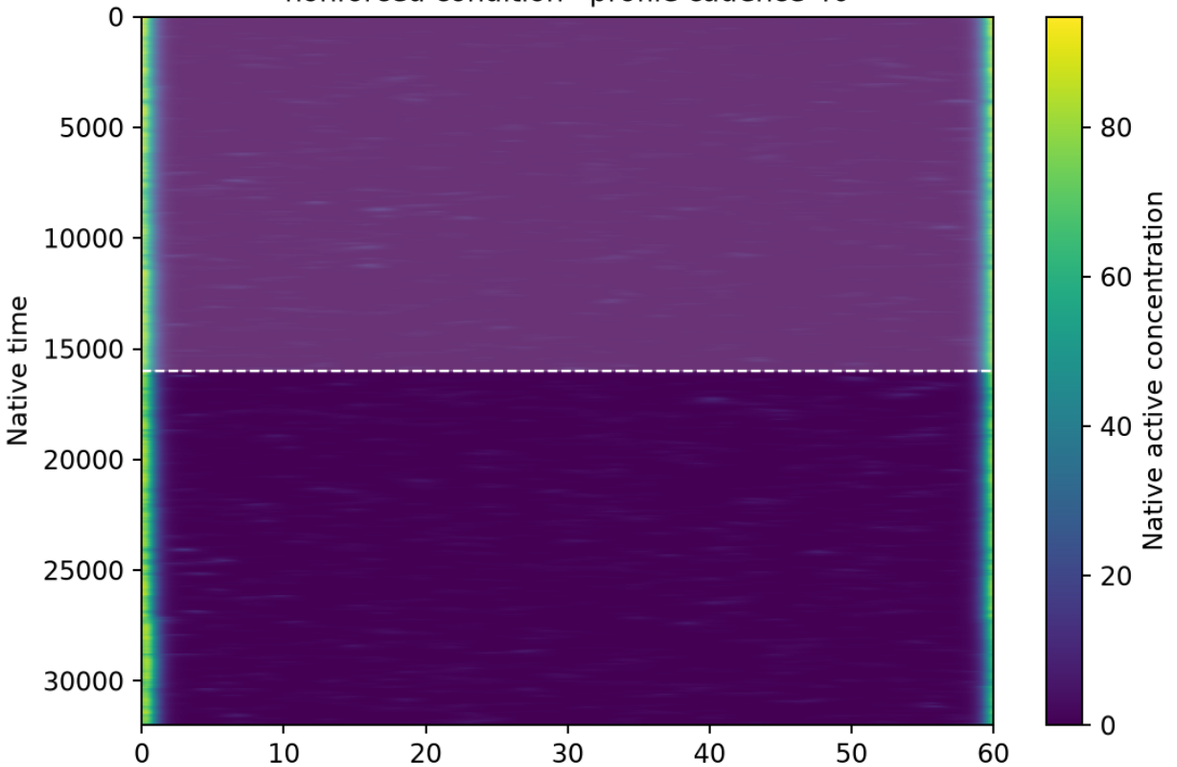

Deterministic distinct random · seed 202610195800103
nonforced condition · profile cadence 40

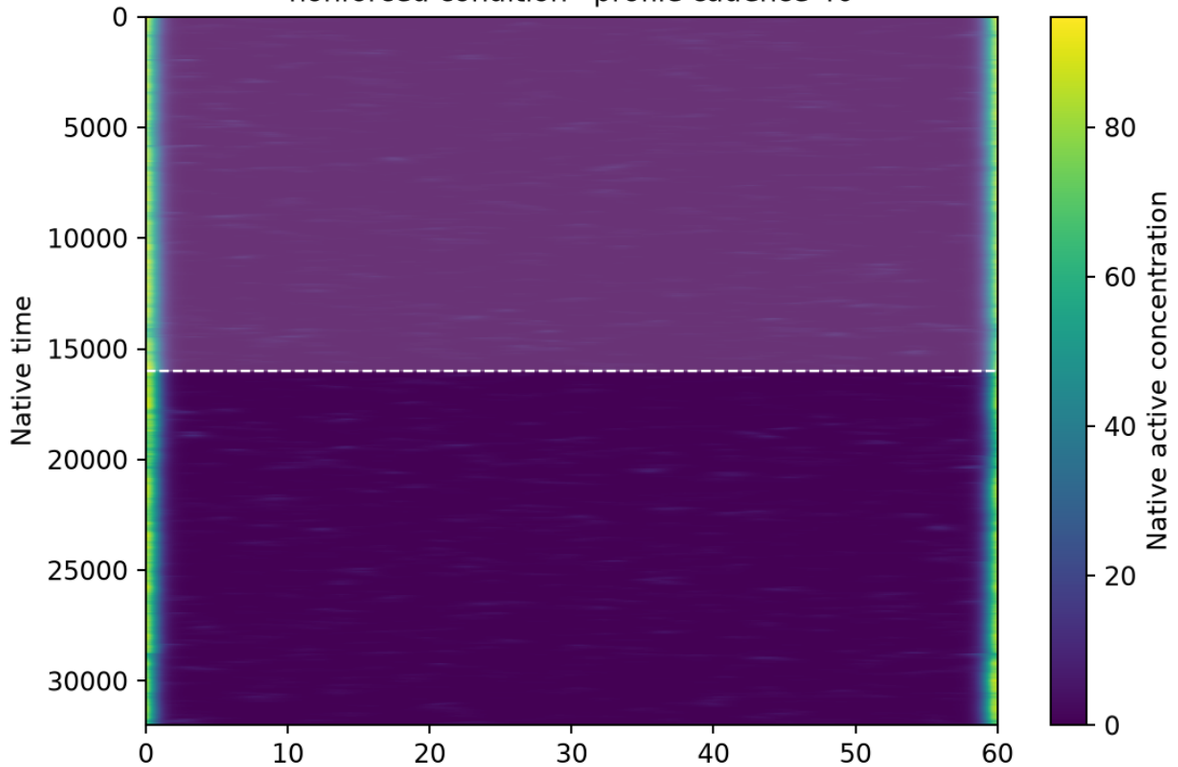

Physical arc from fixed material origin

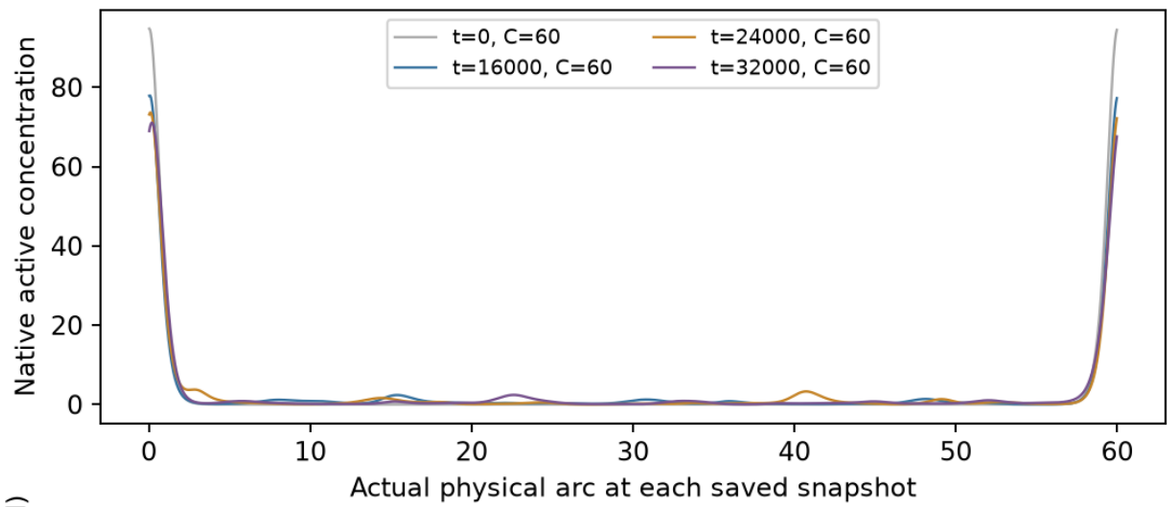

Physical arc from fixed material origin

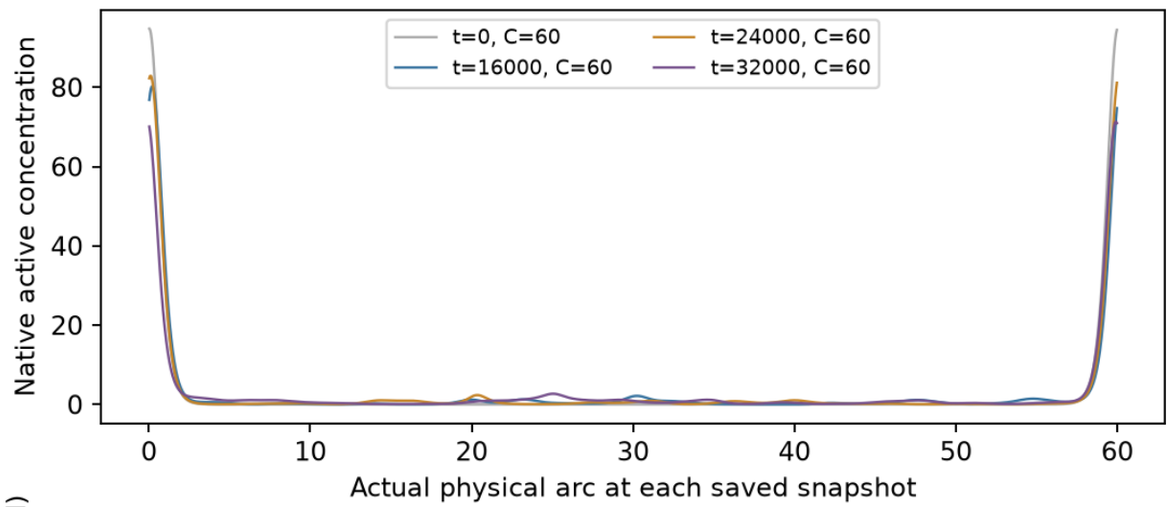

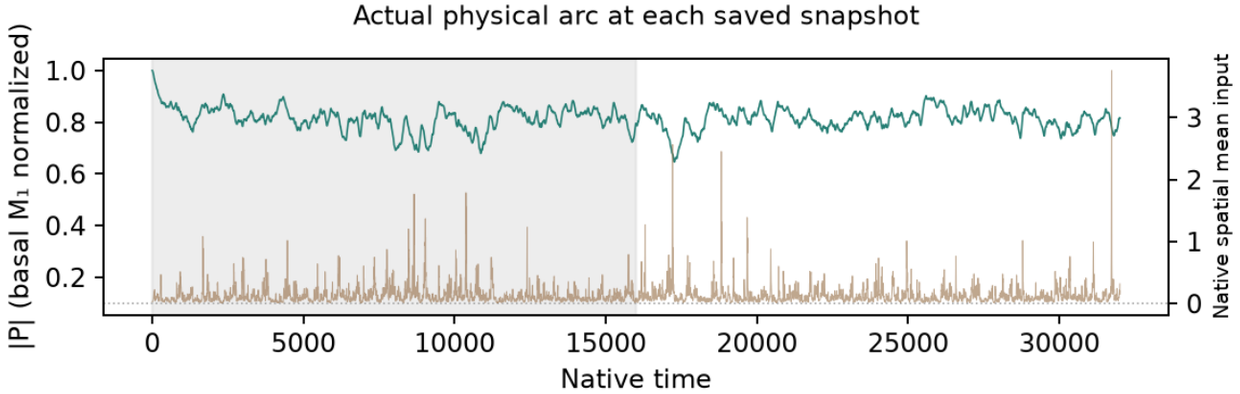

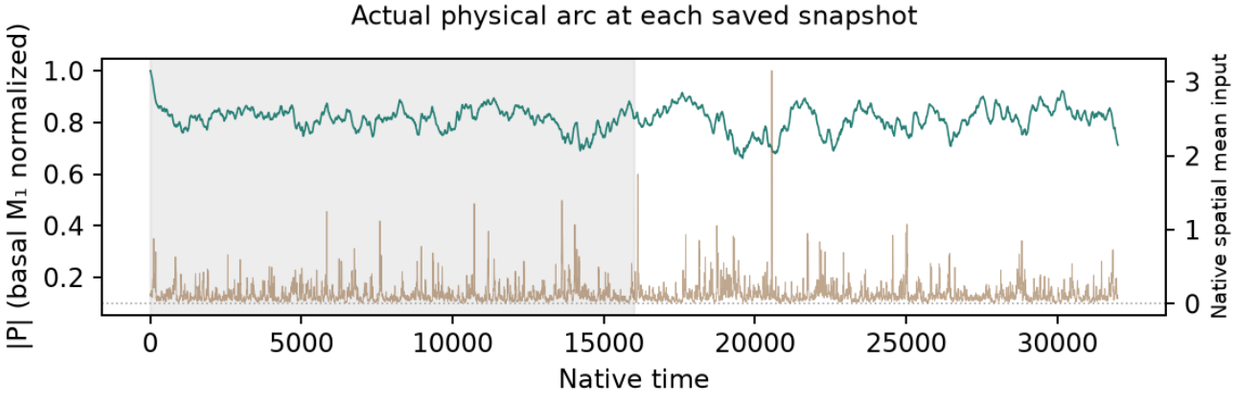

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Goryachev · size label 60 · f=0.03 · noise
context E1_extra · σ=0.25 · horizon=32000 · n=12 independent noisy realizations

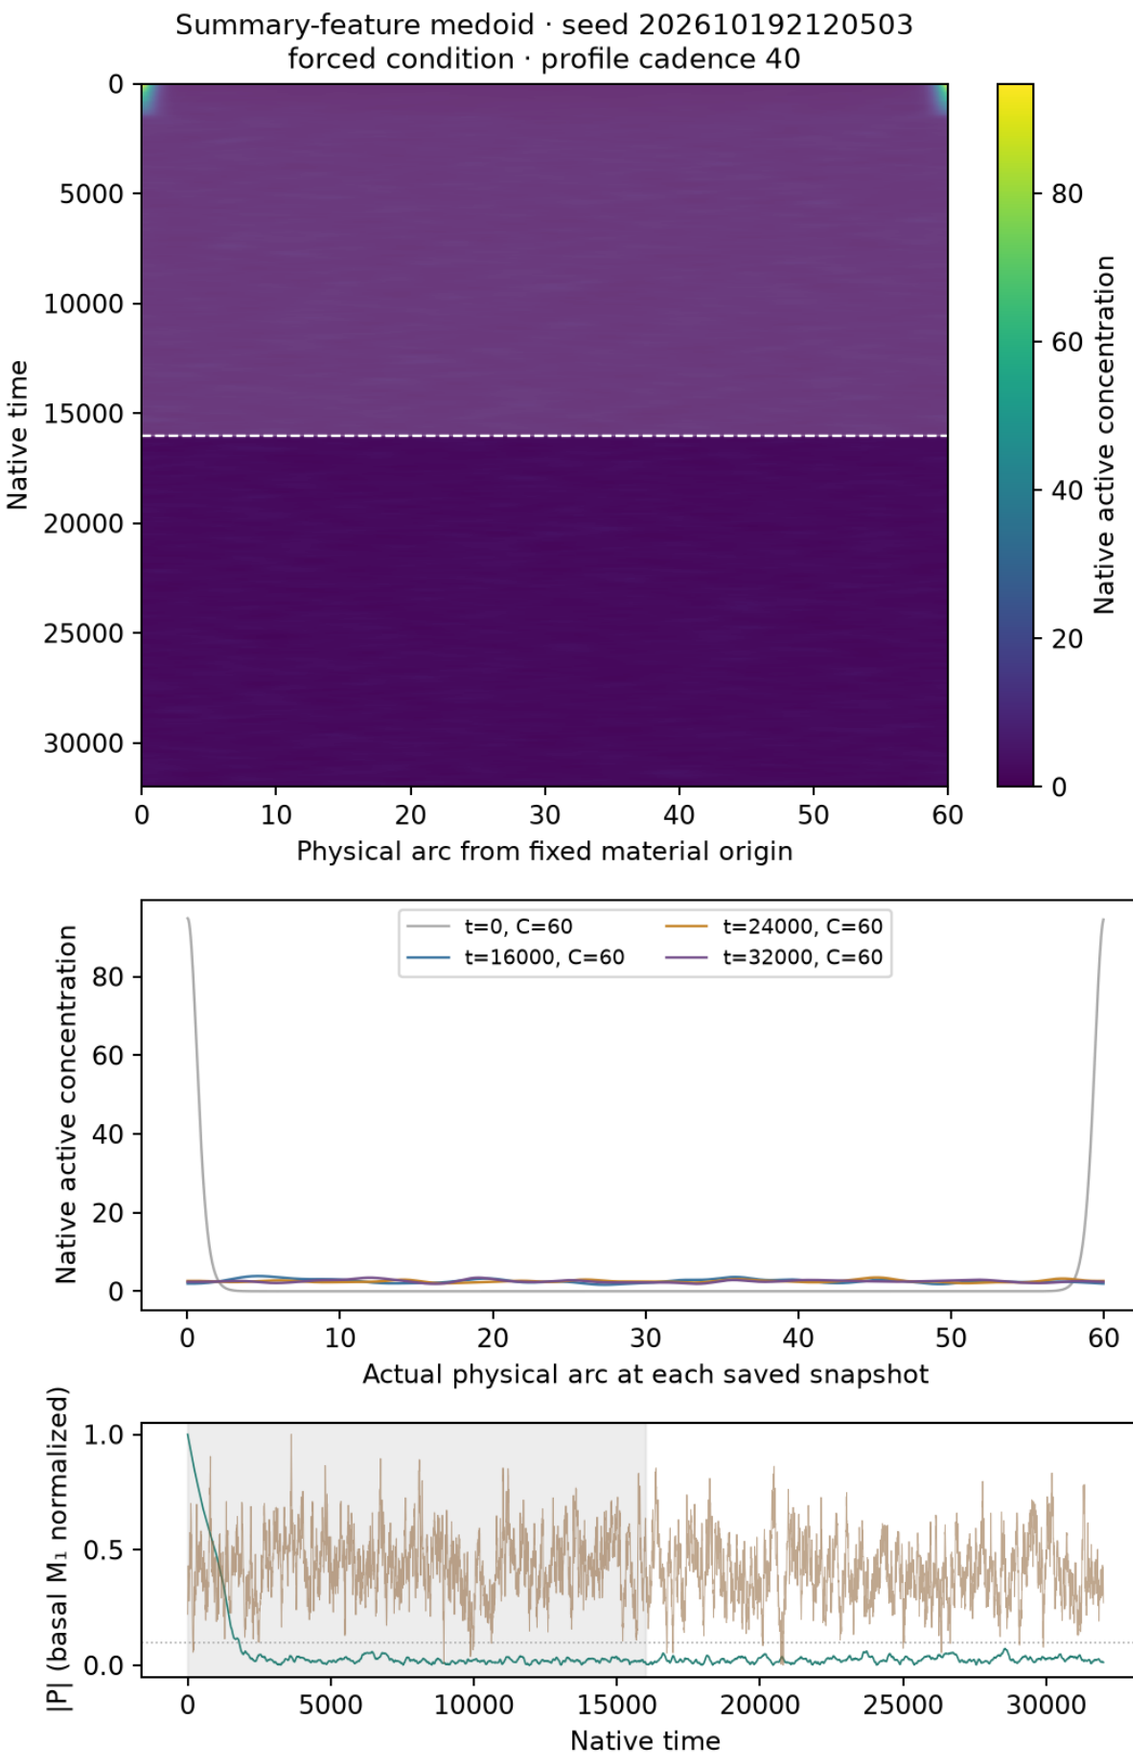

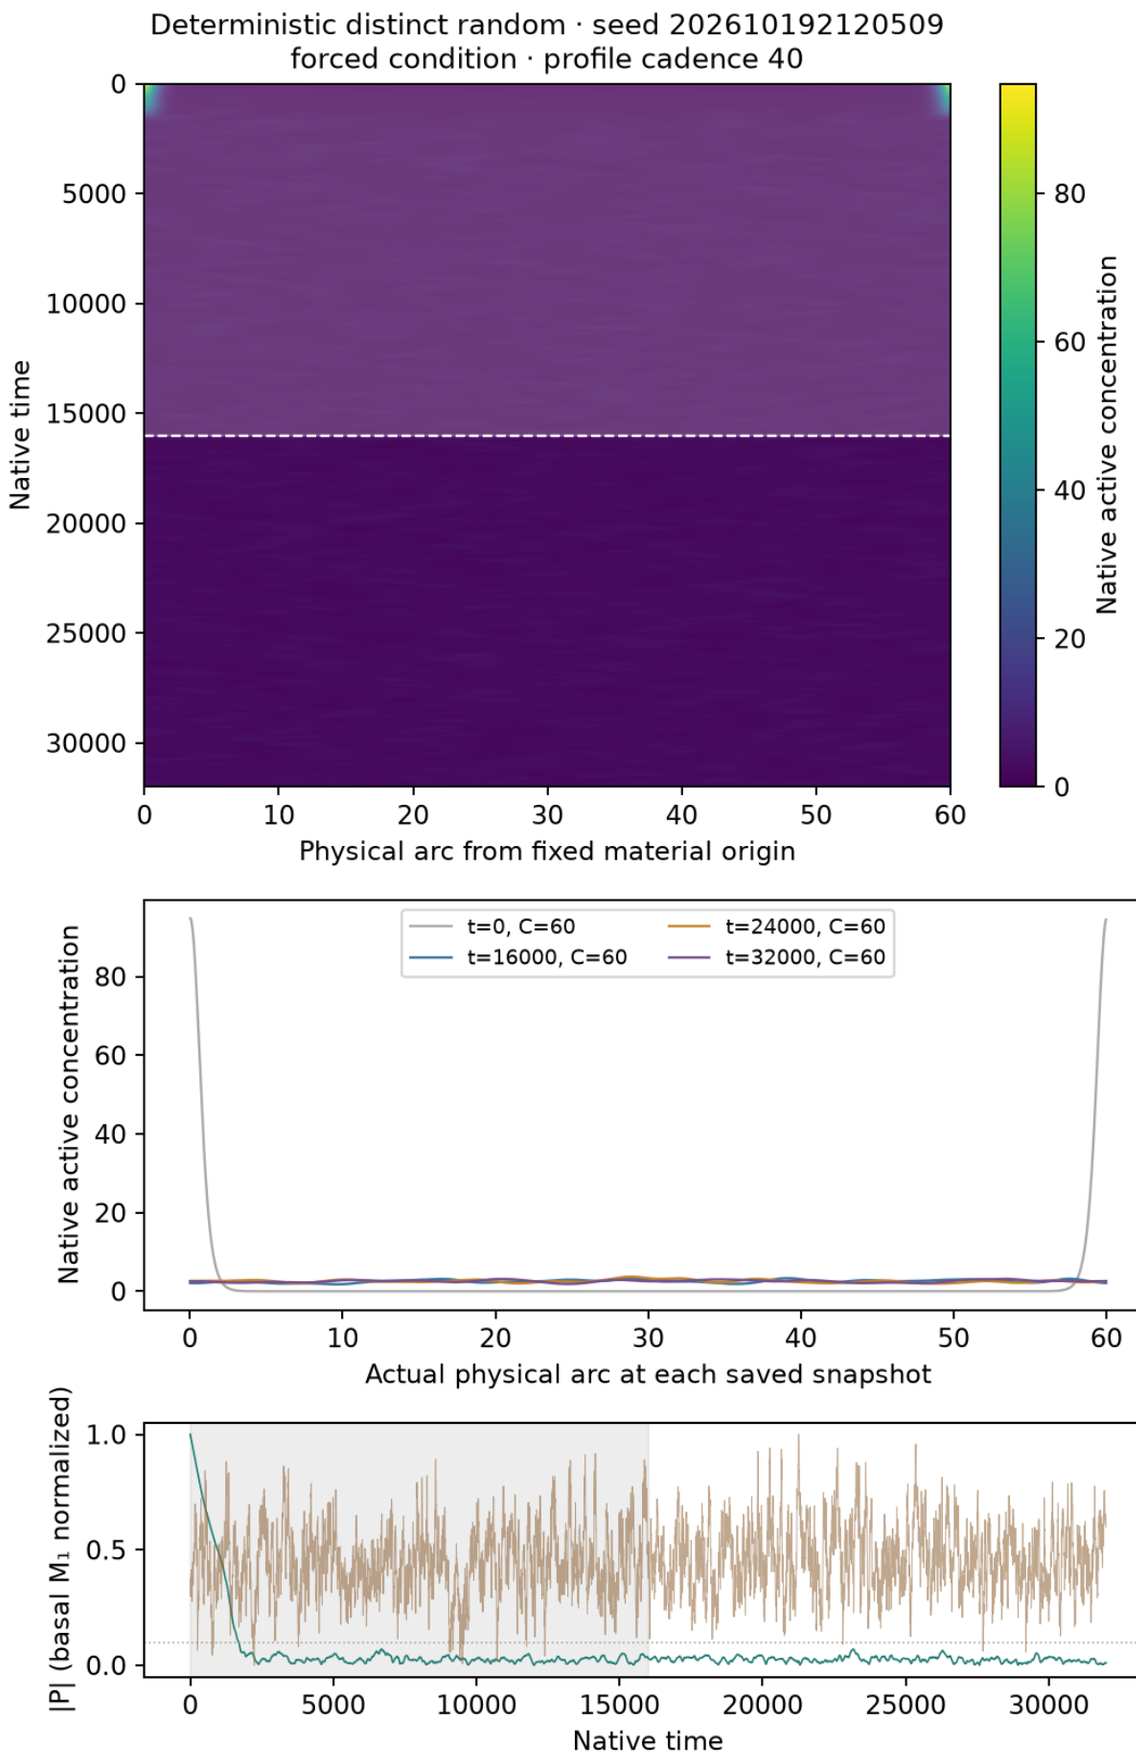

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Goryachev · size label 60 · f=0.03 · noise
context E1_extra · σ=0.5 · horizon=32000 · n=12 independent noisy realizations

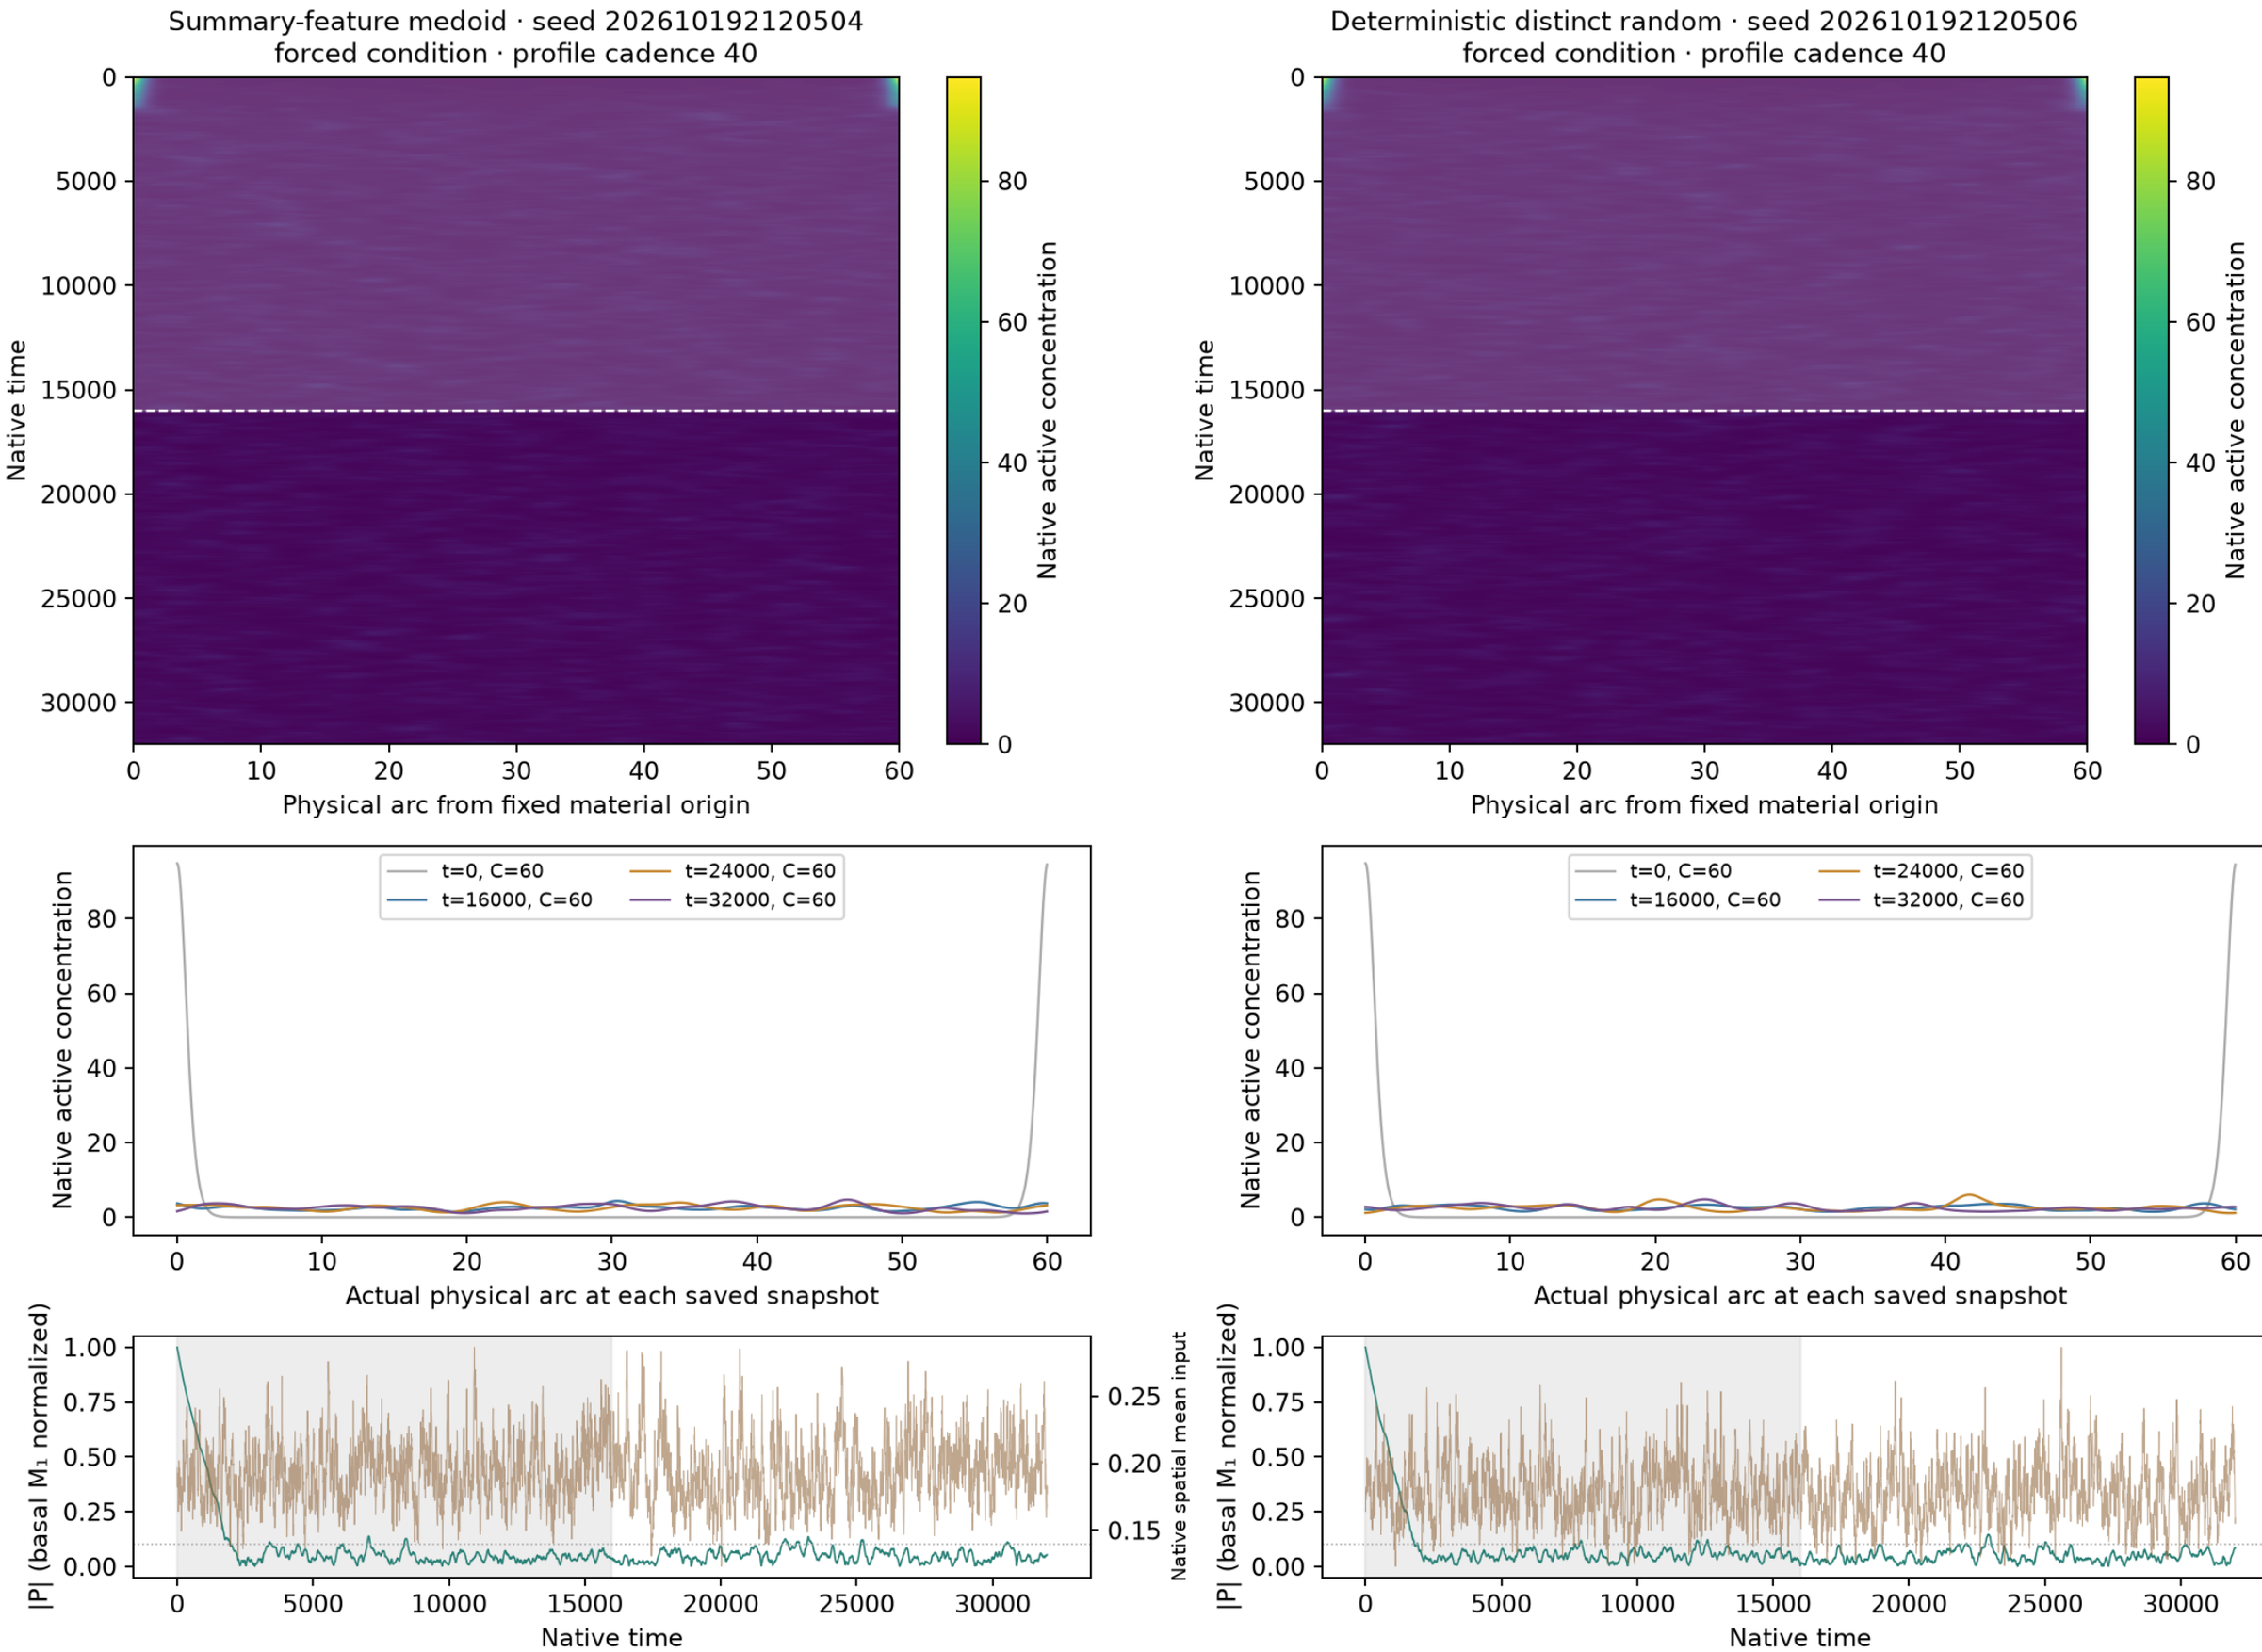

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Goryachev · size label 60 · f=0.03 · noise
context E1_extra · σ=2 · horizon=32000 · n=12 independent noisy realizations

Summary-feature medoid · seed 202610192120506
forced condition · profile cadence 40

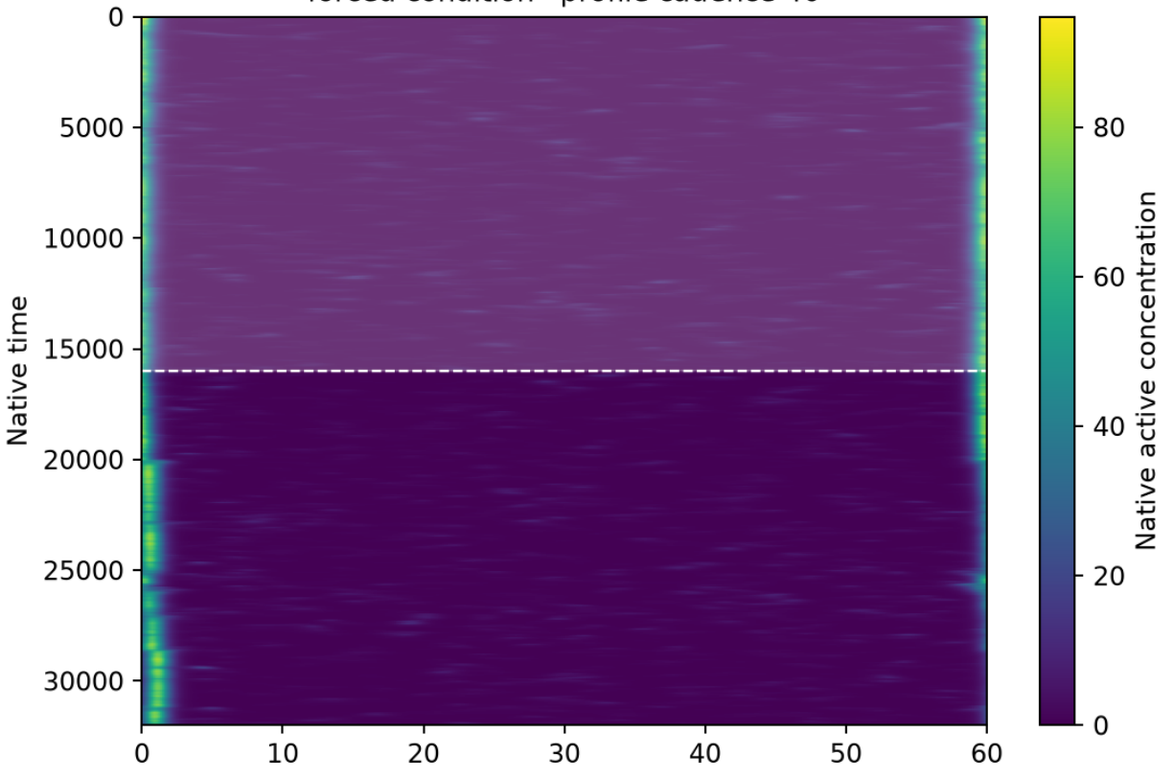

Deterministic distinct random · seed 202610192120502
forced condition · profile cadence 40

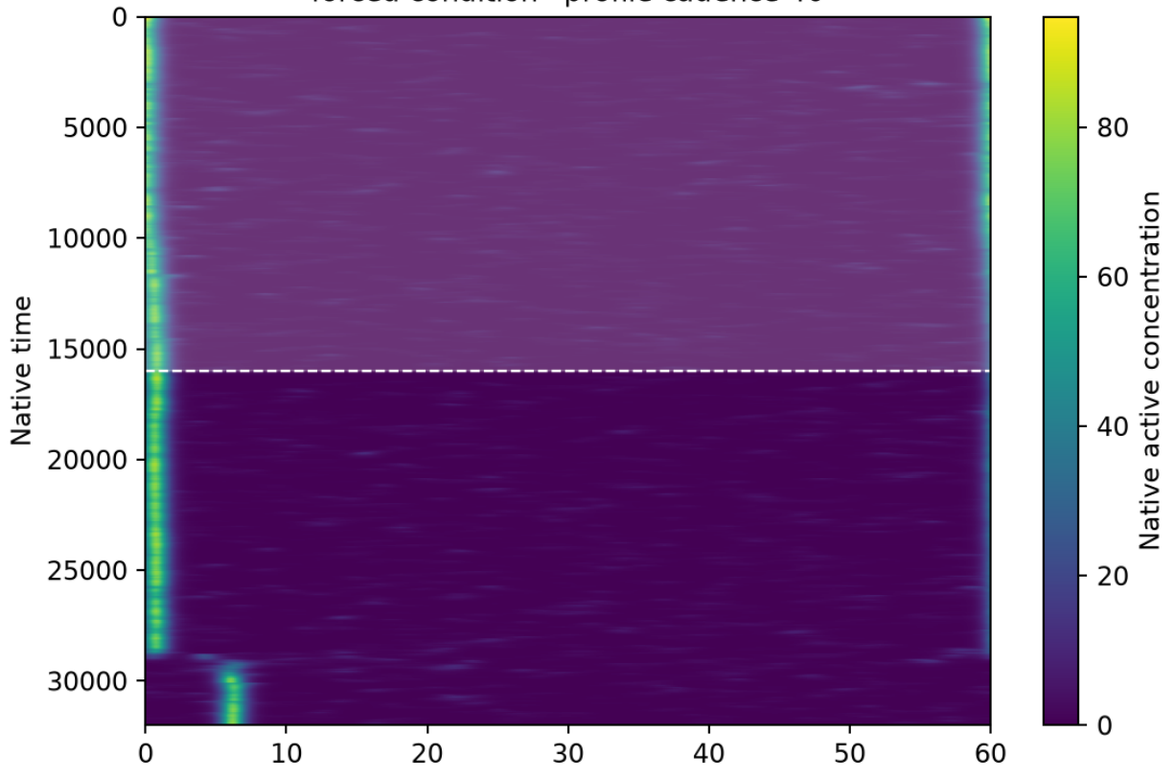

Physical arc from fixed material origin

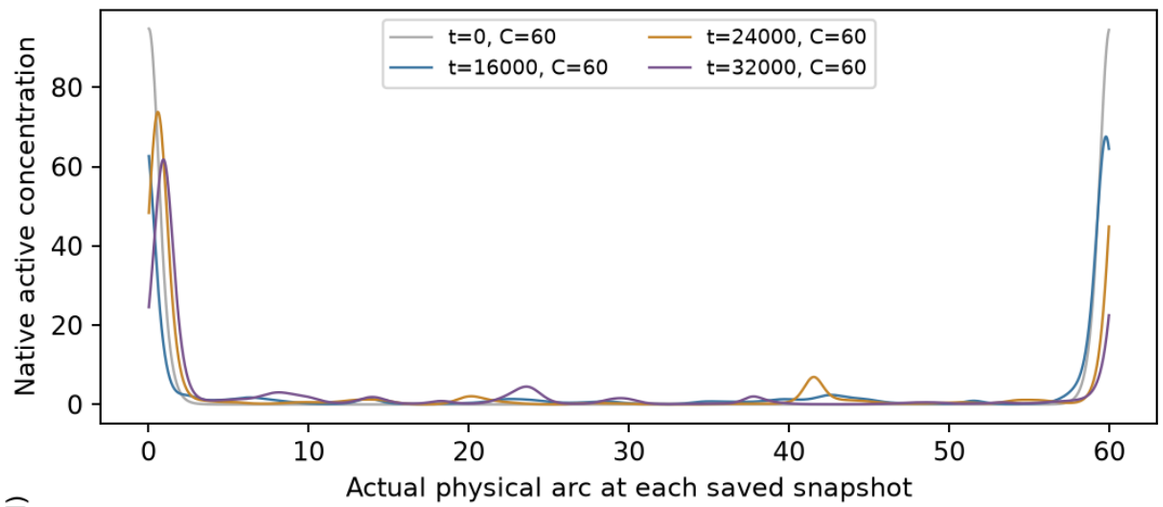

Physical arc from fixed material origin

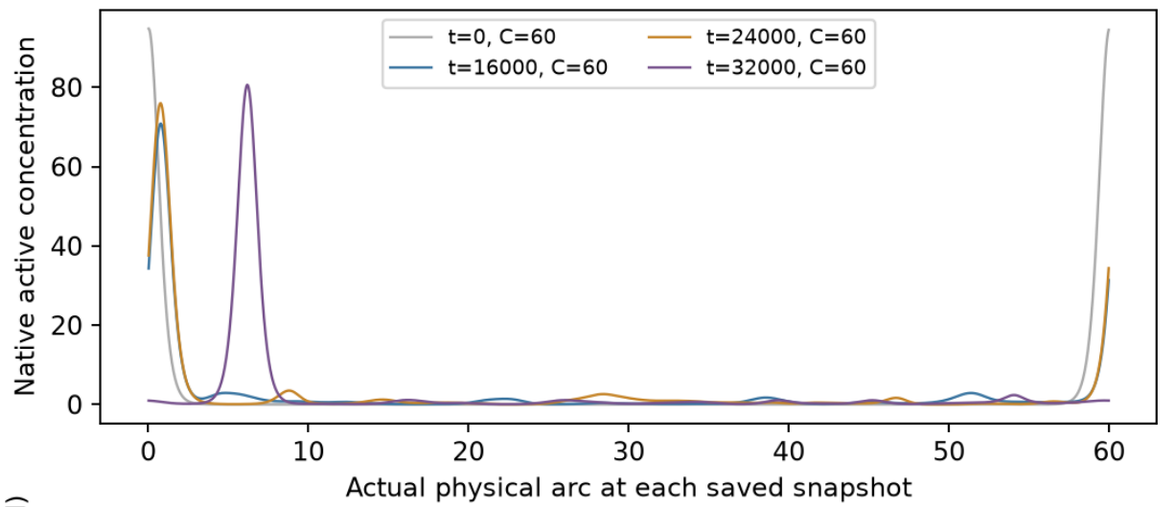

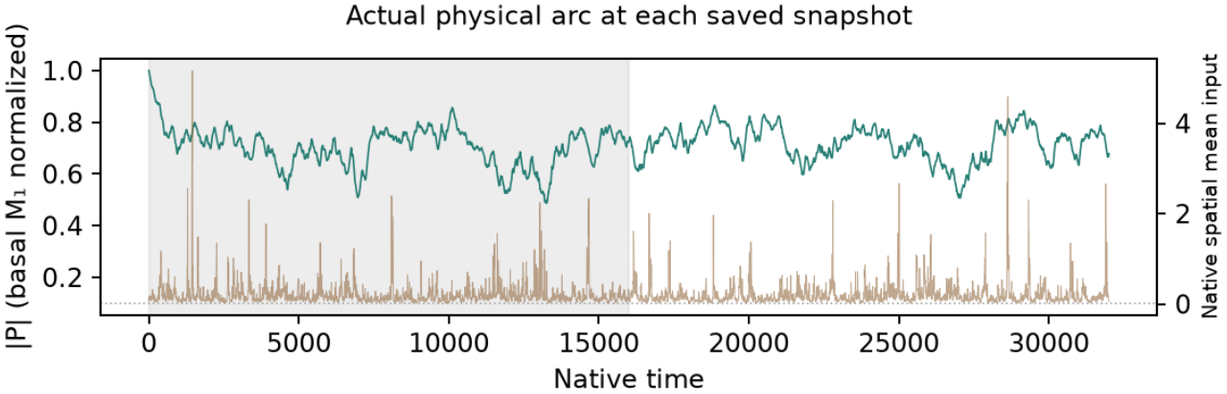

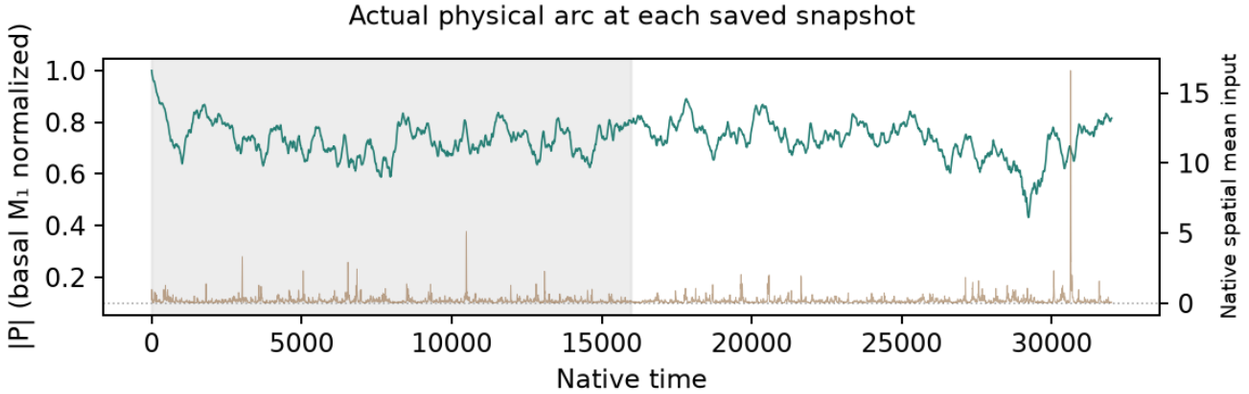

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Holmes 3 · size label 20 · f=0.03 · noise
context E1_extra · σ=0.25 · horizon=32000 · n=12 independent noisy realizations

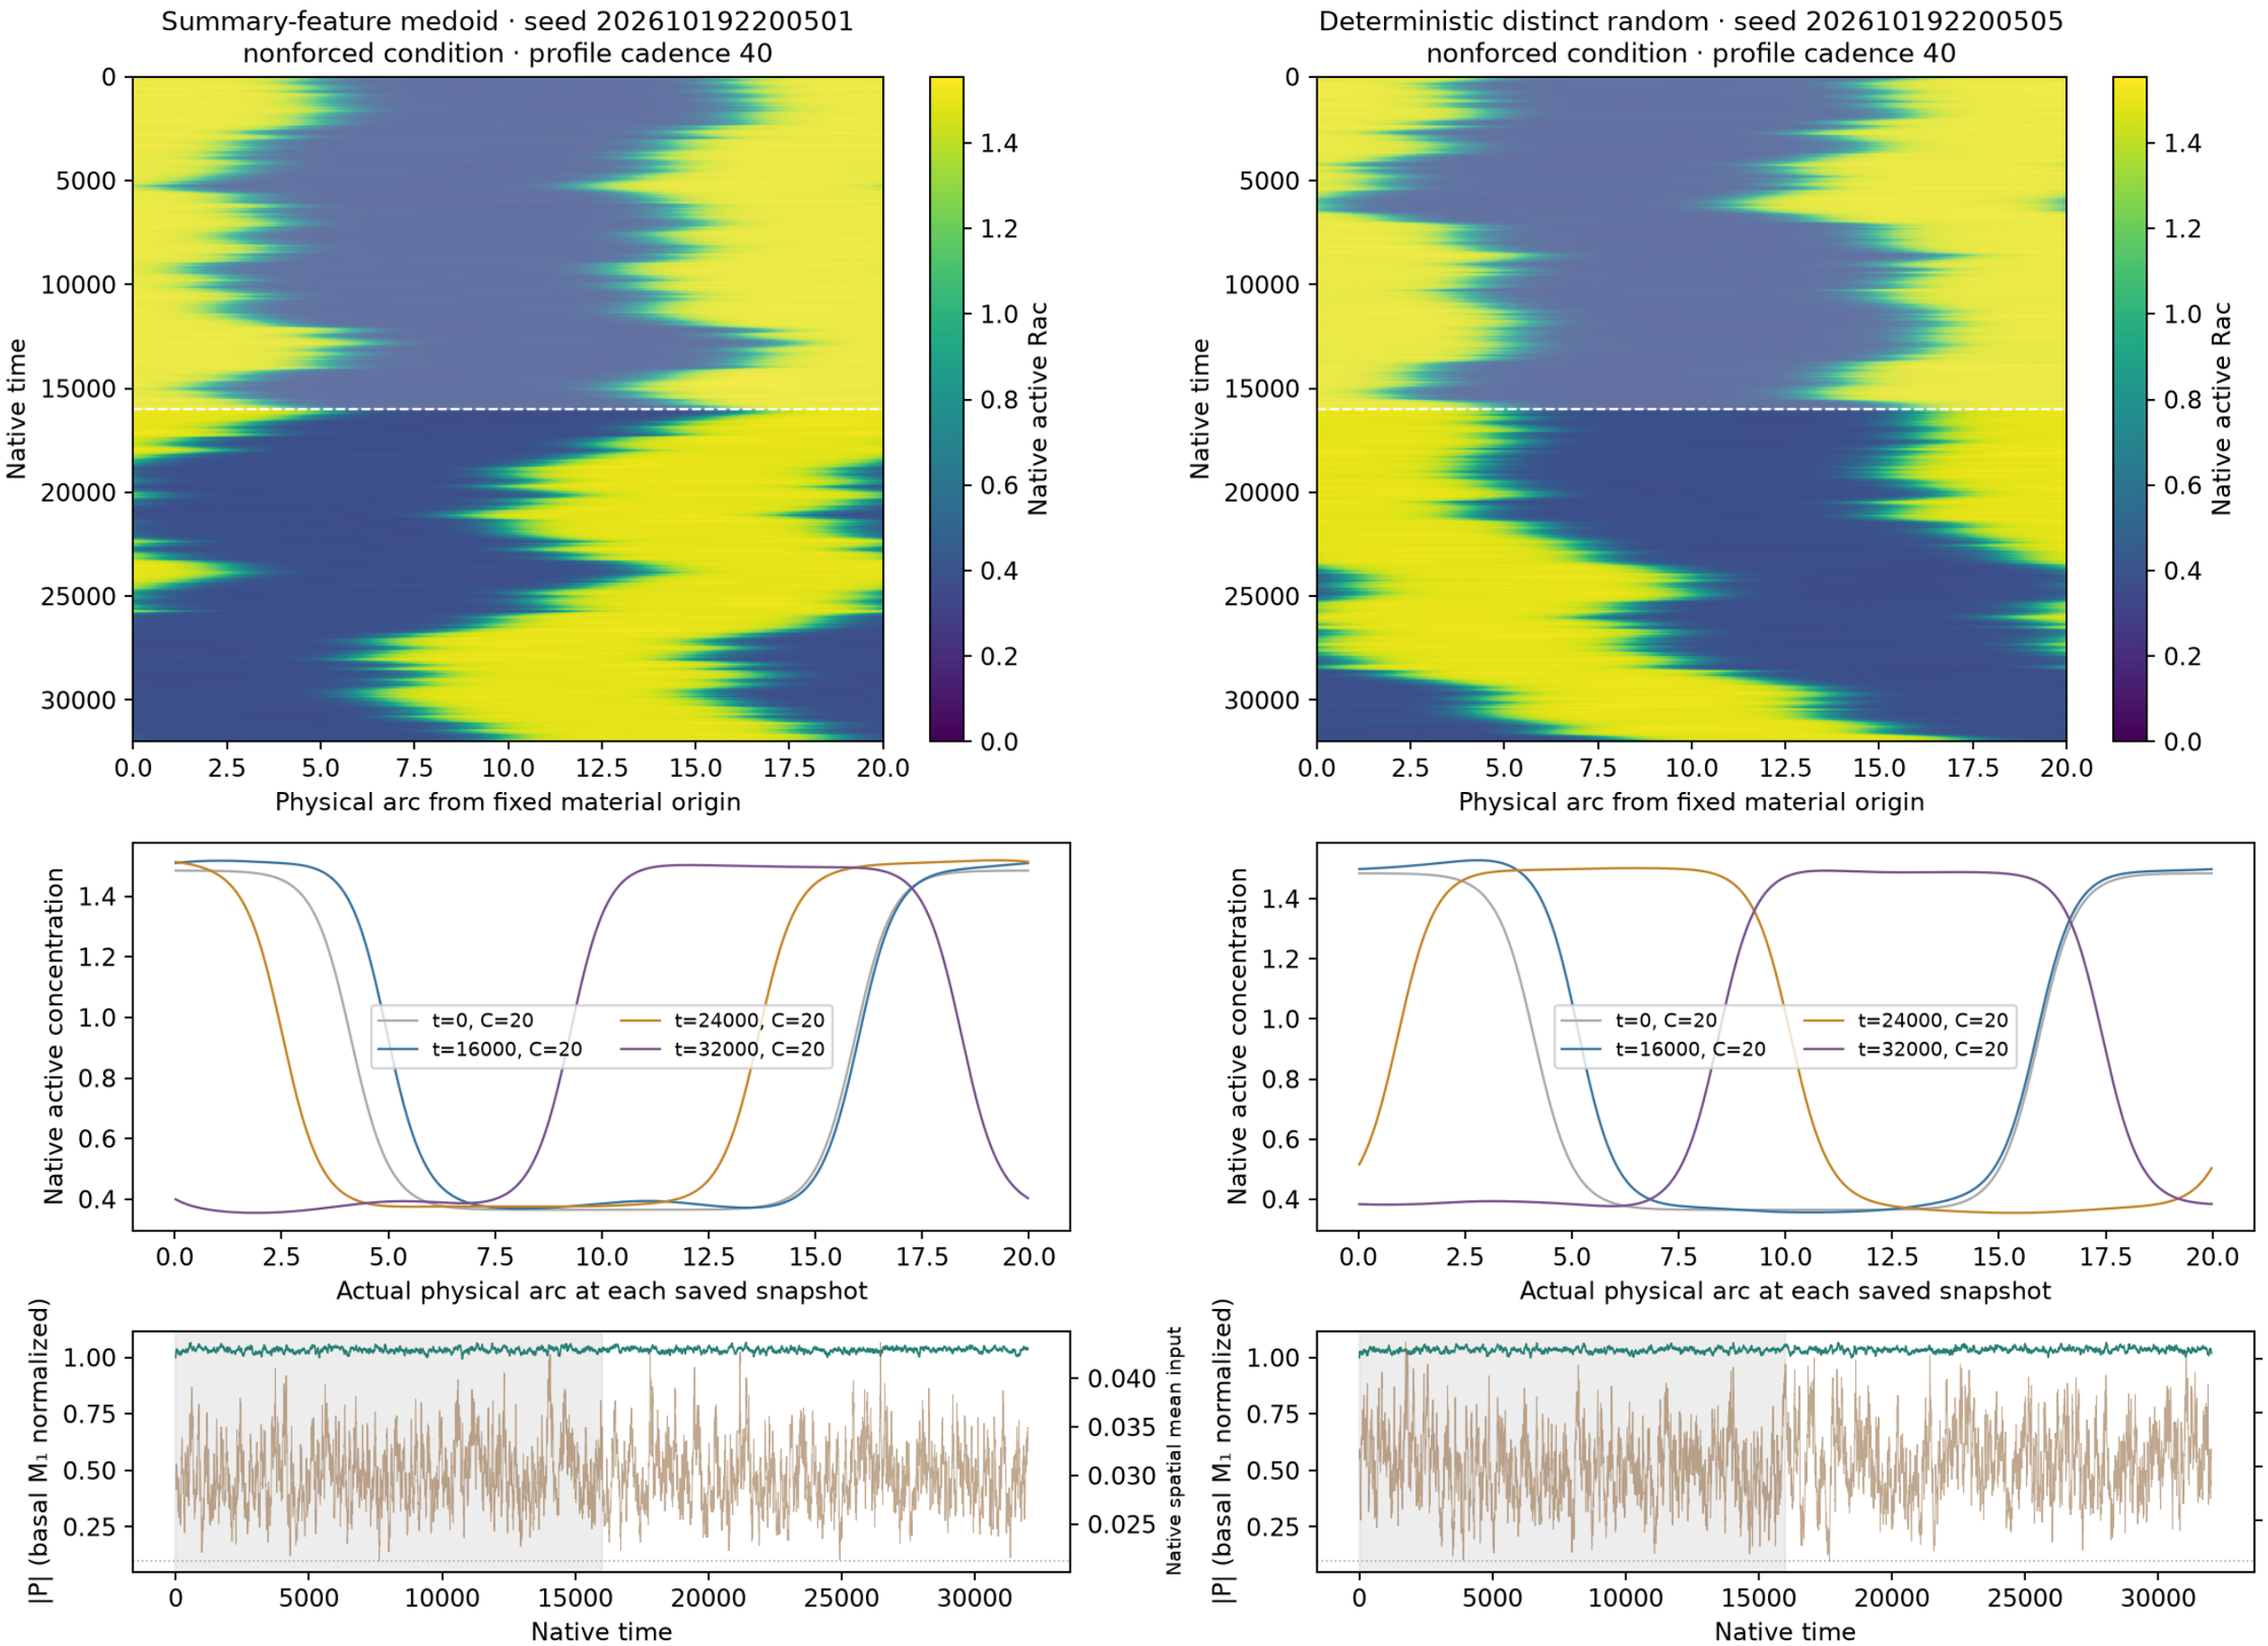

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Holmes 3 · size label 20 · f=0.03 · noise
context E1_extra · σ=0.5 · horizon=32000 · n=12 independent noisy realizations

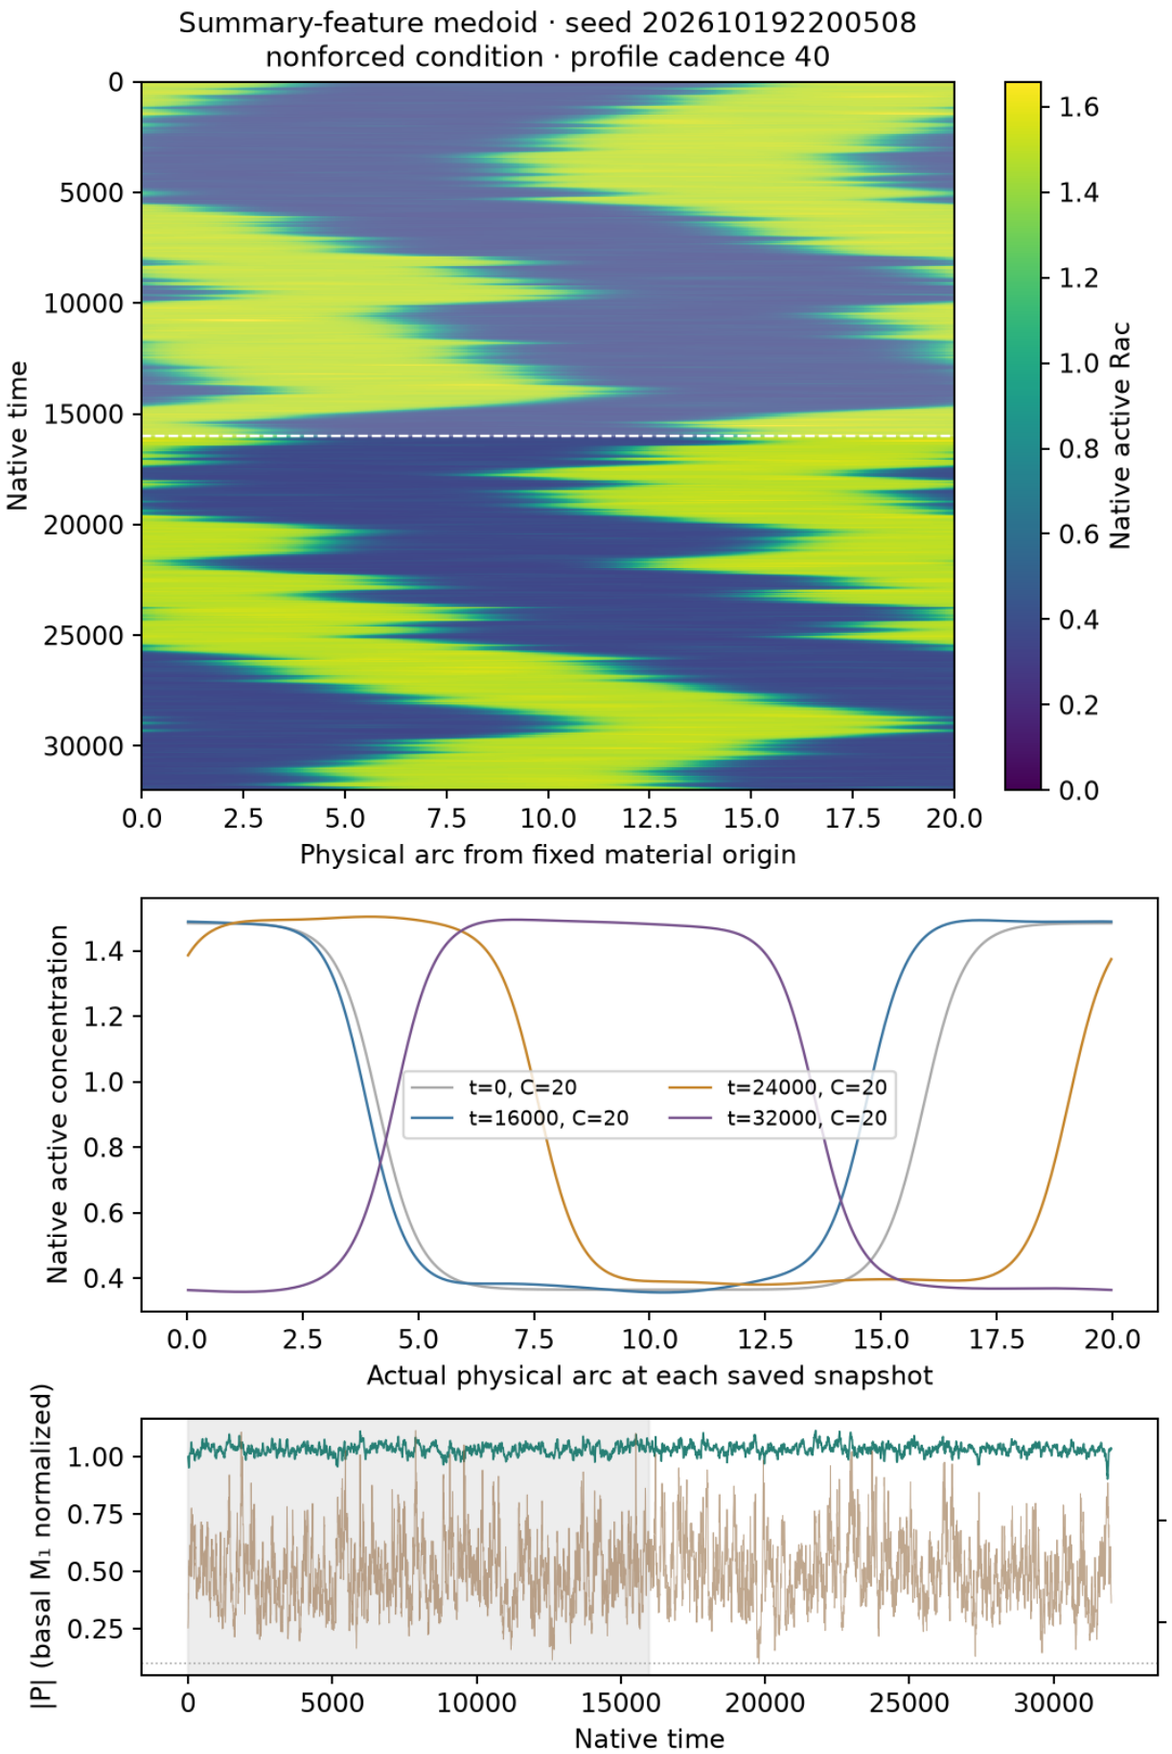

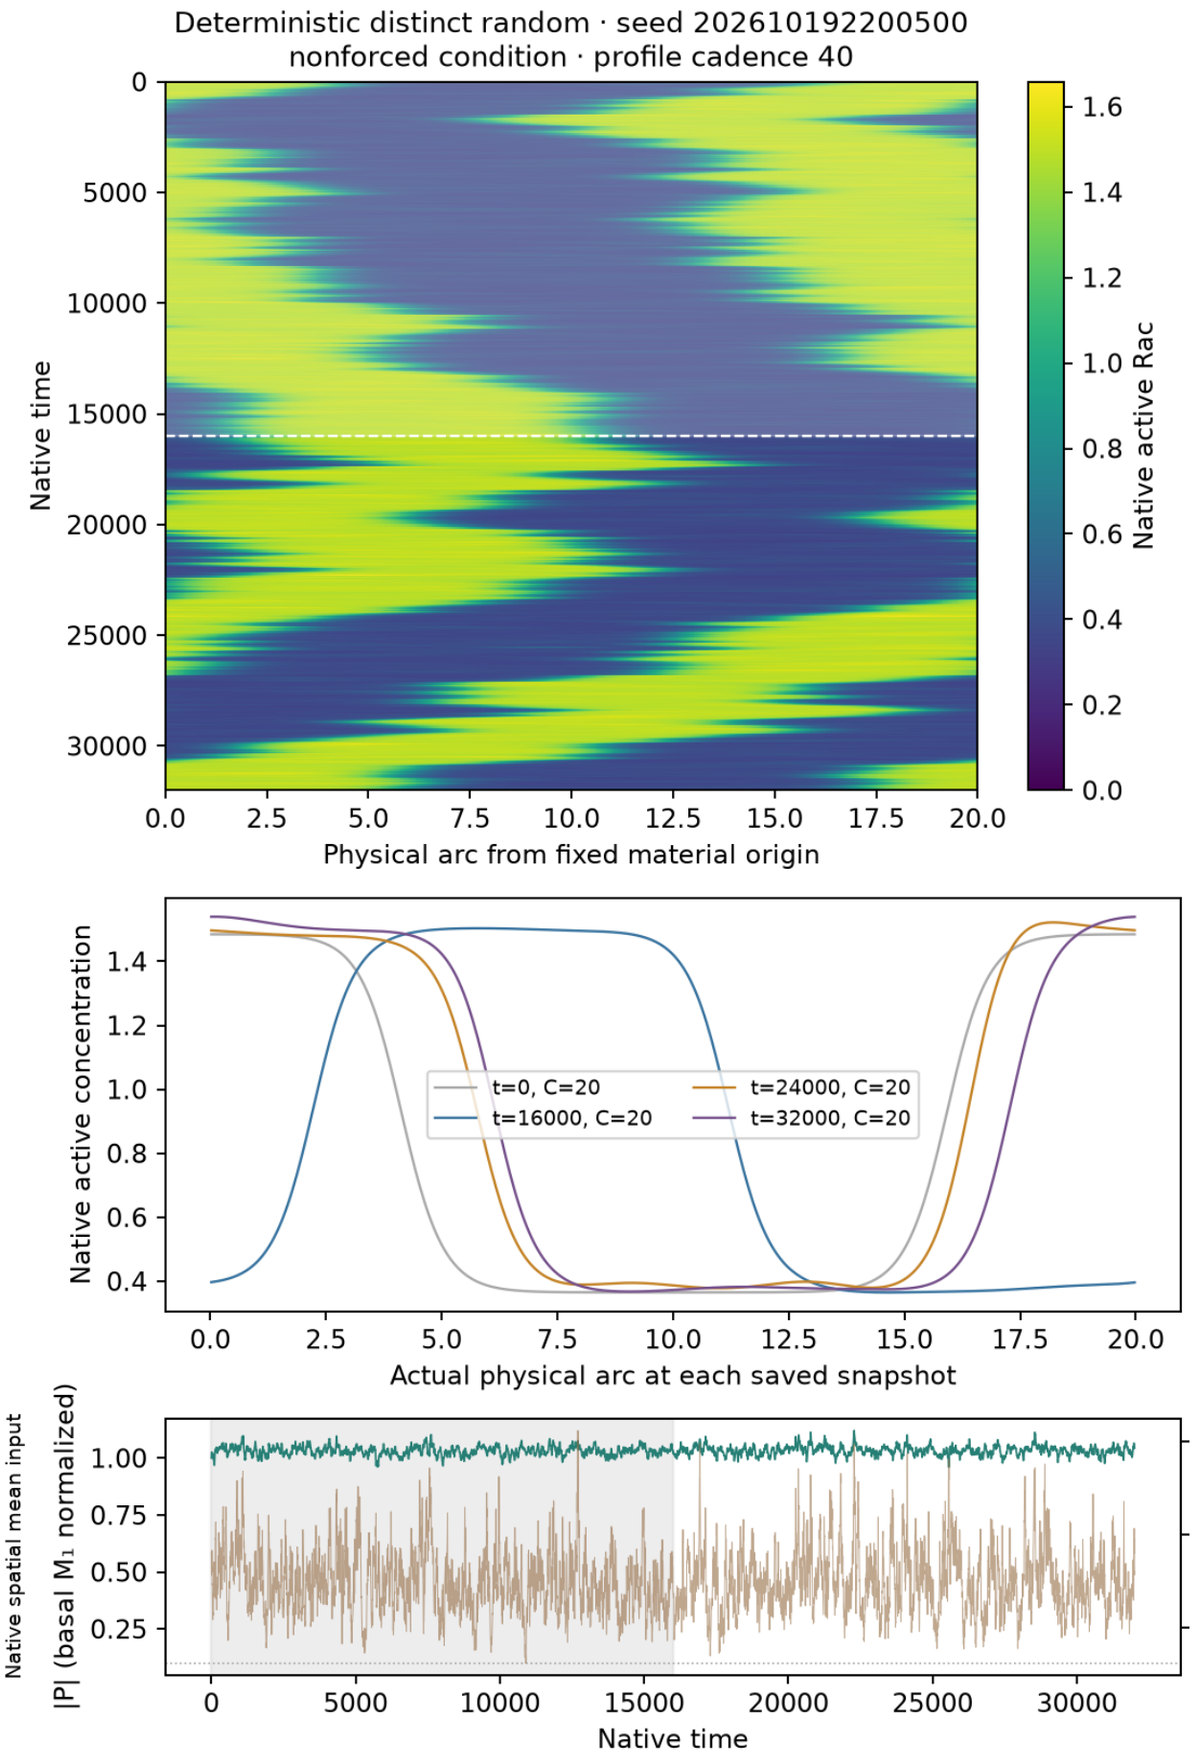

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Holmes 3 · size label 20 · f=0.03 · noise
context E1_extra · σ=2 · horizon=32000 · n=12 independent noisy realizations

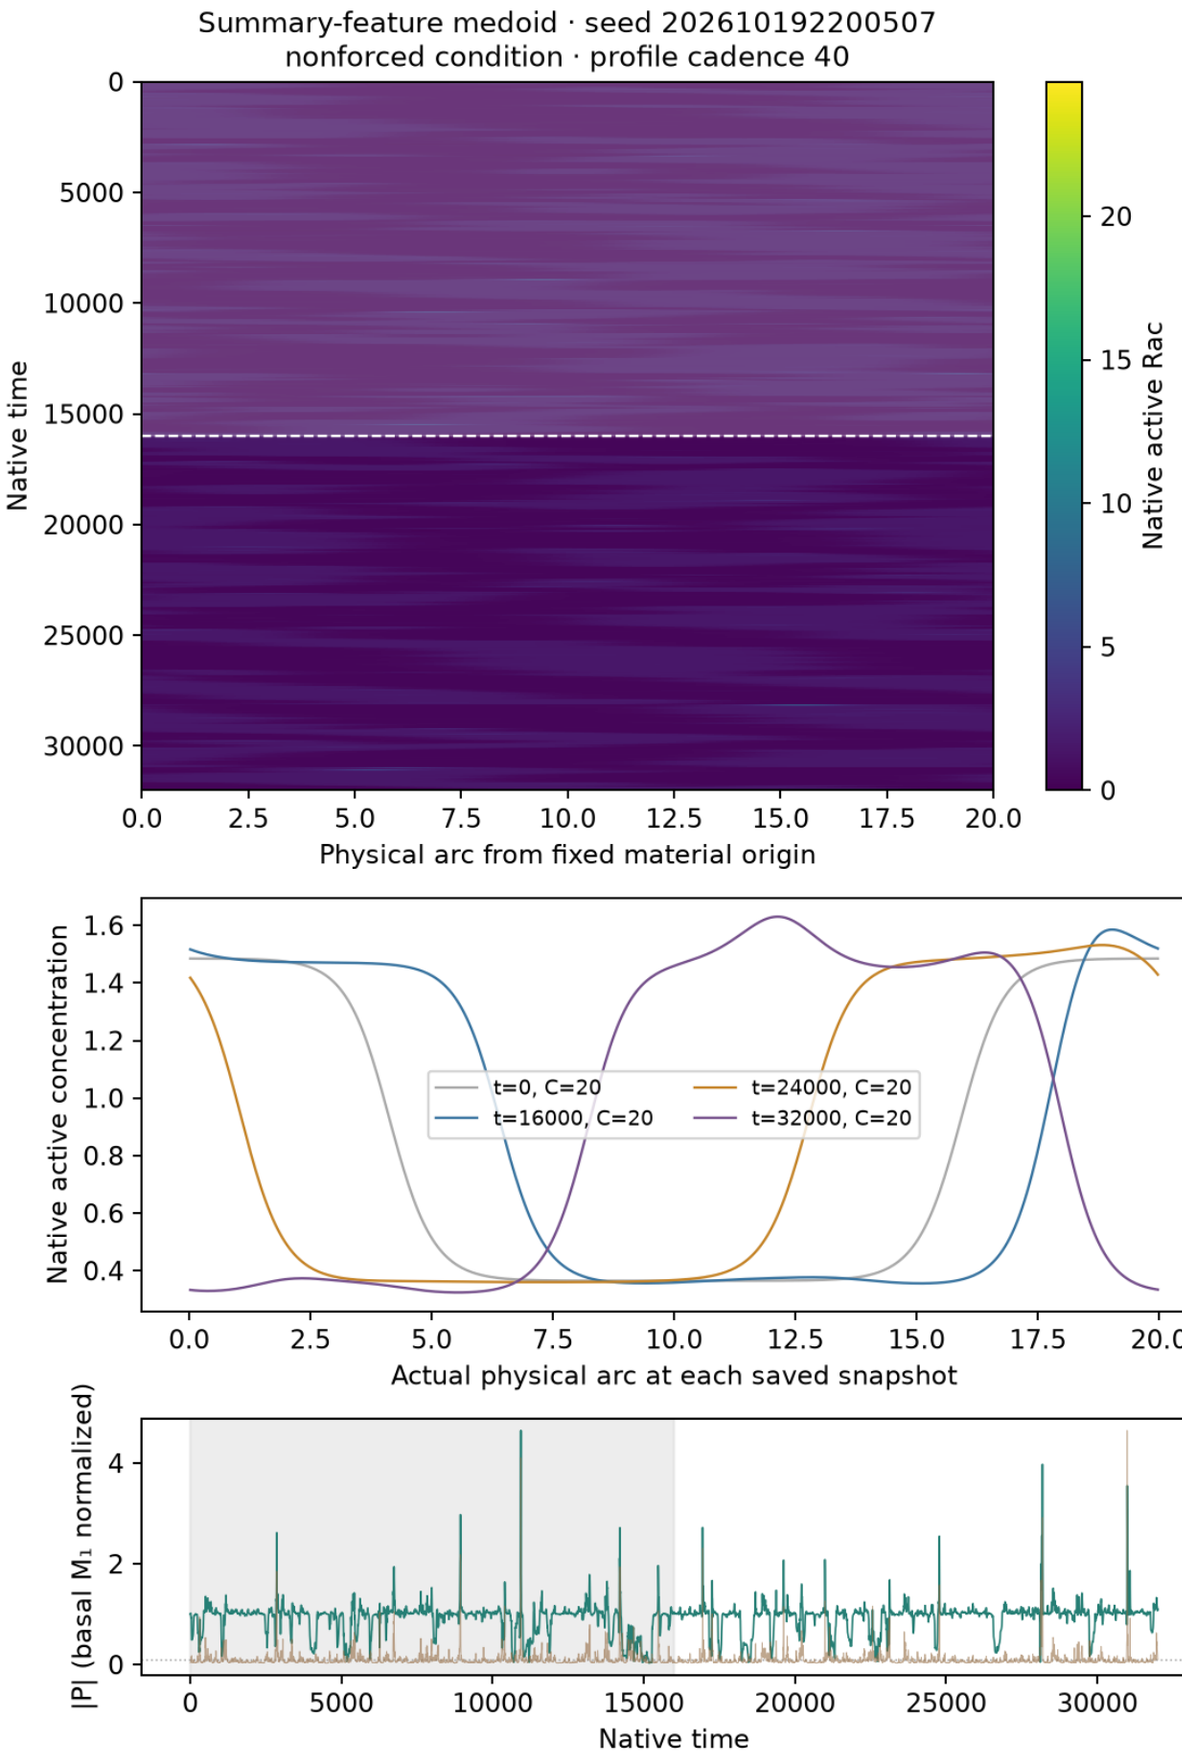

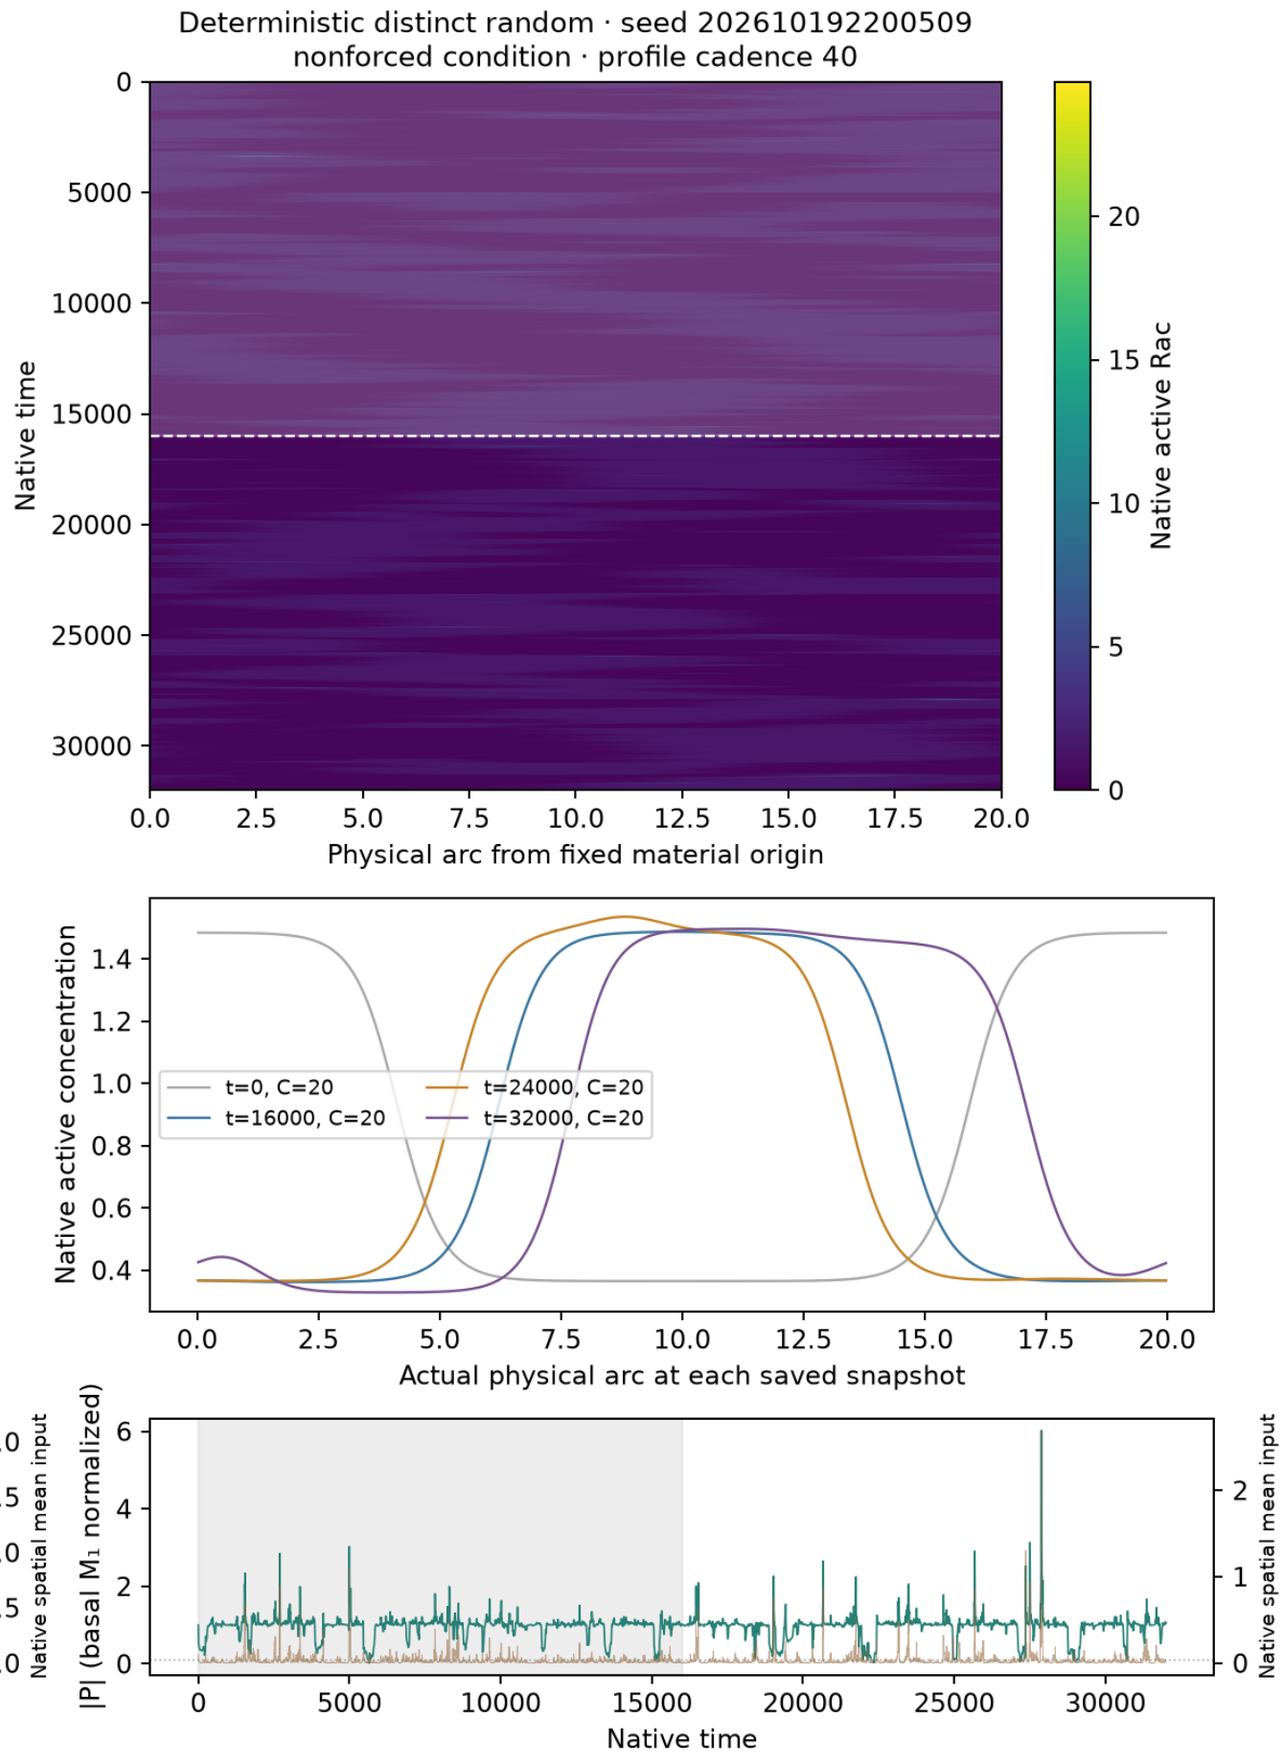

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Holmes 3 · size label 20 · f=0.1 · noise
context E1_extra · σ=0.25 · horizon=32000 · n=12 independent noisy realizations

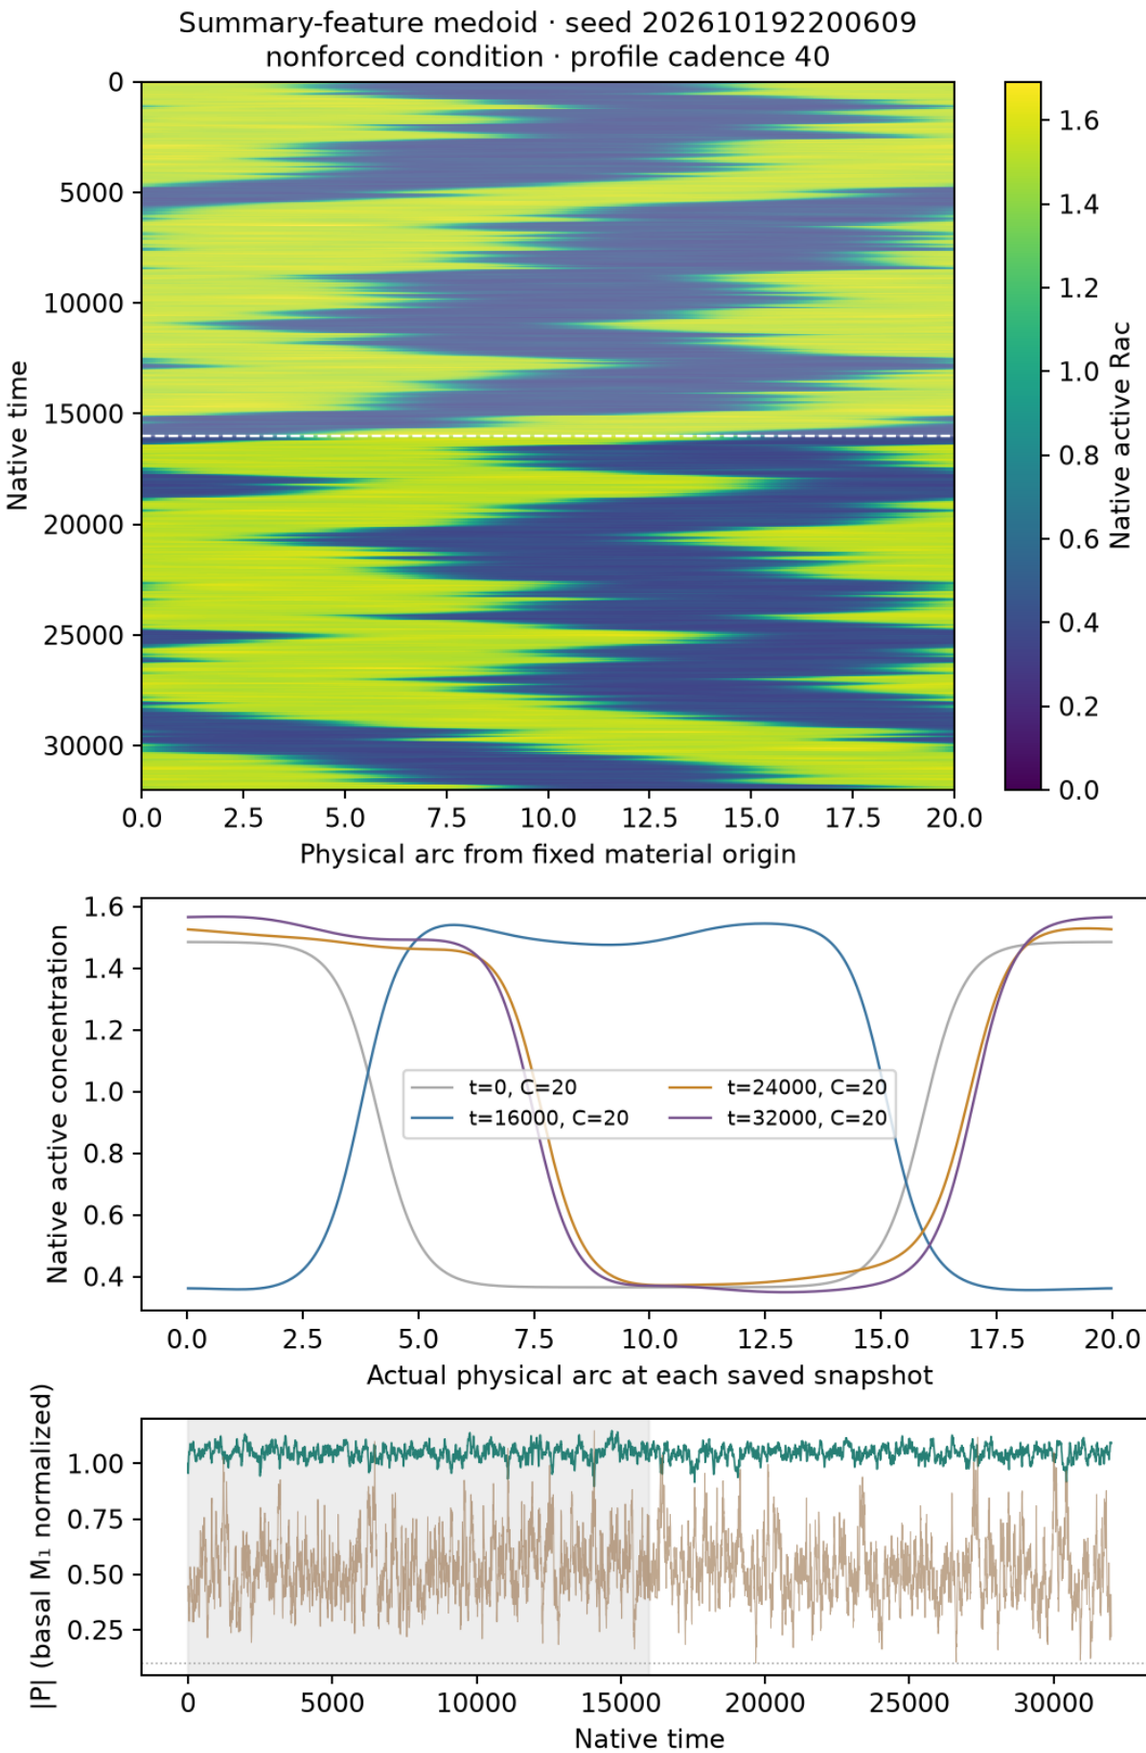

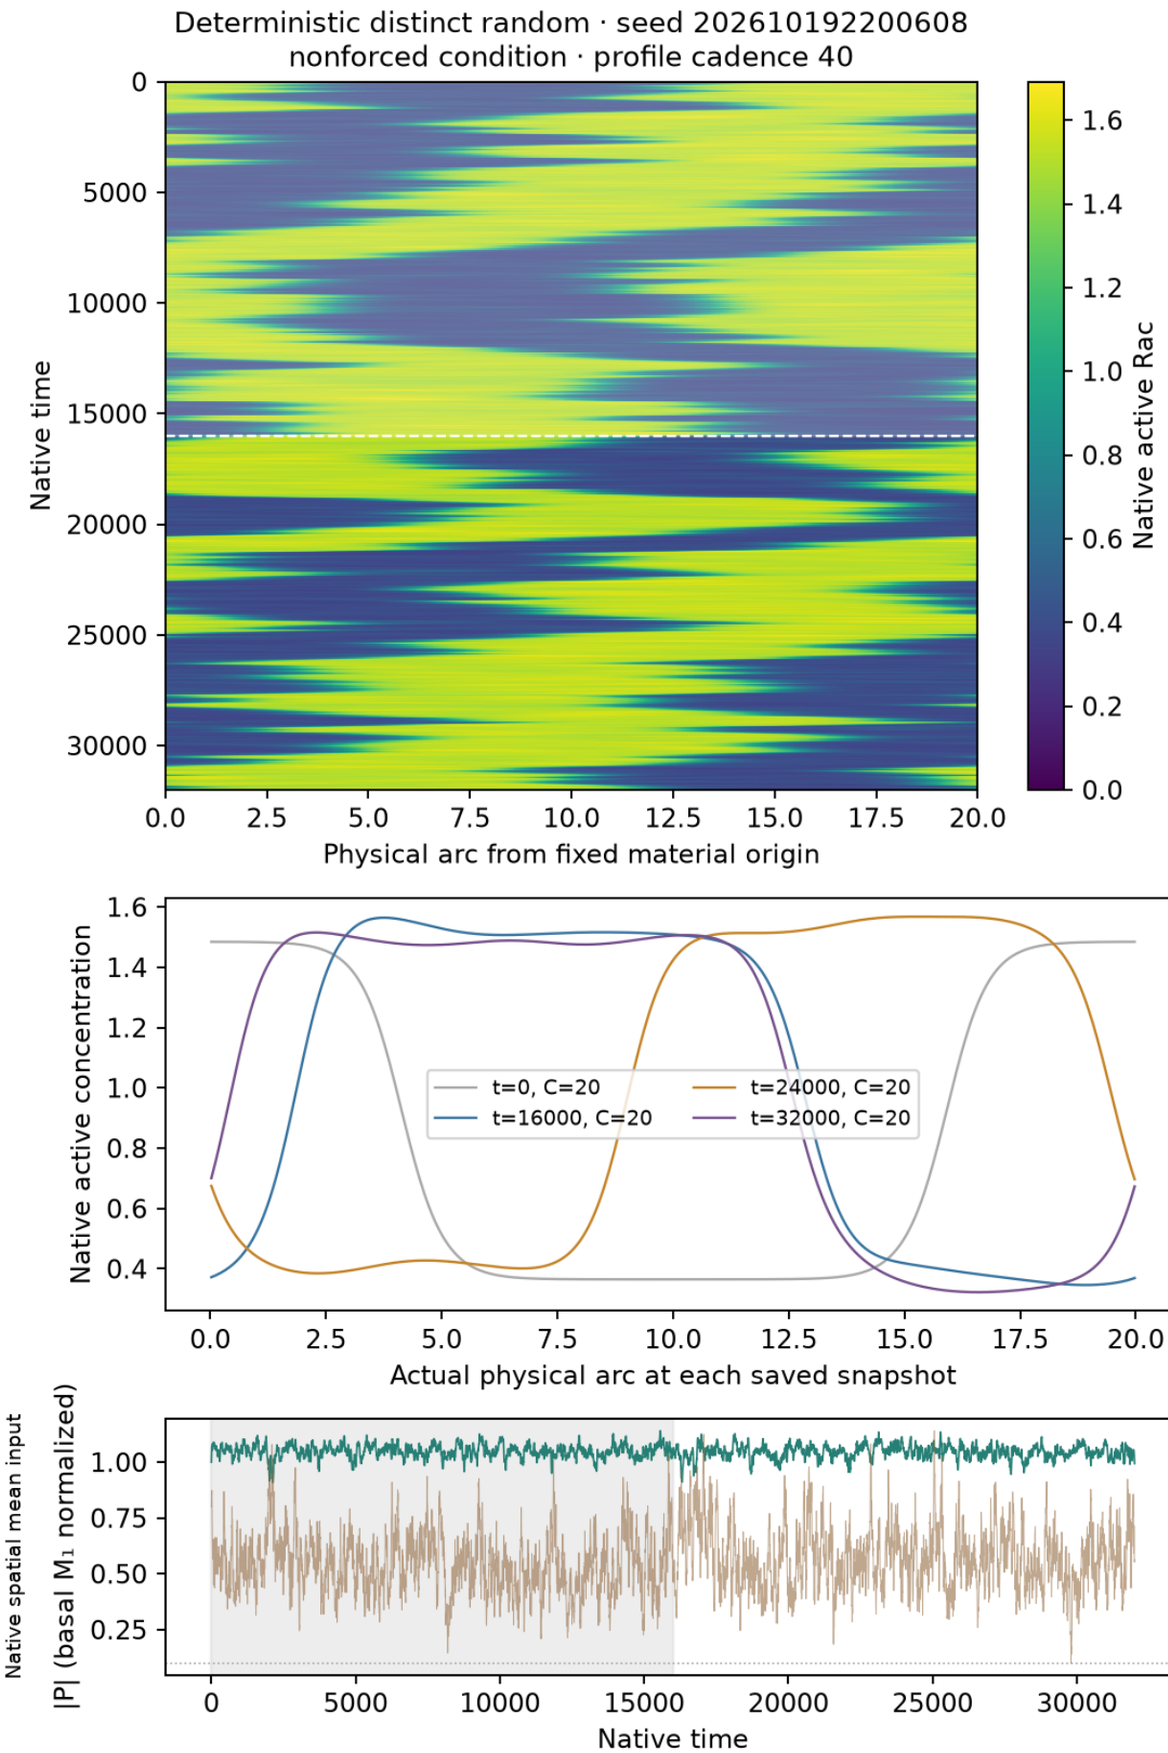

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Holmes 3 · size label 20 · f=0.1 · noise
context E1_extra · σ=0.5 · horizon=32000 · n=12 independent noisy realizations

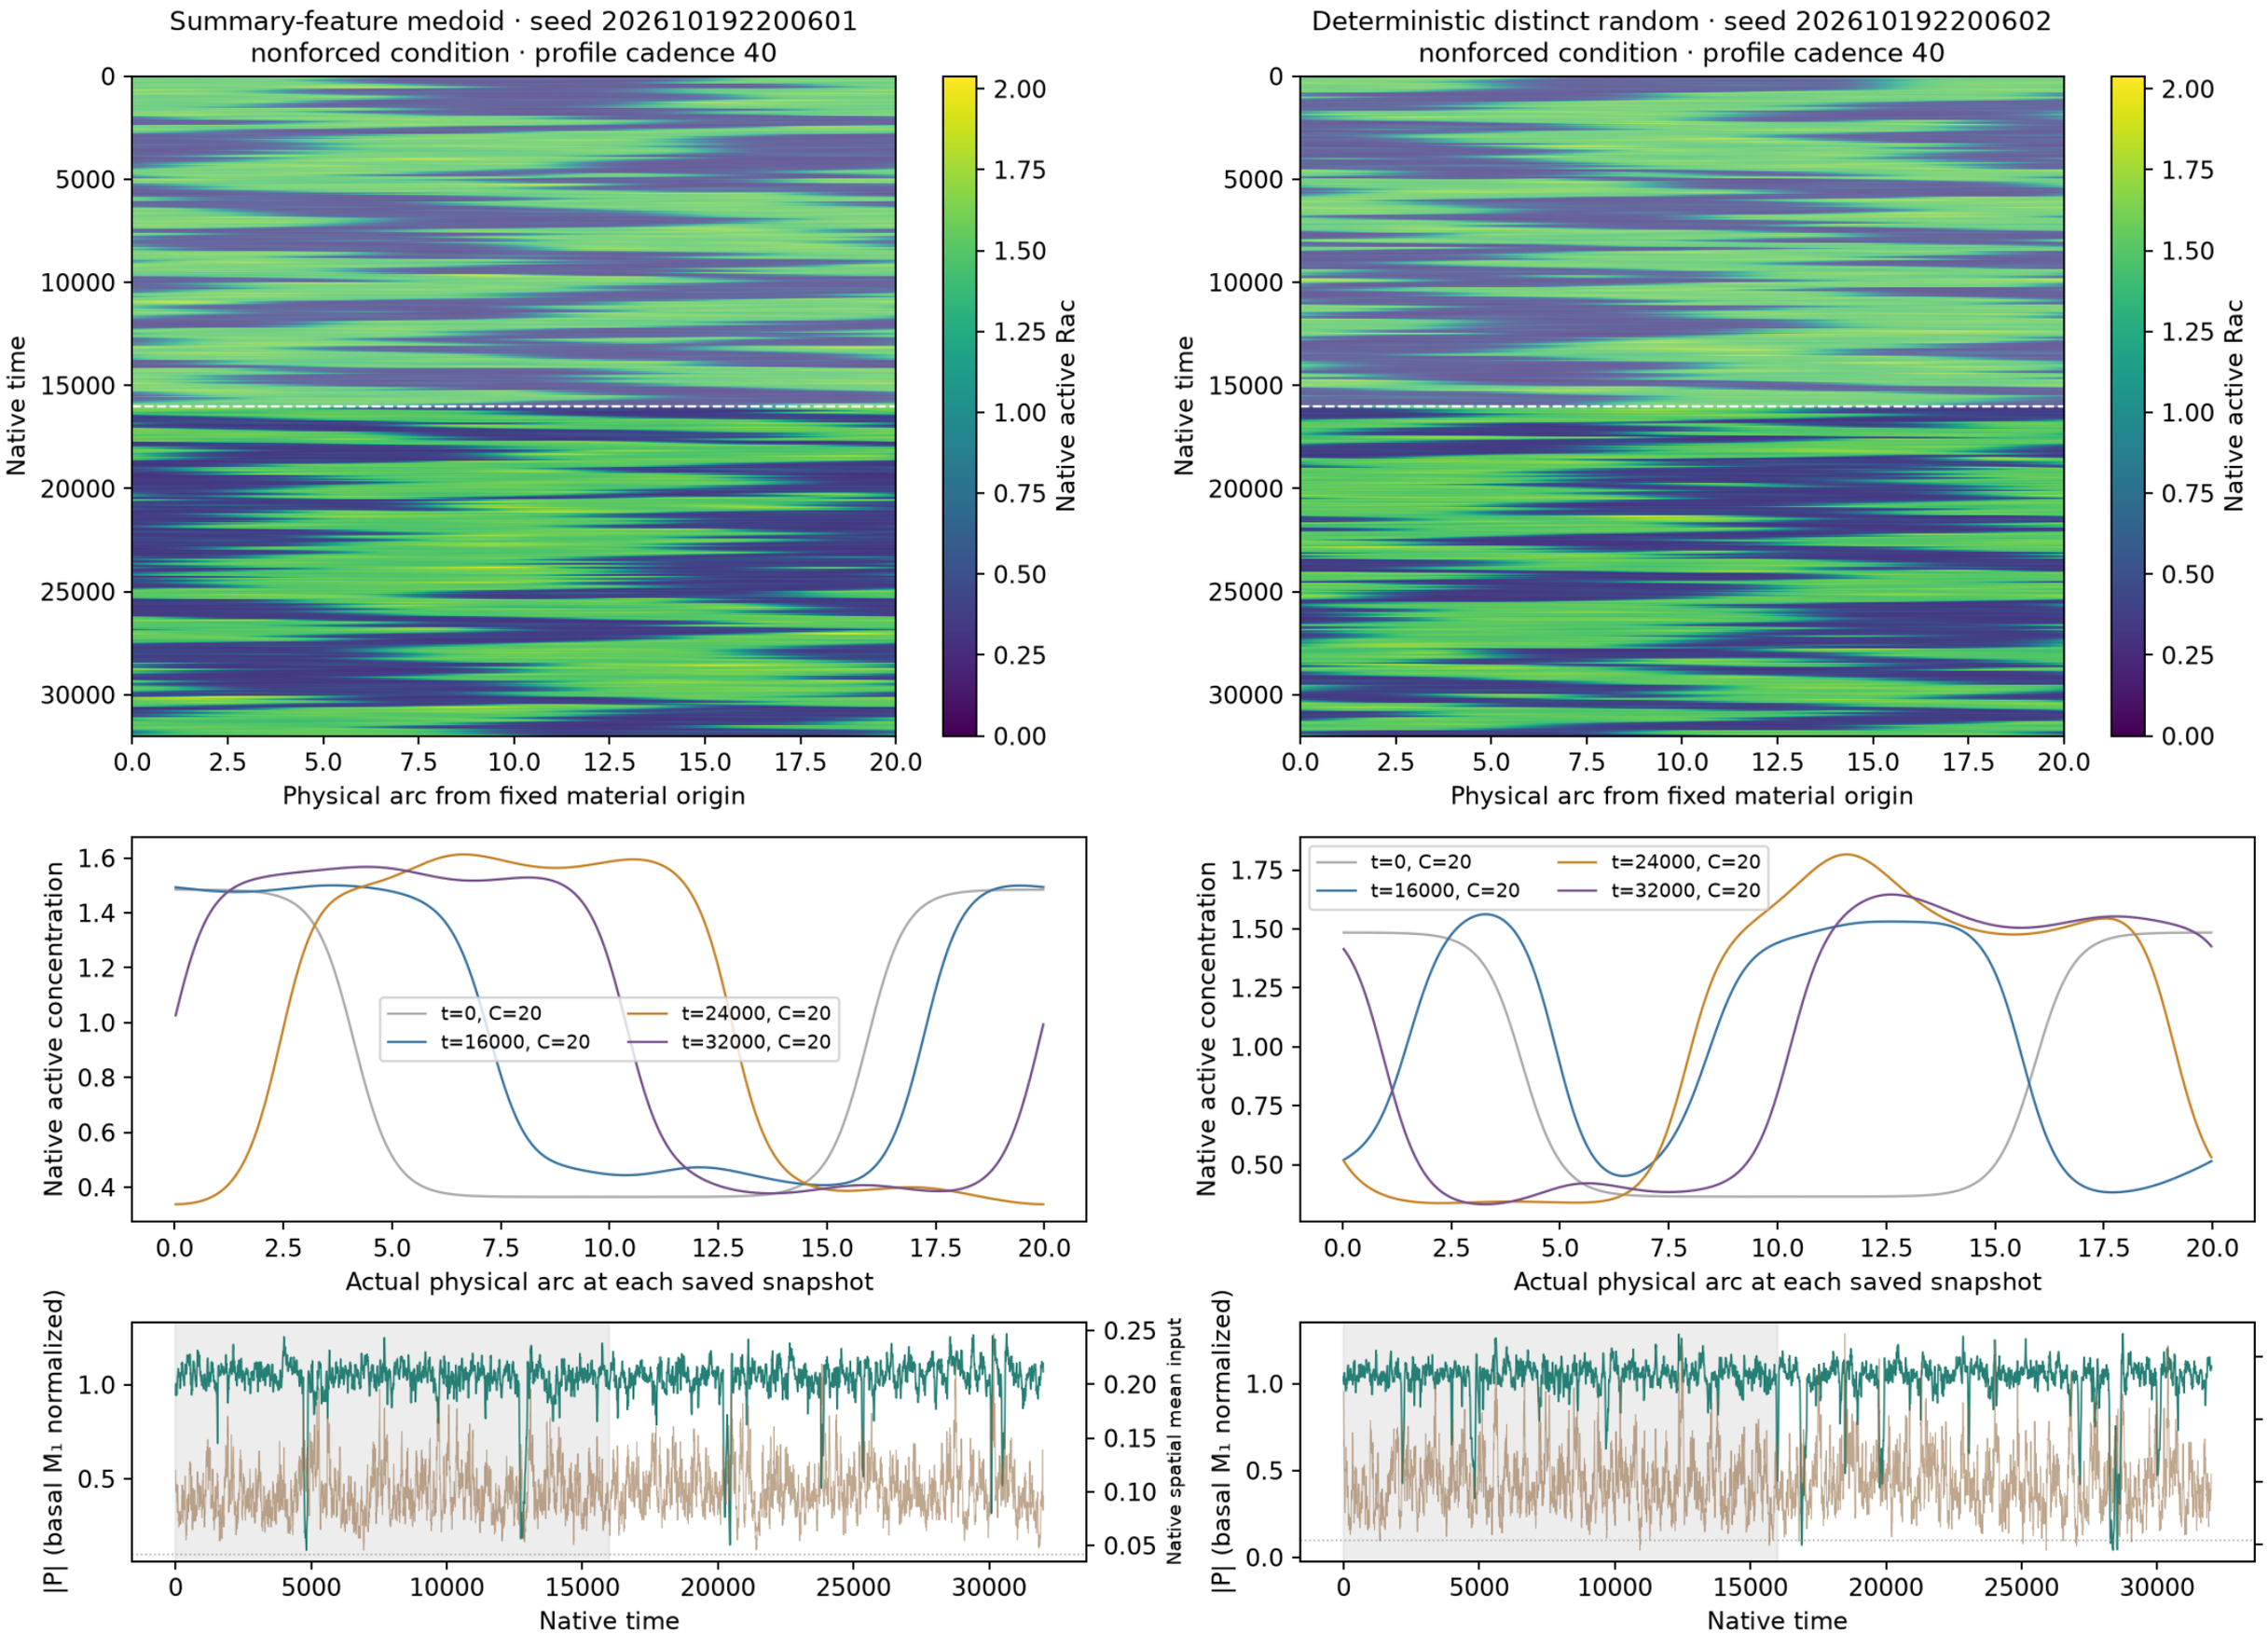

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Holmes 3 · size label 20 · f=0.1 · noise
context E1_extra · σ=2 · horizon=32000 · n=12 independent noisy realizations

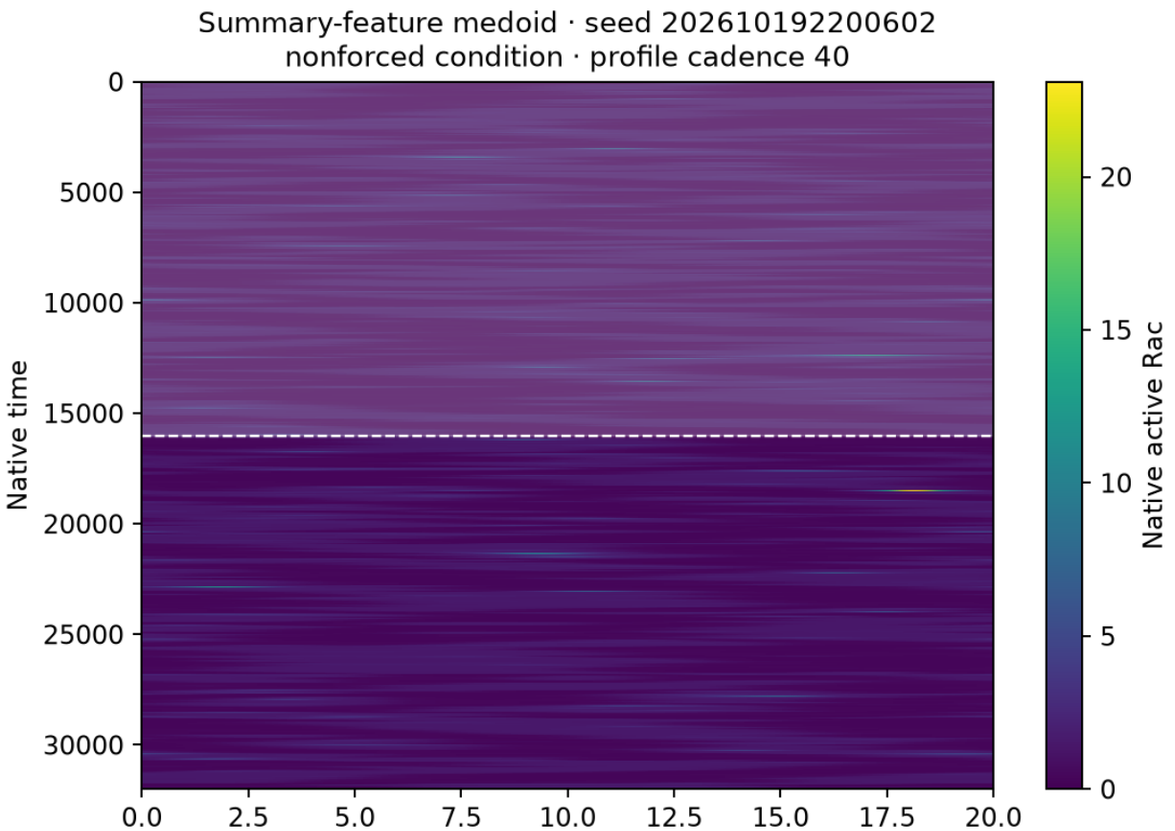

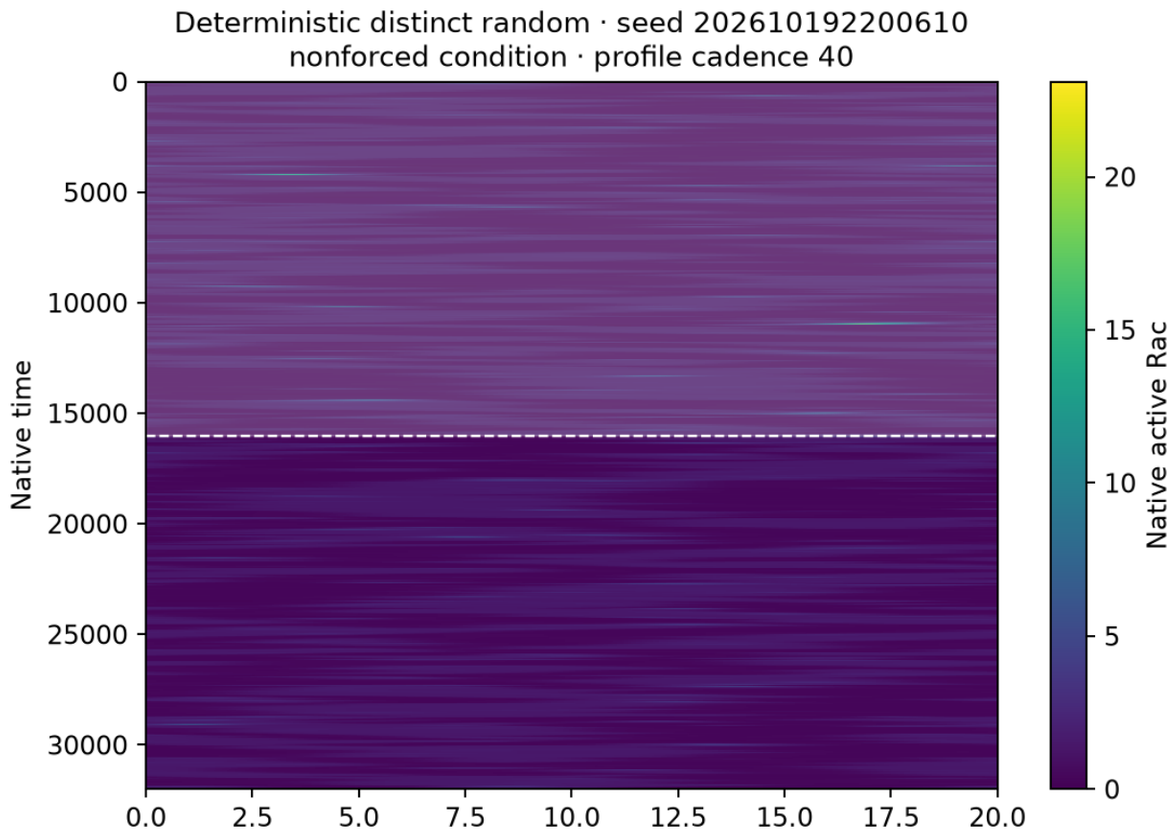

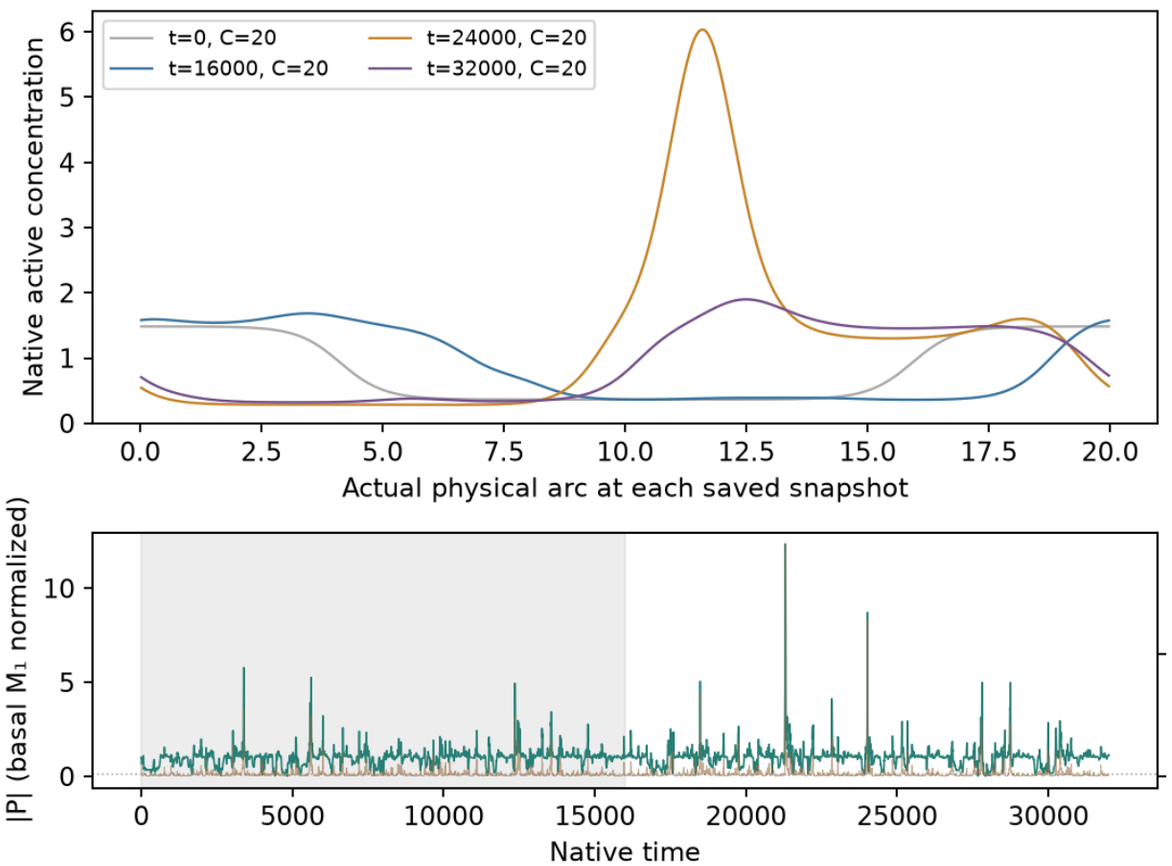

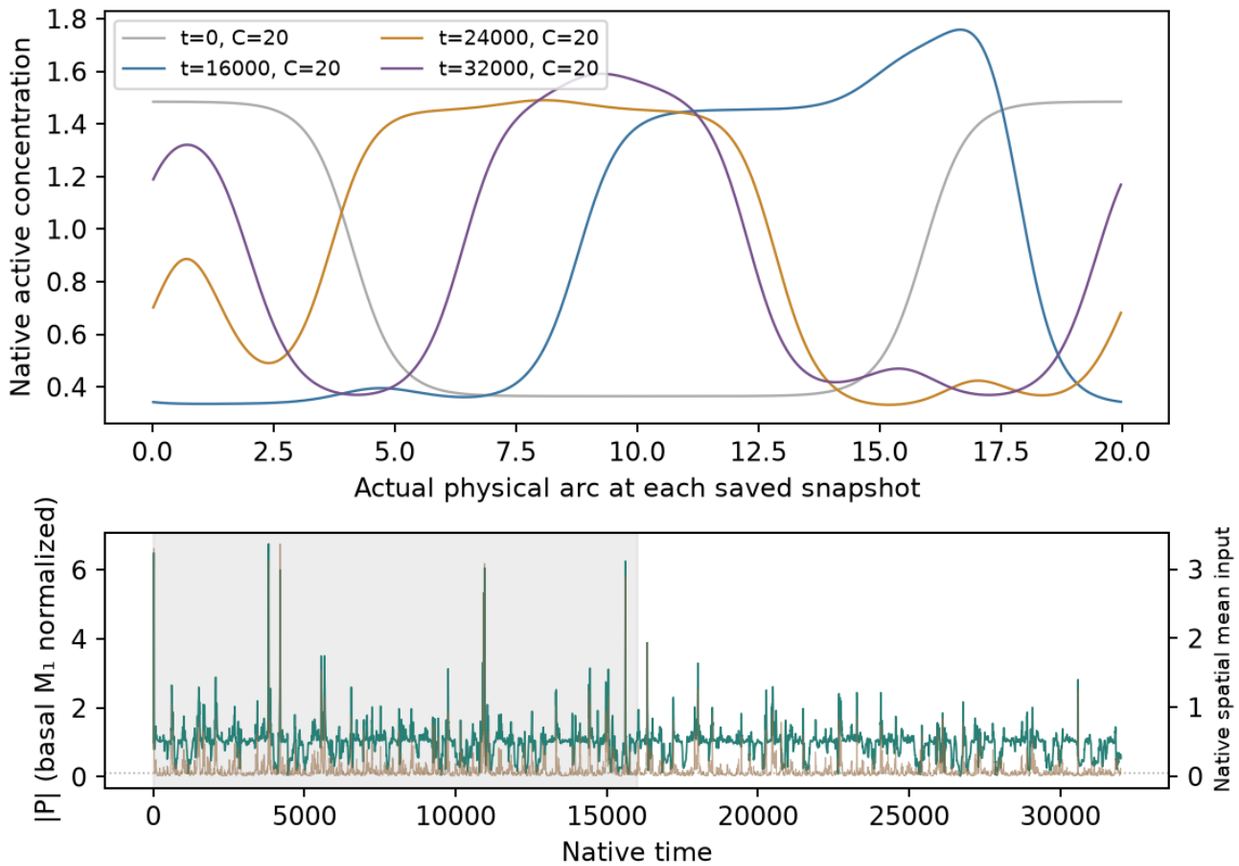

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M_1 normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Holmes 3 · size label 40 · f=0.03 · noise
context E1_extra · σ=0.25 · horizon=32000 · n=12 independent noisy realizations

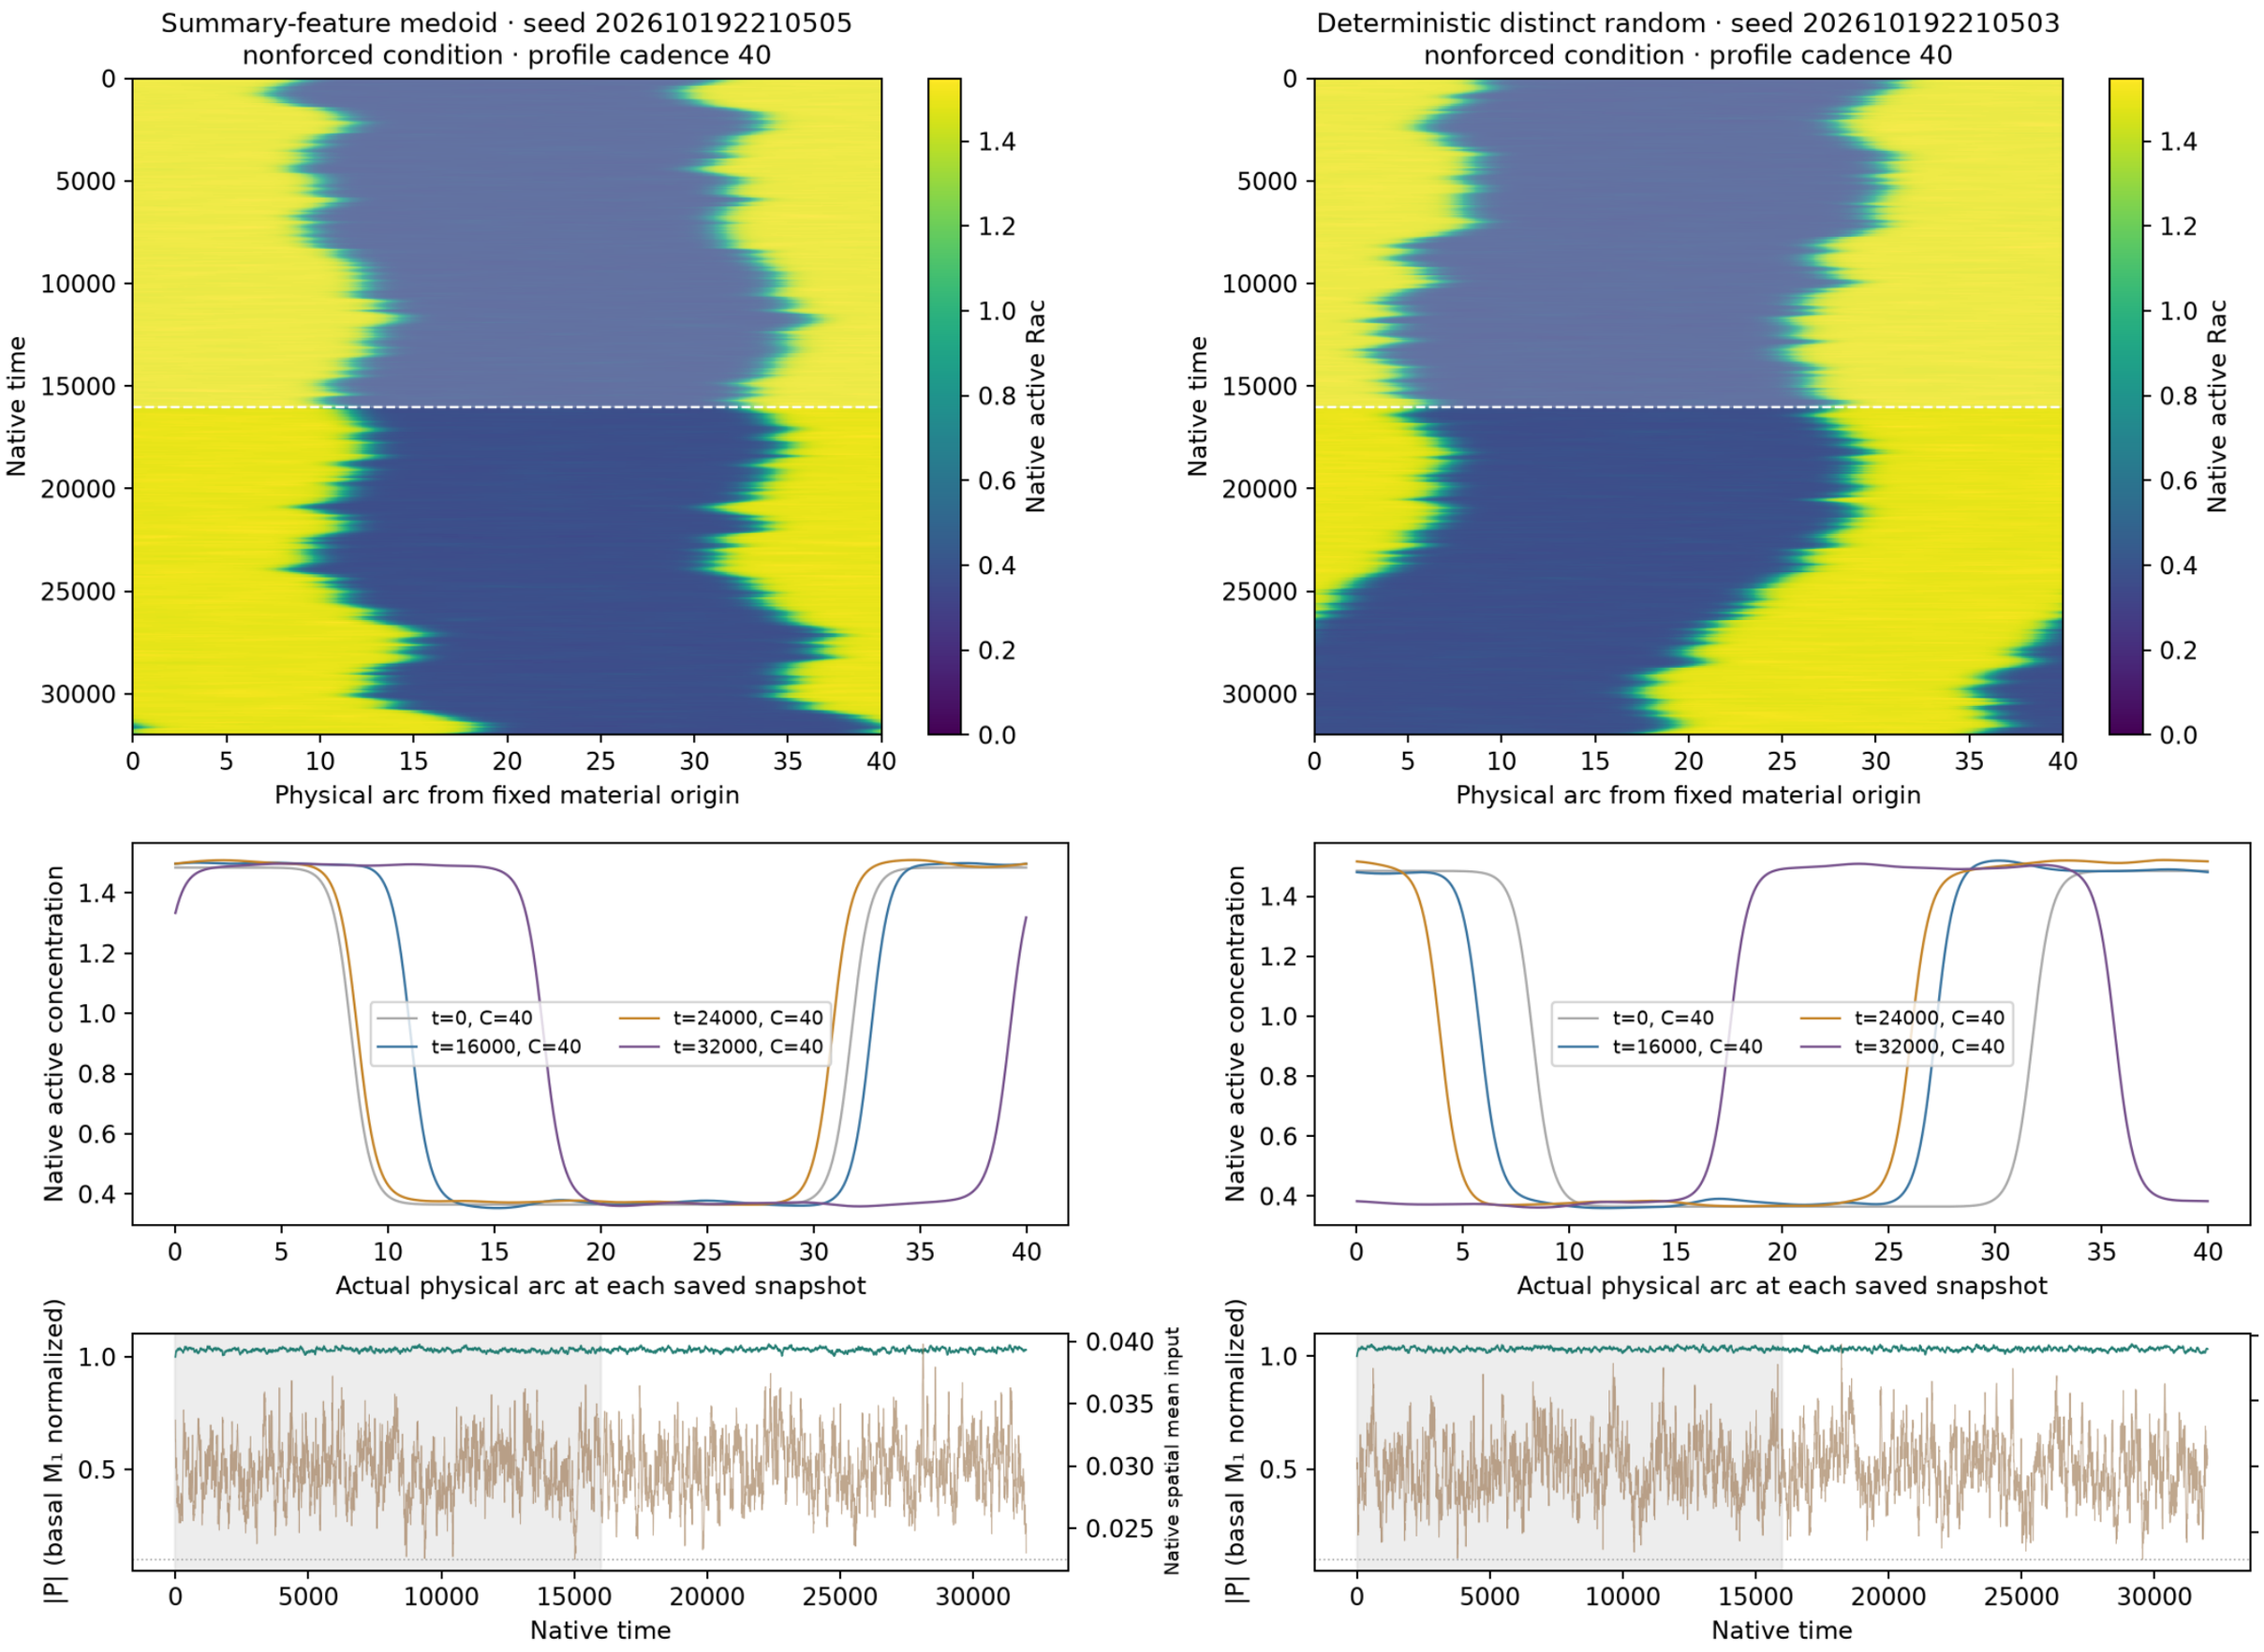

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M_1 normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Holmes 3 · size label 40 · f=0.03 · noise
context E1_extra · σ=0.5 · horizon=32000 · n=12 independent noisy realizations

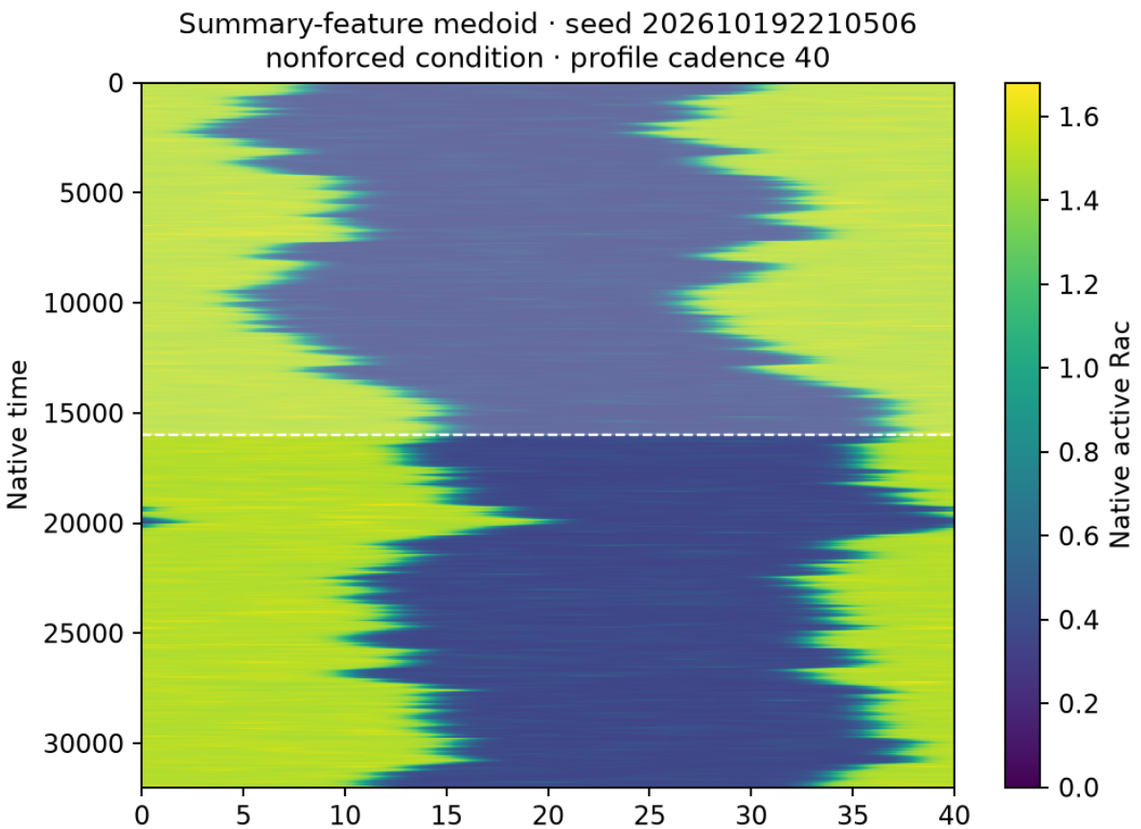

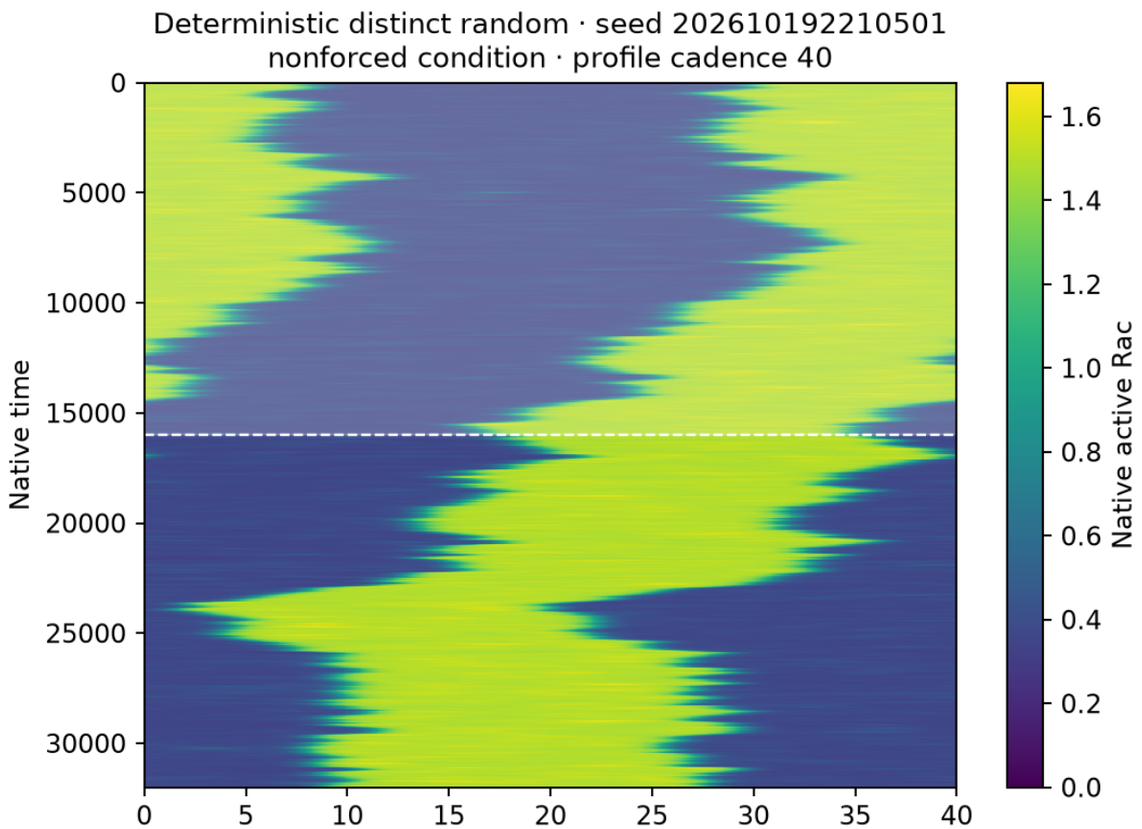

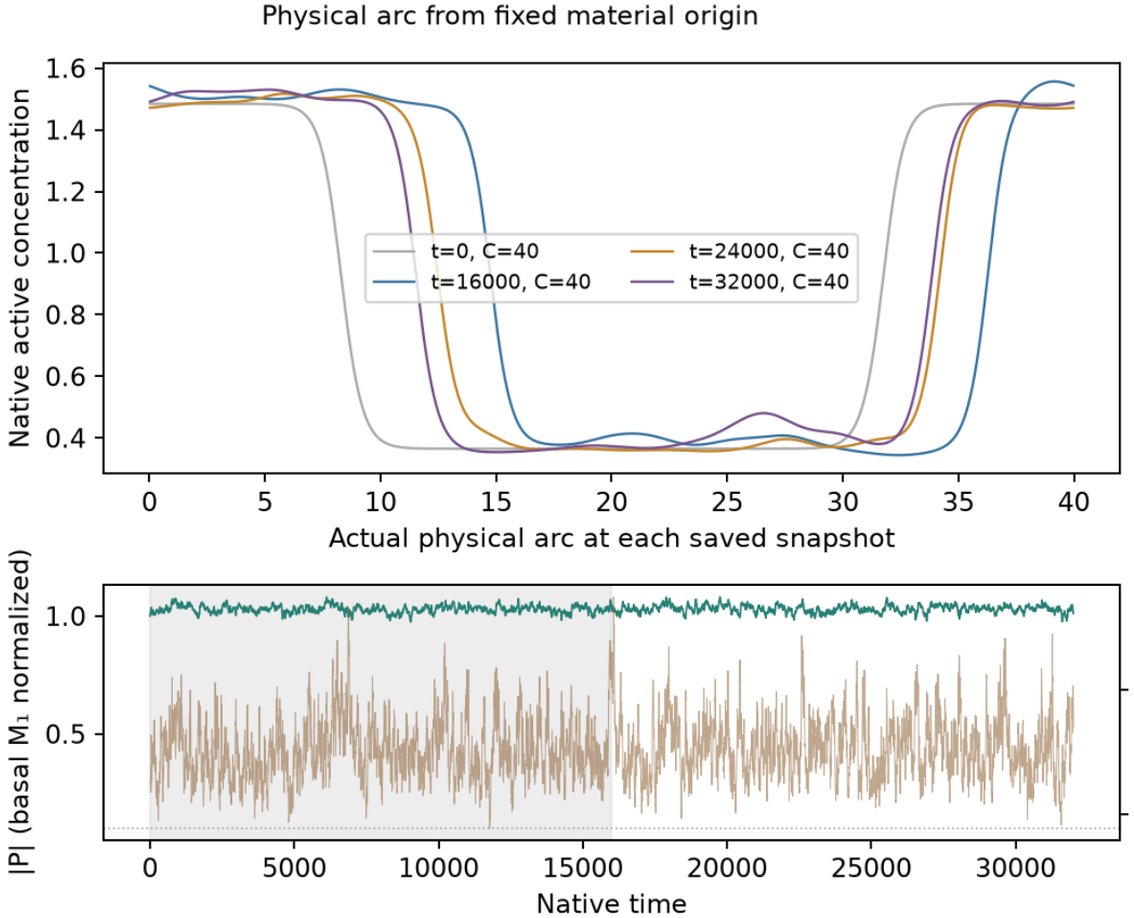

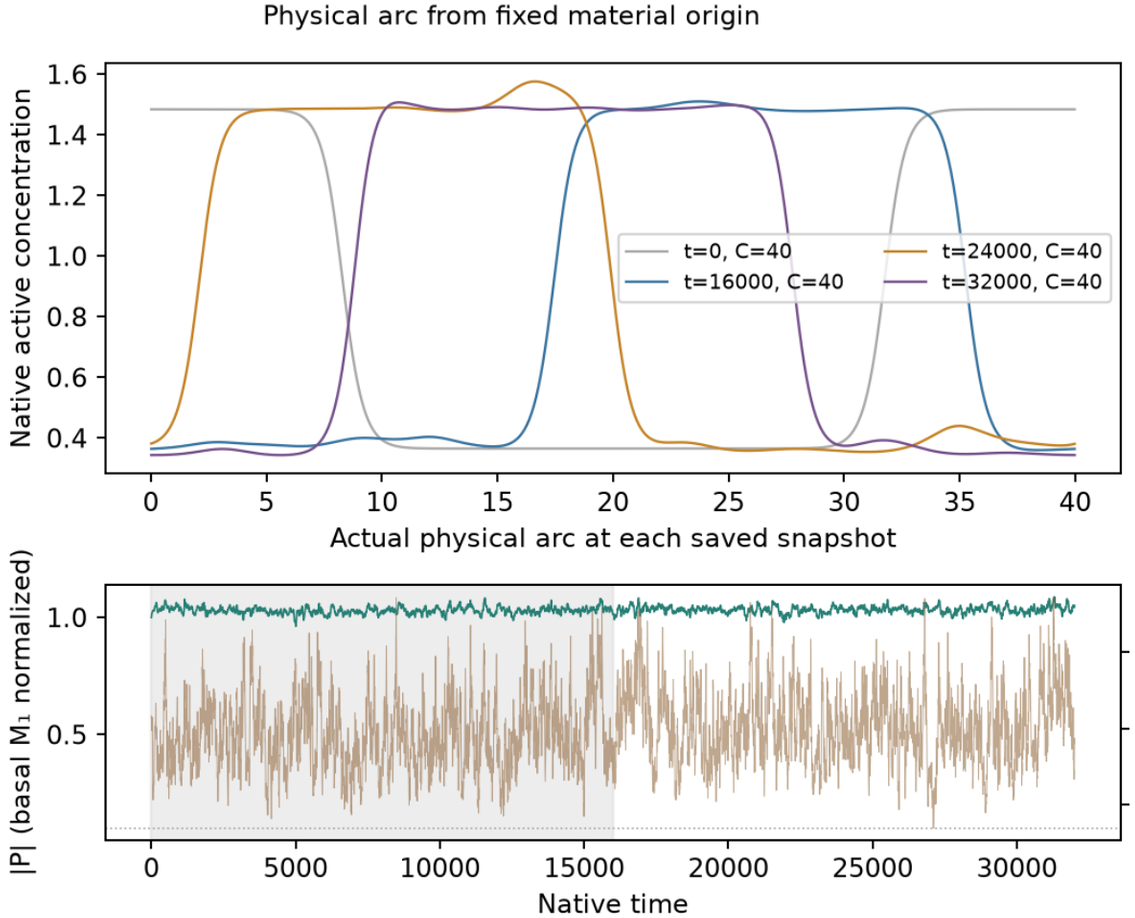

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Holmes 3 · size label 40 · f=0.03 · noise
context E1_extra · σ=2 · horizon=32000 · n=12 independent noisy realizations

Summary-feature medoid · seed 202610192210508
nonforced condition · profile cadence 40

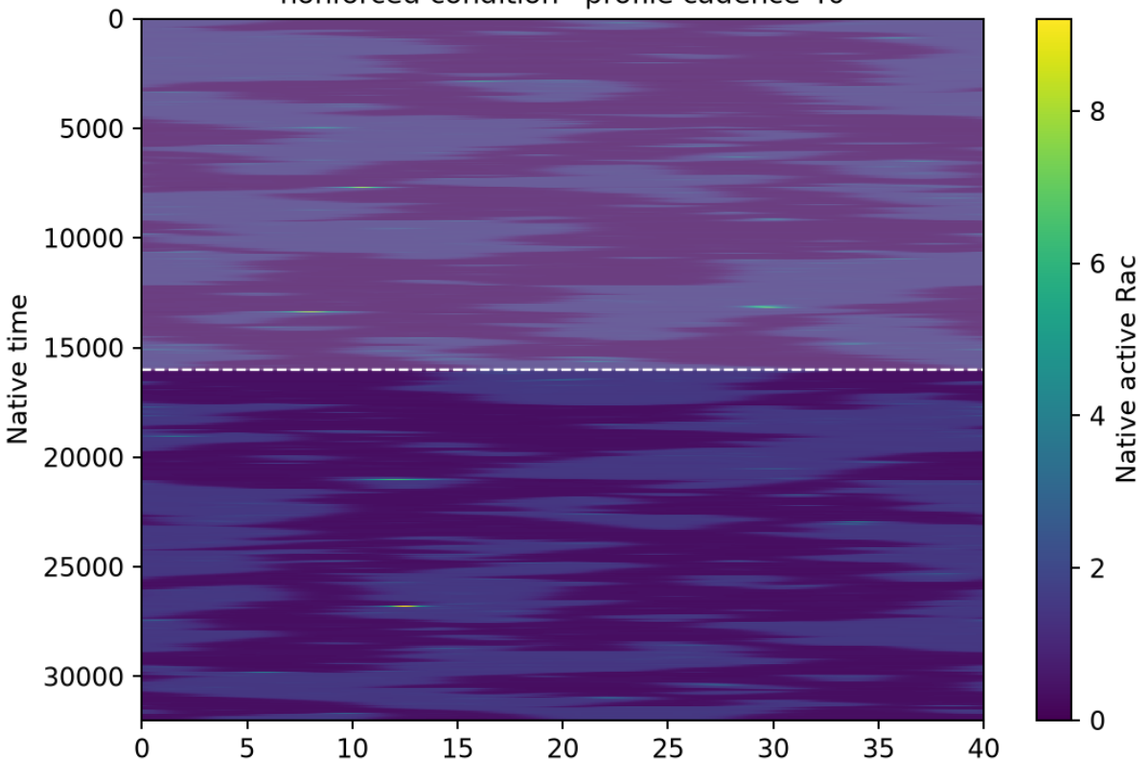

Deterministic distinct random · seed 202610192210507
nonforced condition · profile cadence 40

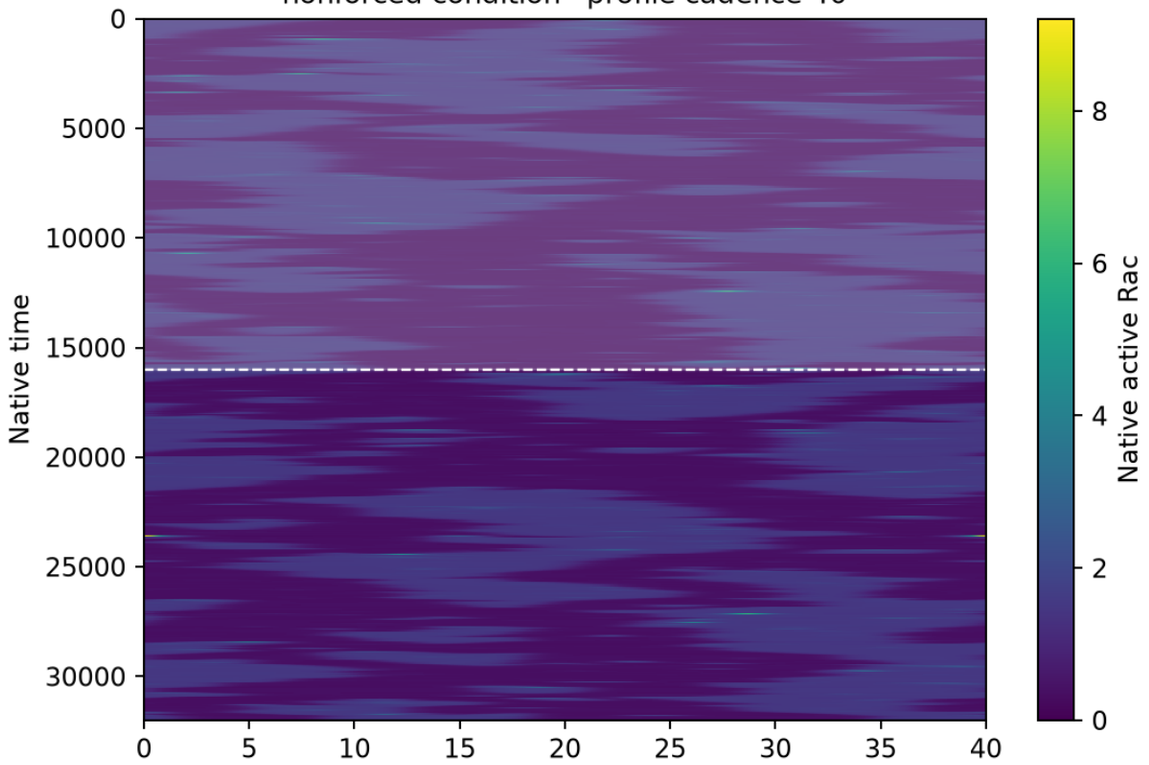

Physical arc from fixed material origin

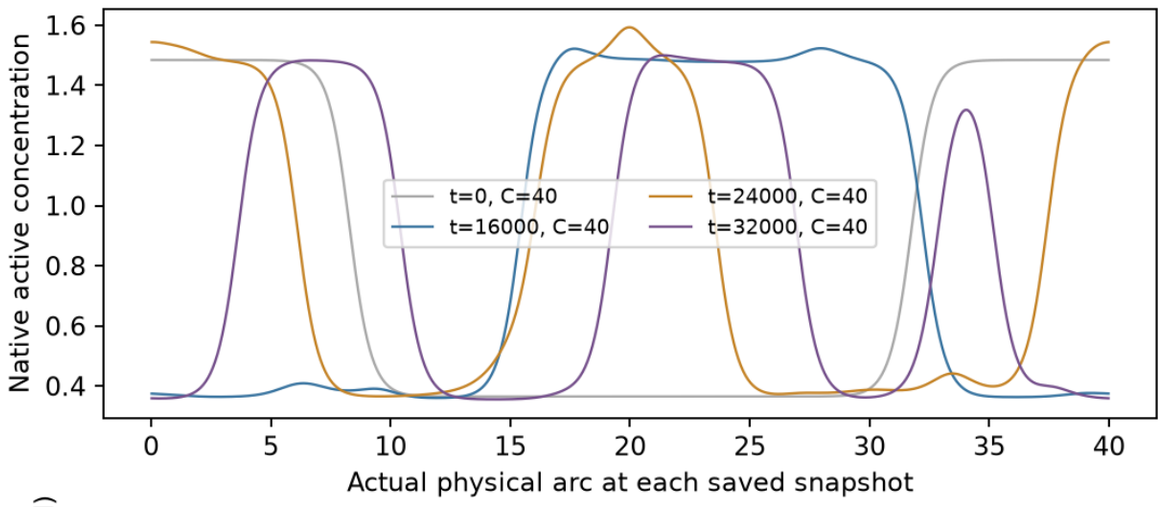

Physical arc from fixed material origin

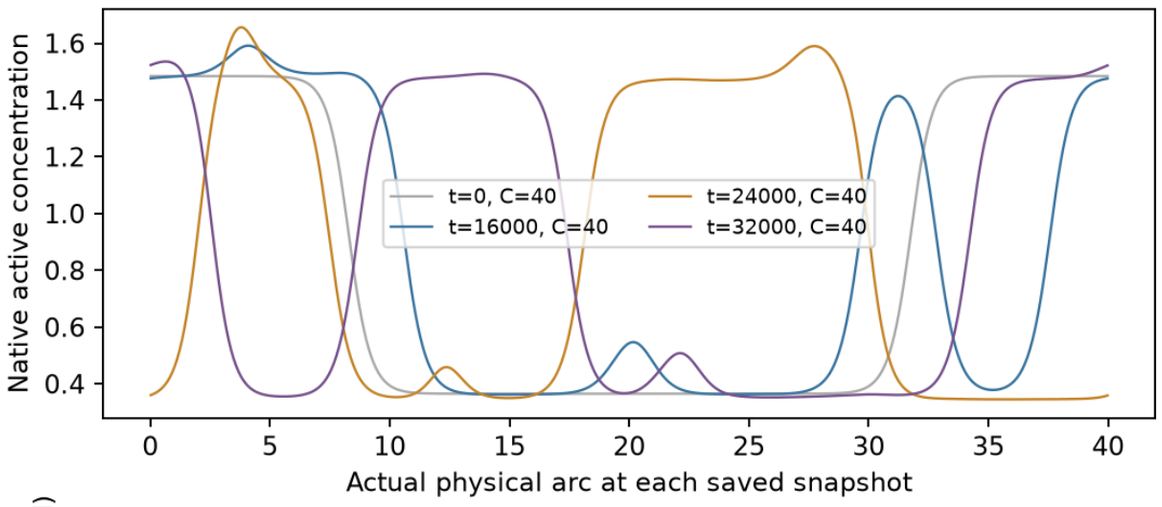

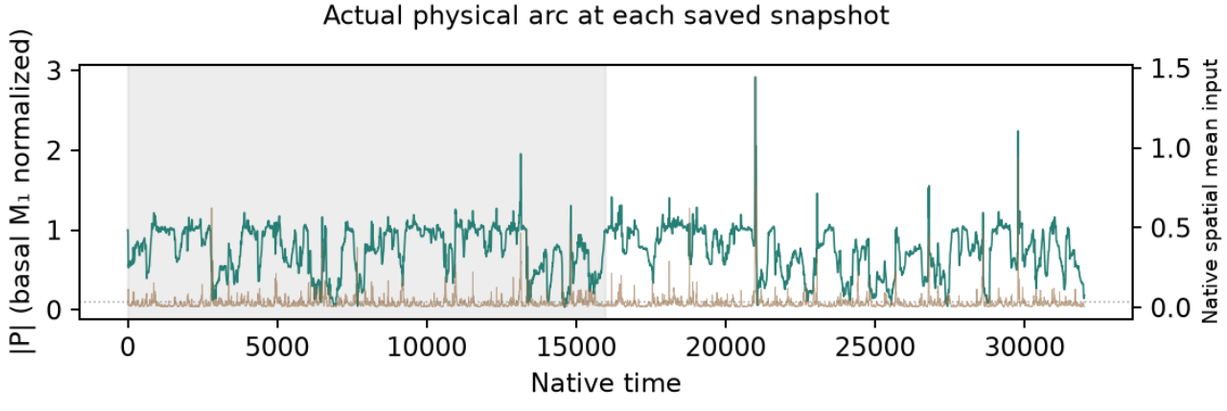

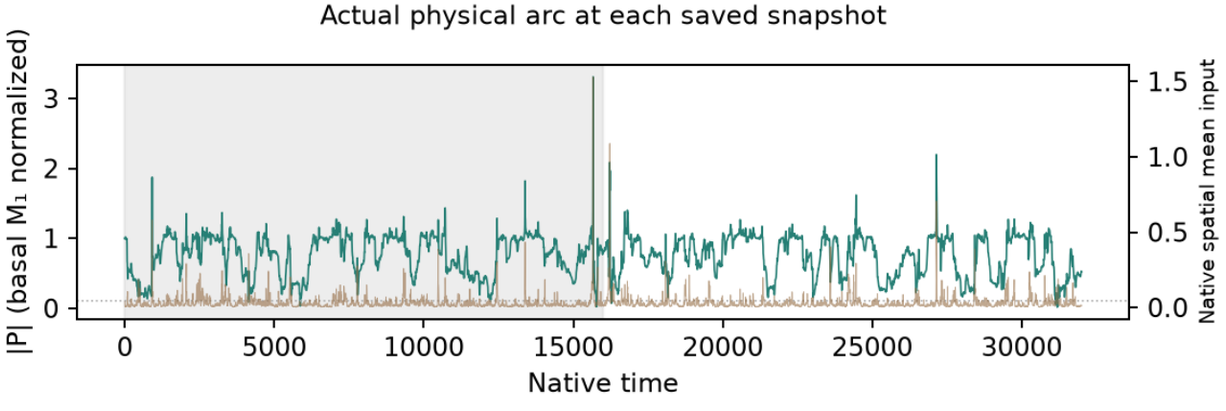

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Holmes 3 · size label 40 · f=0.1 · noise
context E1_extra · σ=0.25 · horizon=32000 · n=12 independent noisy realizations

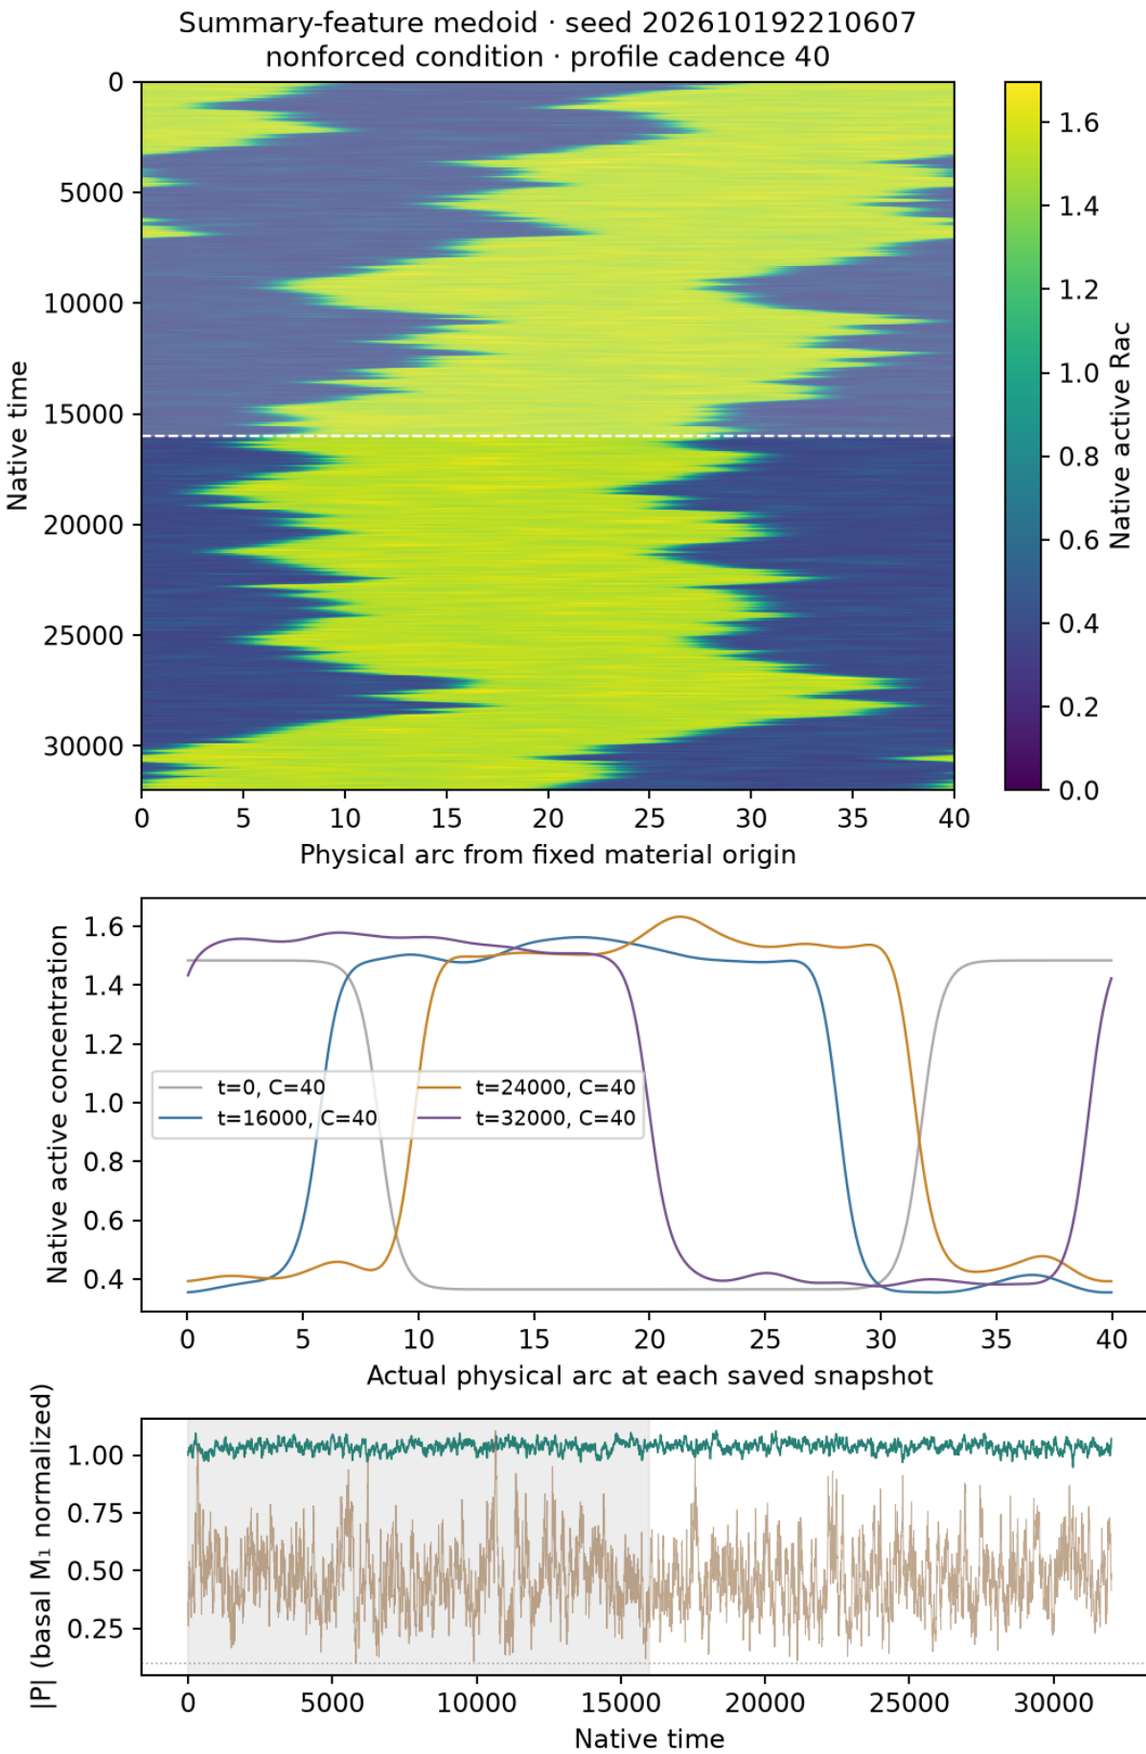

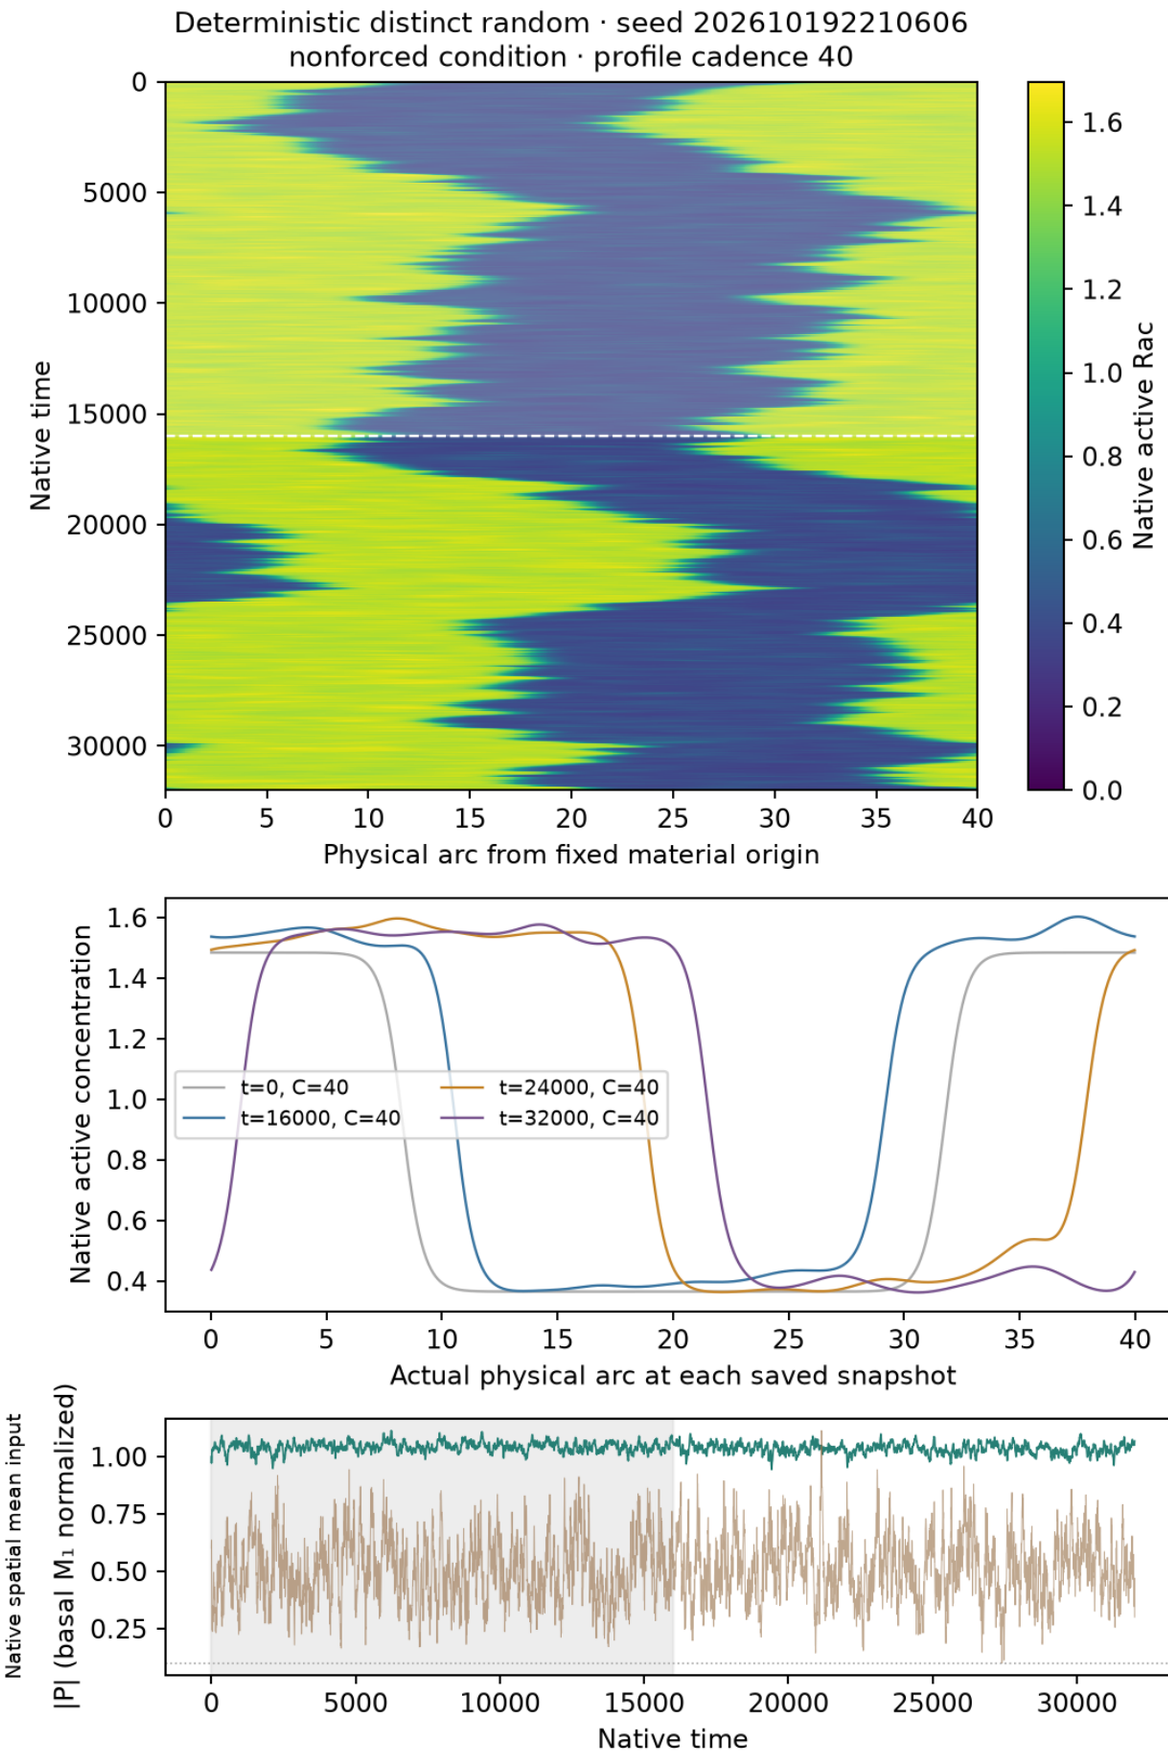

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Holmes 3 · size label 40 · f=0.1 · noise
context E1_extra · σ=0.5 · horizon=32000 · n=12 independent noisy realizations

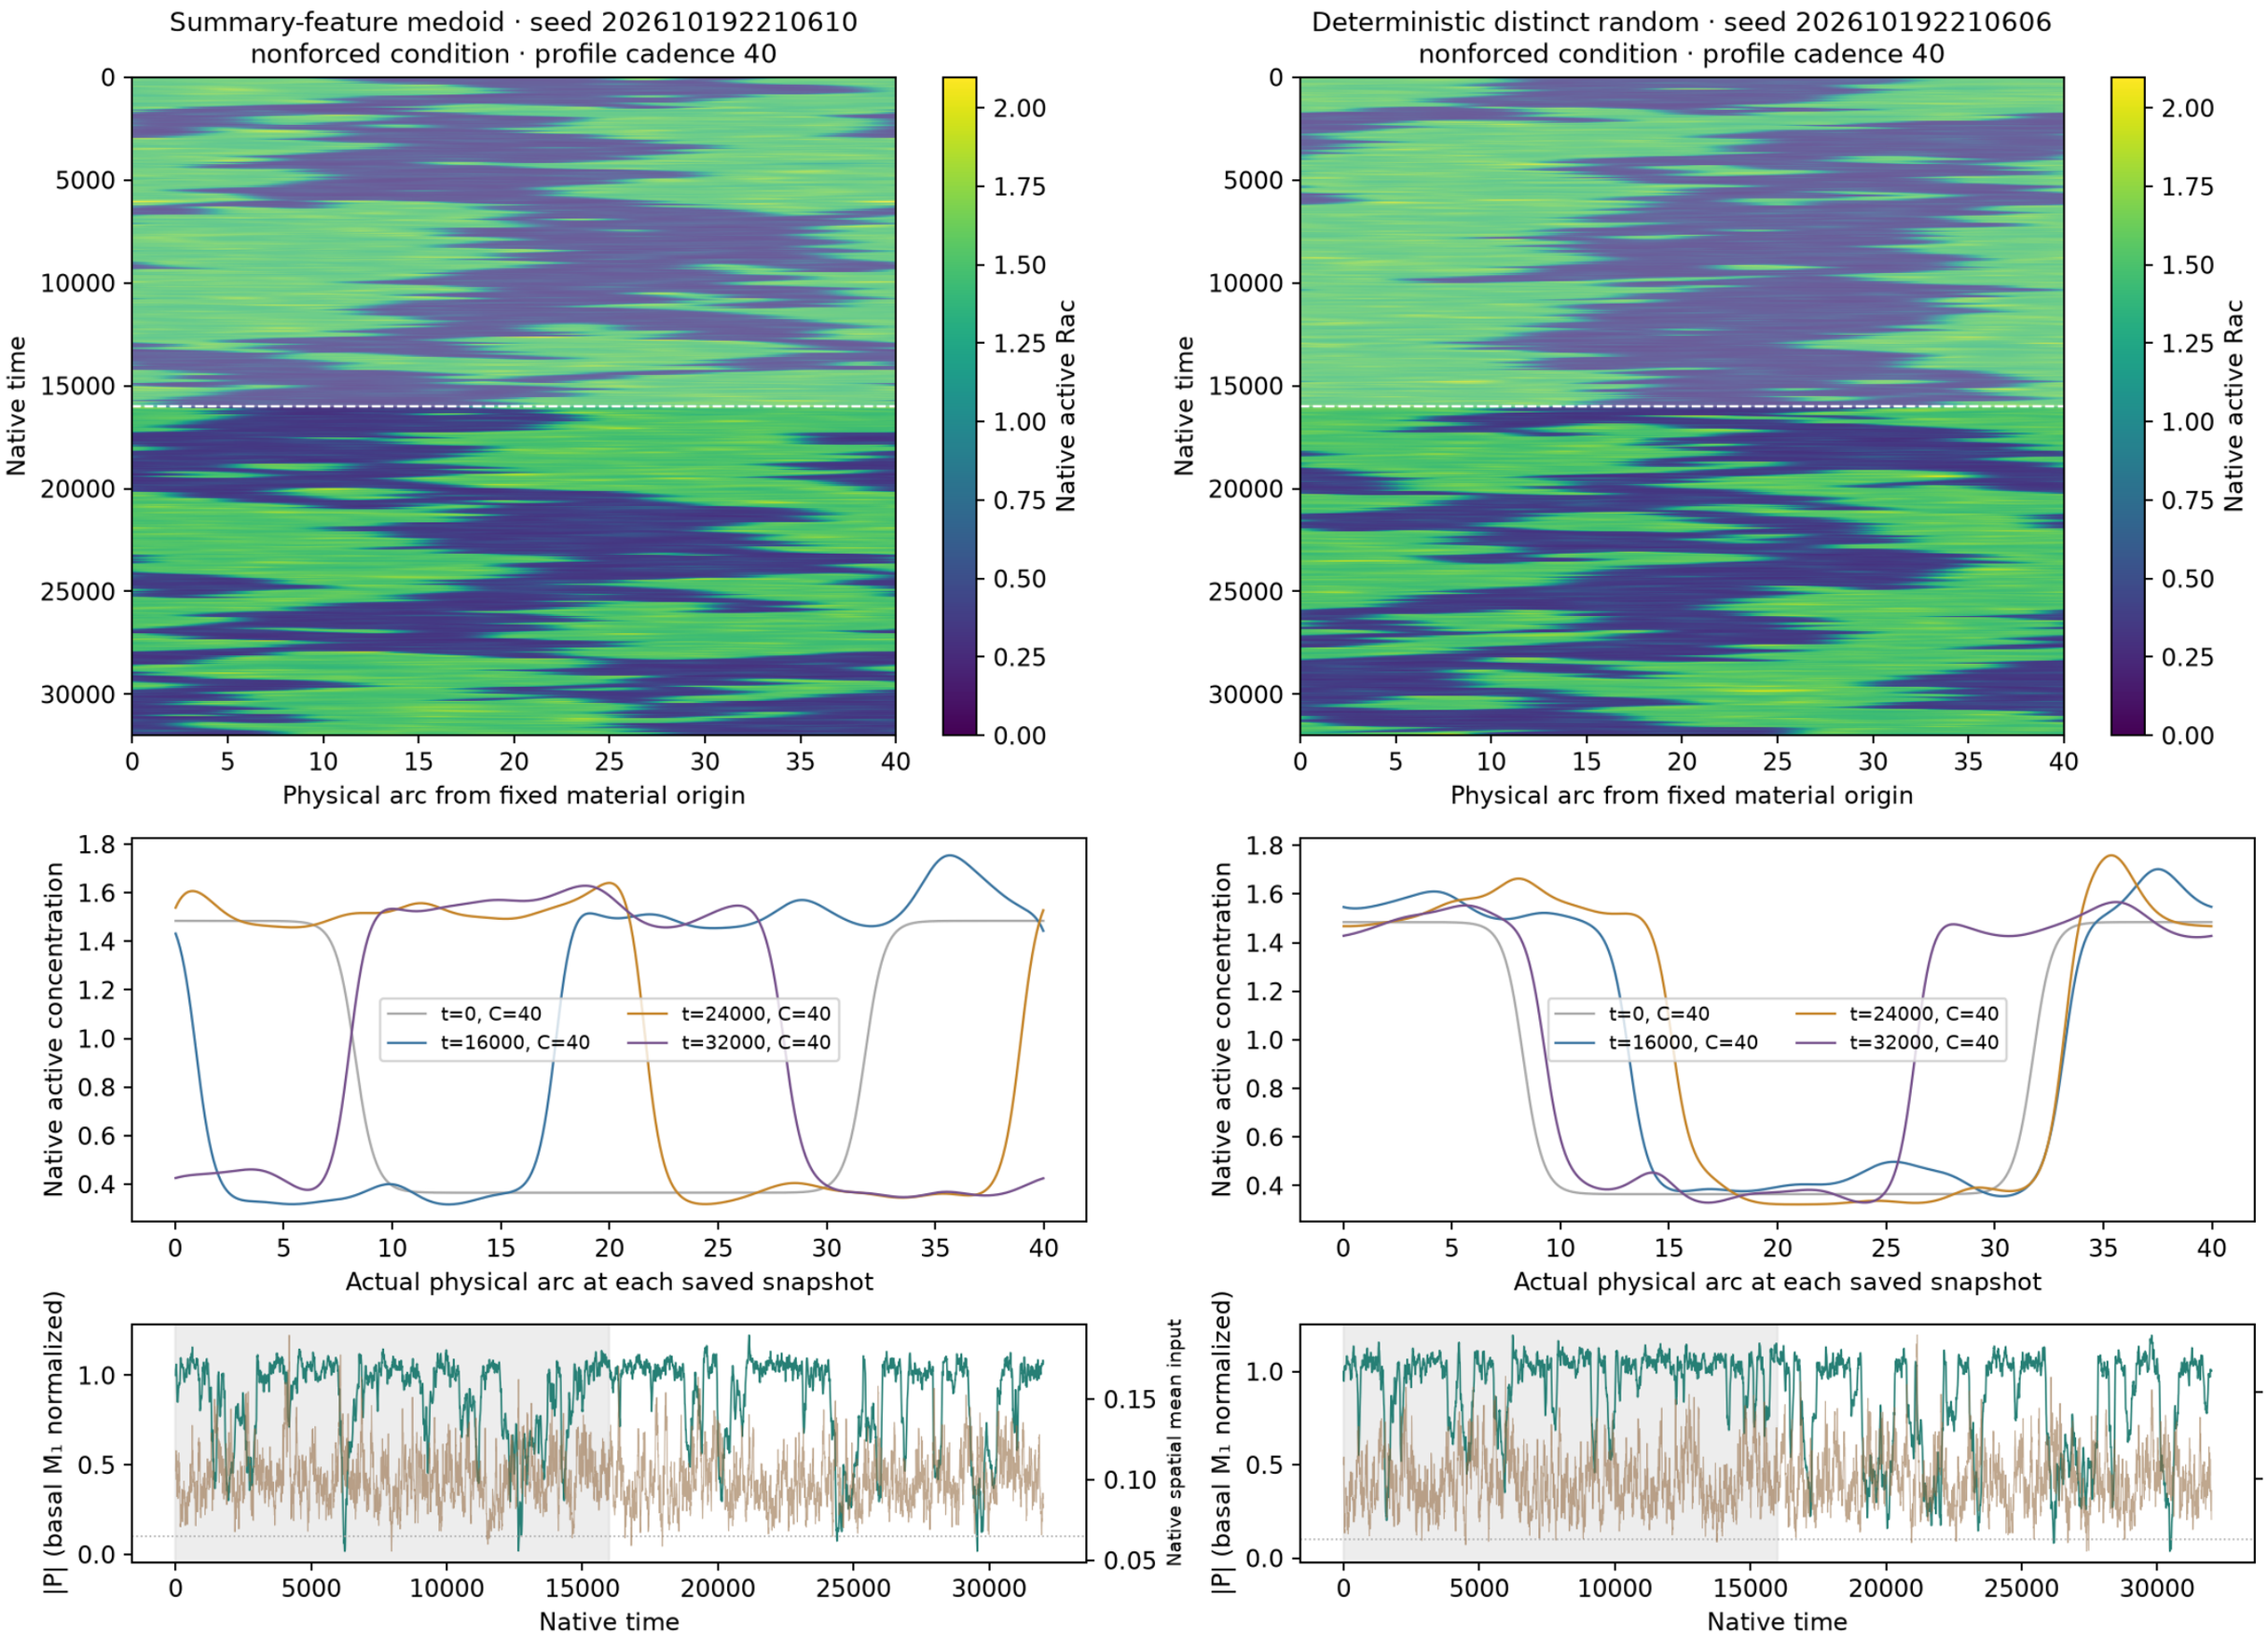

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Holmes 3 · size label 40 · f=0.1 · noise
context E1_extra · σ=2 · horizon=32000 · n=12 independent noisy realizations

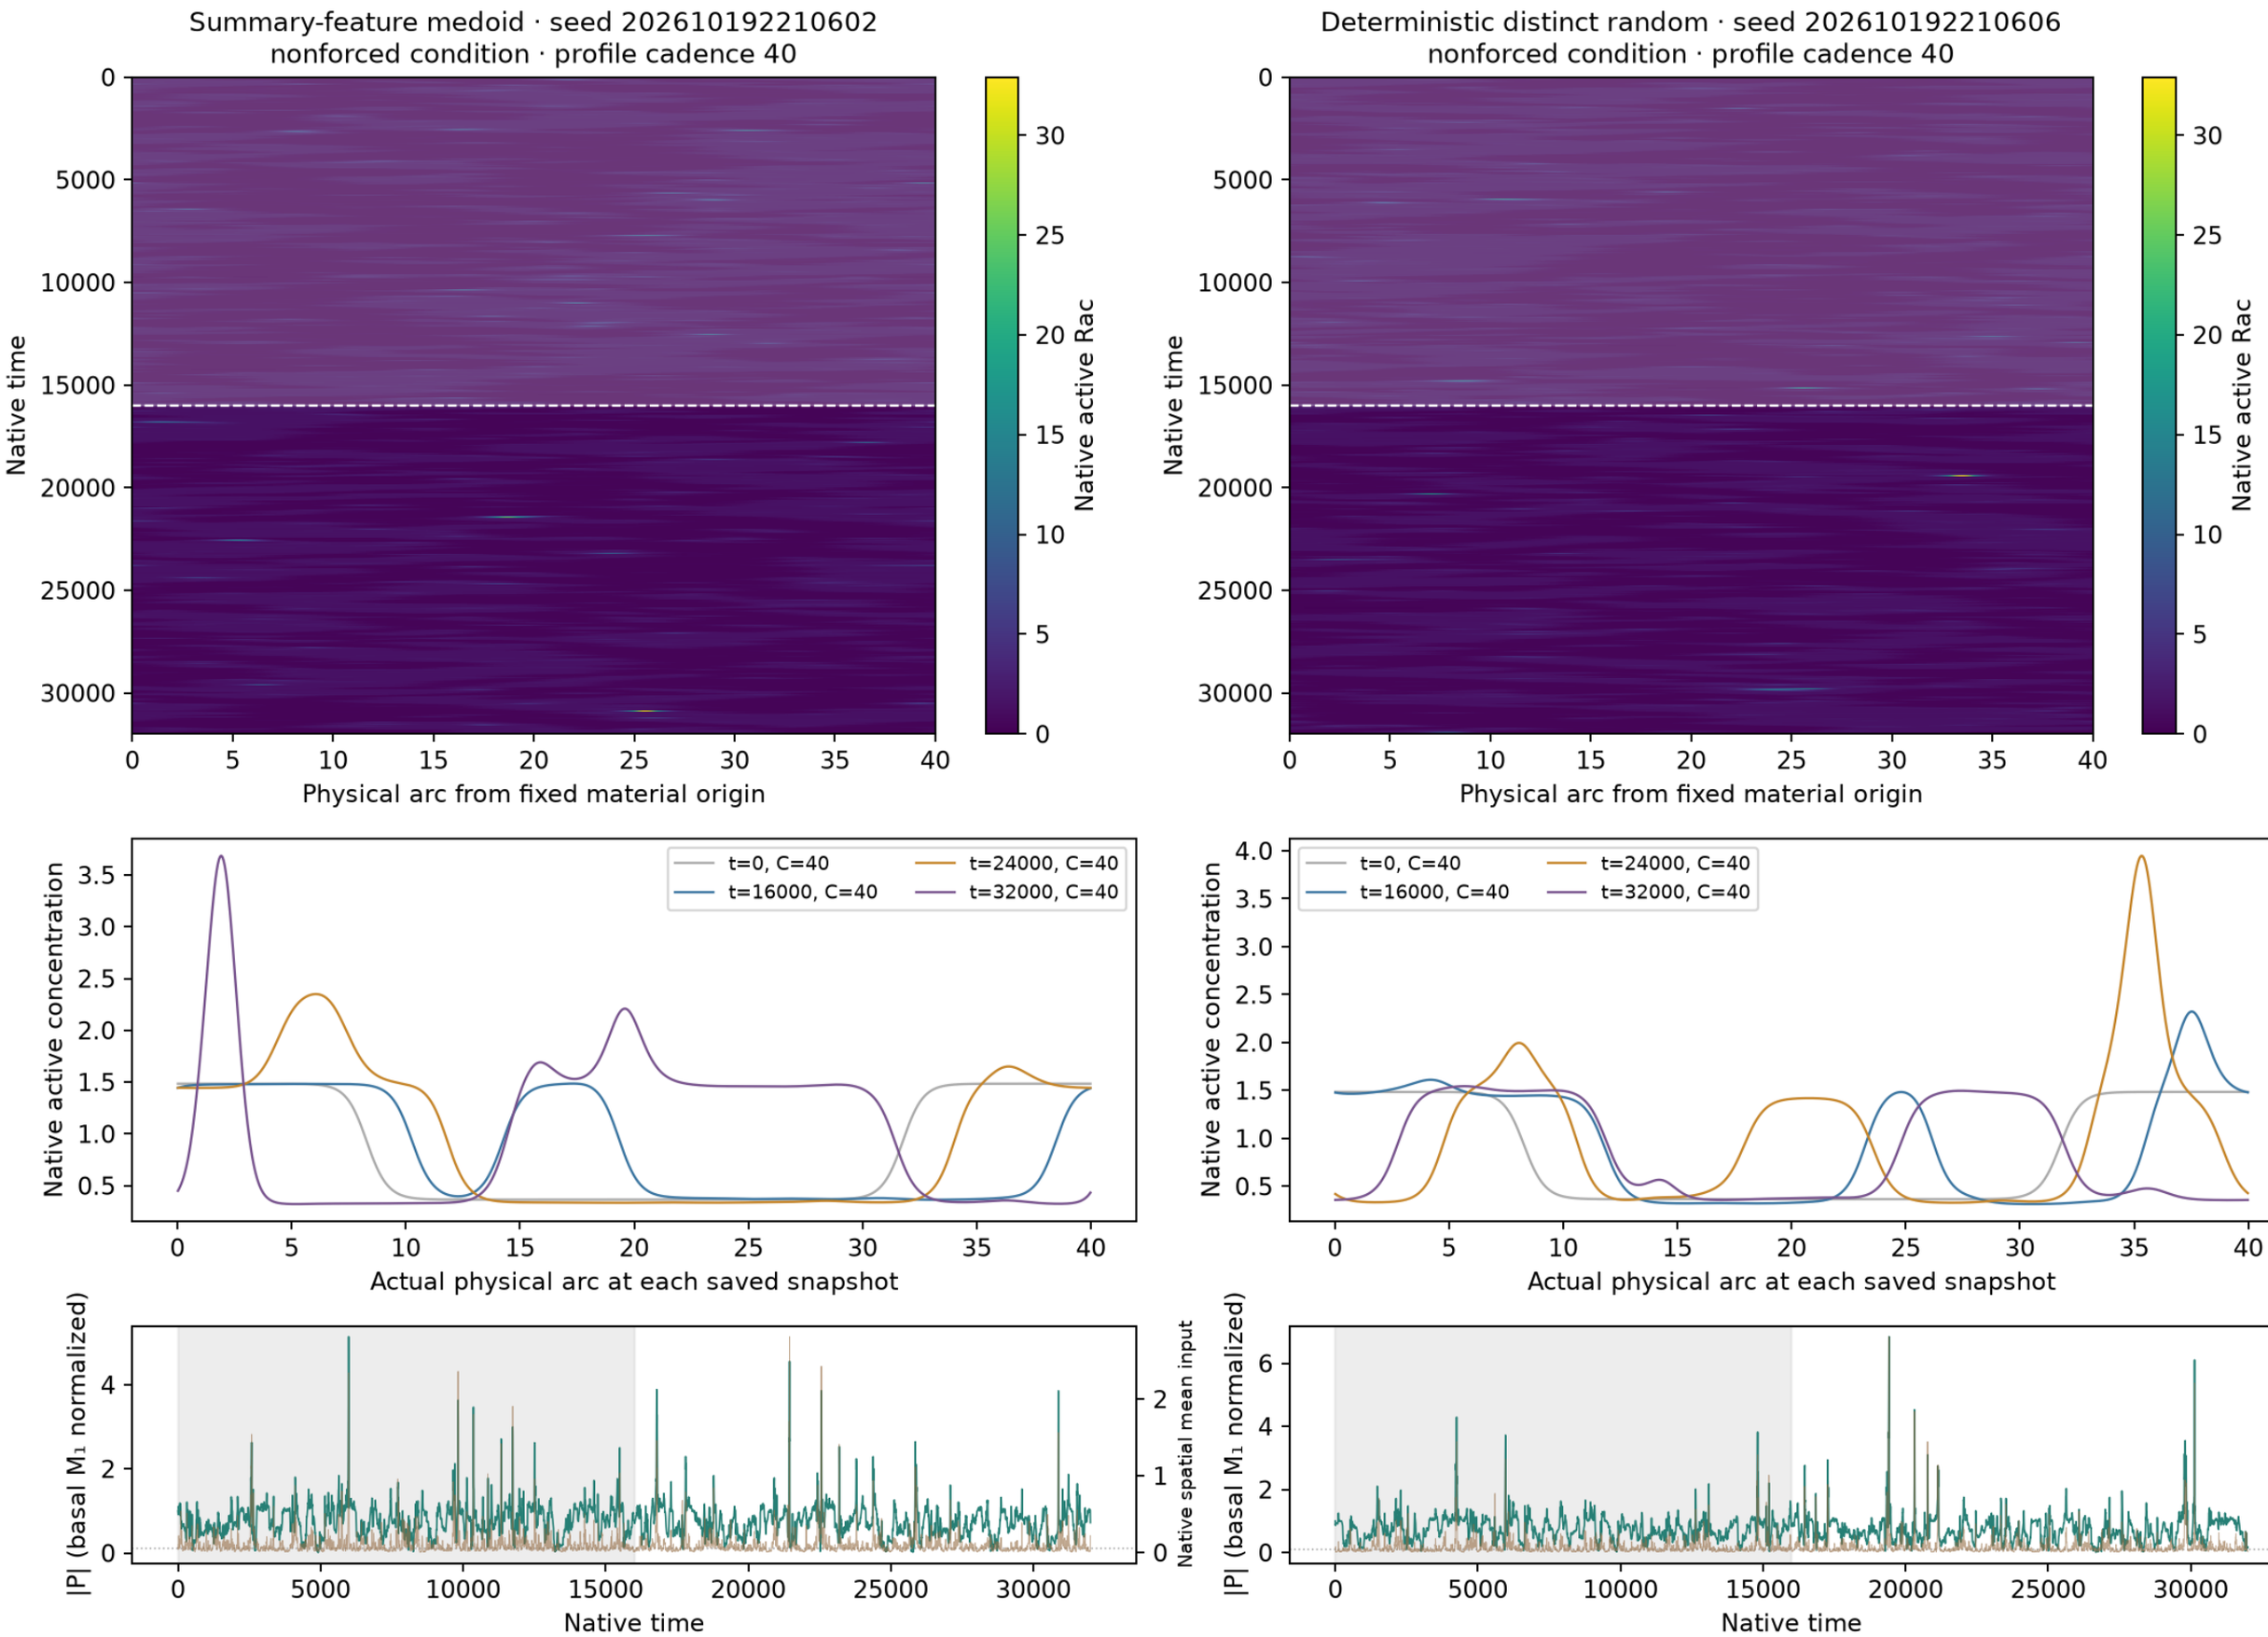

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M_1 normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Holmes 3 · size label 60 · f=0.03 · noise
context E1_extra · σ=0.25 · horizon=32000 · n=12 independent noisy realizations

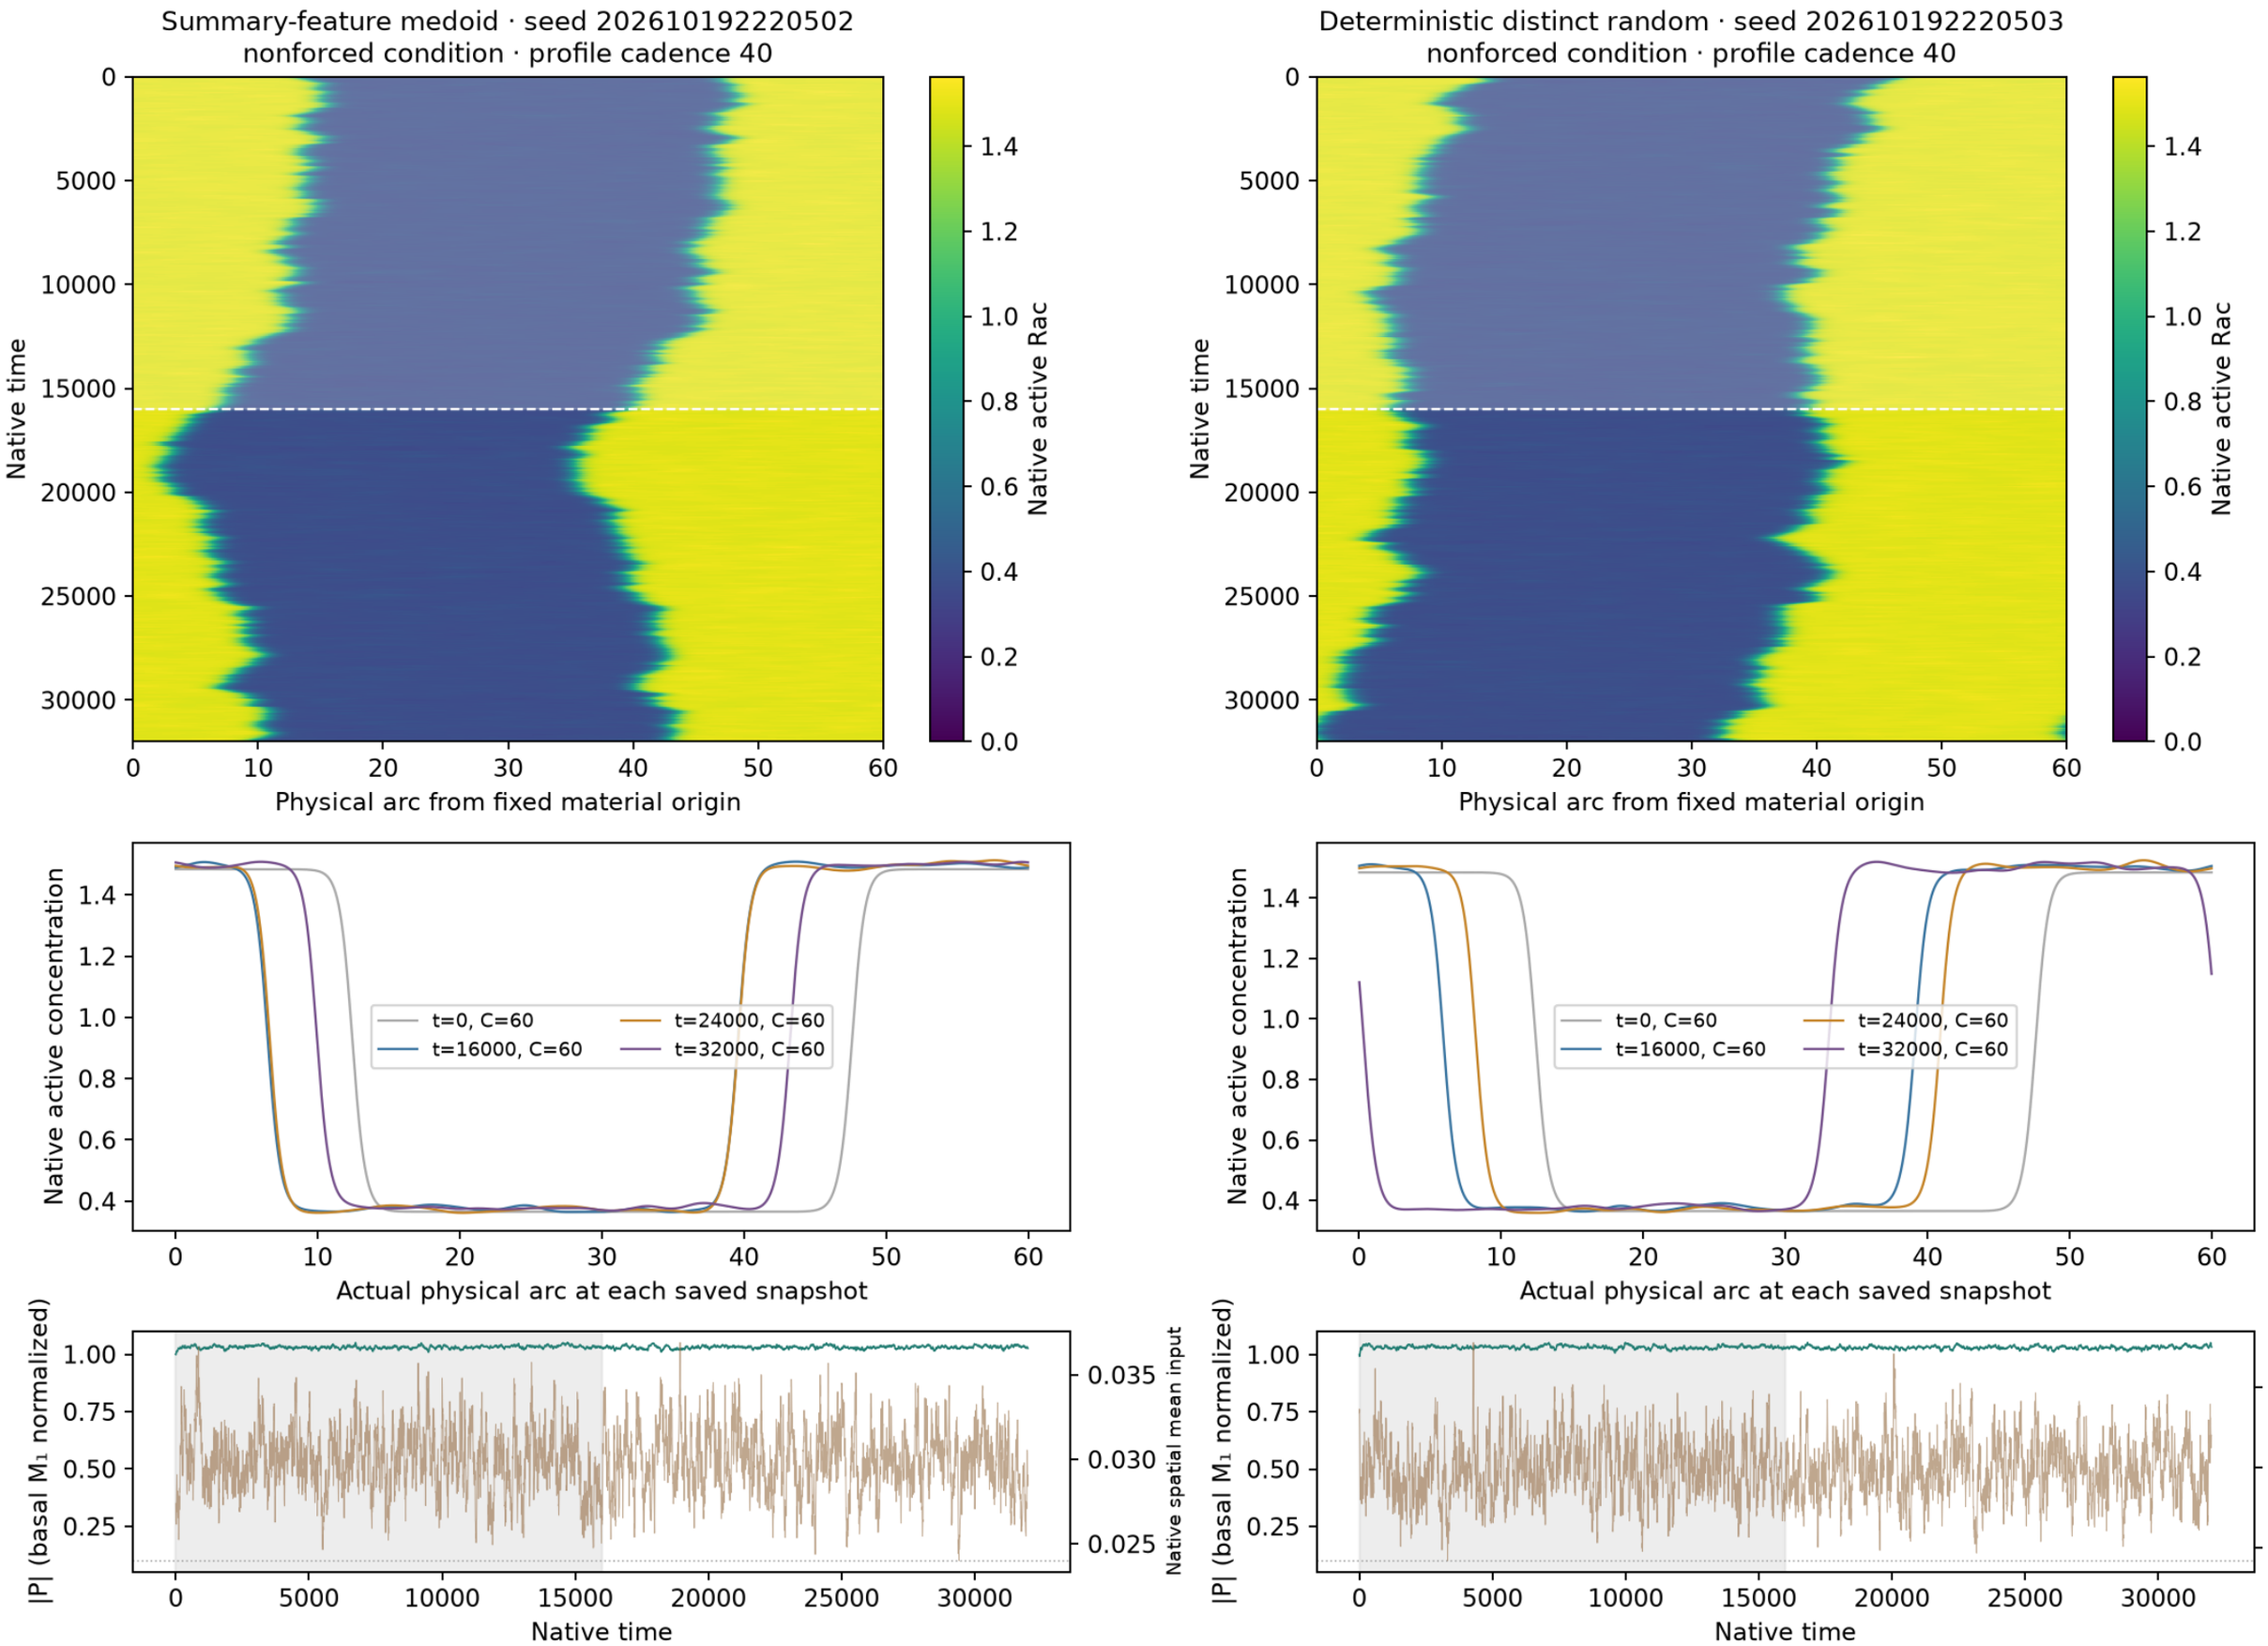

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M_1 normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Holmes 3 · size label 60 · f=0.03 · noise
context E1_extra · σ=0.5 · horizon=32000 · n=12 independent noisy realizations

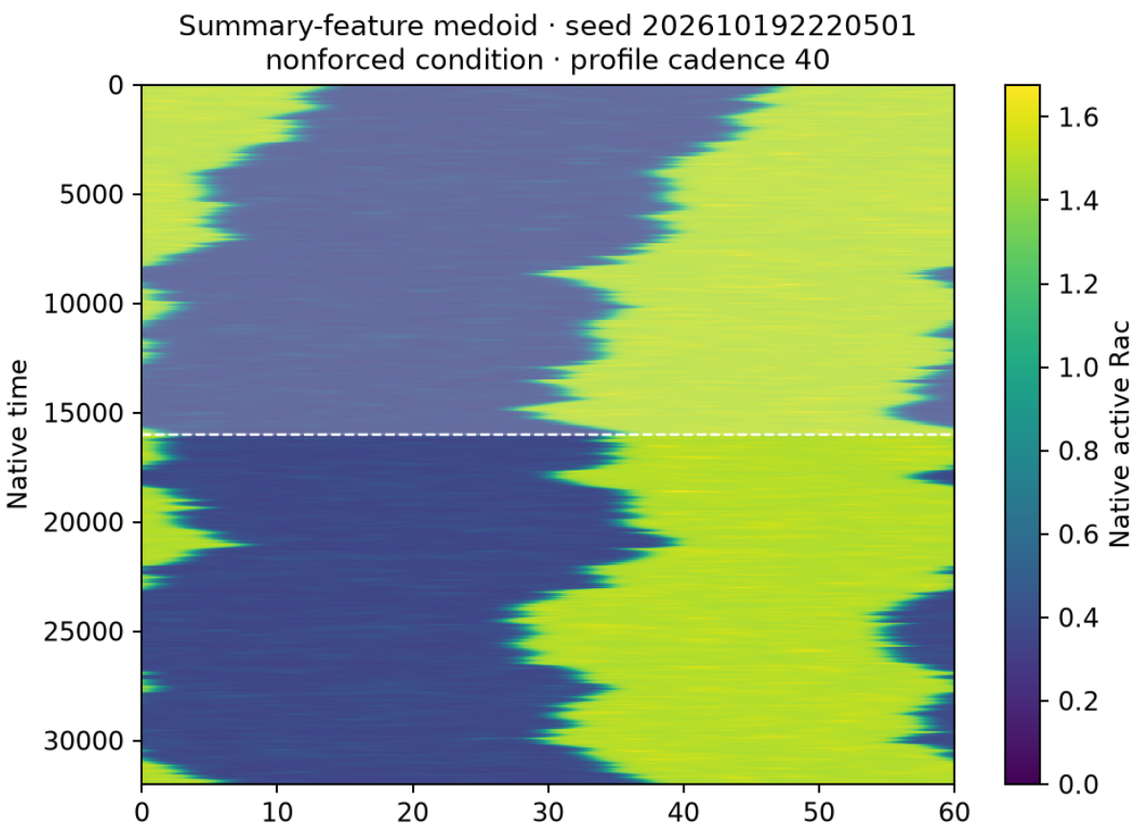

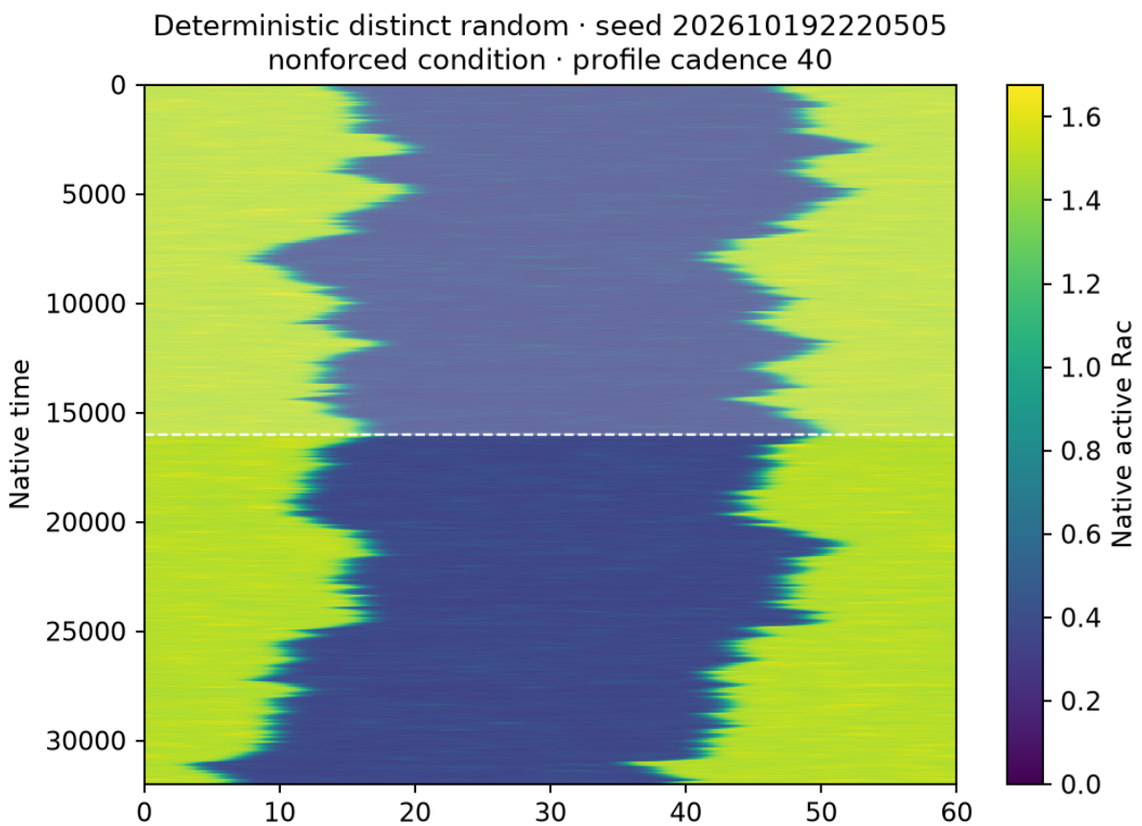

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M_1 normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Holmes 3 · size label 60 · f=0.03 · noise
context E1_extra · σ=2 · horizon=32000 · n=12 independent noisy realizations

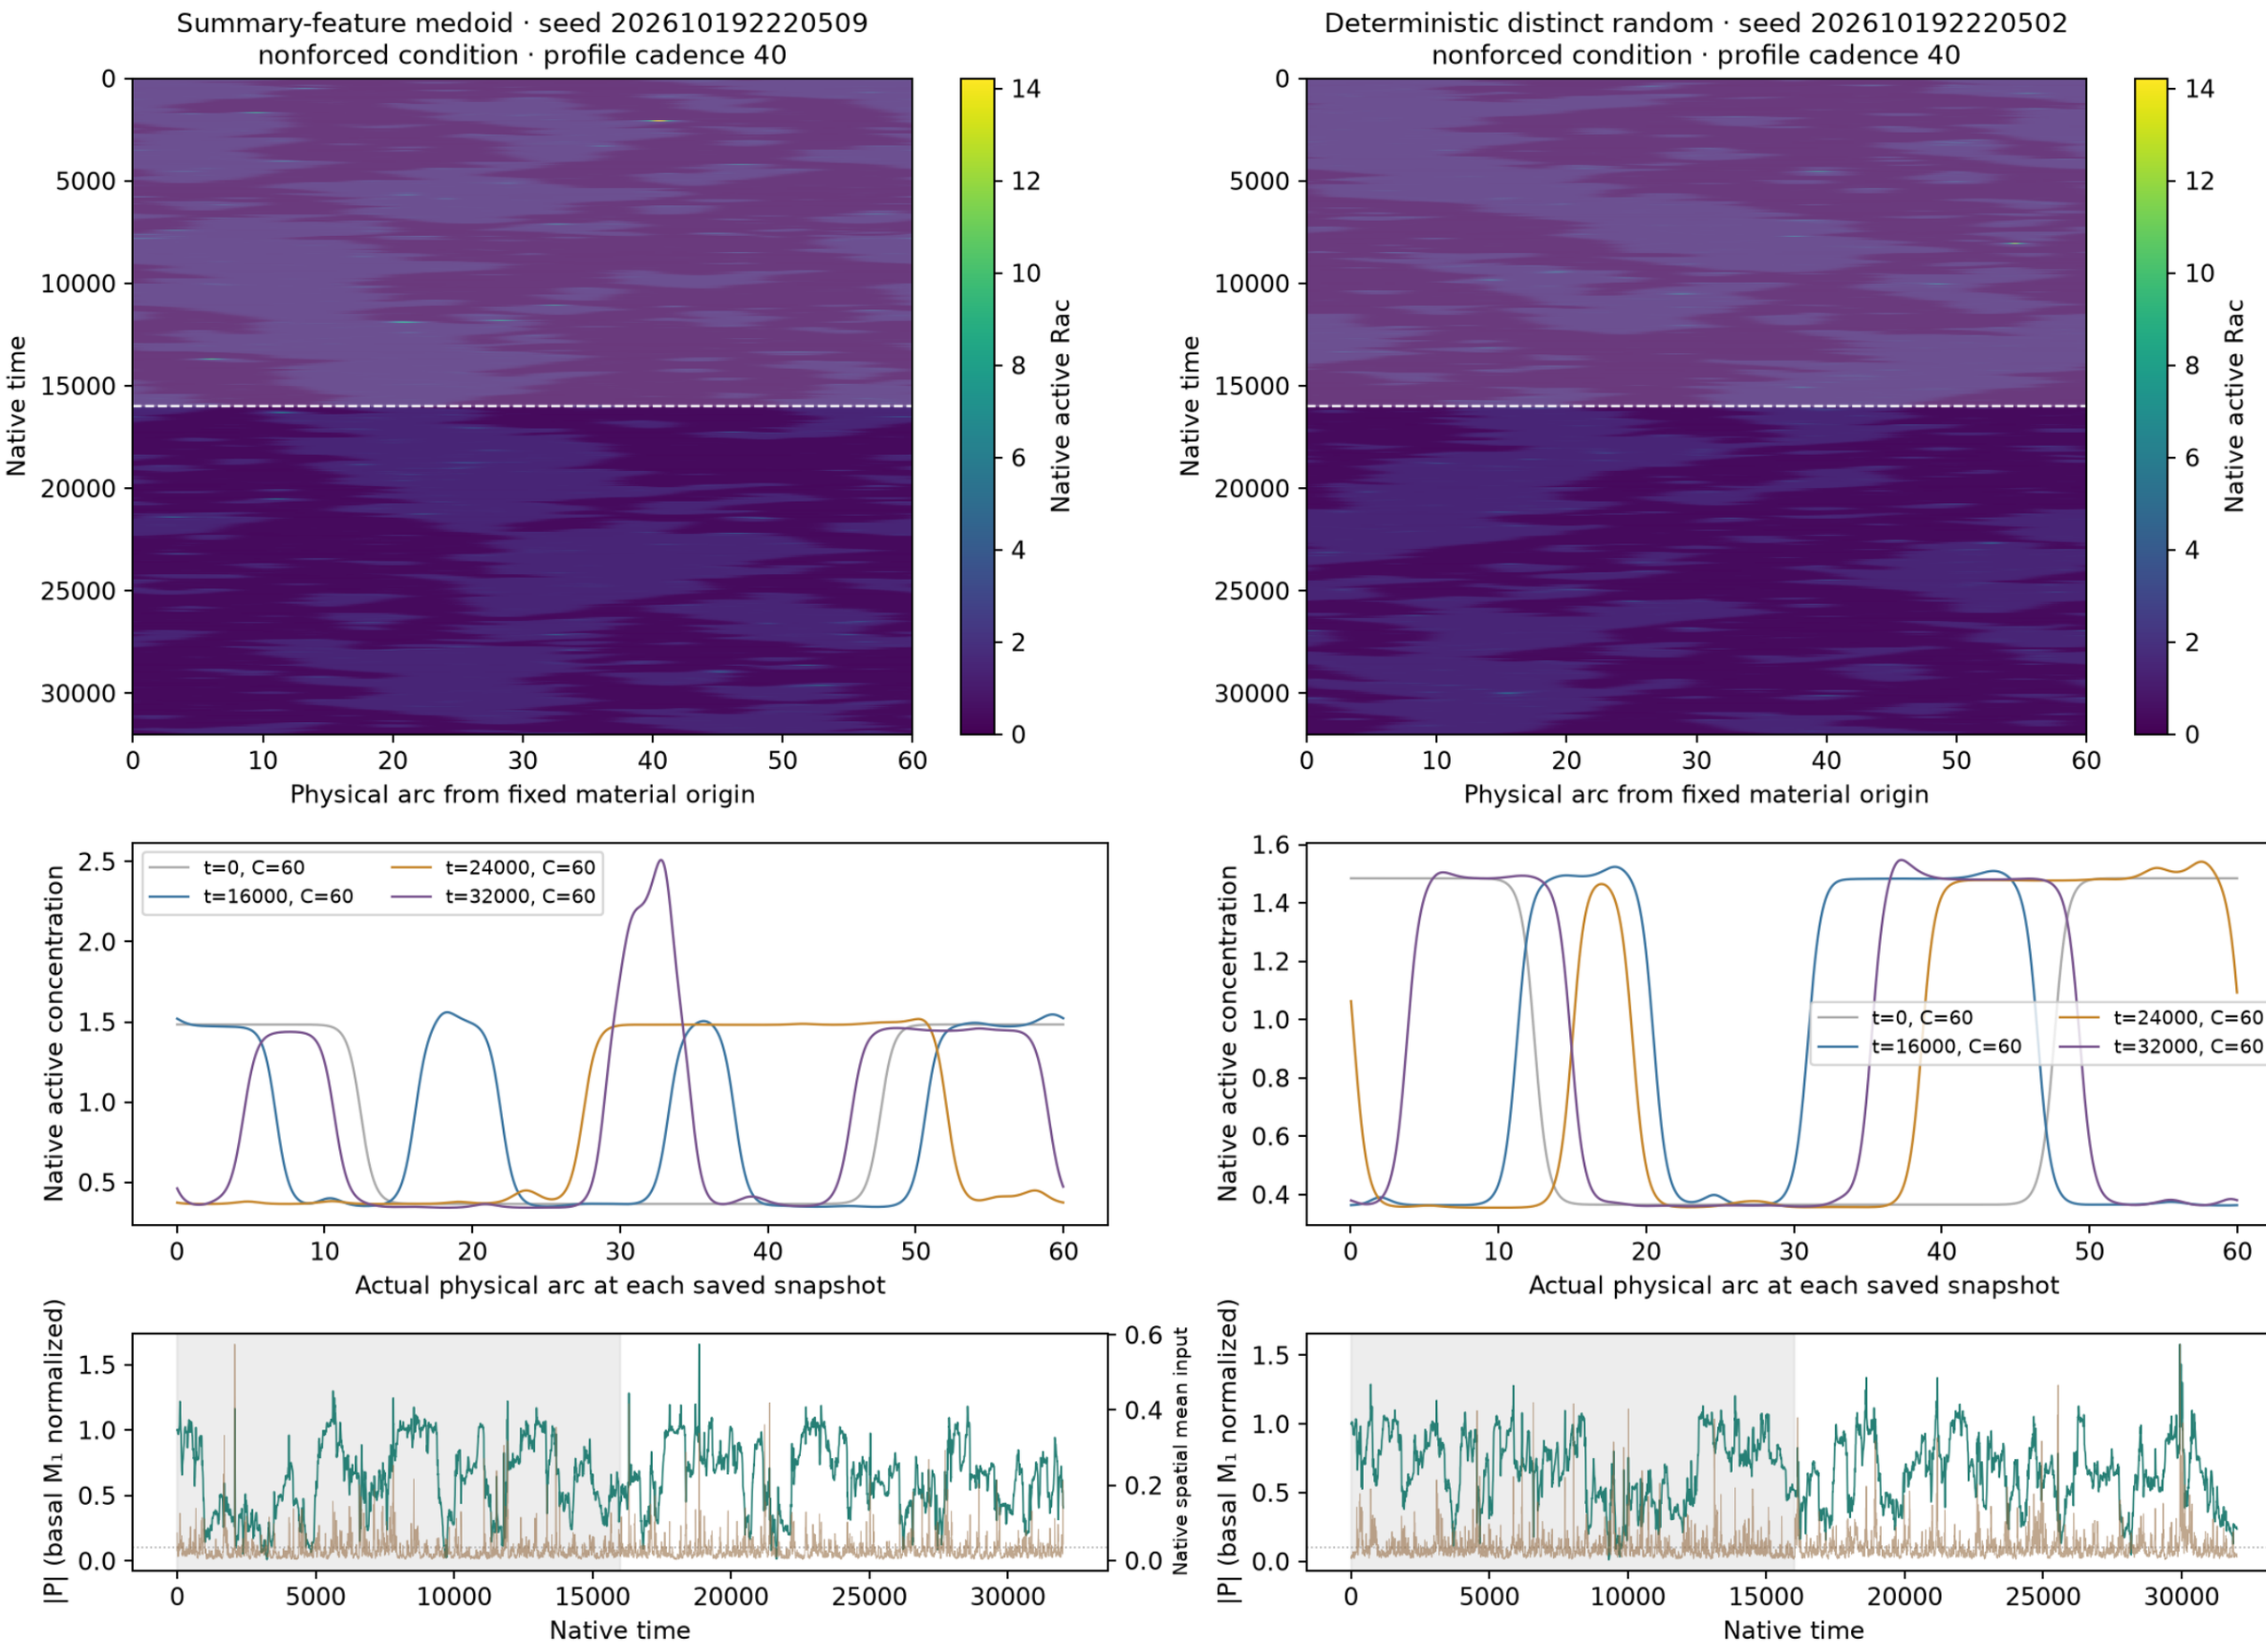

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M_1 normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Holmes 3 · size label 60 · f=0.1 · noise
context E1_extra · σ=0.25 · horizon=32000 · n=12 independent noisy realizations

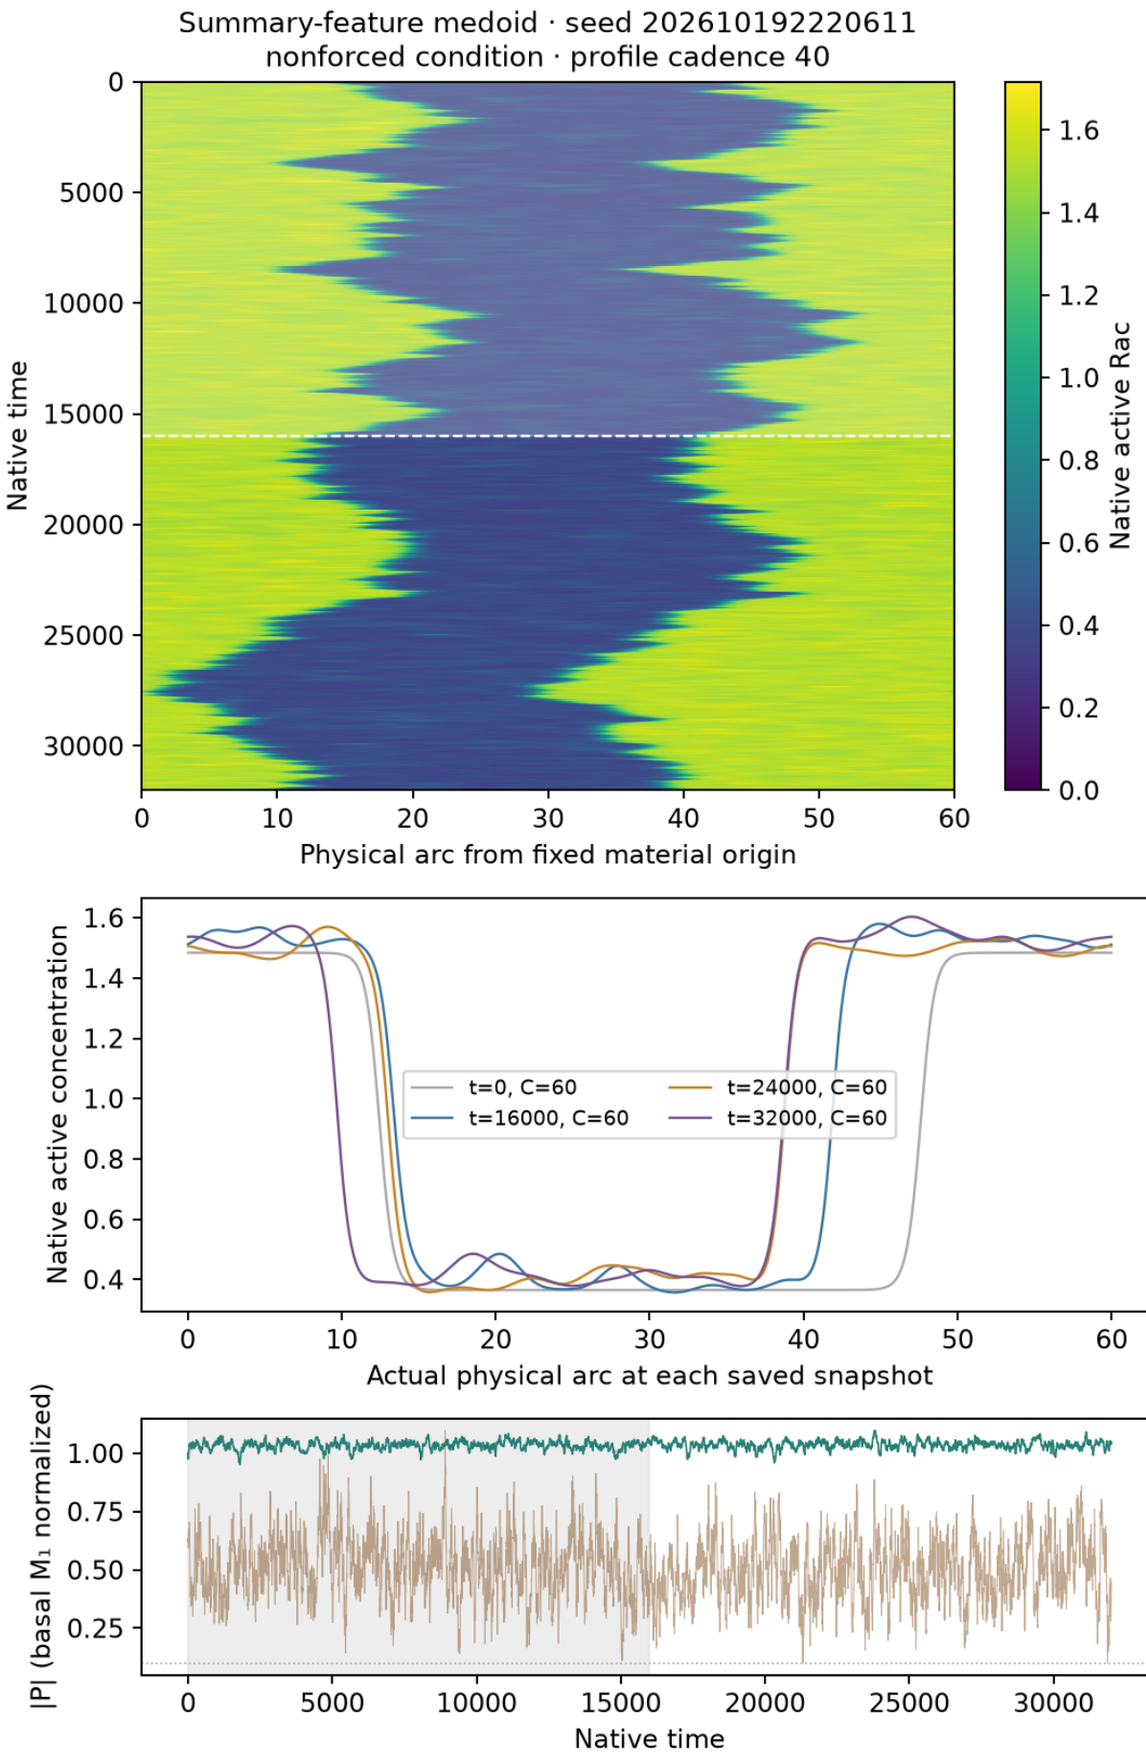

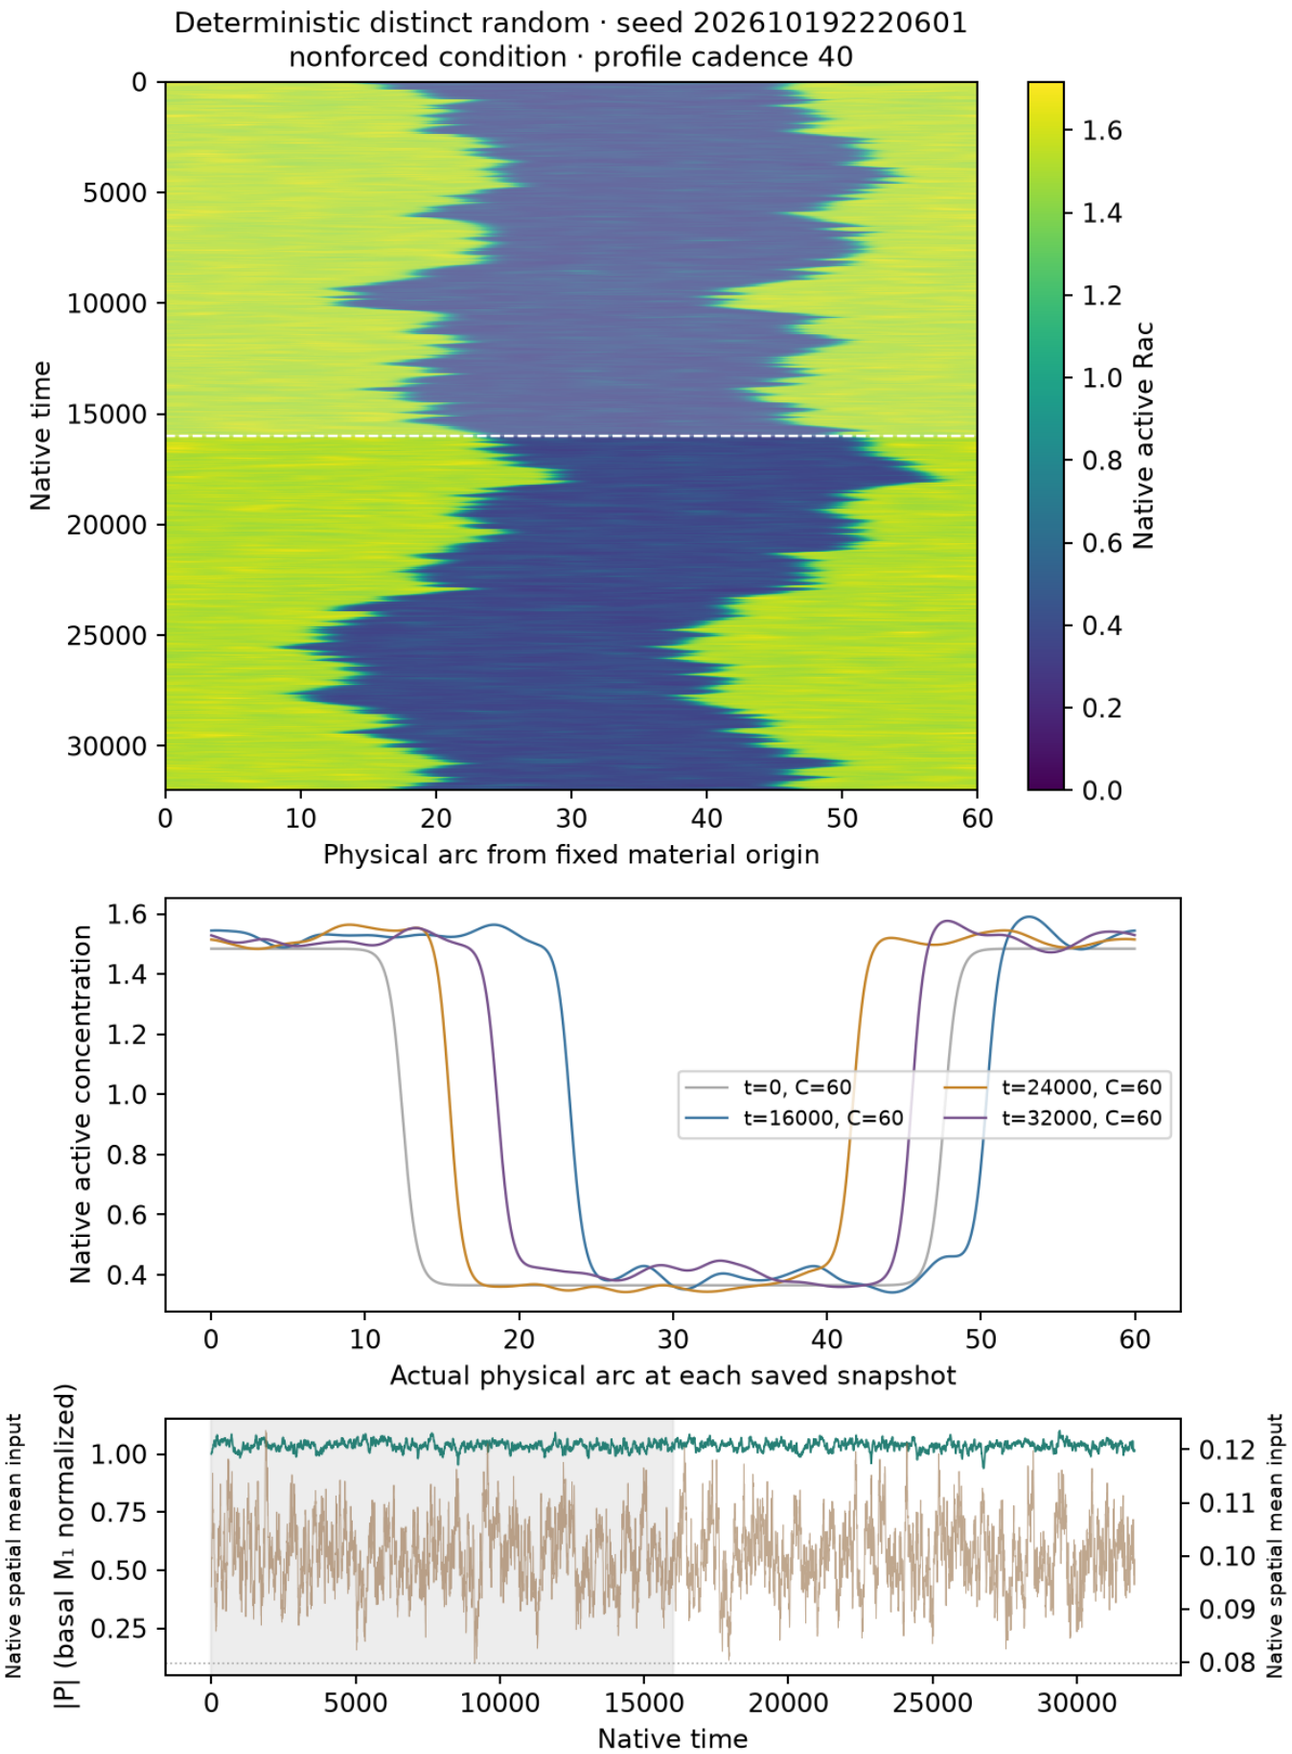

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Holmes 3 · size label 60 · f=0.1 · noise
context E1_extra · σ=0.5 · horizon=32000 · n=12 independent noisy realizations

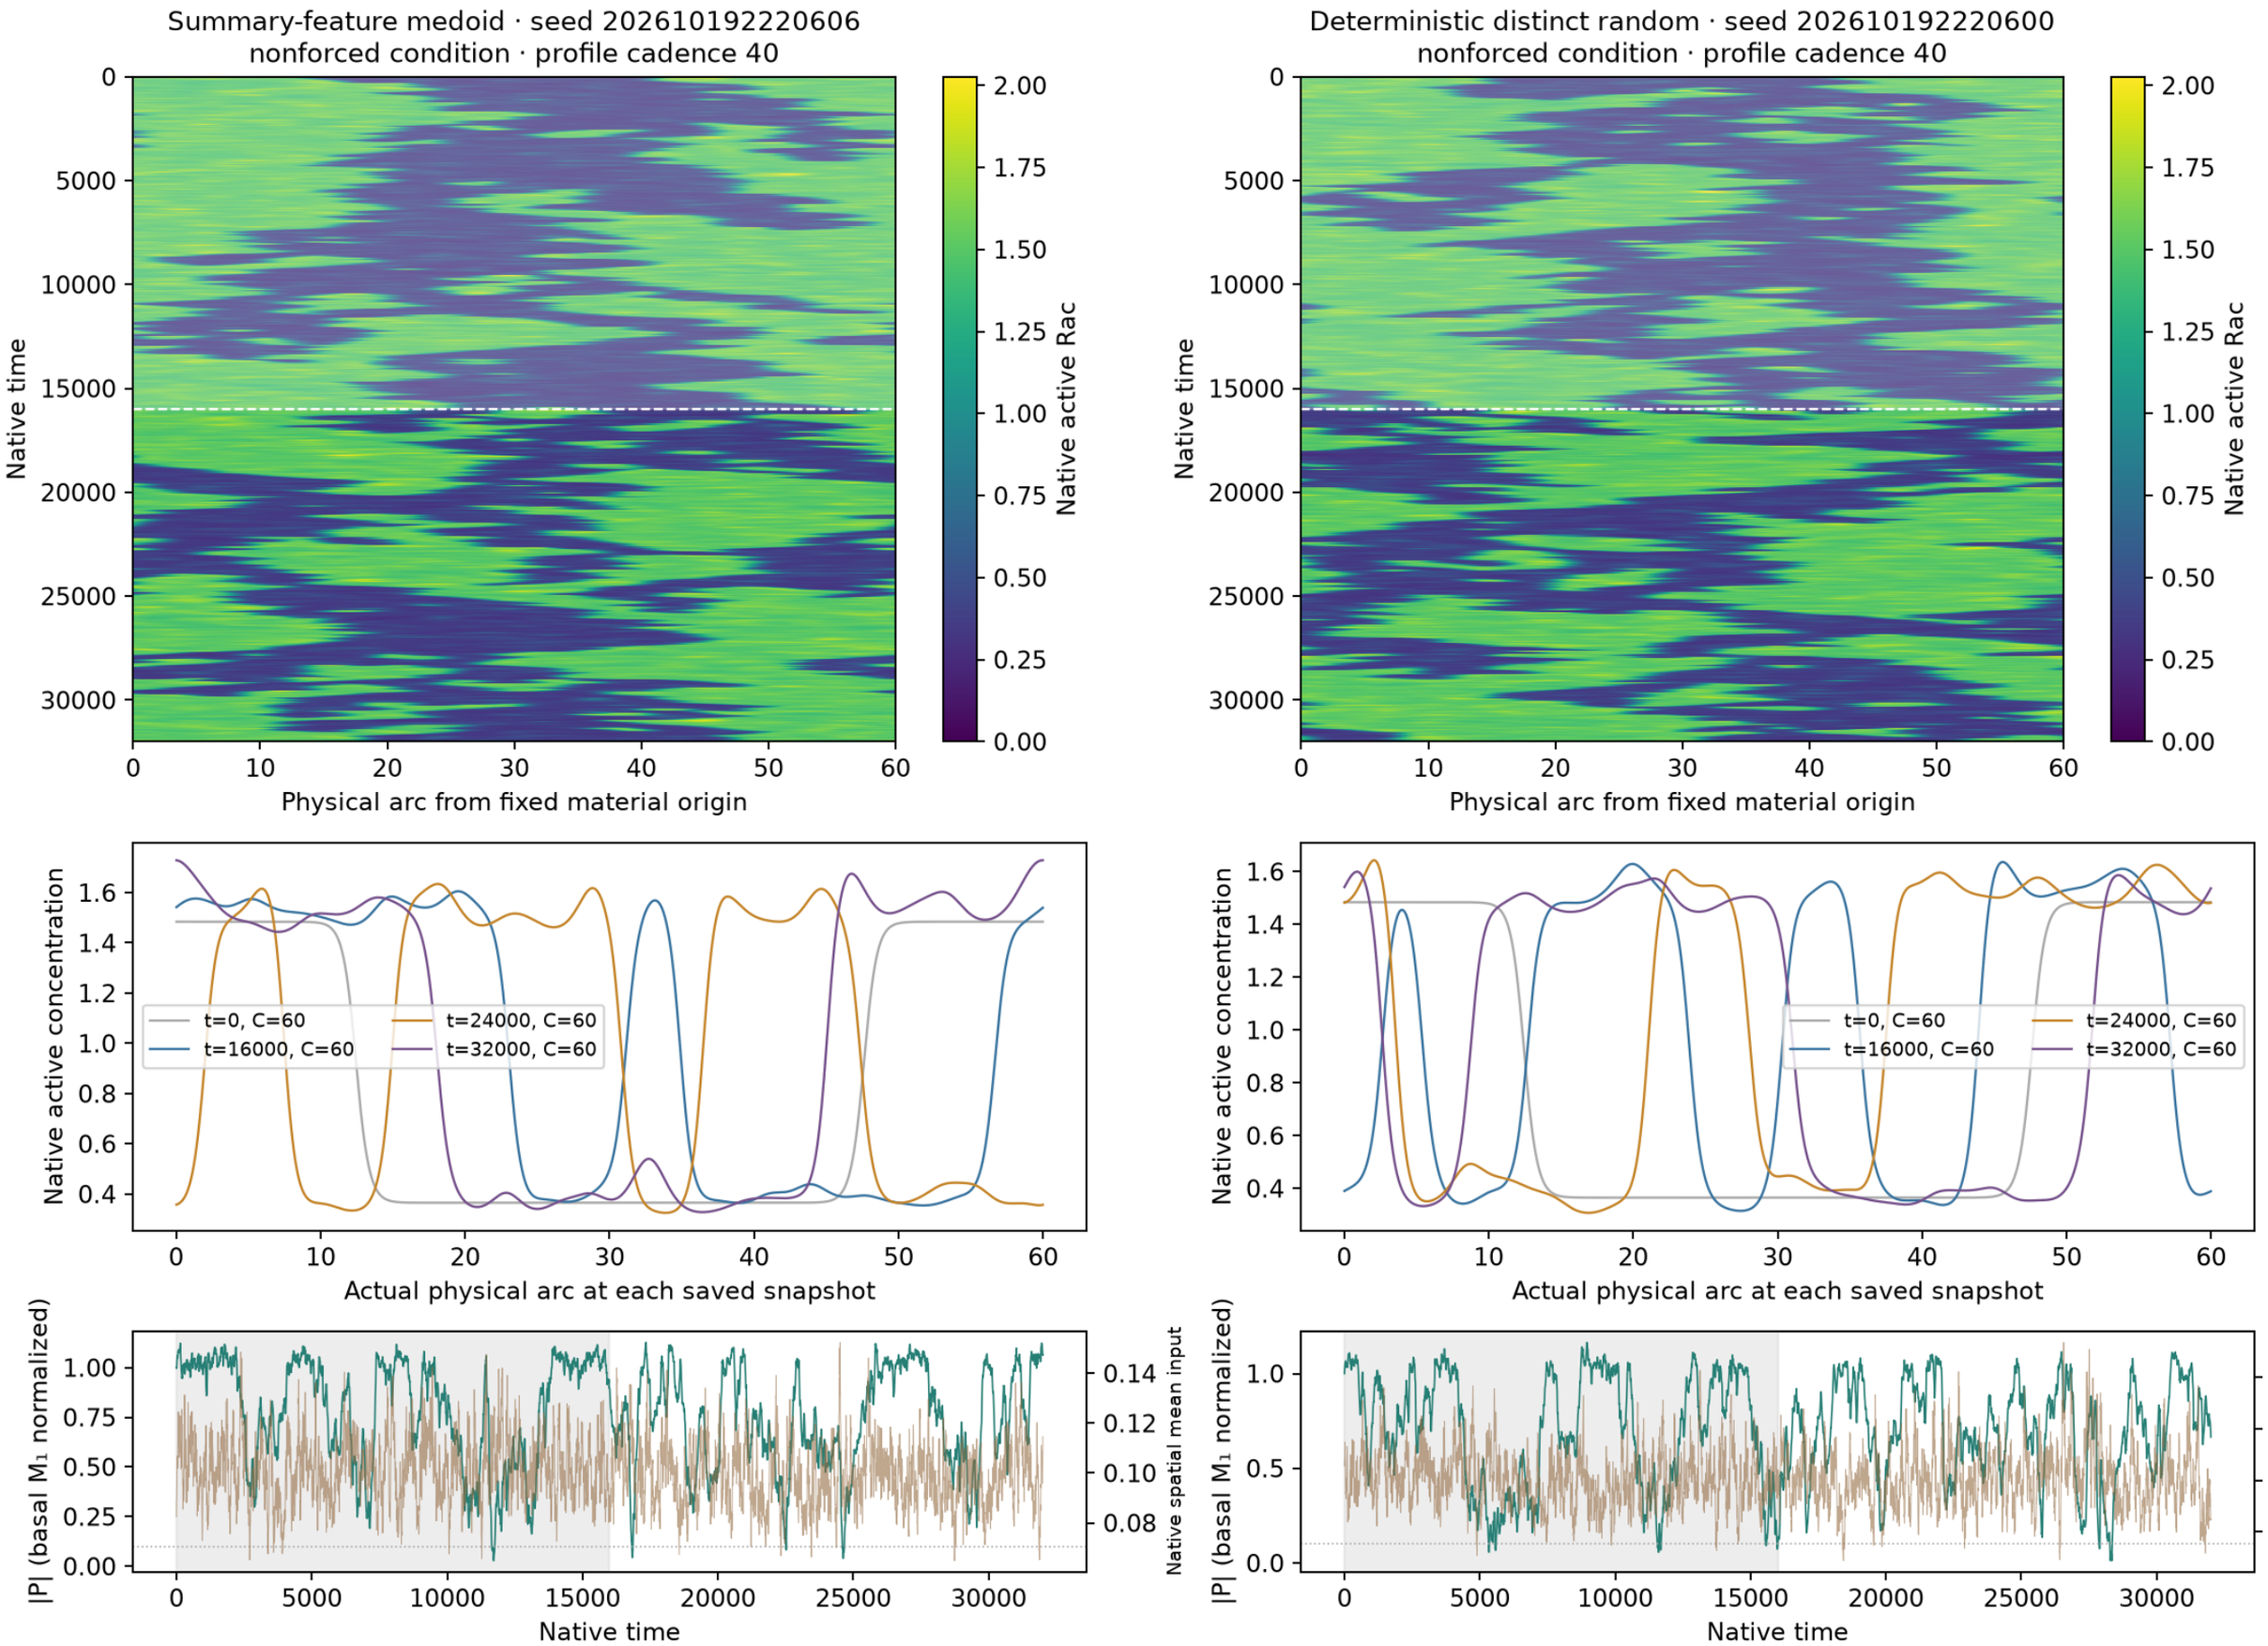

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Holmes 3 · size label 60 · f=0.1 · noise
context E1_extra · σ=2 · horizon=32000 · n=12 independent noisy realizations

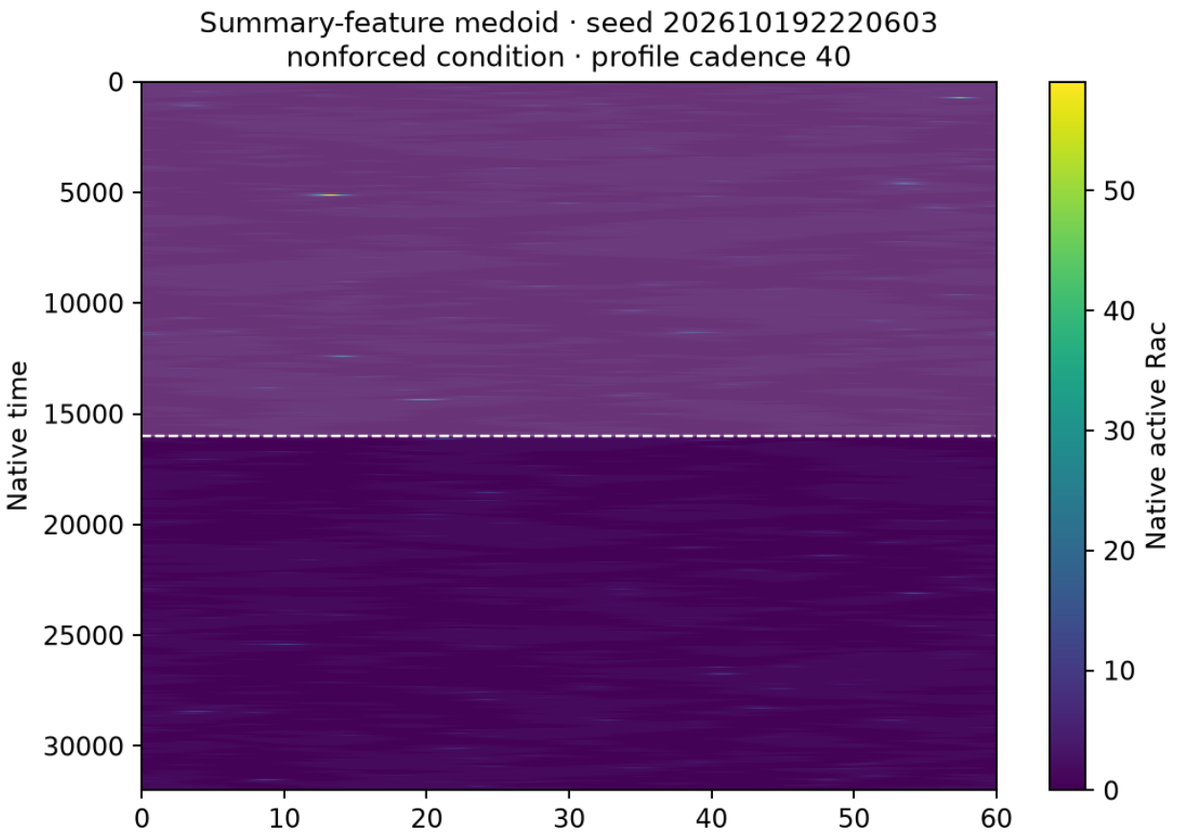

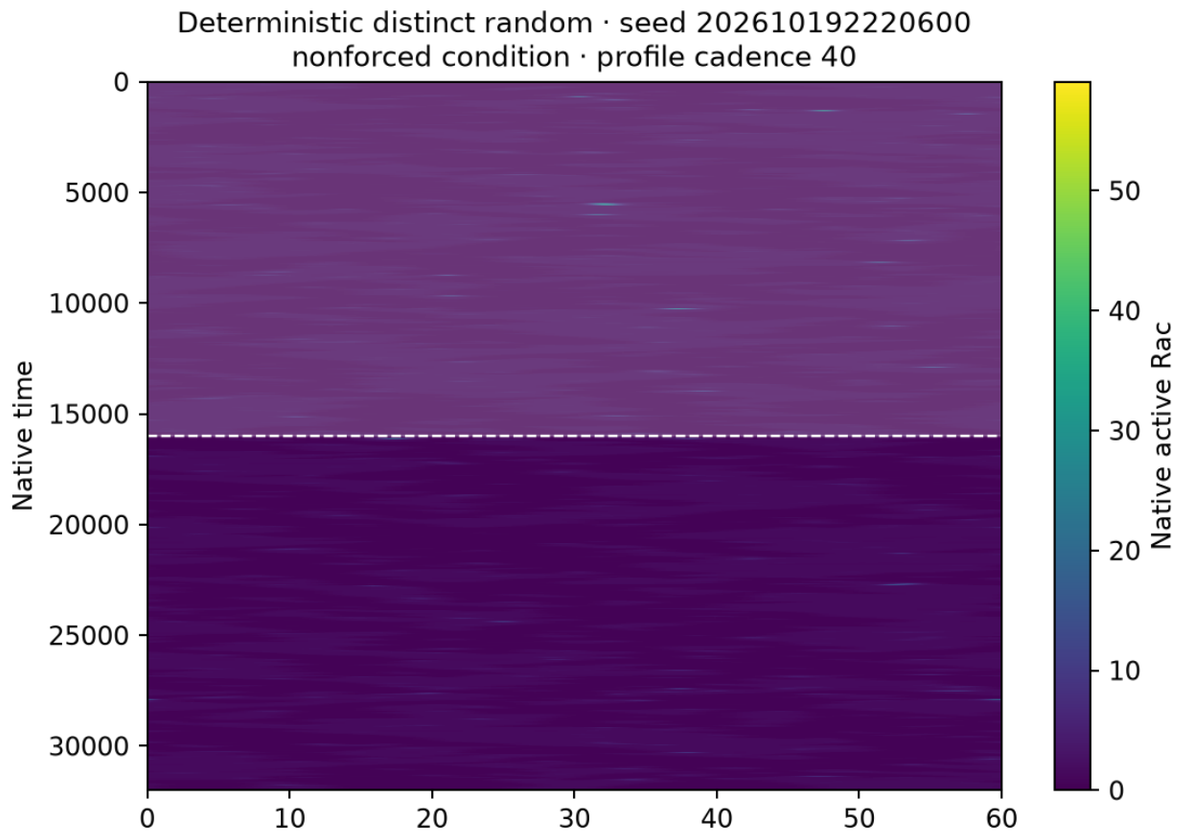

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Spring · size label 1 · f=0.03 · noise
context E1_extra · σ=0.25 · horizon=3200 · n=12 independent noisy realizations

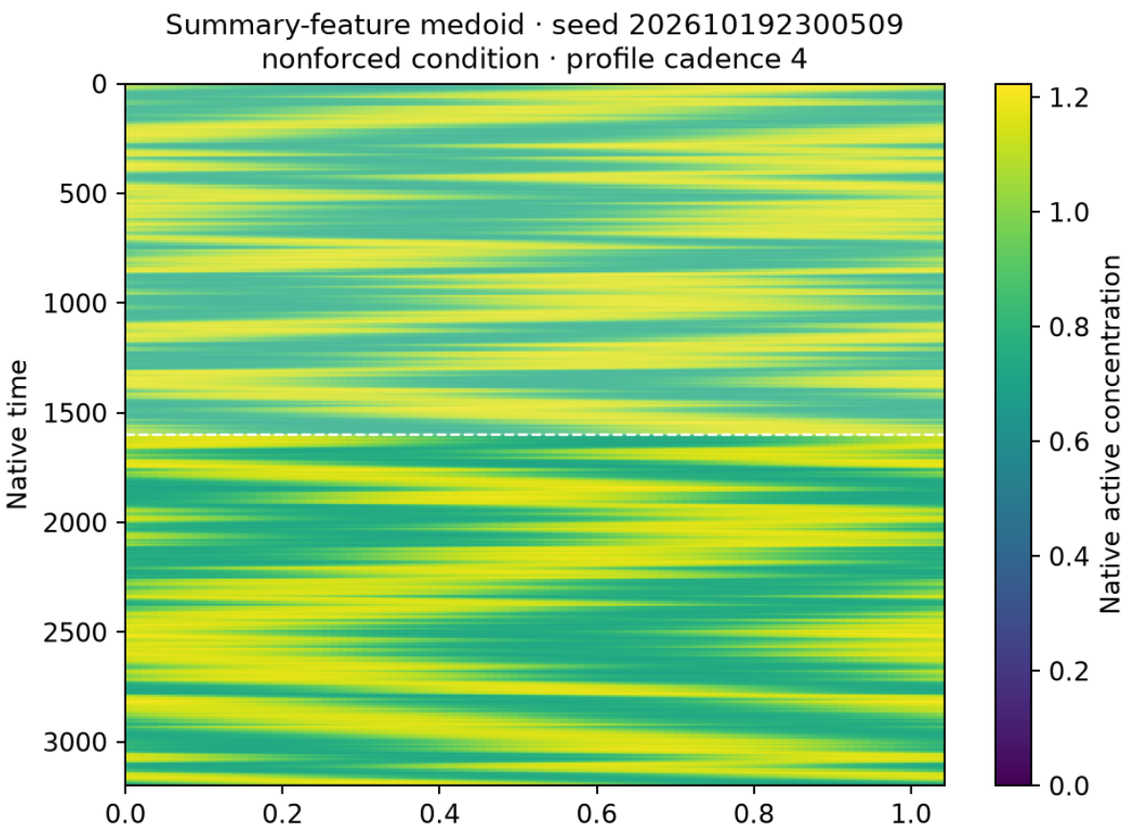

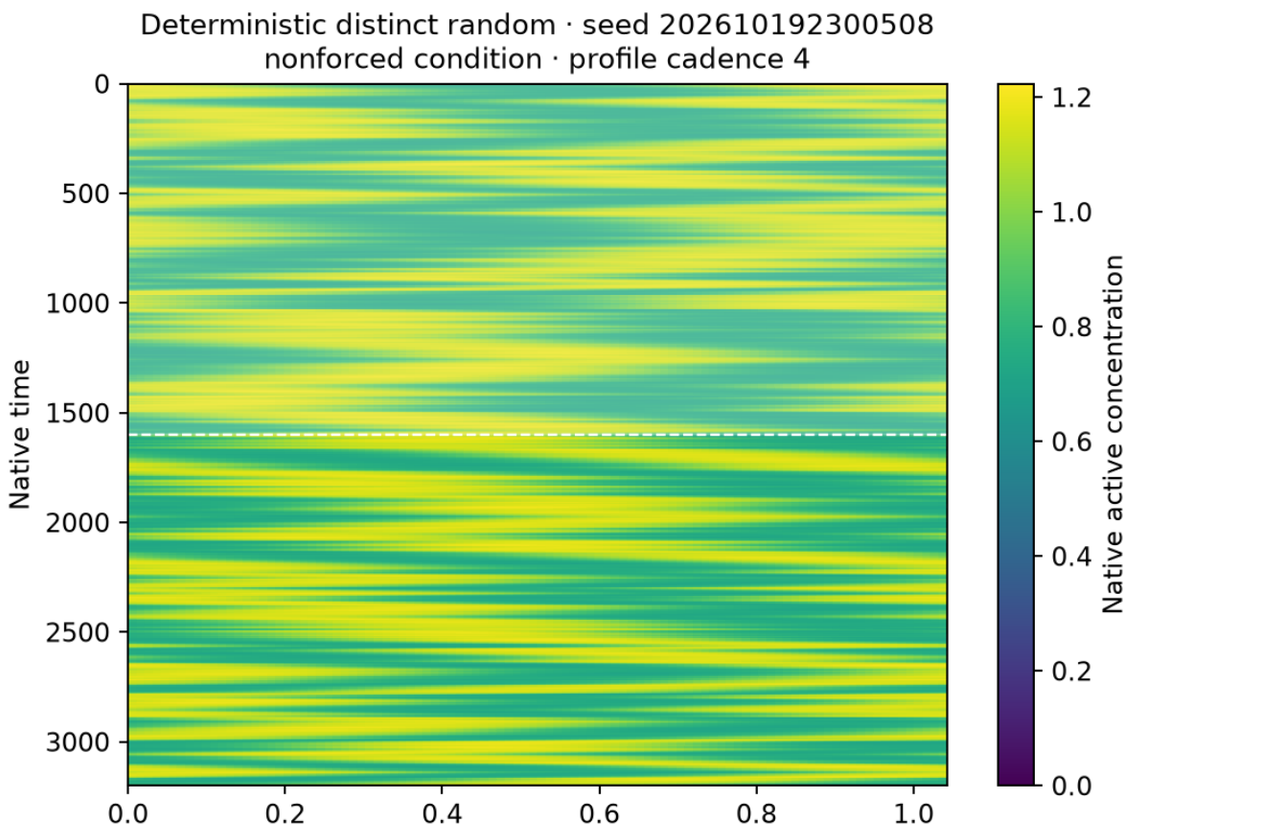

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Spring · size label 1 · f=0.03 · noise
context E1_extra · σ=0.5 · horizon=3200 · n=12 independent noisy realizations

Summary-feature medoid · seed 202610192300502
nonforced condition · profile cadence 4

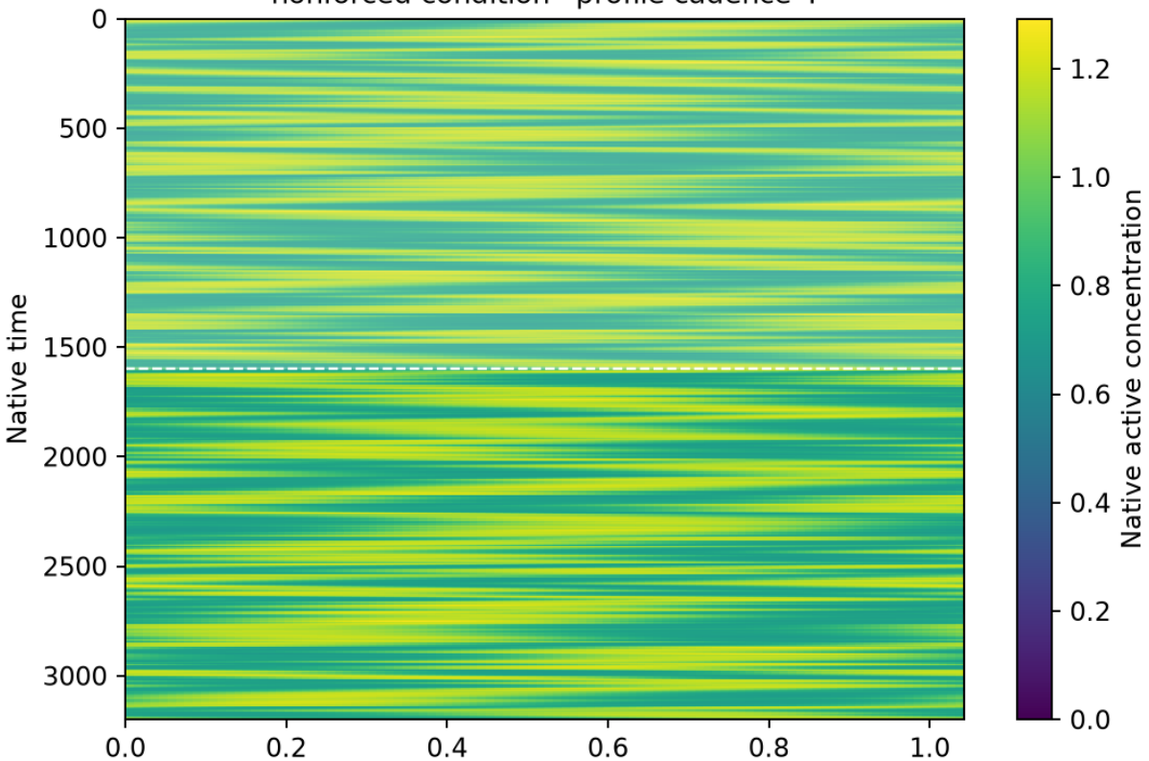

Deterministic distinct random · seed 202610192300510
nonforced condition · profile cadence 4

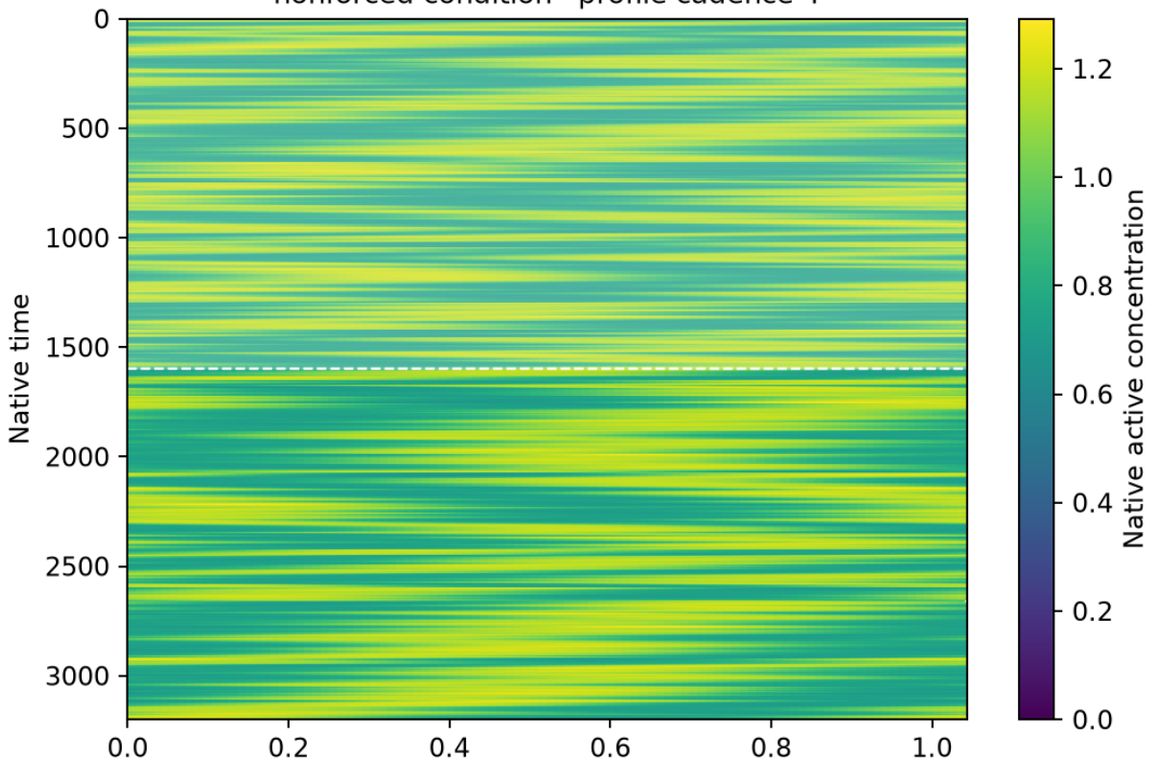

Physical arc from fixed material origin

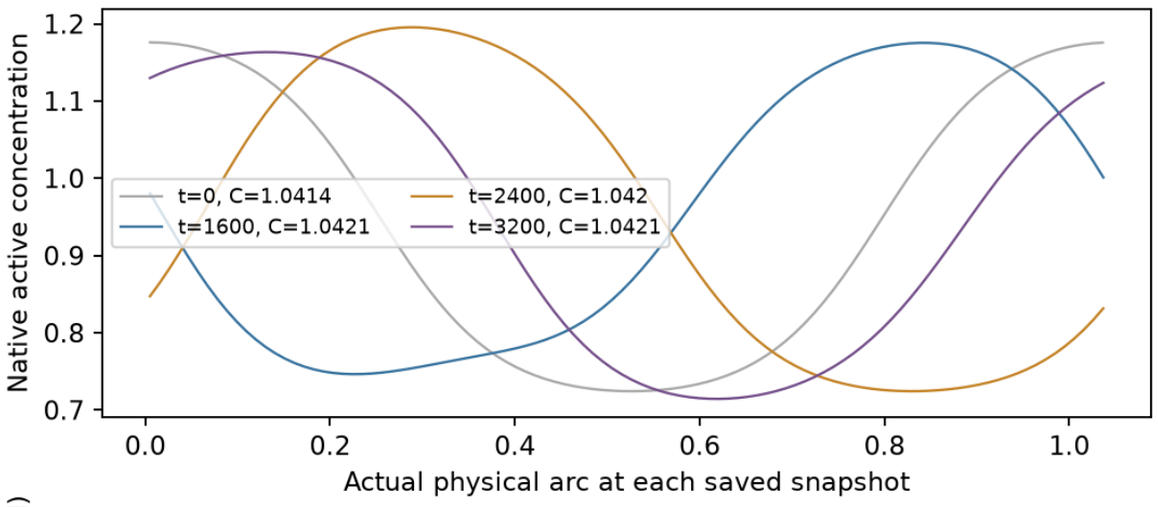

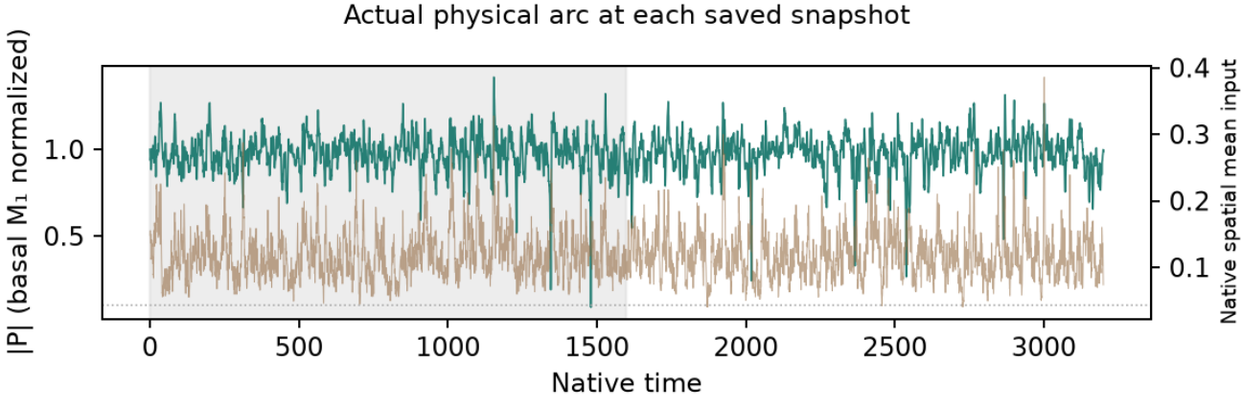

Physical arc from fixed material origin

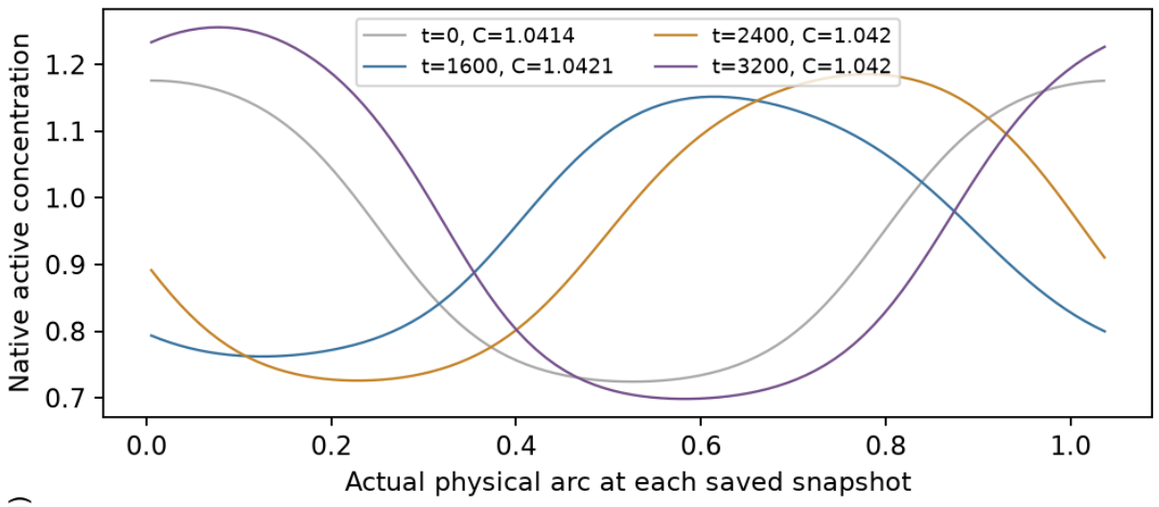

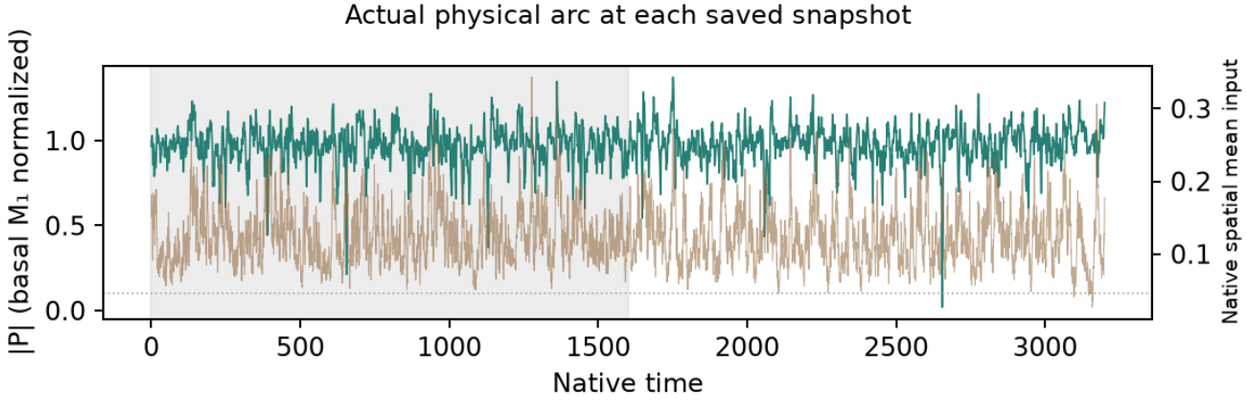

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Spring · size label 1 · f=0.03 · noise
context E1_extra · σ=2 · horizon=3200 · n=12 independent noisy realizations

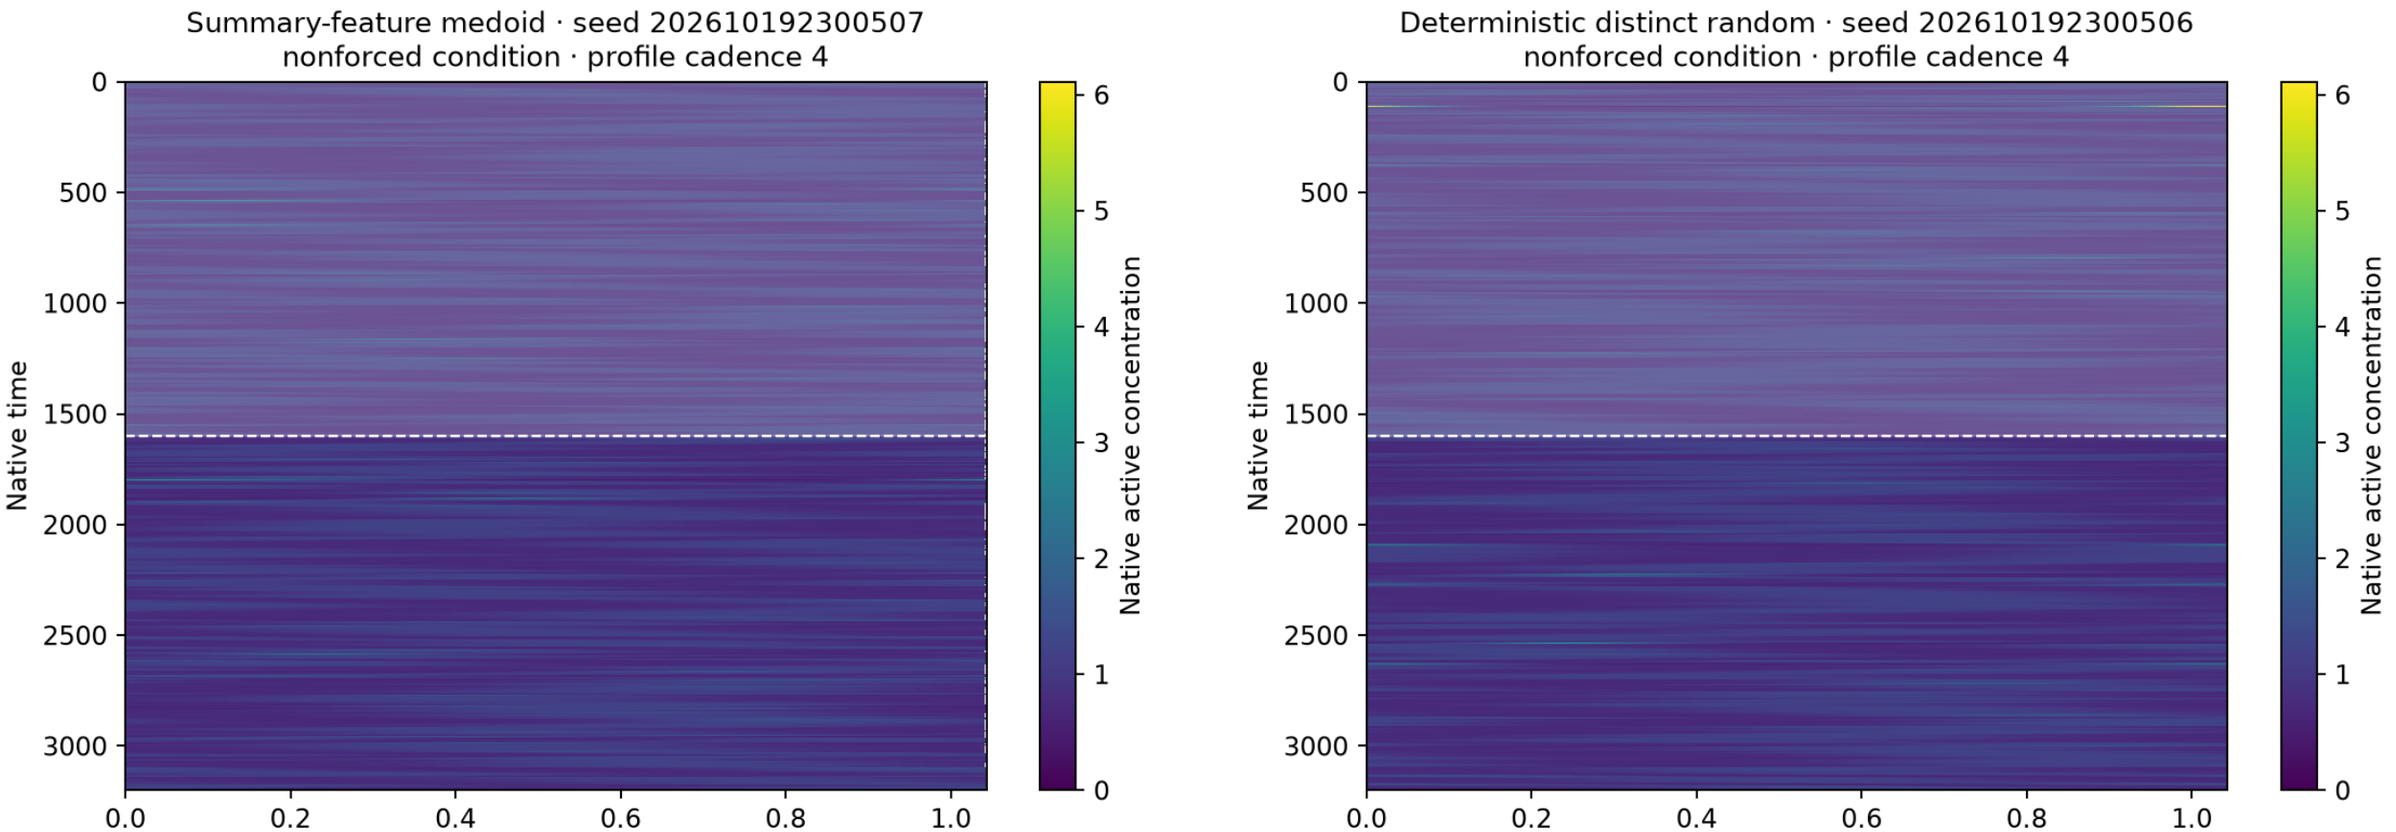

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M_1 normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Spring · size label 1 · f=0.1 · noise
context E1_extra · σ=0.25 · horizon=3200 · n=12 independent noisy realizations

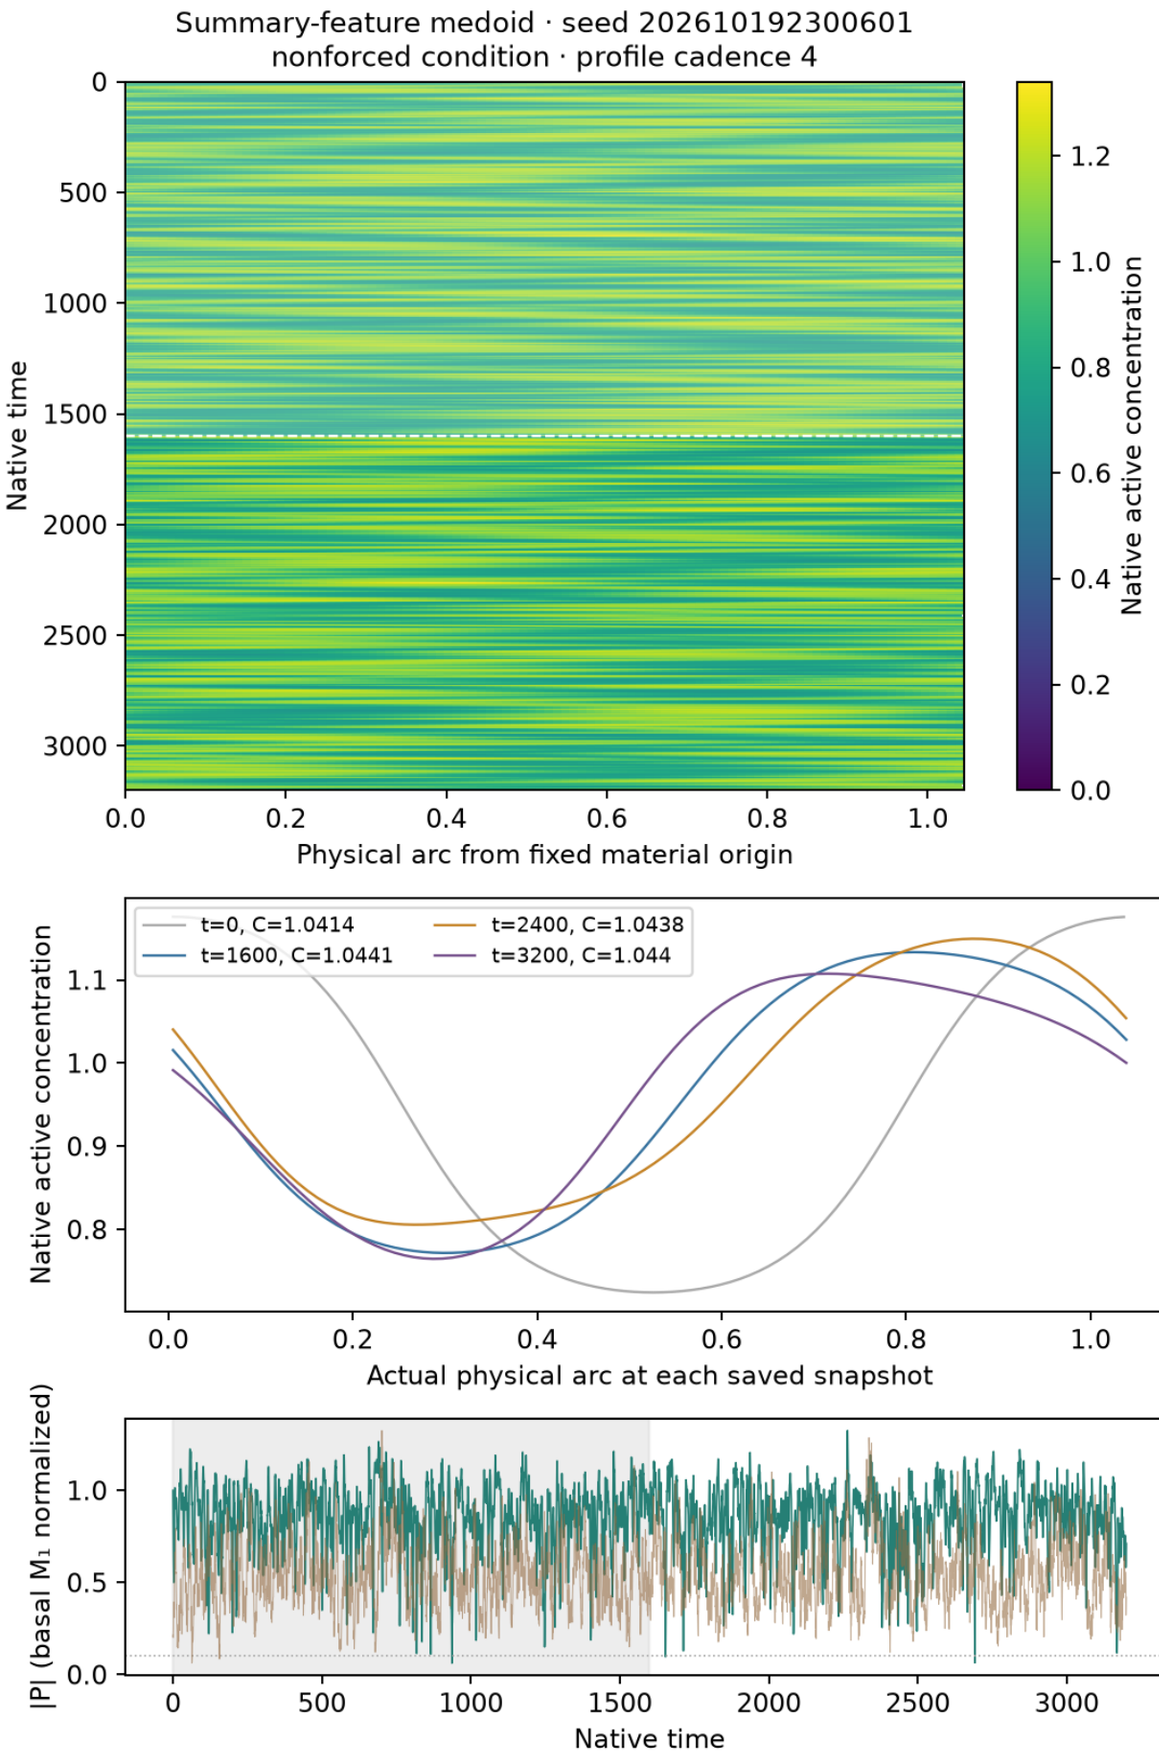

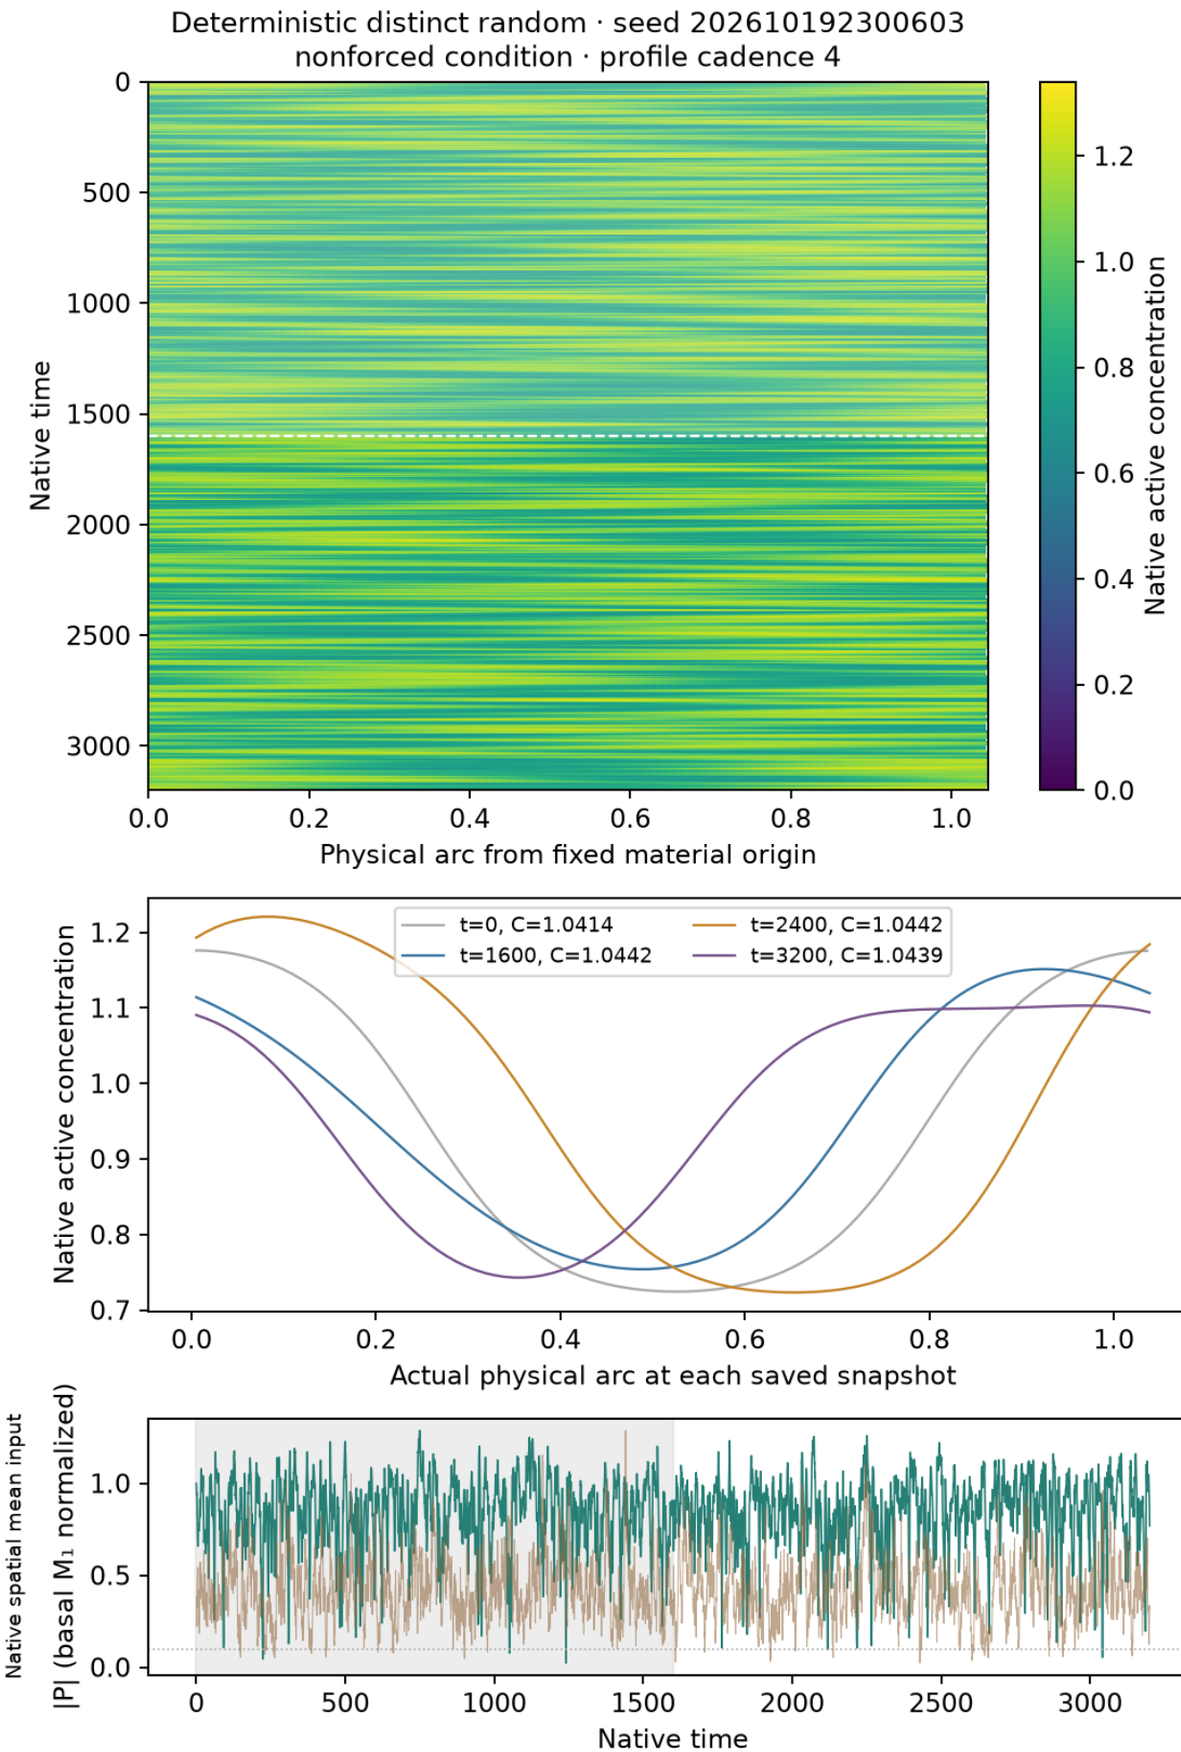

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Spring · size label 1 · f=0.1 · noise
context E1_extra · σ=0.5 · horizon=3200 · n=12 independent noisy realizations

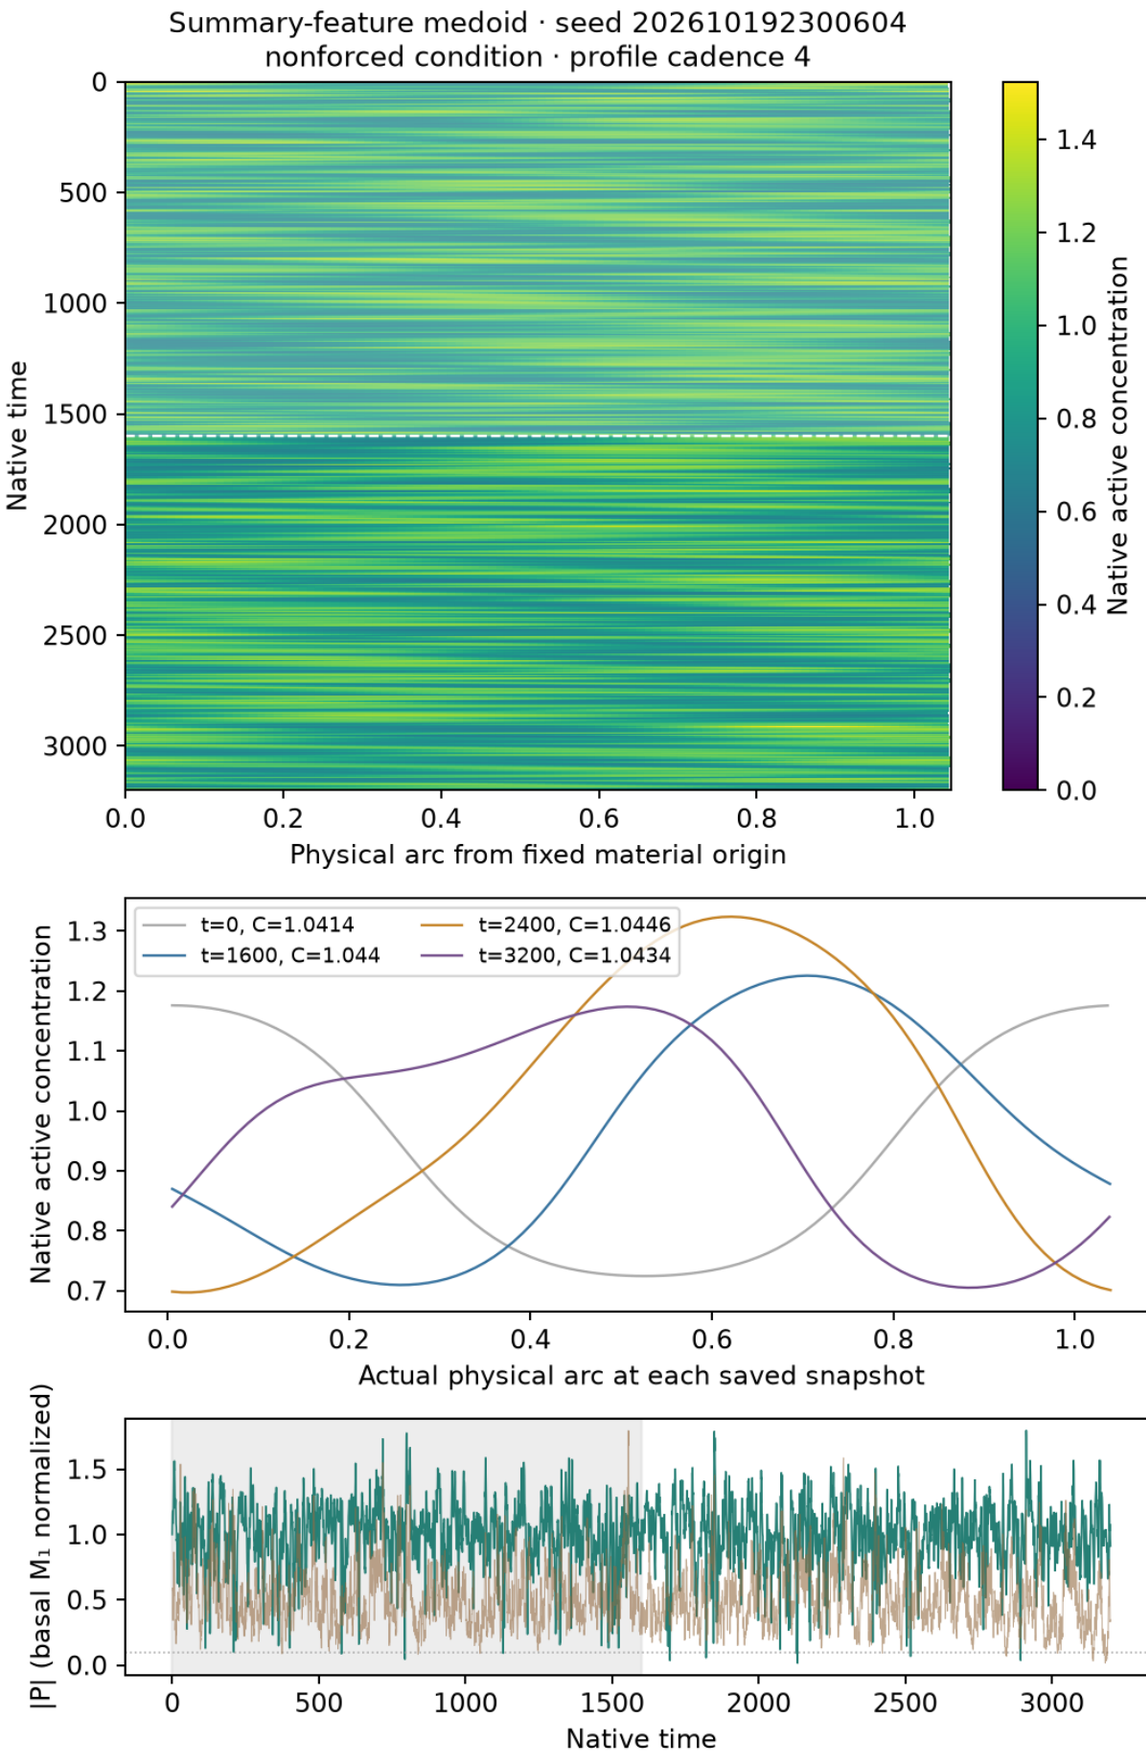

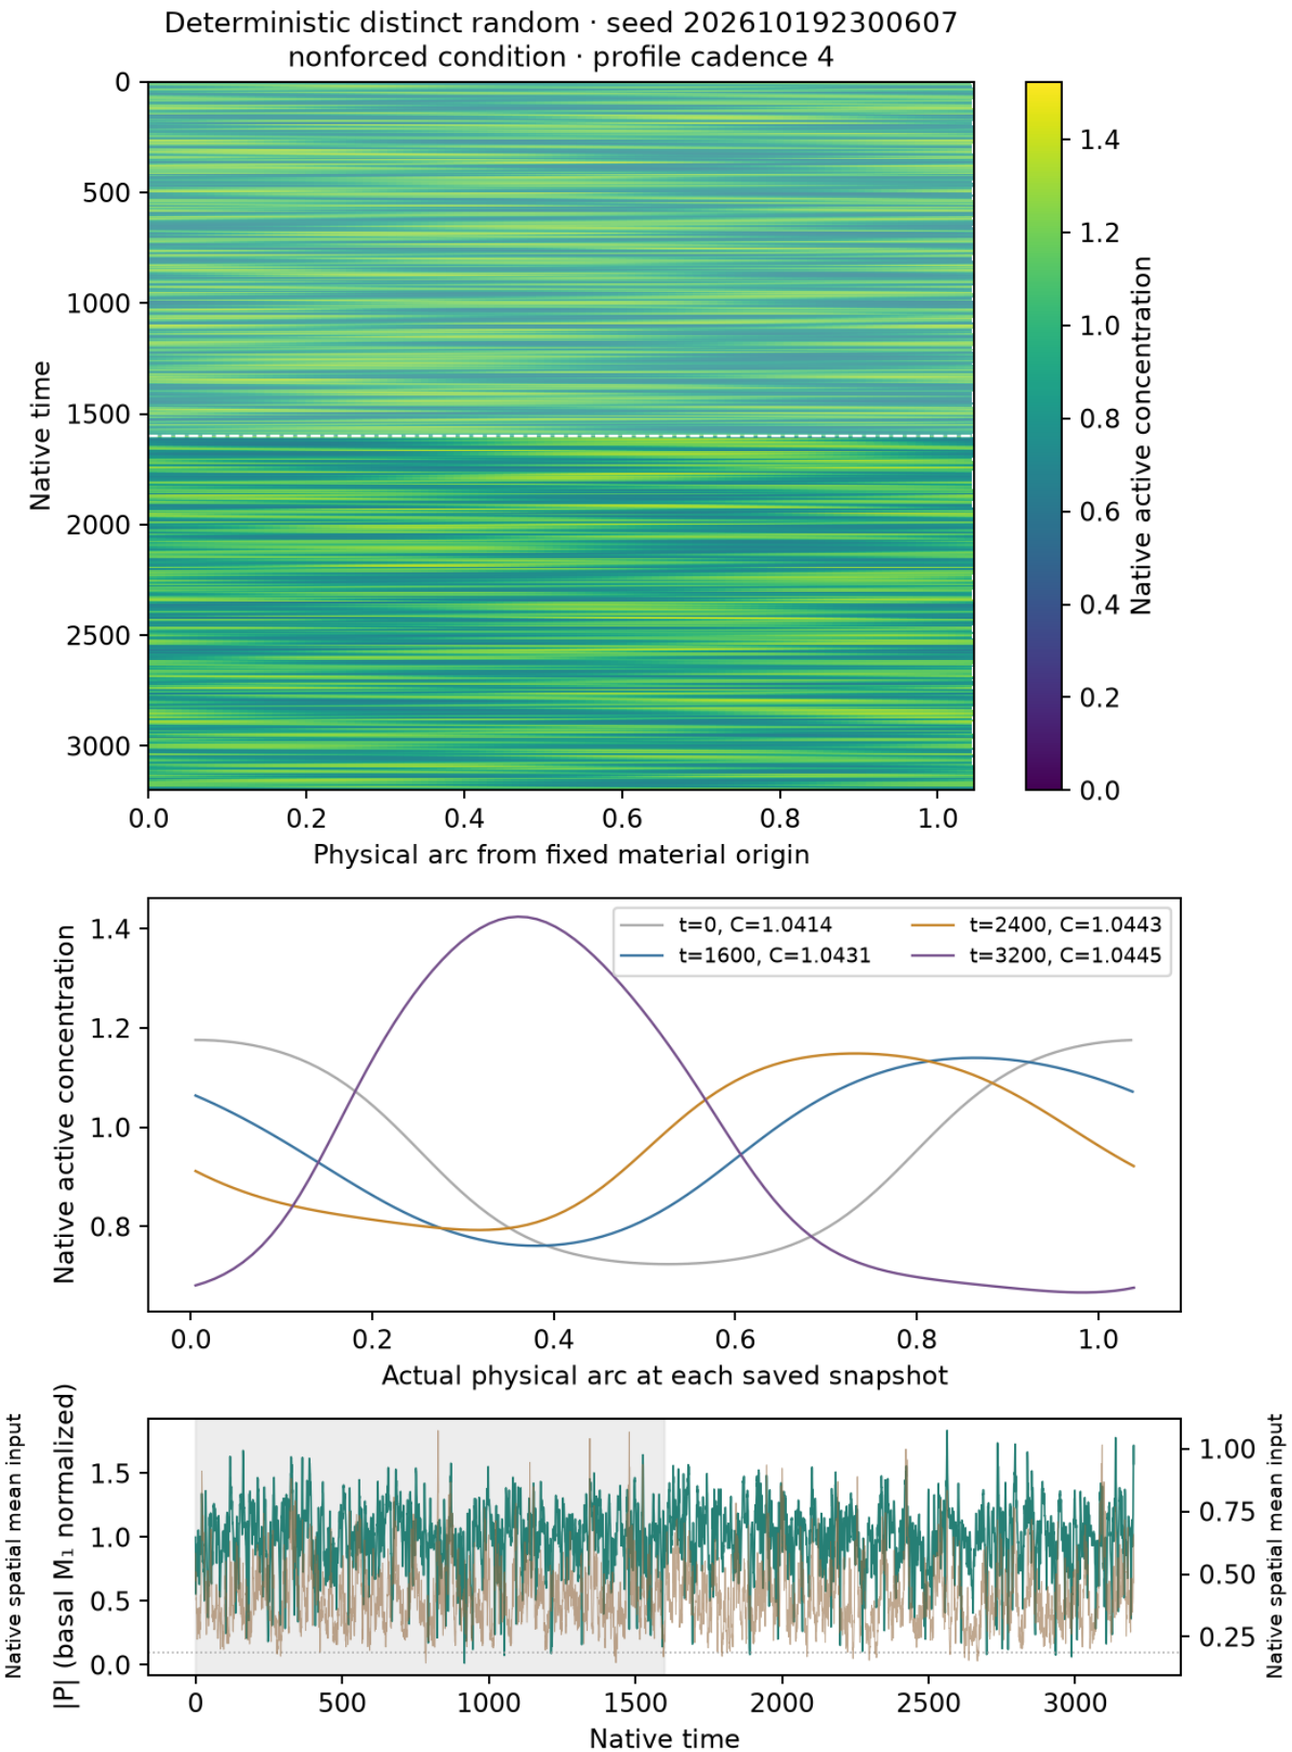

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Spring · size label 1 · f=0.1 · noise
context E1_extra · σ=2 · horizon=3200 · n=12 independent noisy realizations

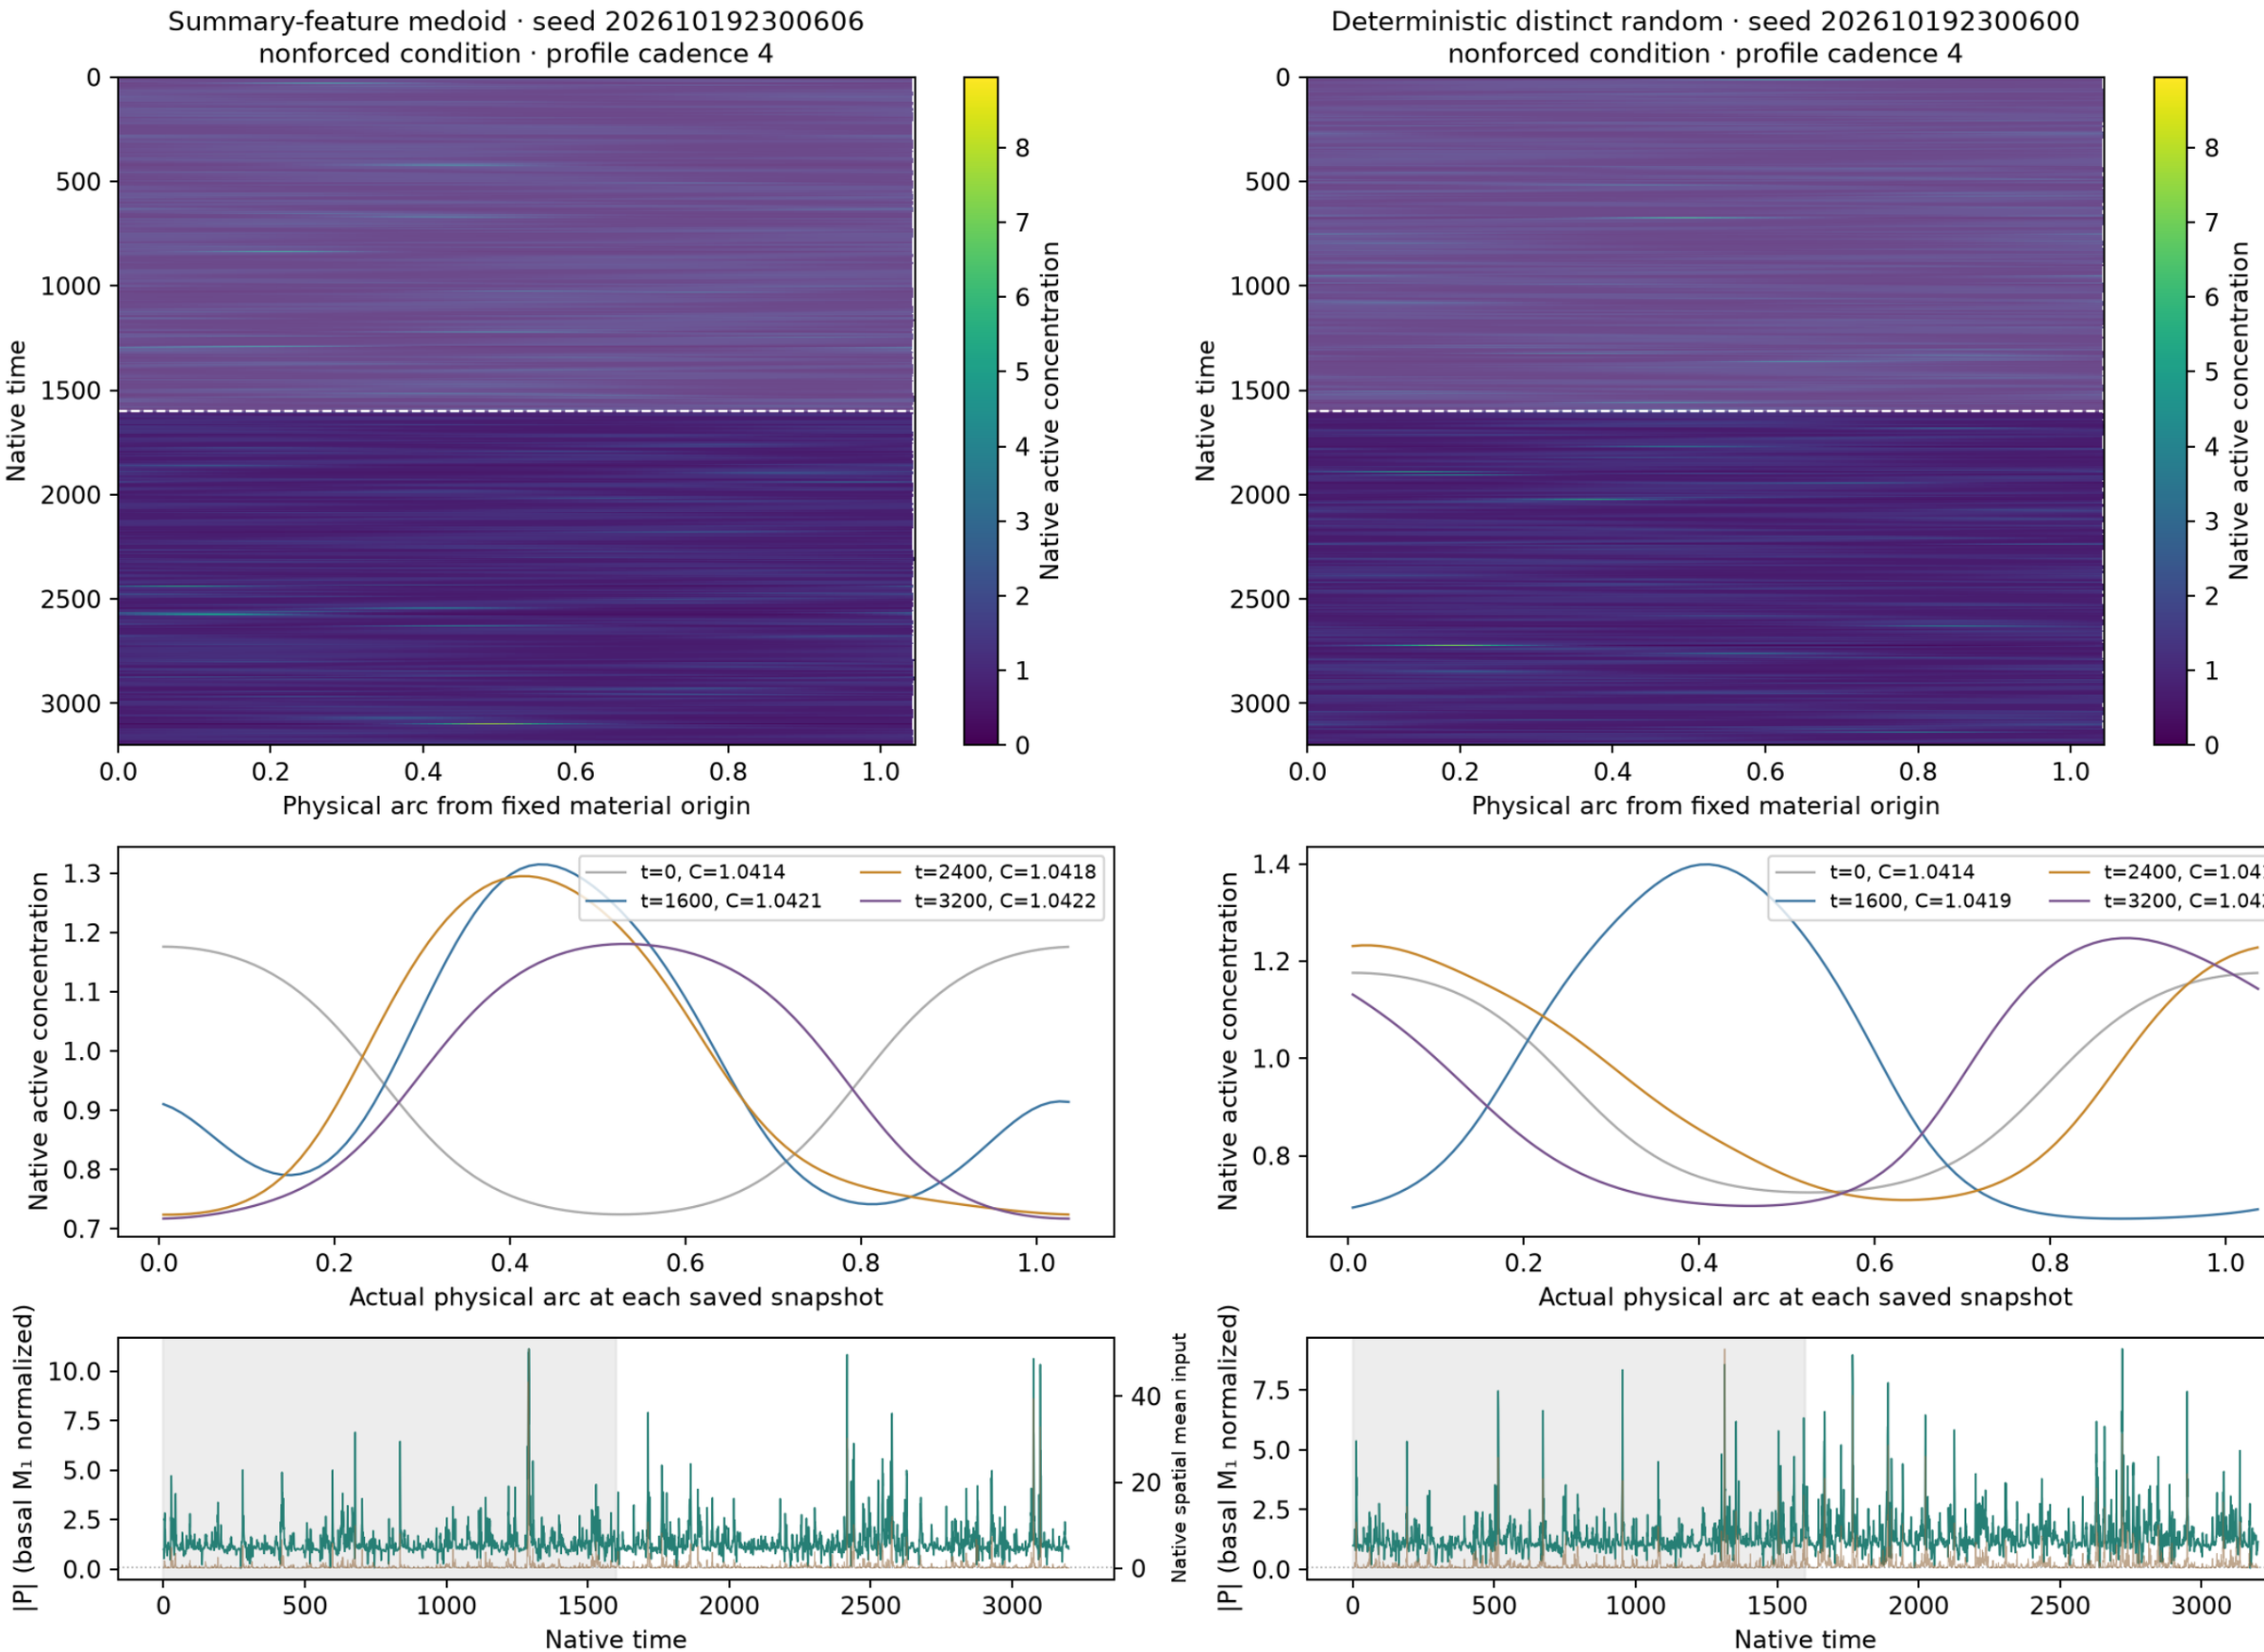

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Spring · size label 2 · f=0.03 · noise
context E1_extra · σ=0.25 · horizon=3200 · n=12 independent noisy realizations

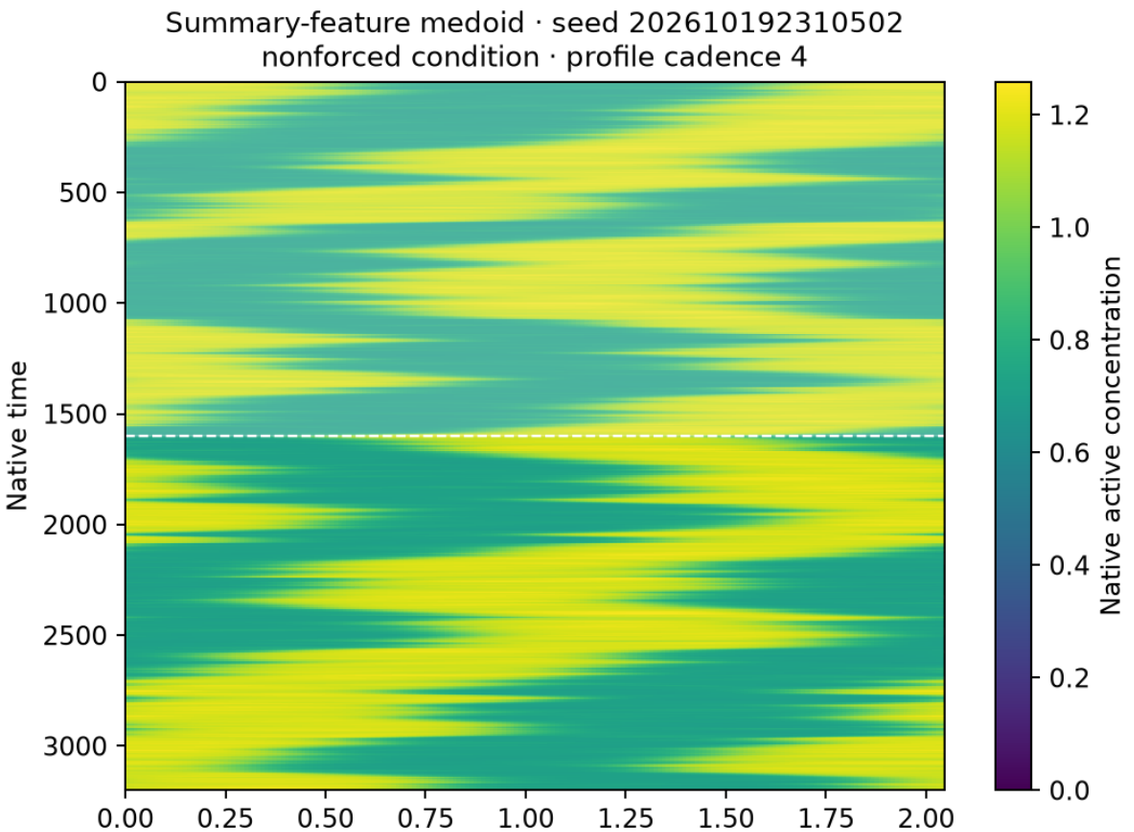

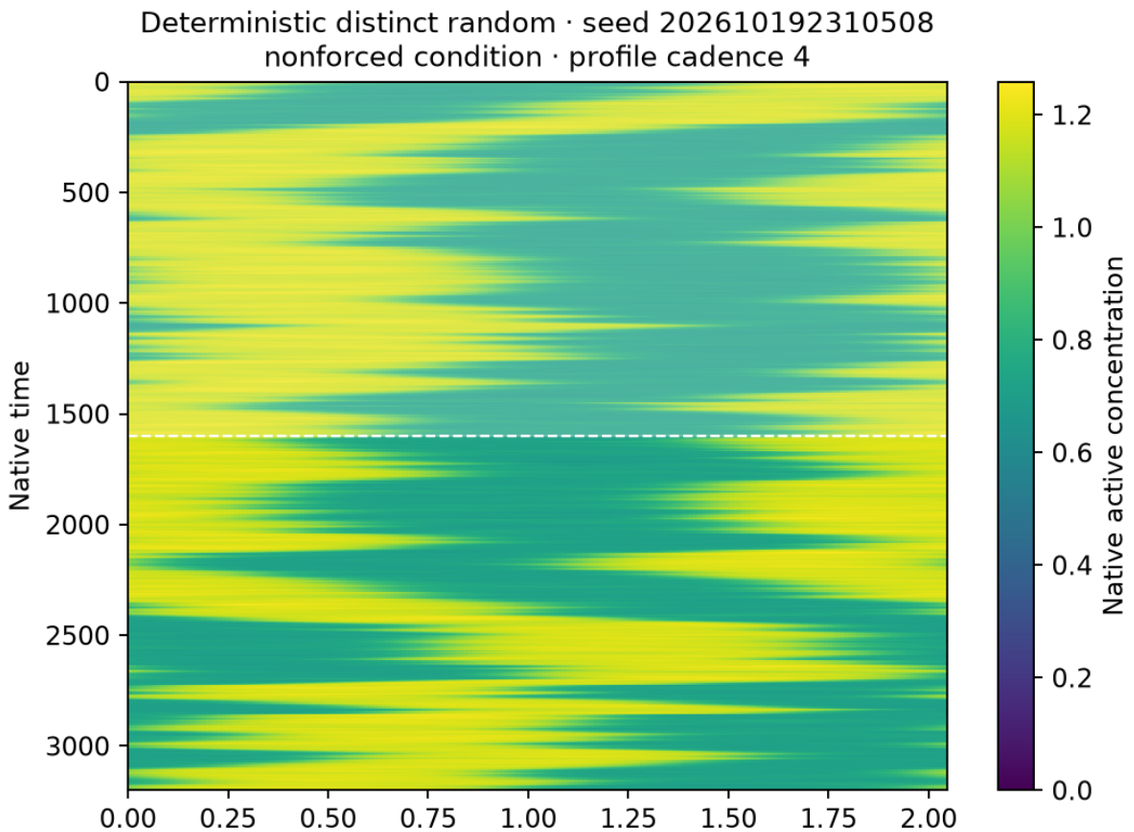

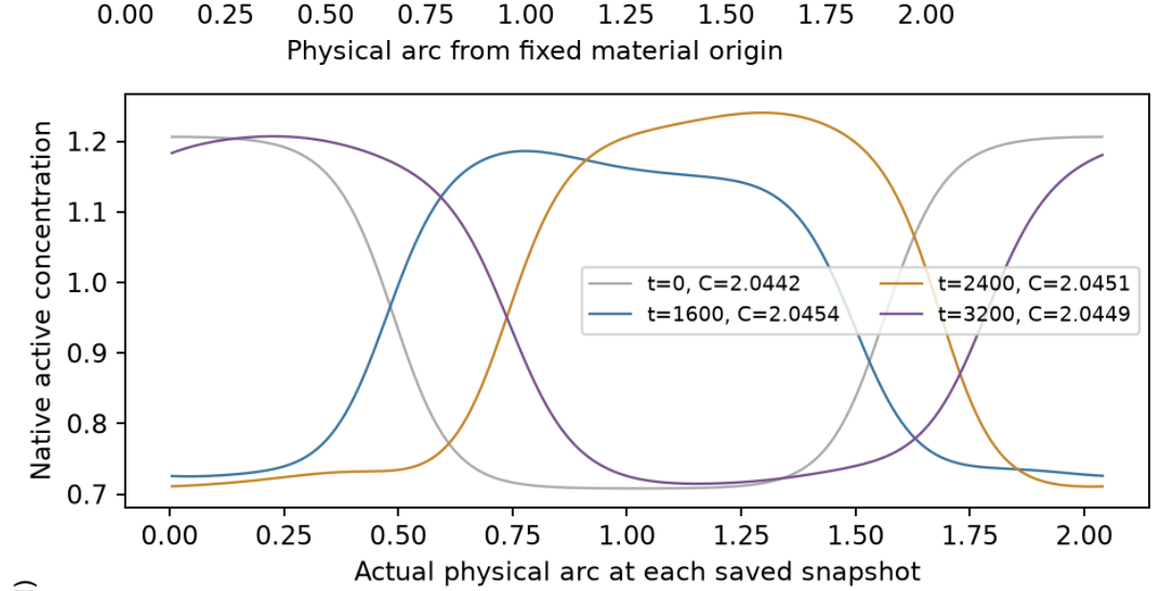

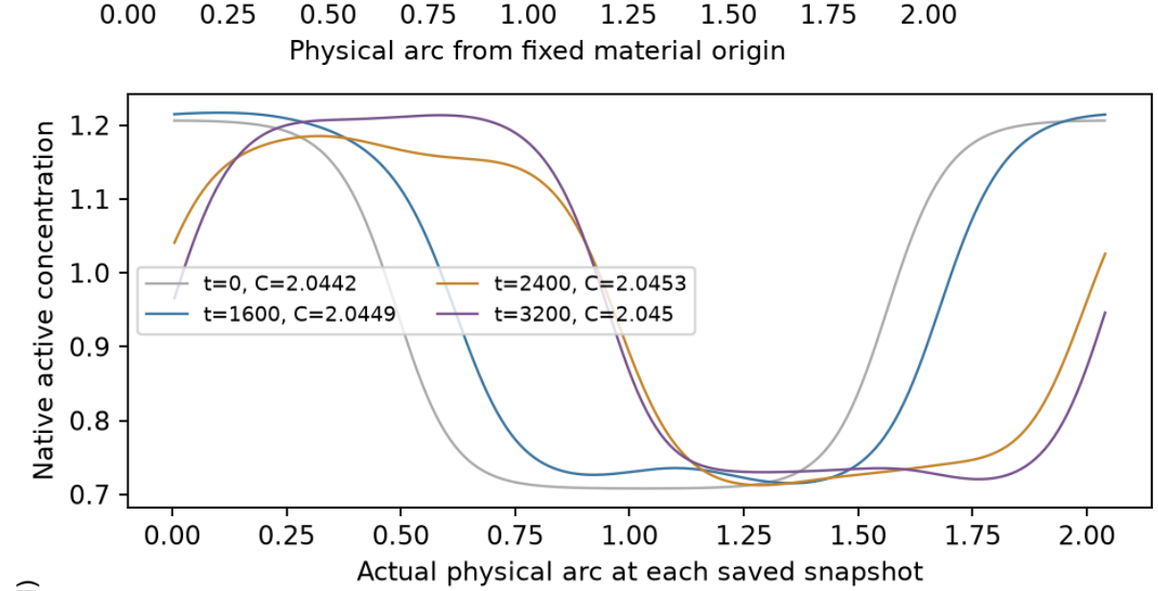

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Spring · size label 2 · f=0.03 · noise
context E1_extra · σ=0.5 · horizon=3200 · n=12 independent noisy realizations

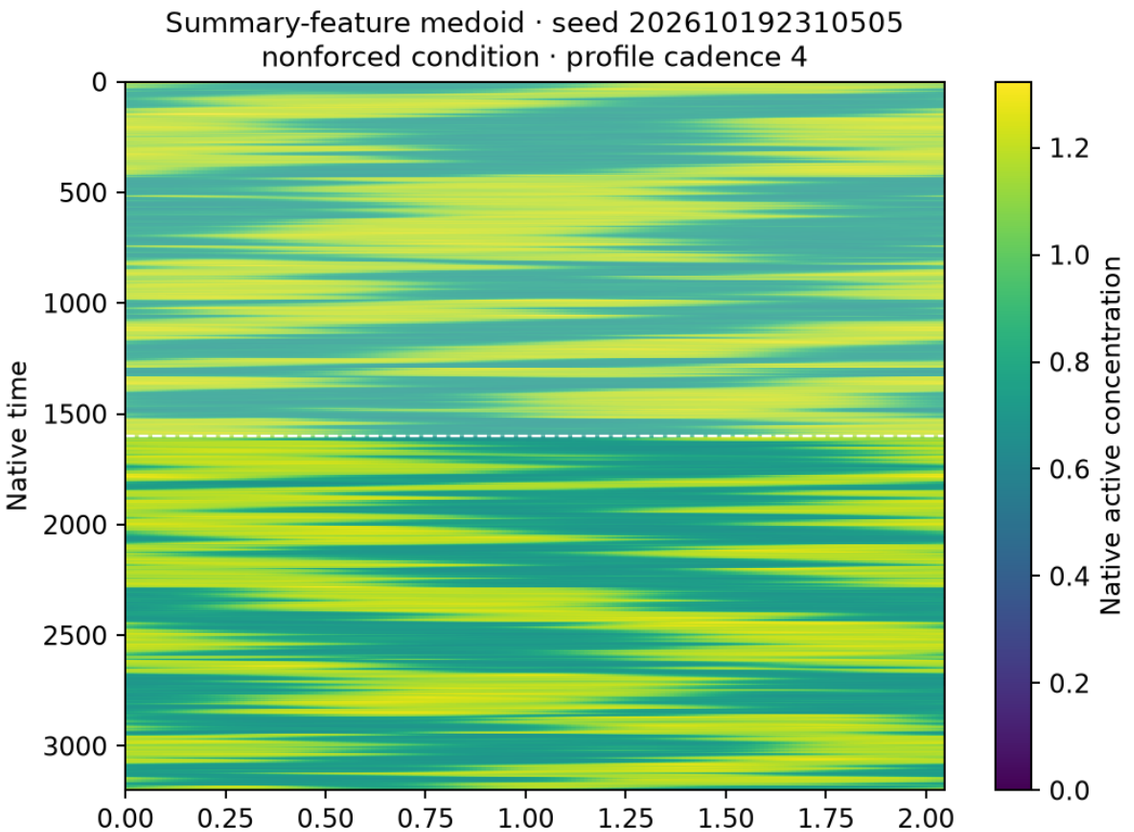

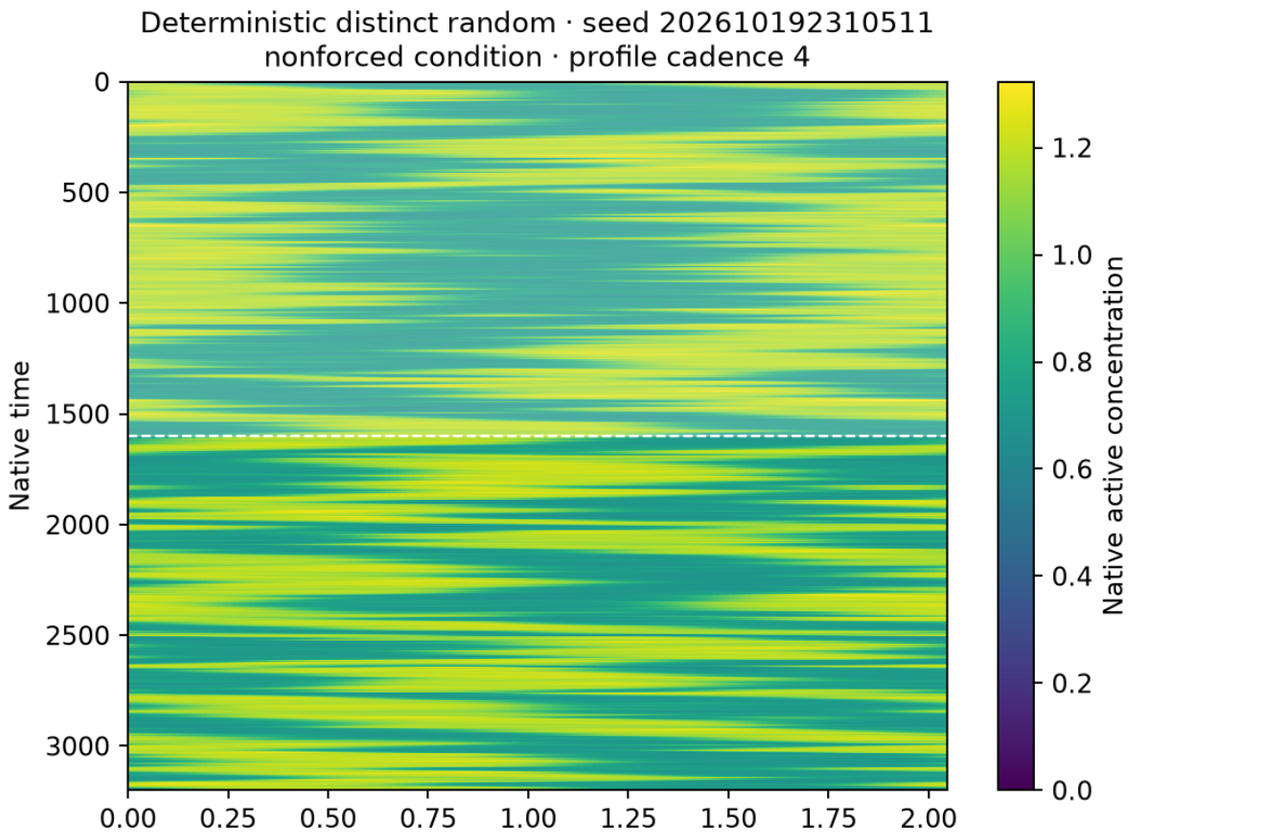

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Spring · size label 2 · f=0.03 · noise
context E1_extra · σ=2 · horizon=3200 · n=12 independent noisy realizations

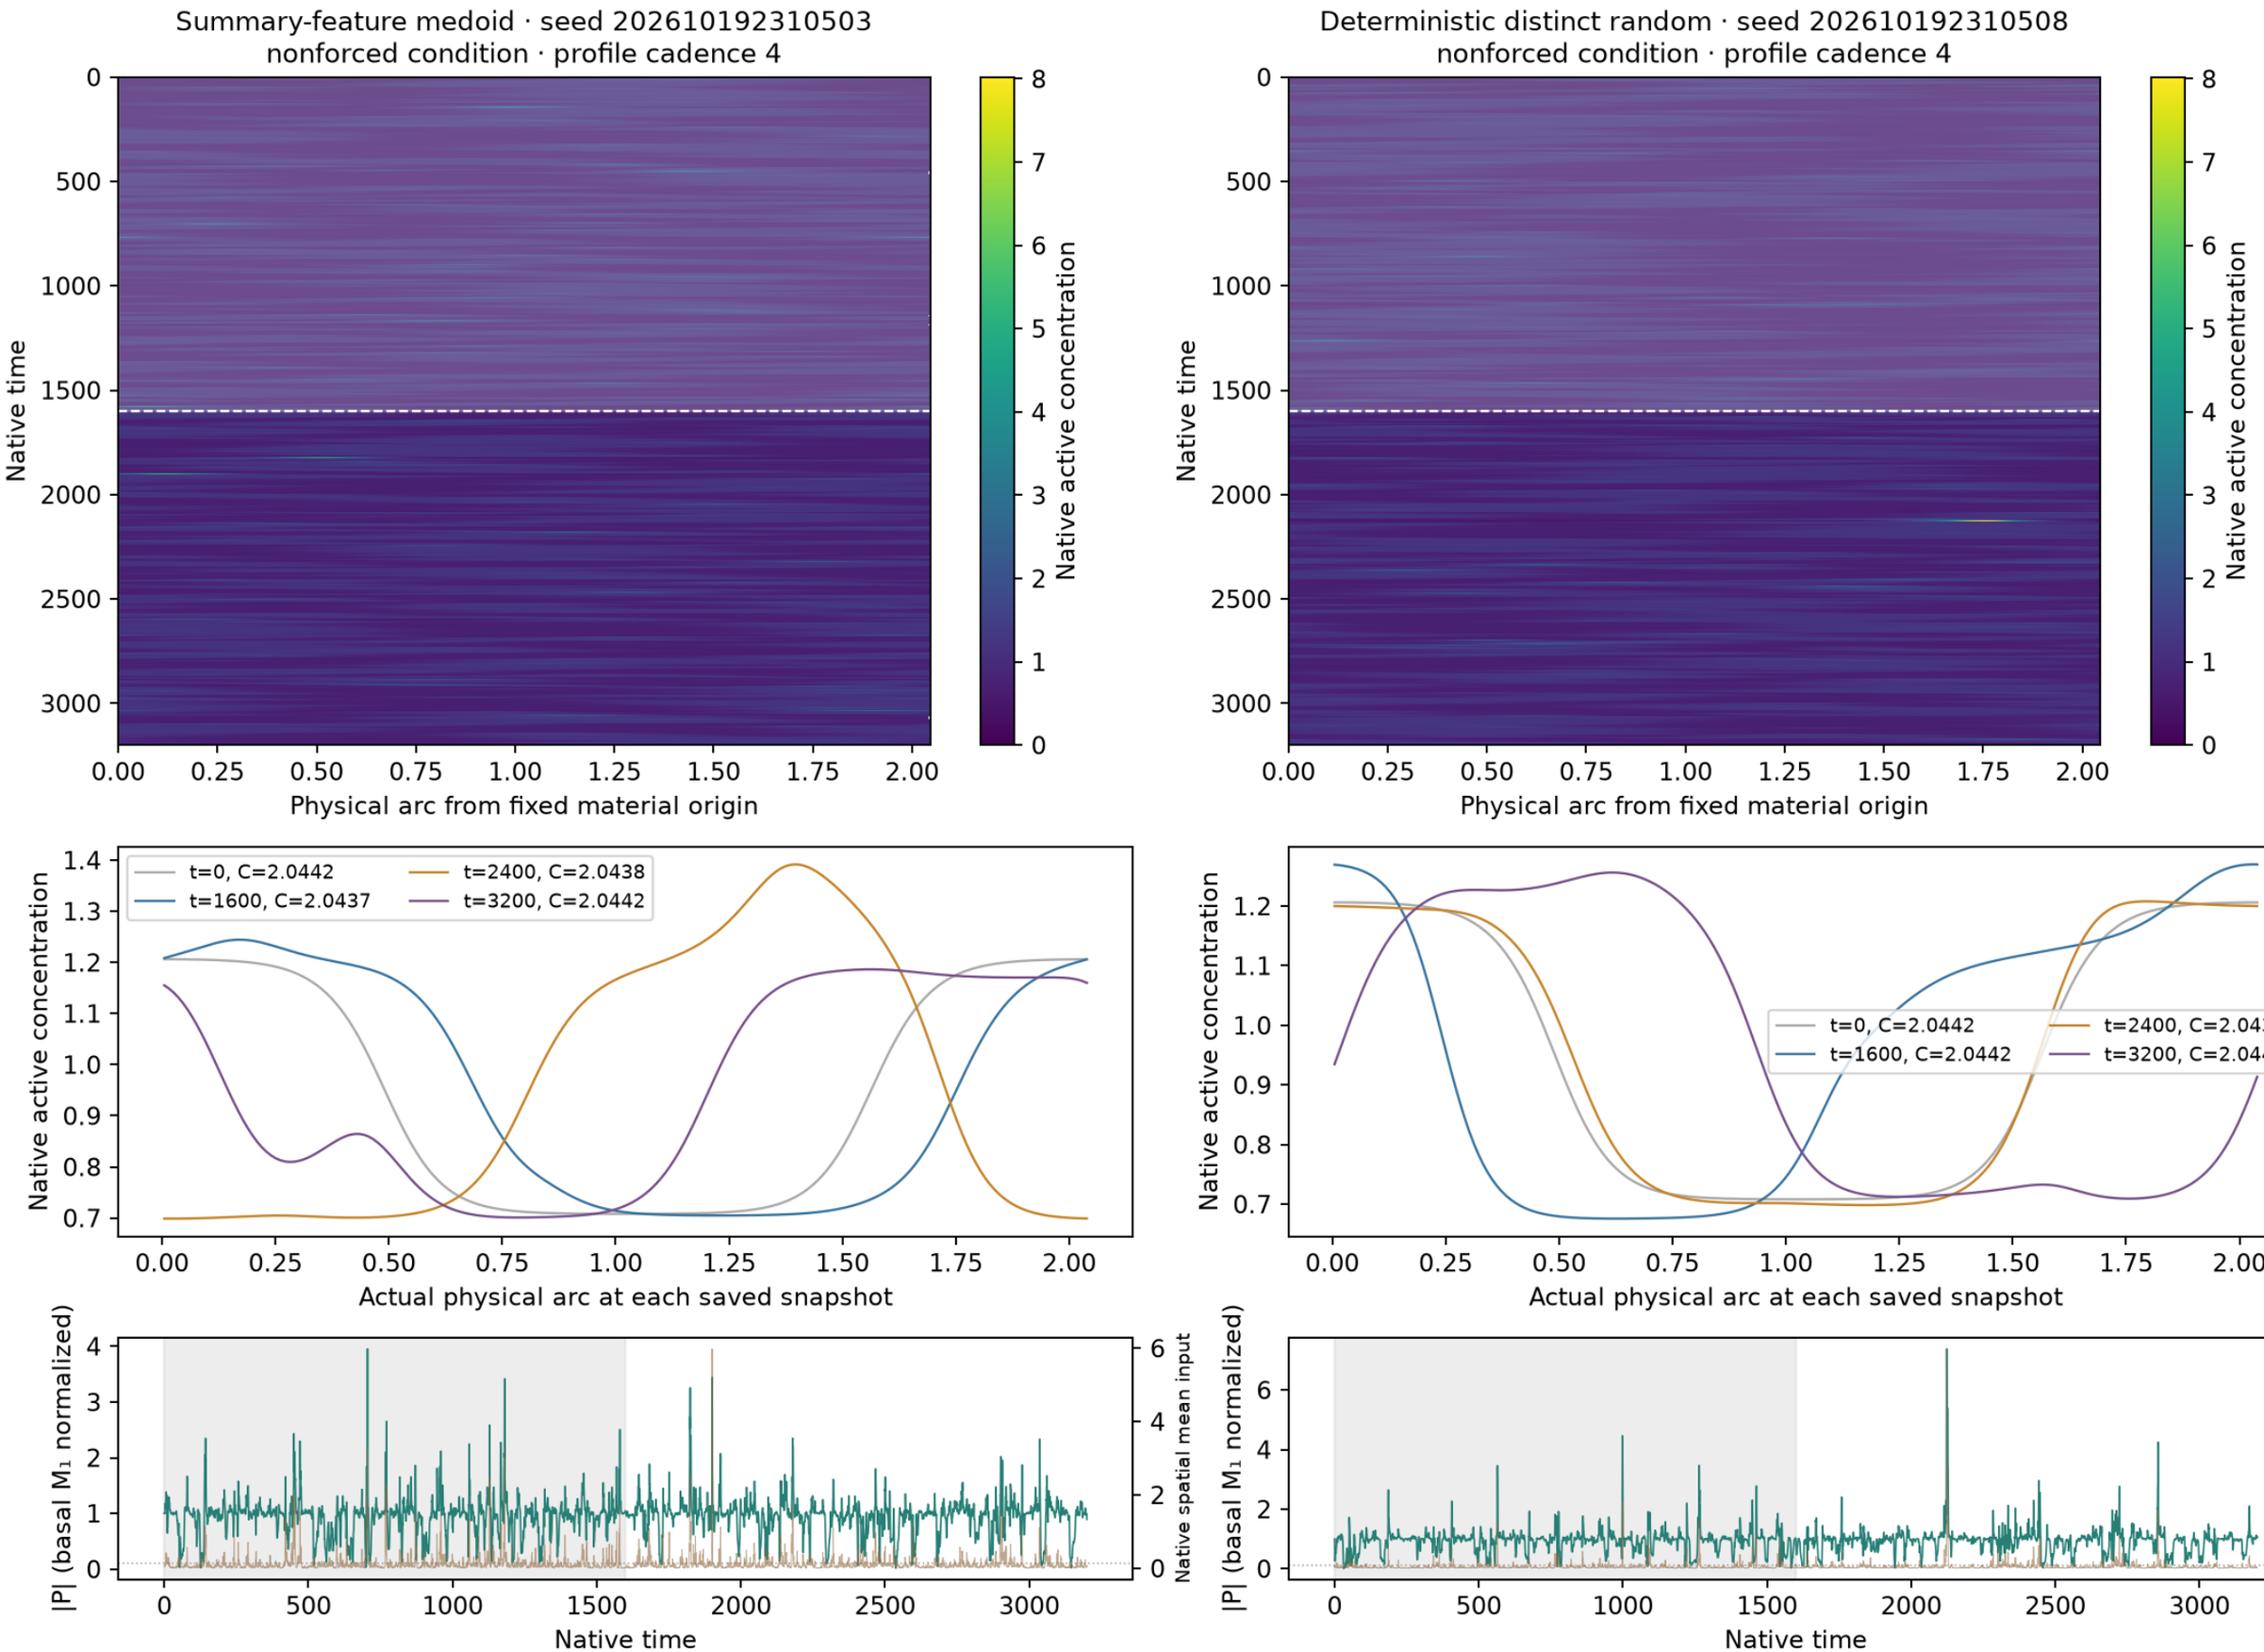

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Spring · size label 2 · f=0.1 · noise
context E1_extra · σ=0.25 · horizon=3200 · n=12 independent noisy realizations

Summary-feature medoid · seed 202610192310602
nonforced condition · profile cadence 4

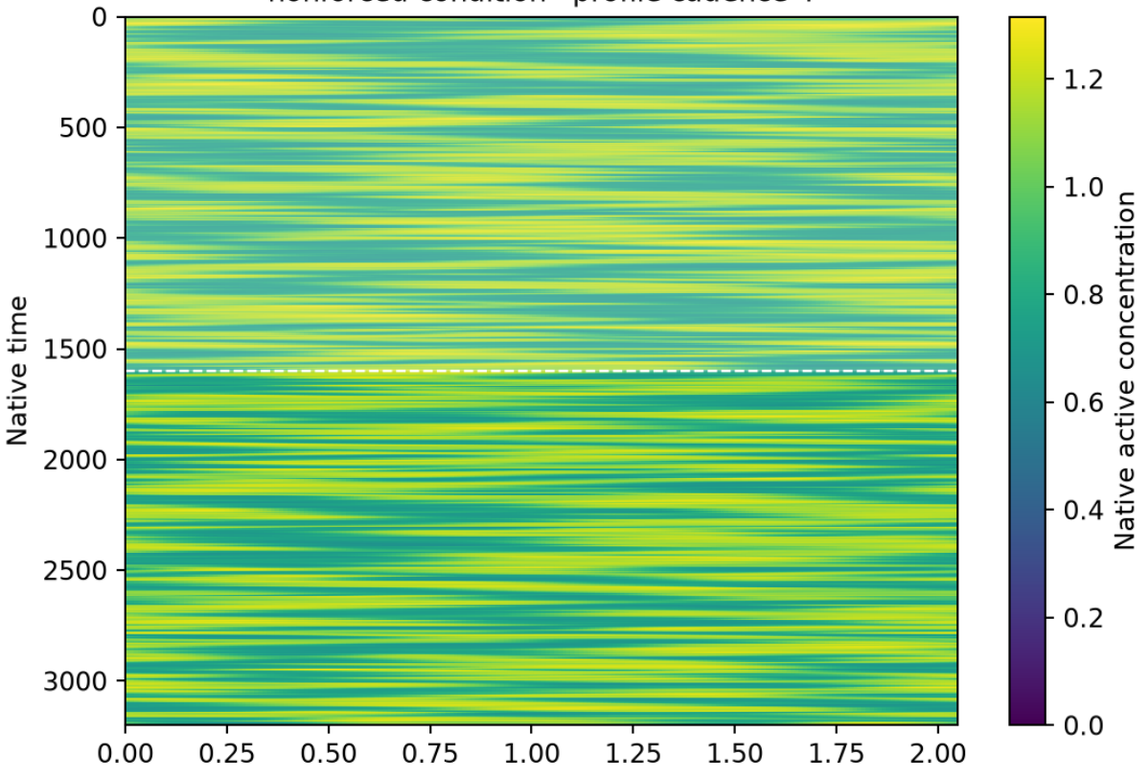

Deterministic distinct random · seed 202610192310604
nonforced condition · profile cadence 4

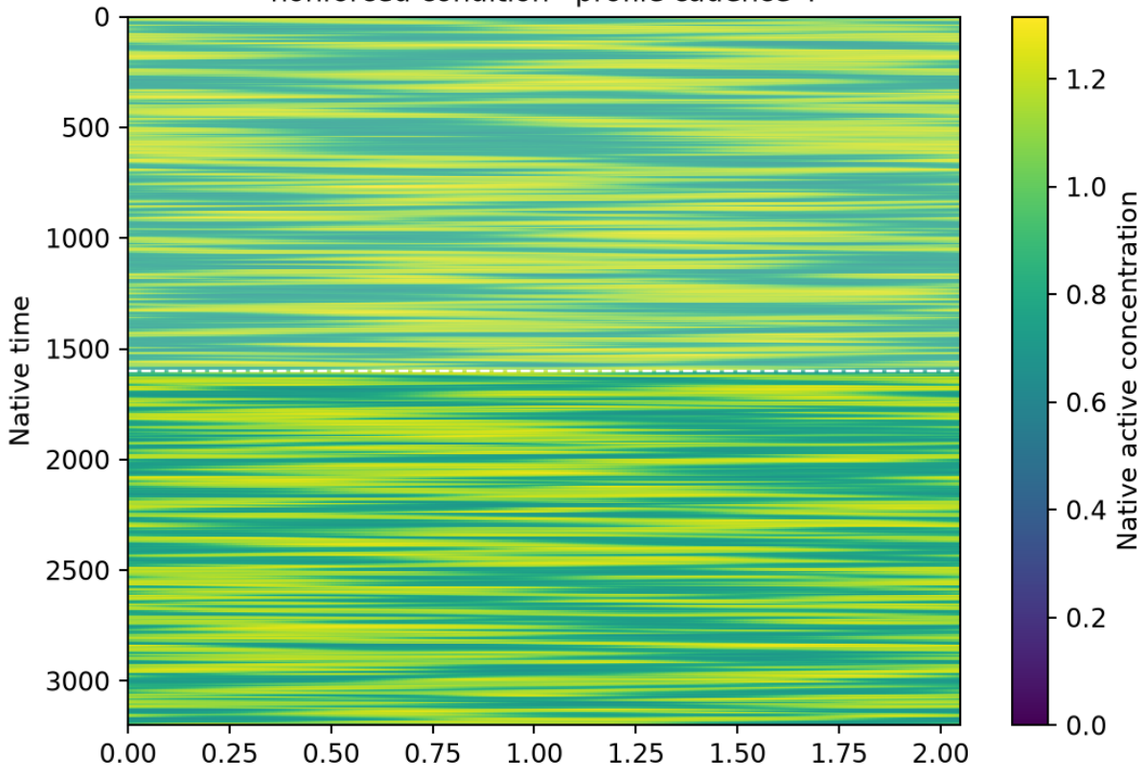

Physical arc from fixed material origin

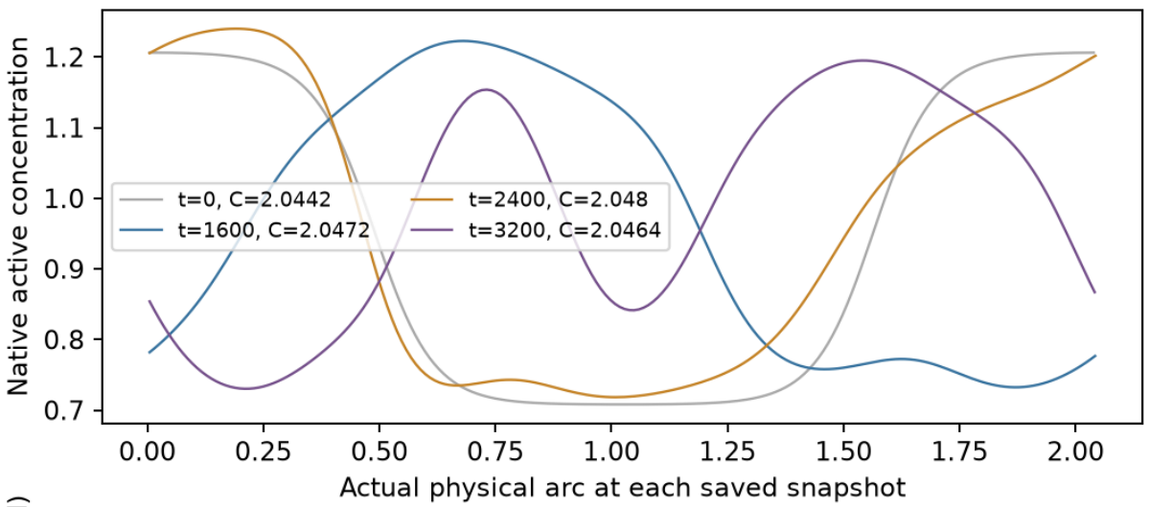

Physical arc from fixed material origin

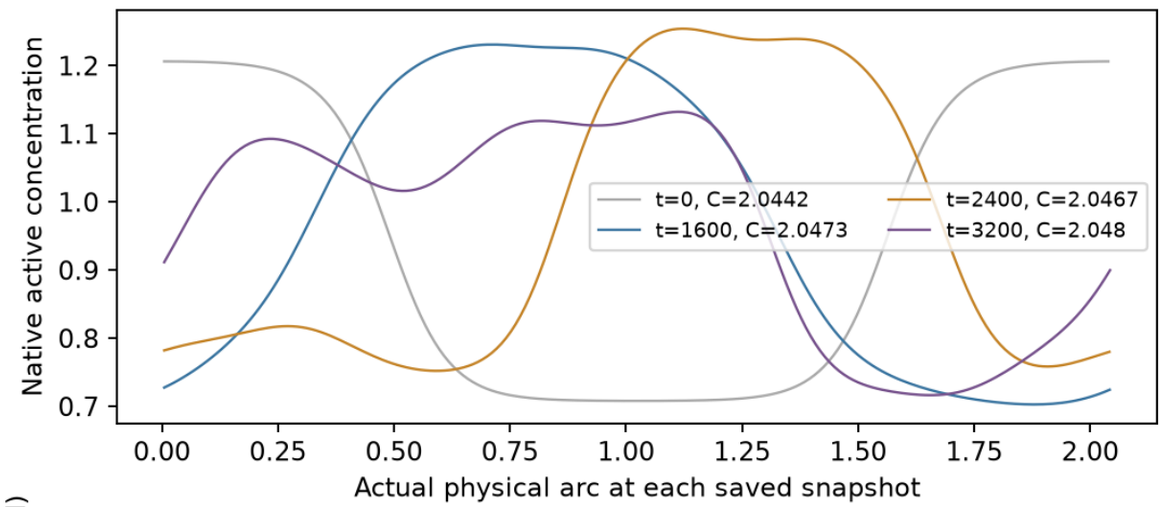

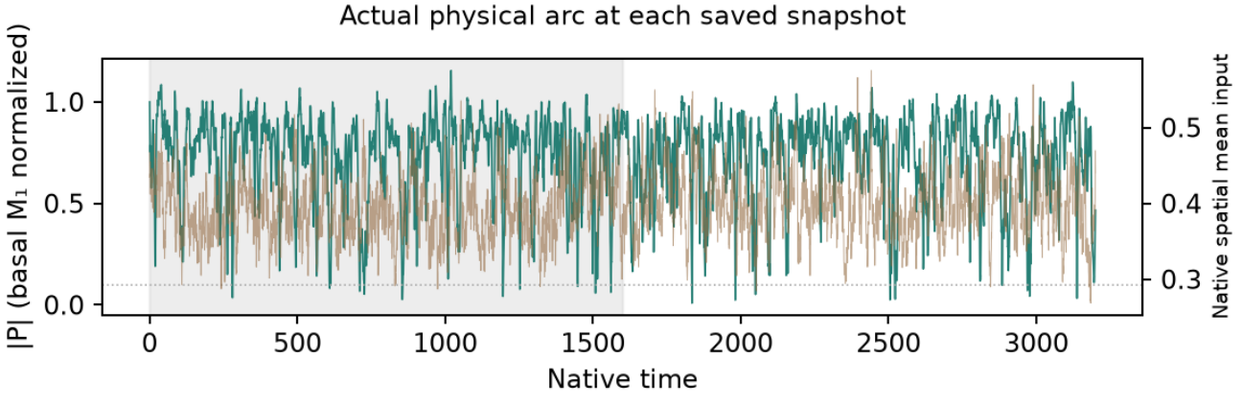

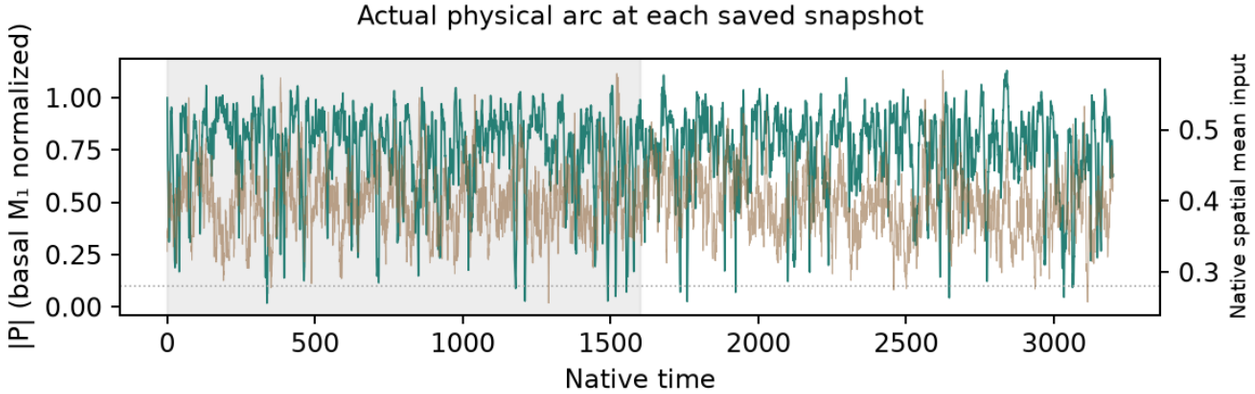

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Spring · size label 2 · f=0.1 · noise
context E1_extra · σ=0.5 · horizon=3200 · n=12 independent noisy realizations

Summary-feature medoid · seed 202610192310603
nonforced condition · profile cadence 4

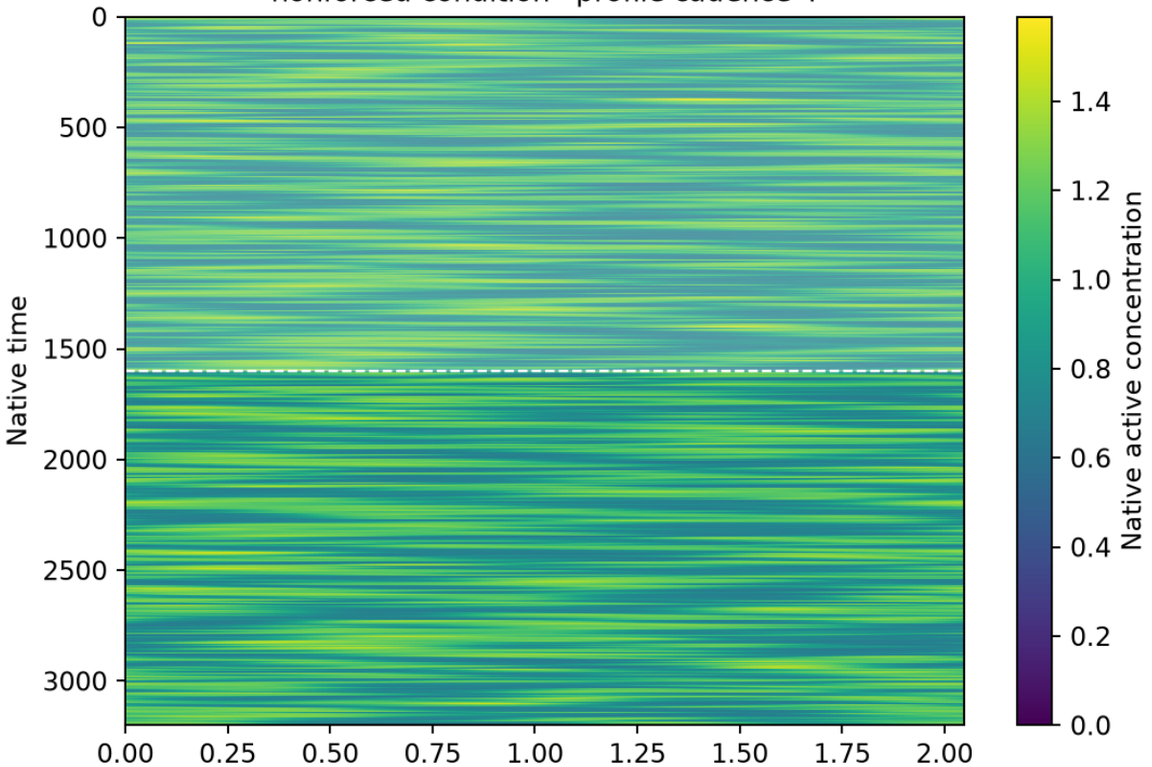

Deterministic distinct random · seed 202610192310605
nonforced condition · profile cadence 4

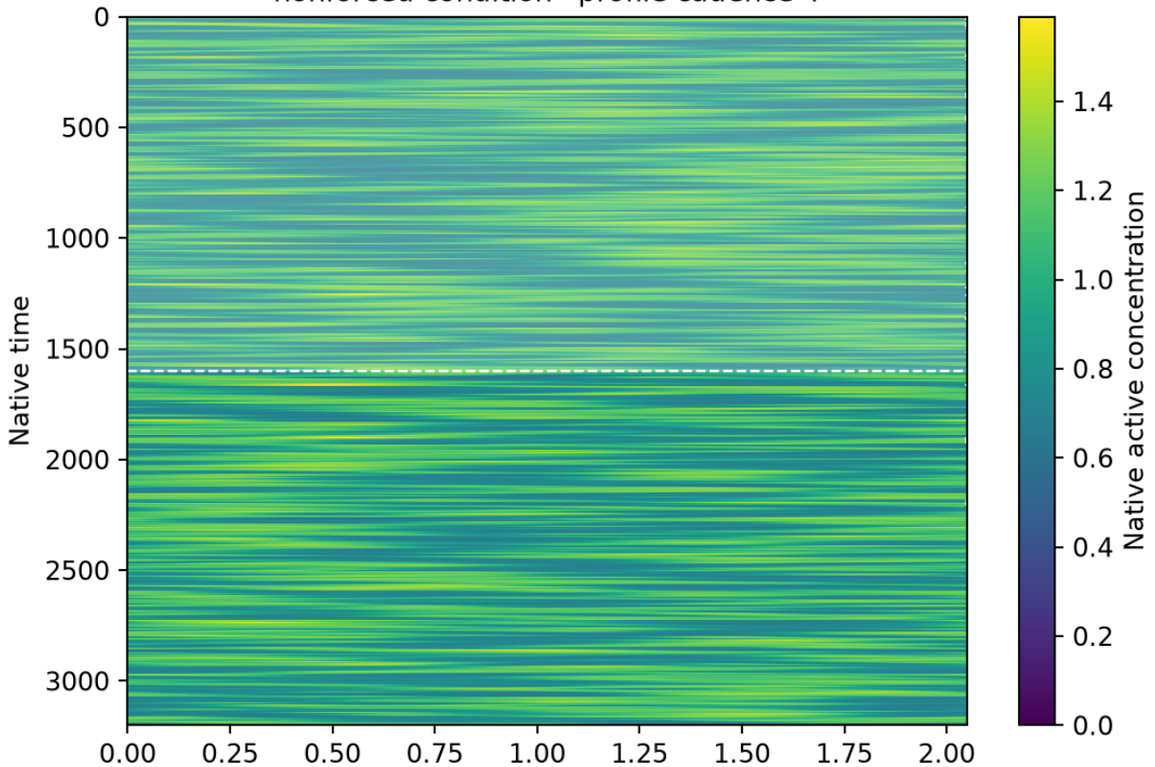

Physical arc from fixed material origin

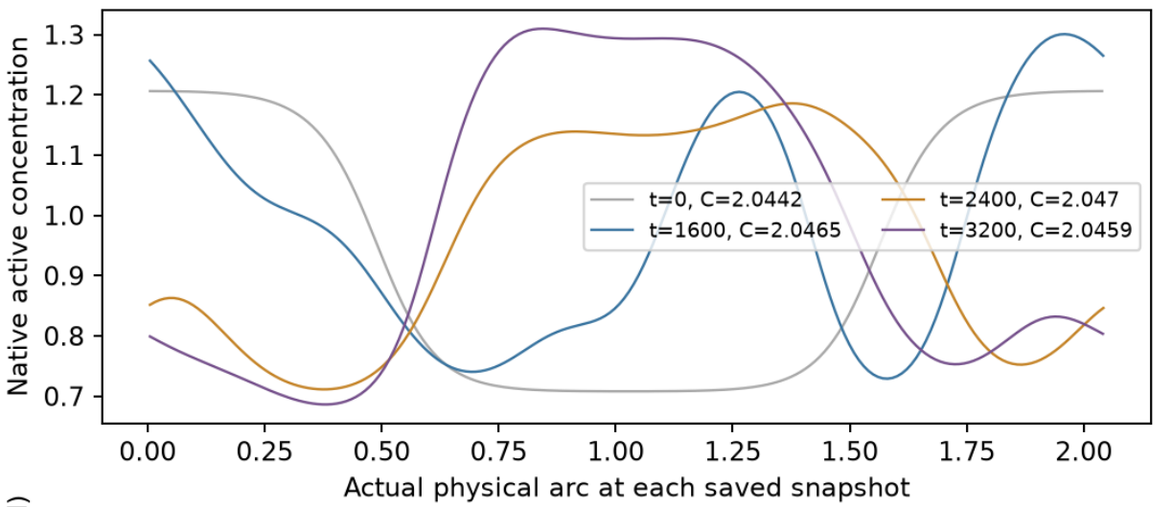

Physical arc from fixed material origin

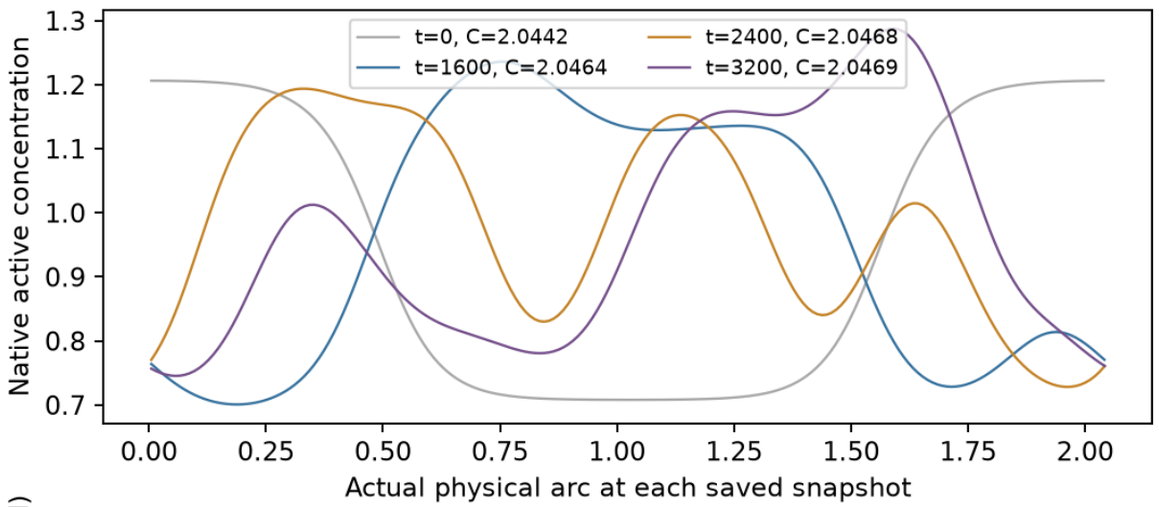

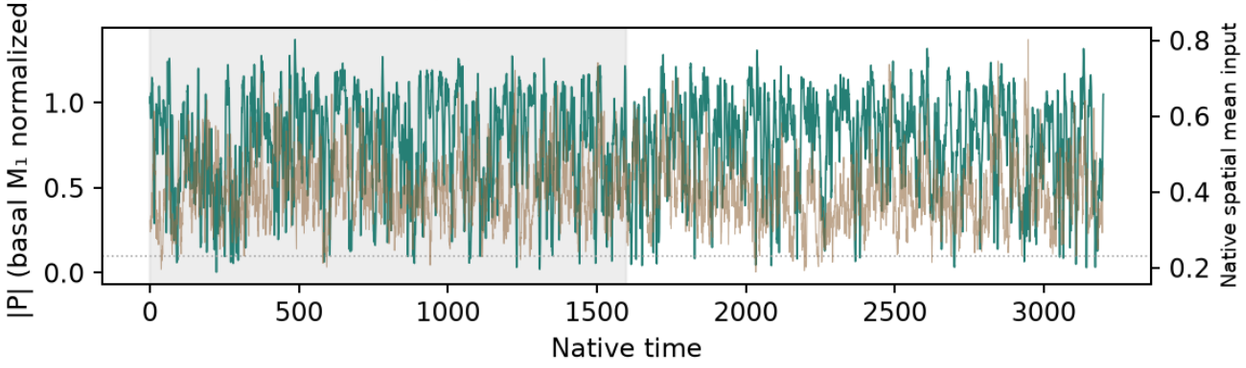

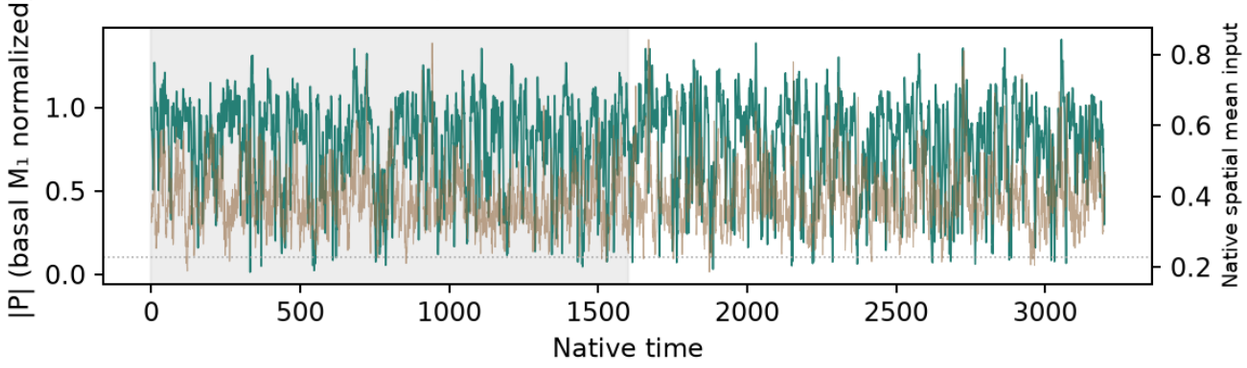

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Spring · size label 2 · f=0.1 · noise
context E1_extra · σ=2 · horizon=3200 · n=12 independent noisy realizations

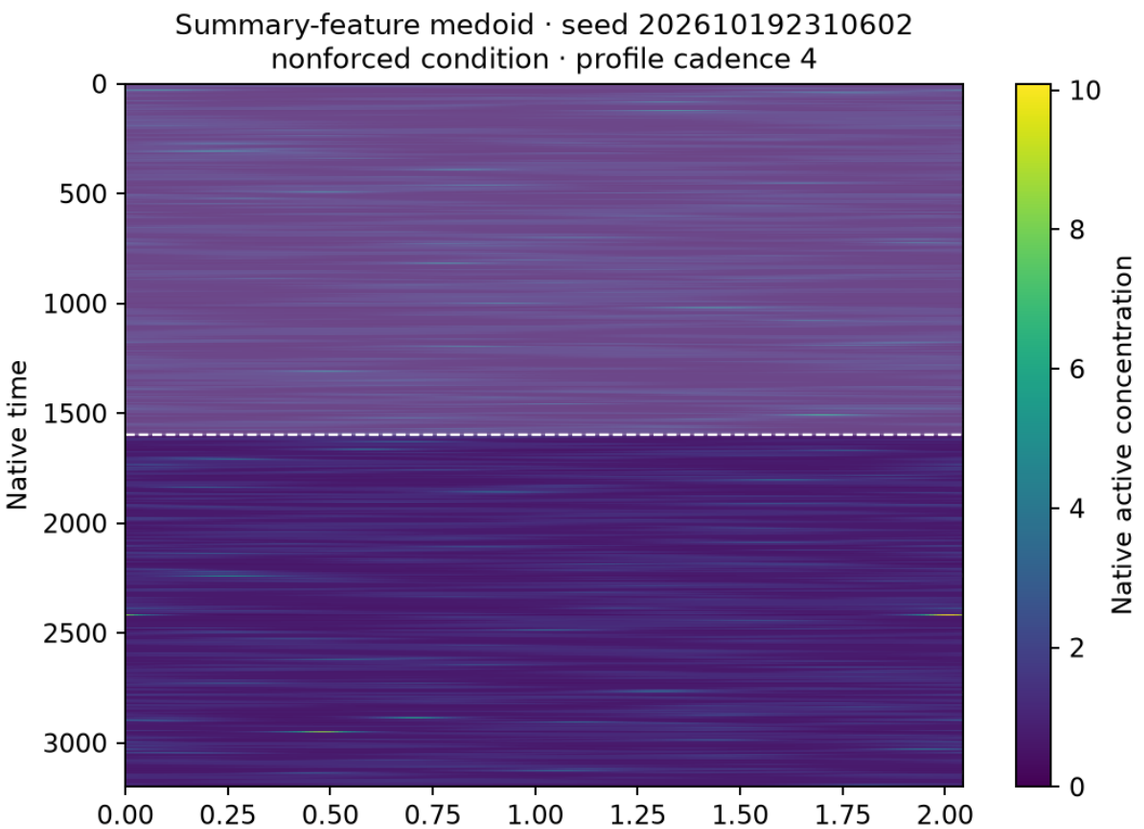

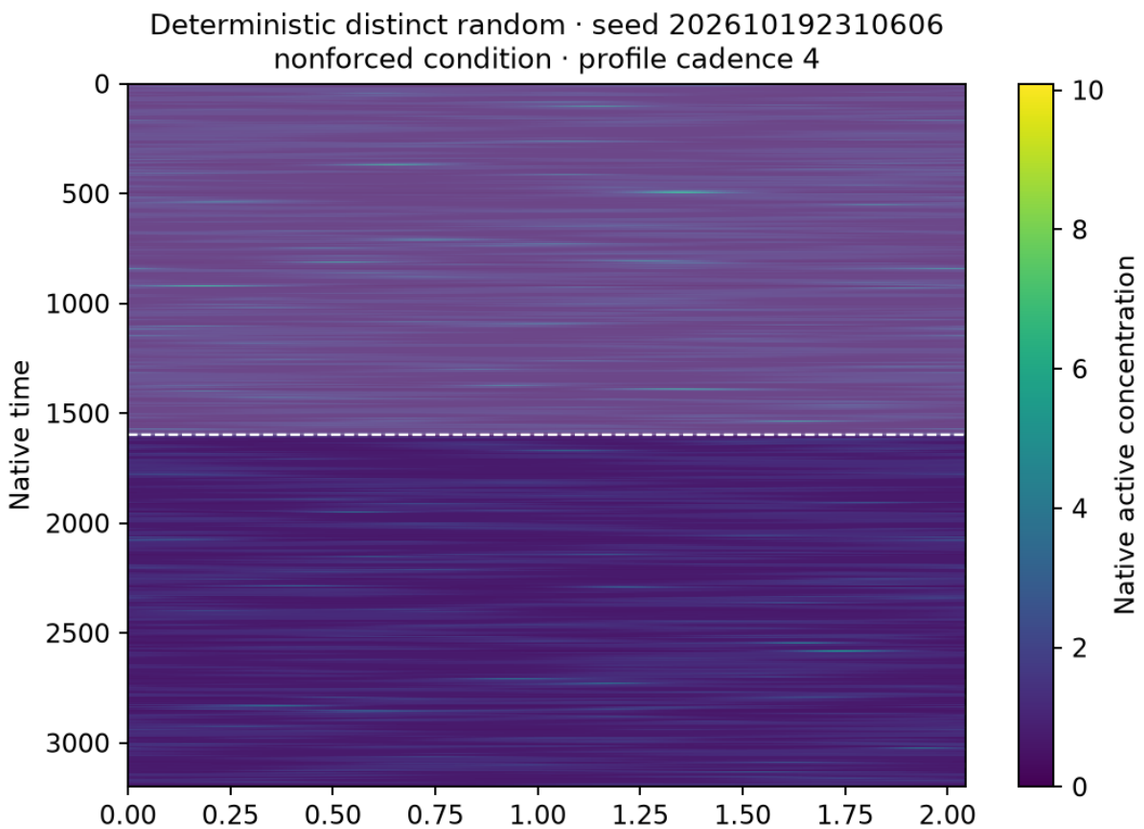

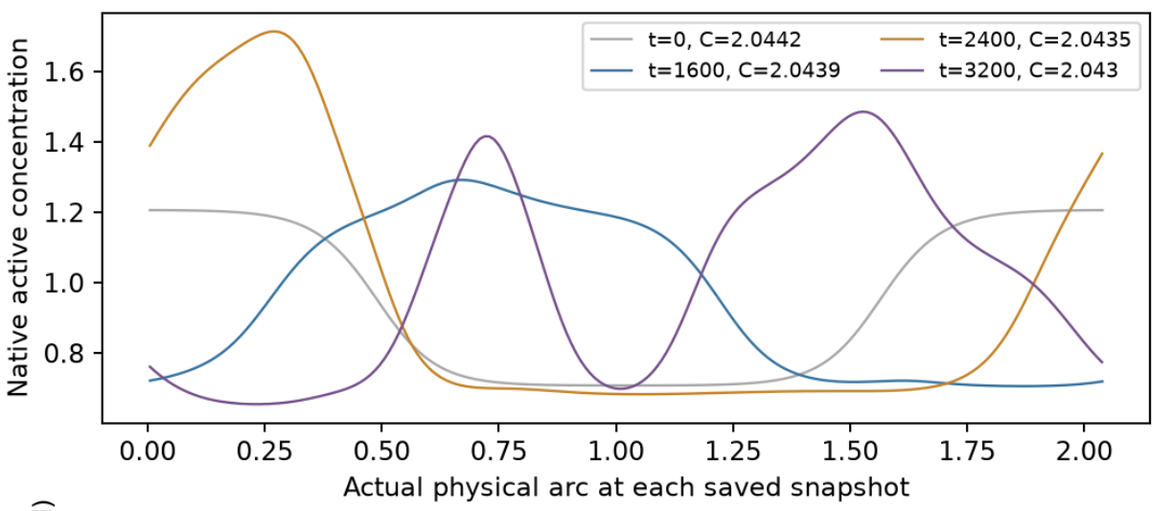

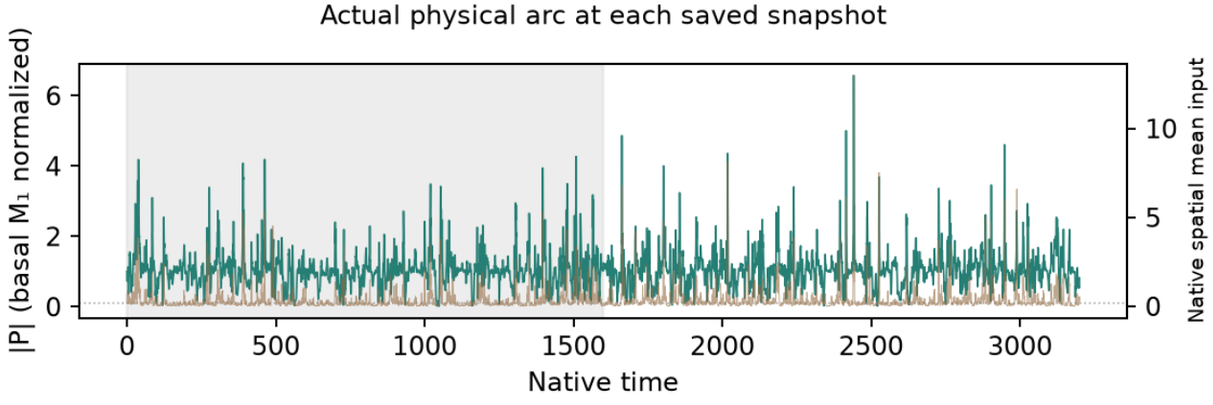

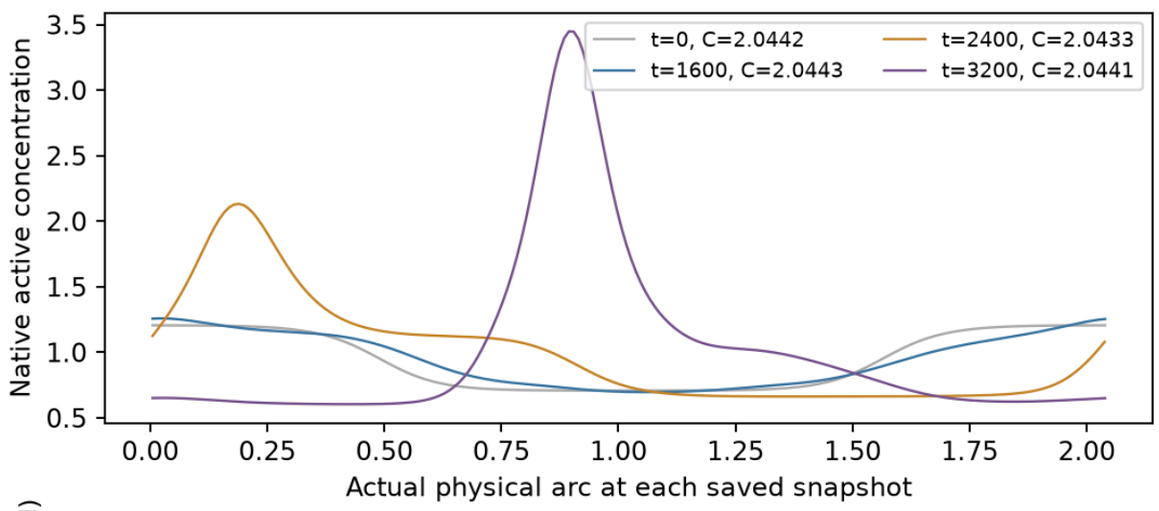

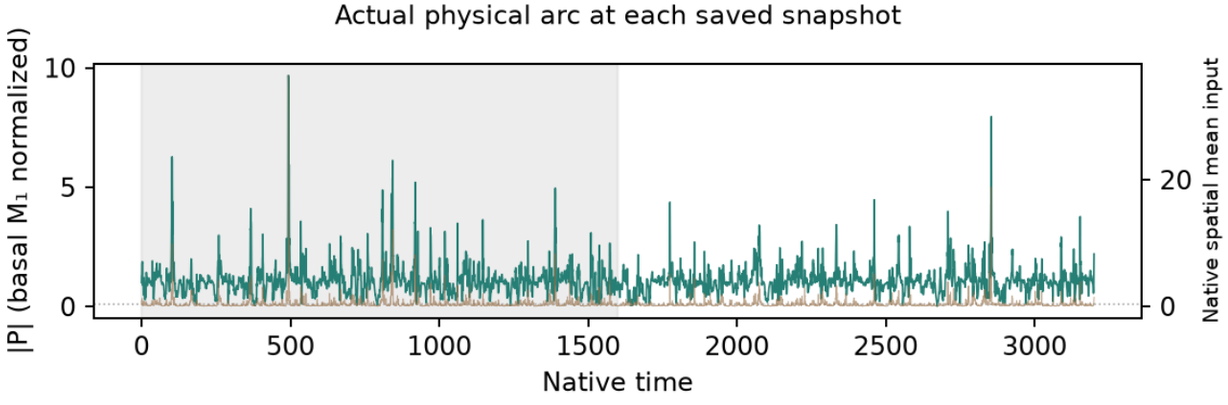

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M_1 normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Spring · size label 3 · f=0.03 · noise
context E1_extra · σ=0.25 · horizon=3200 · n=12 independent noisy realizations

Summary-feature medoid · seed 202610192320509
nonforced condition · profile cadence 4

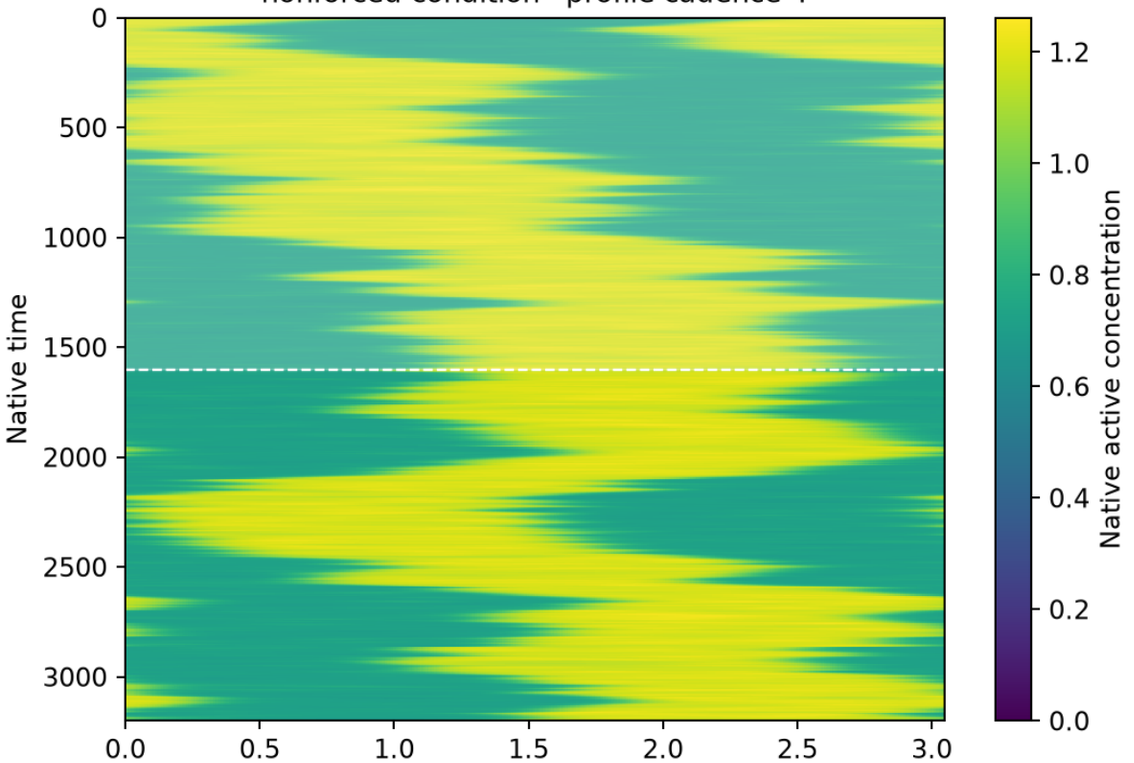

Deterministic distinct random · seed 202610192320500
nonforced condition · profile cadence 4

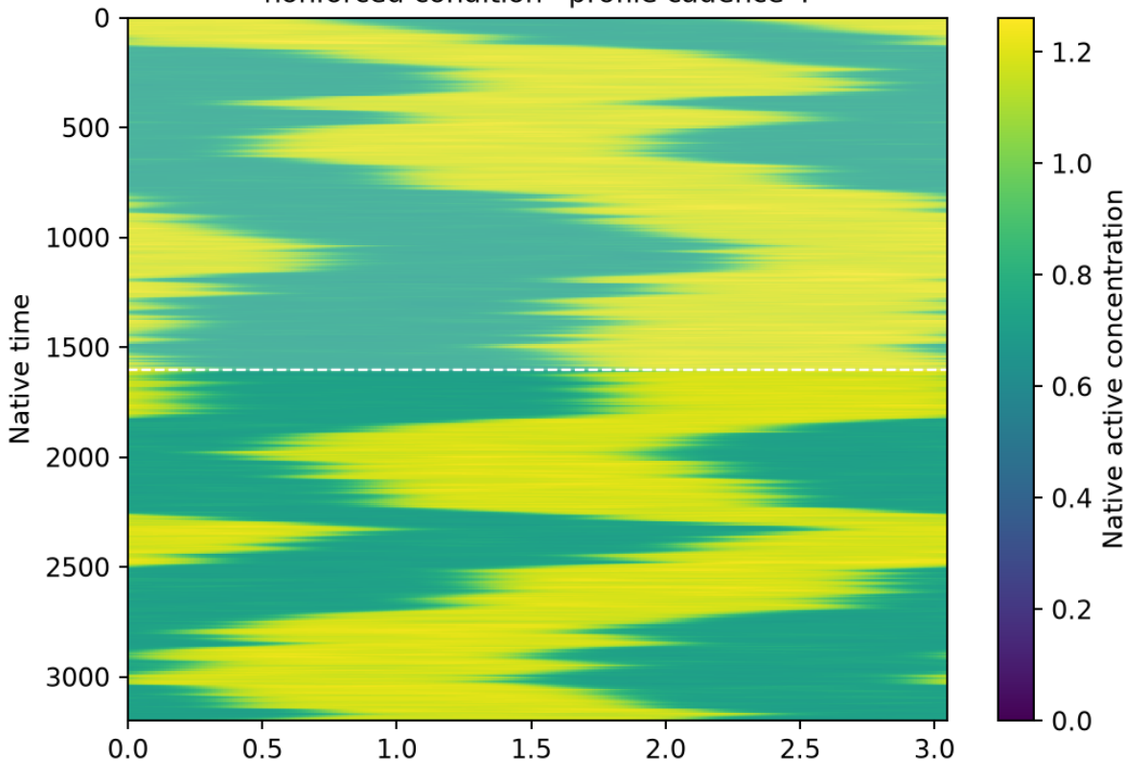

Physical arc from fixed material origin

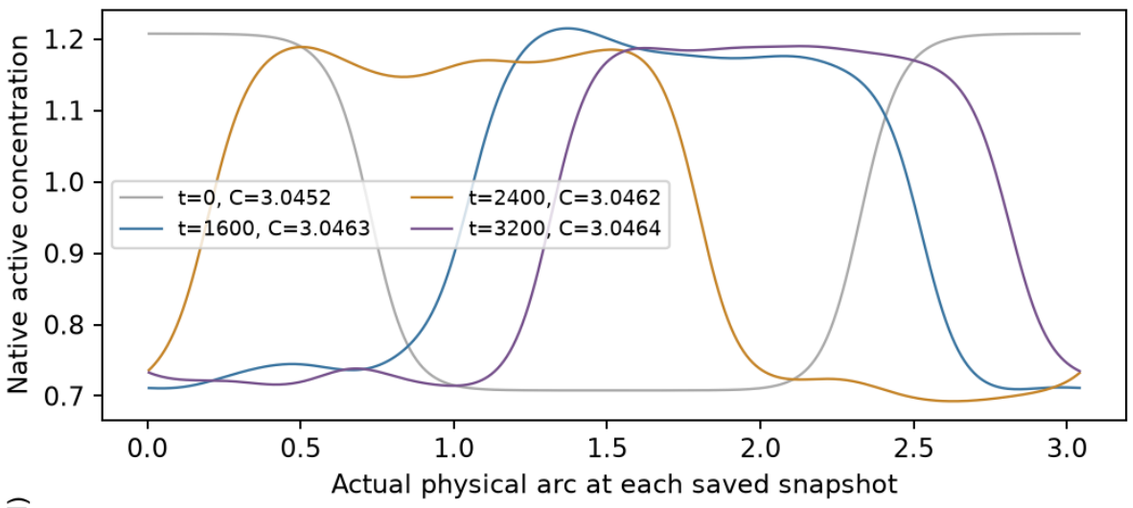

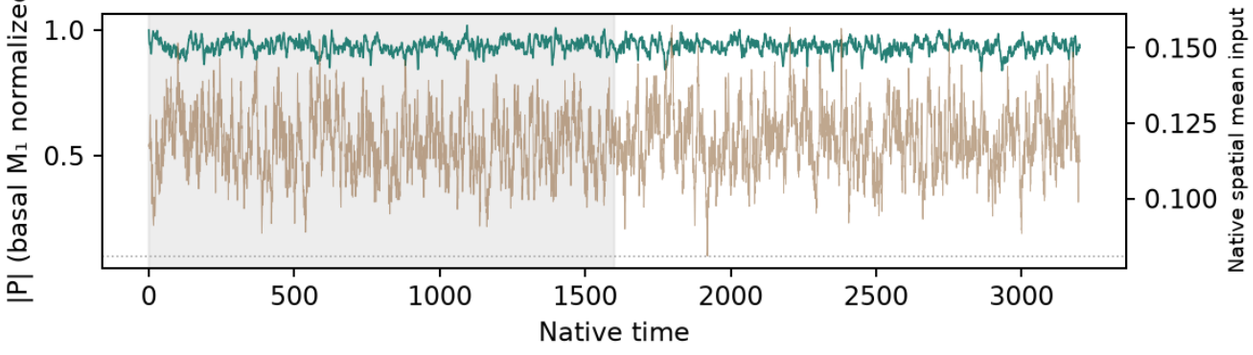

Physical arc from fixed material origin

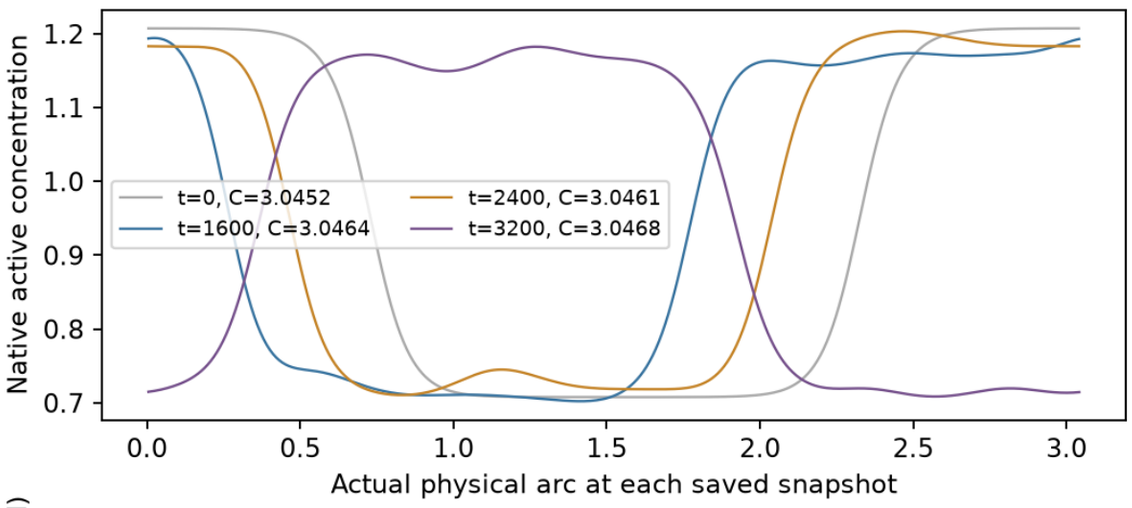

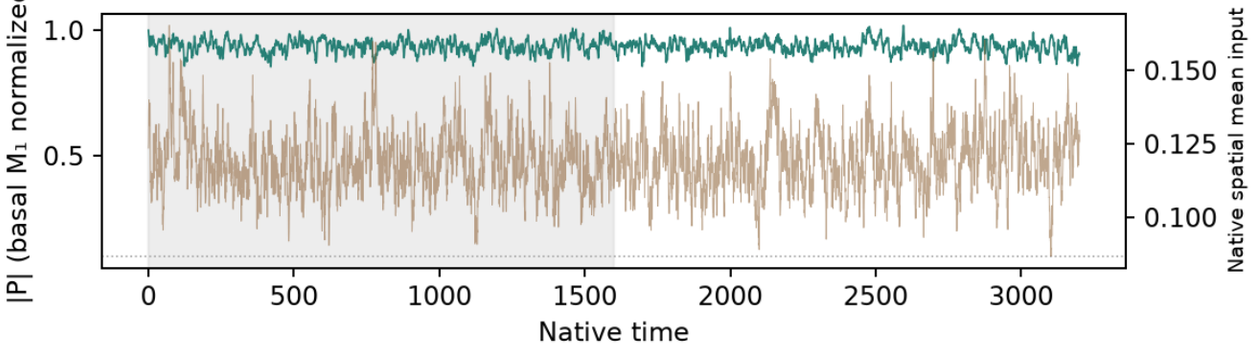

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M_1 normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Spring · size label 3 · f=0.03 · noise
context E1_extra · σ=0.5 · horizon=3200 · n=12 independent noisy realizations

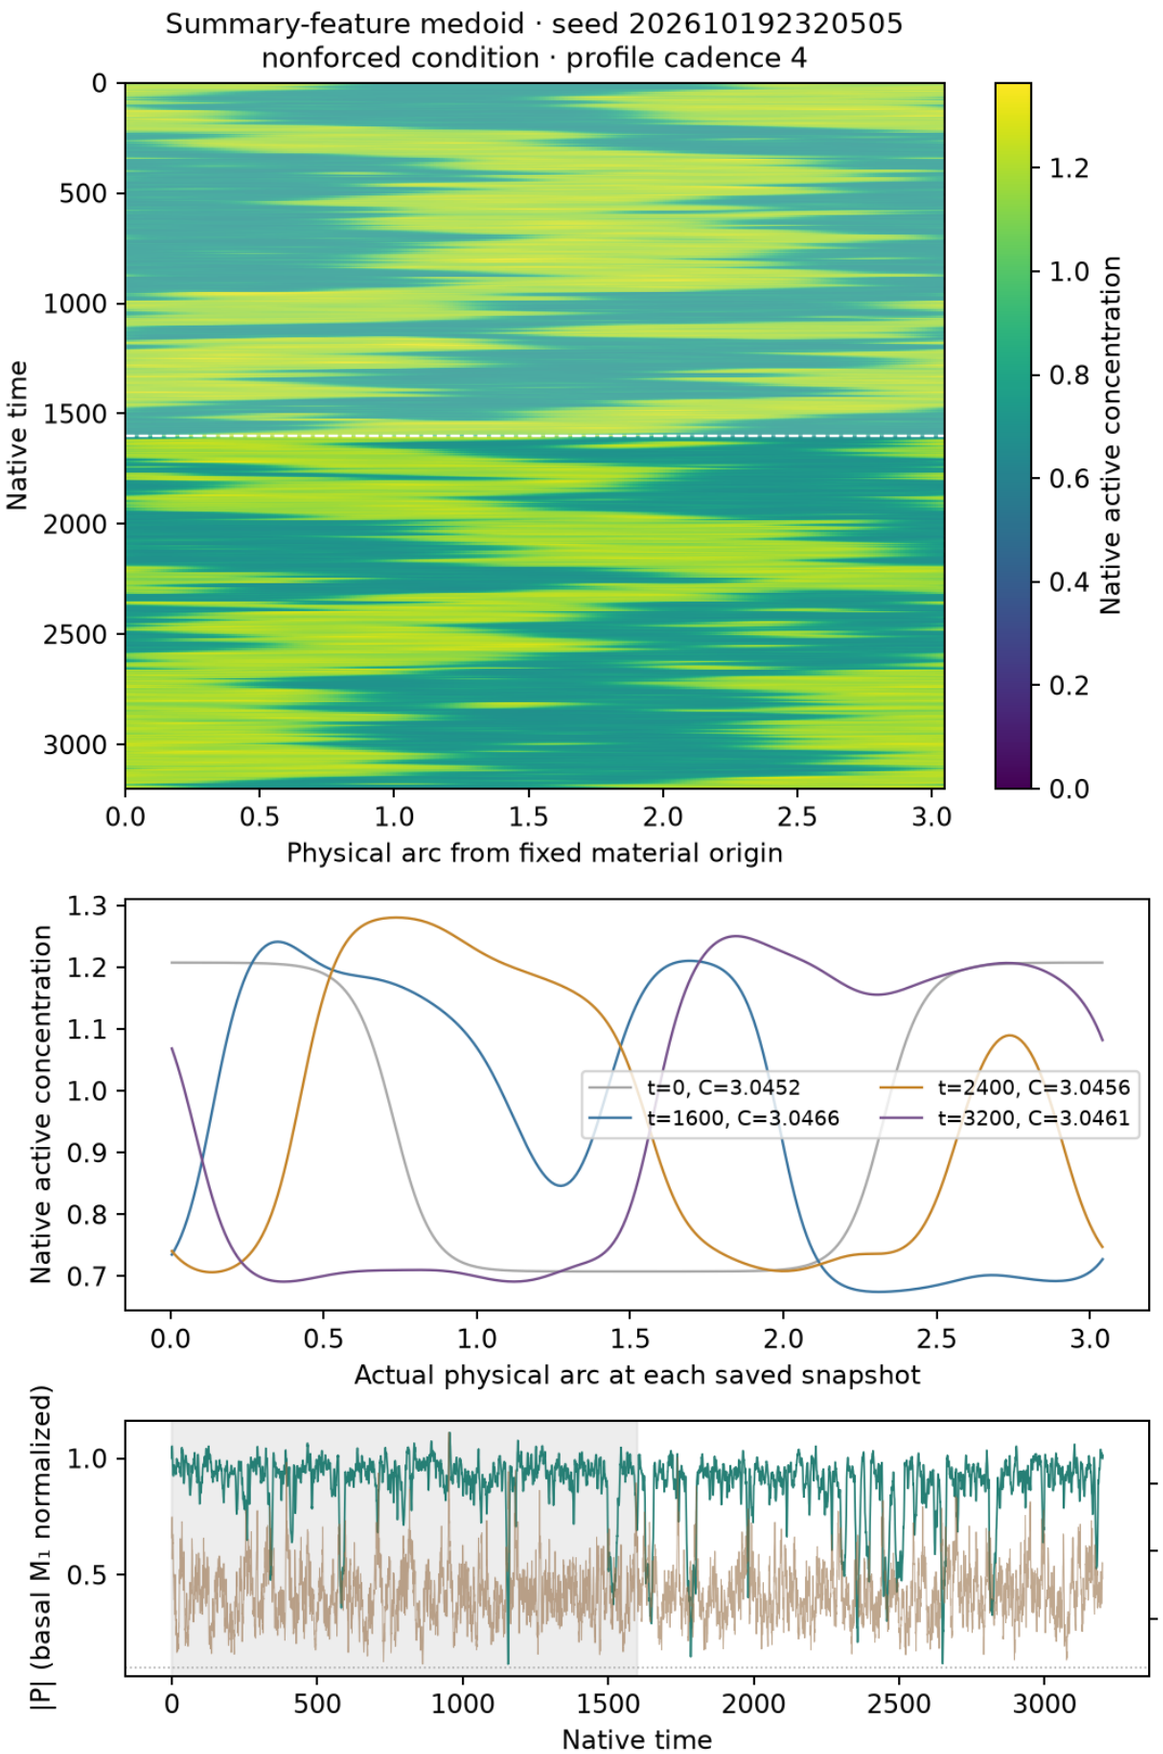

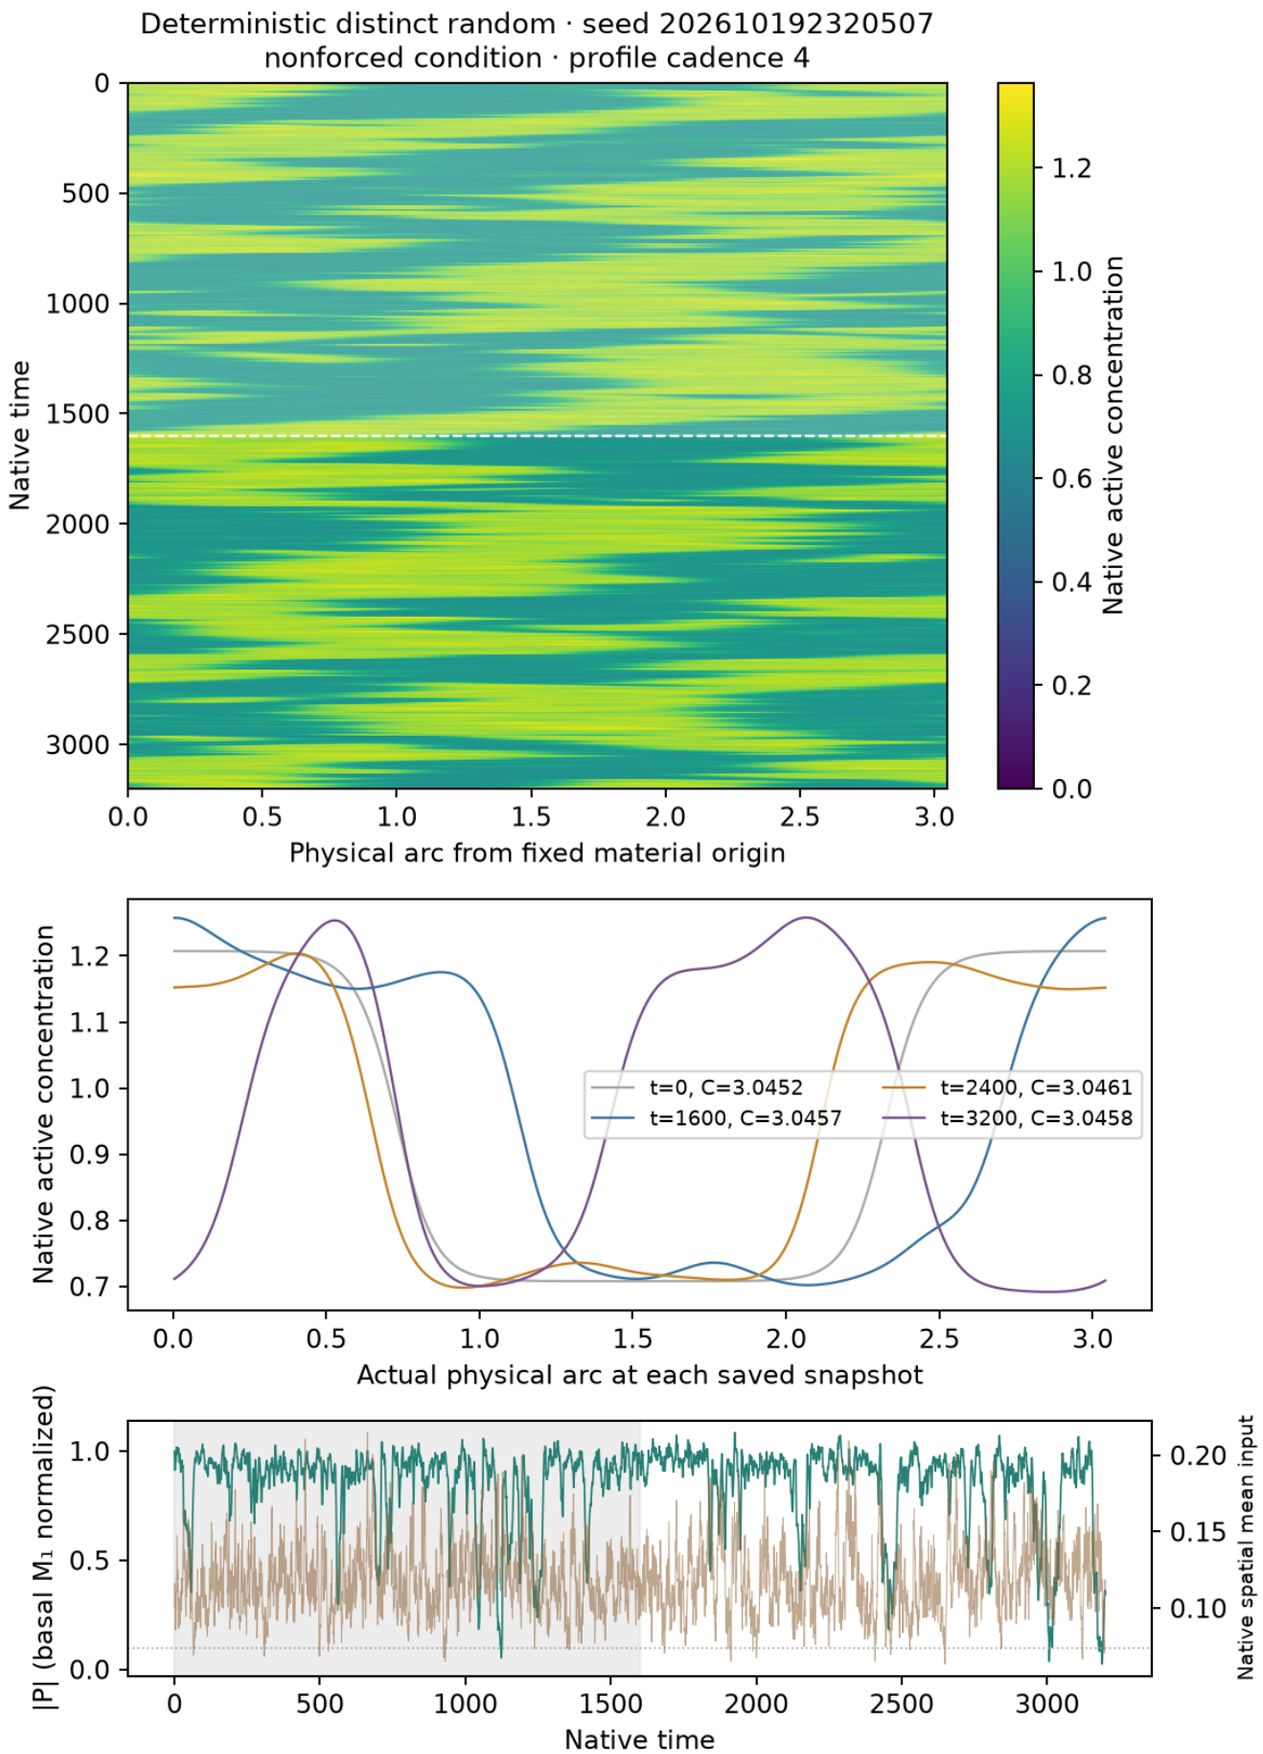

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.