

S11 · Spring · size label 3 · f=0.03 · noise
context E1_extra · σ=2 · horizon=3200 · n=12 independent noisy realizations

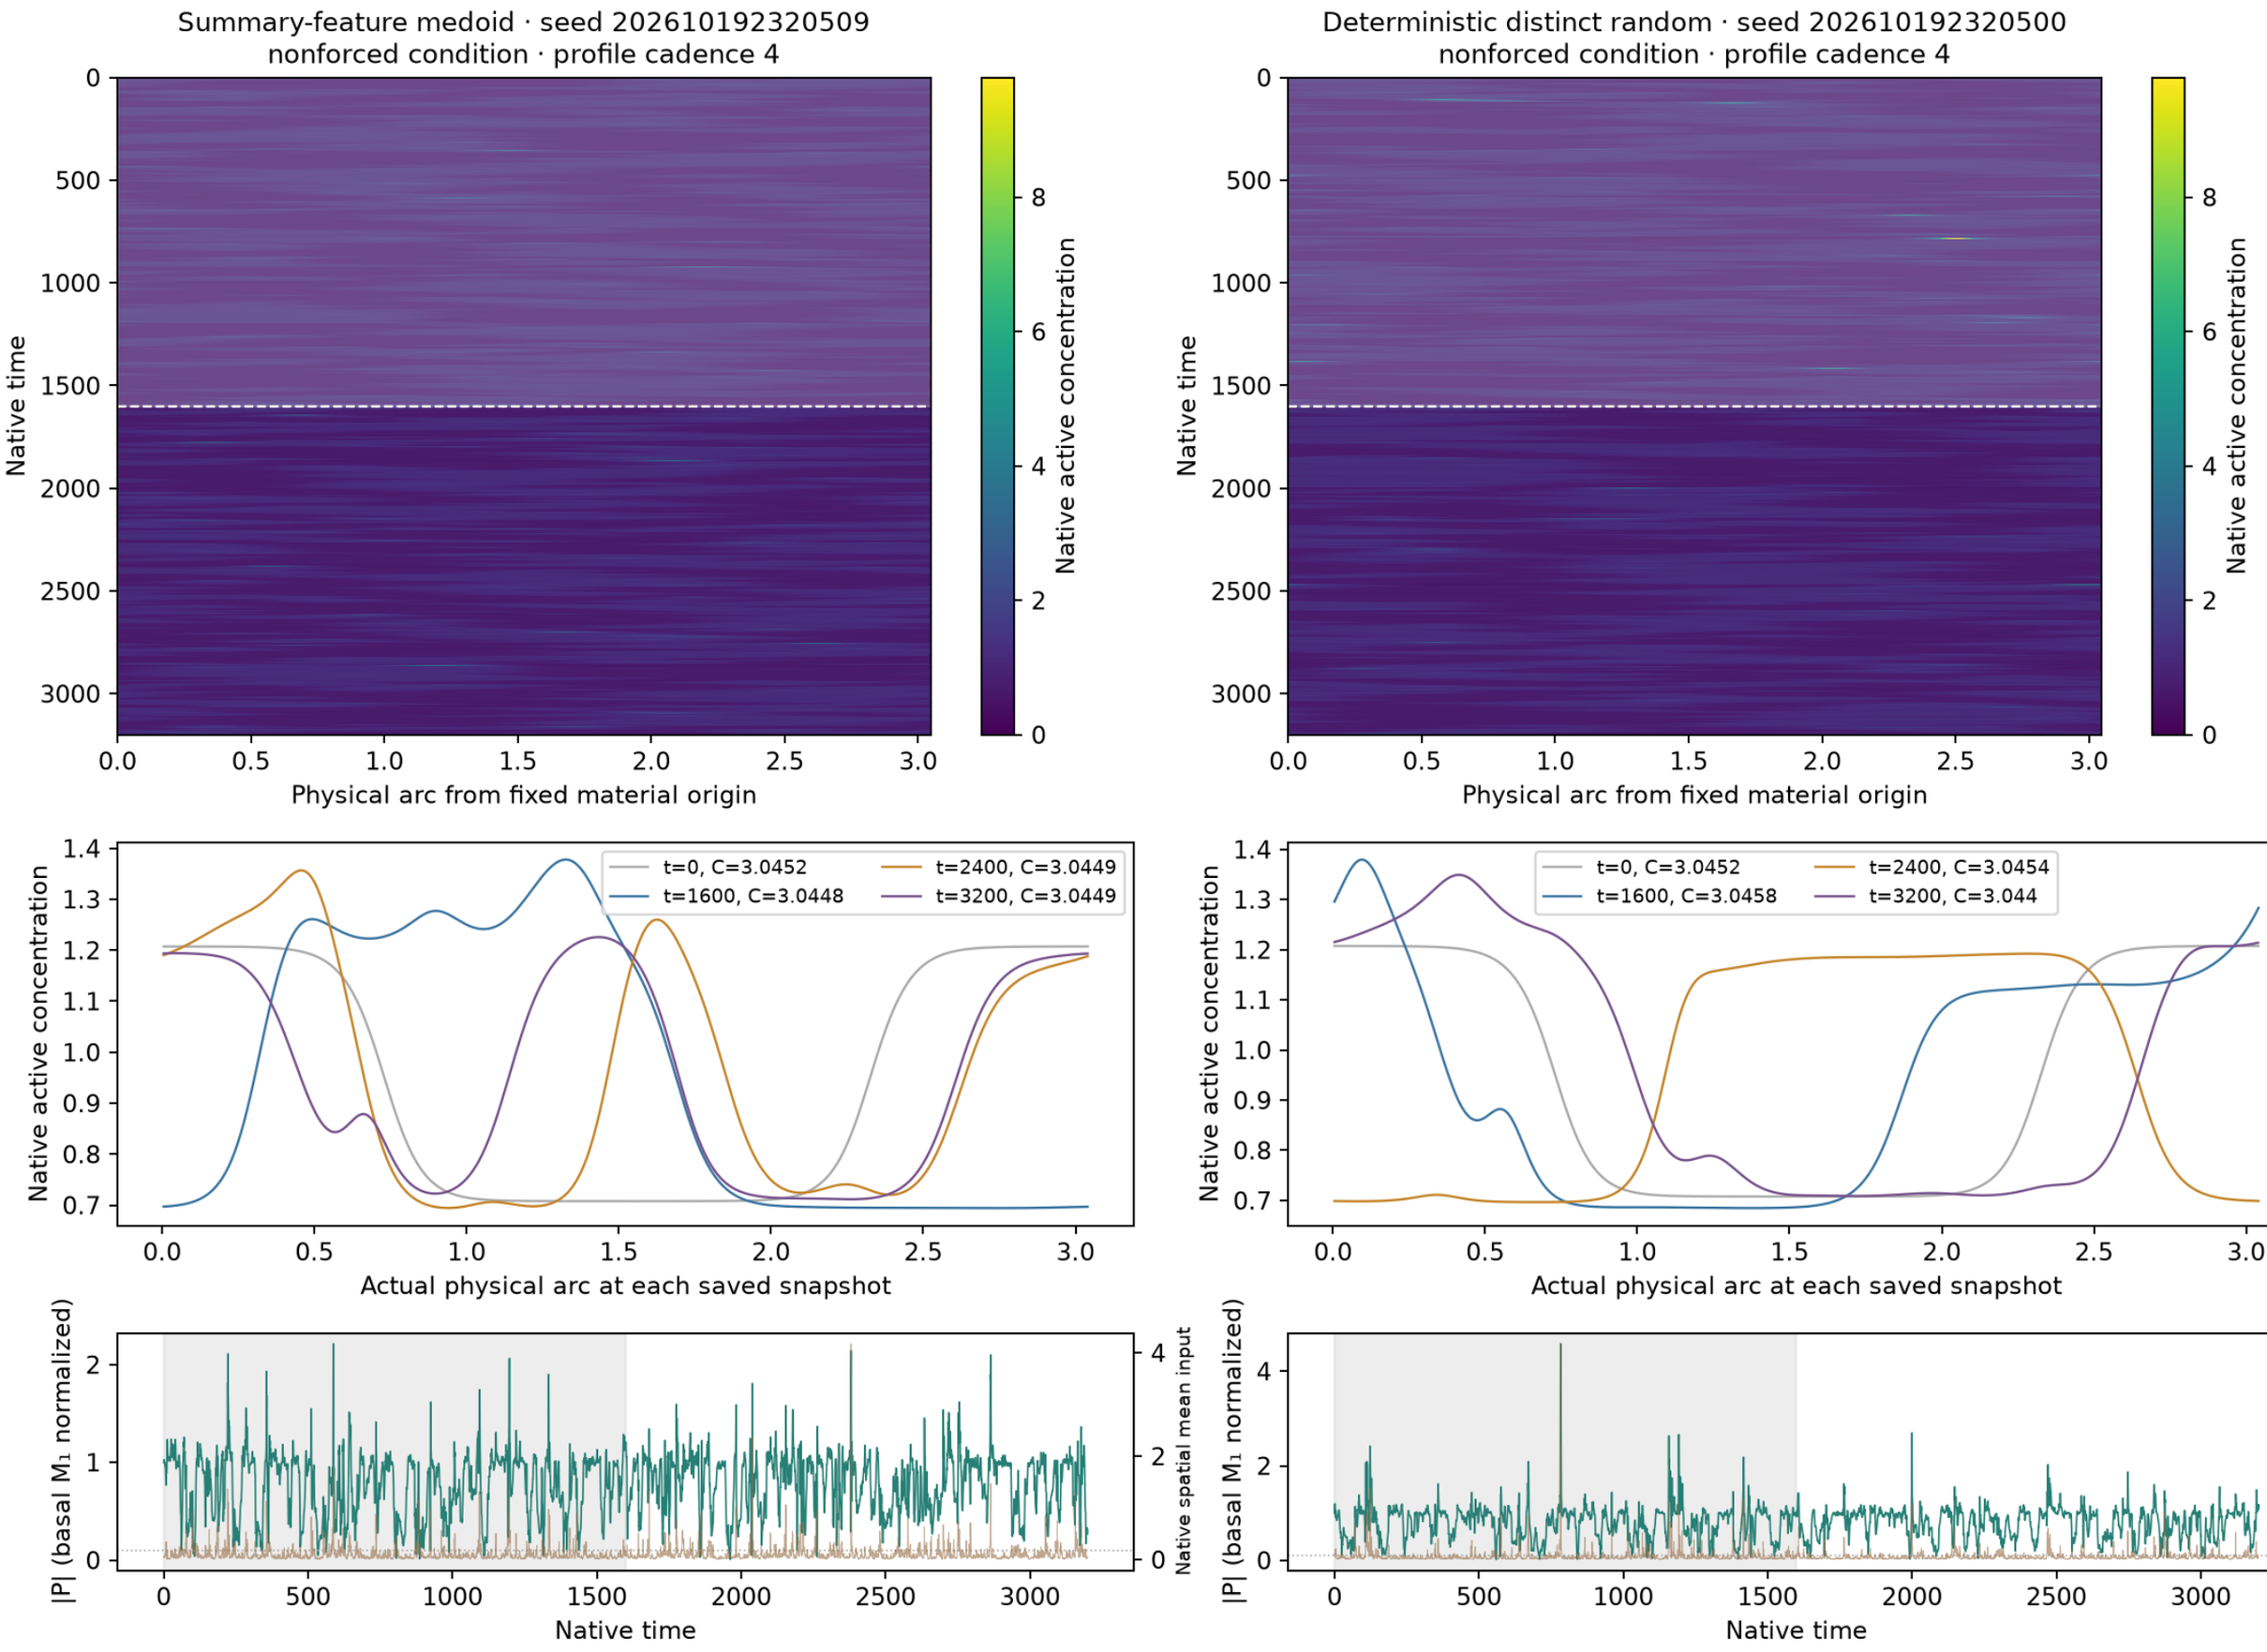


Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Spring · size label 3 · f=0.1 · noise
context E1_extra · σ=0.25 · horizon=3200 · n=12 independent noisy realizations


Summary-feature medoid · seed 202610192320611
nonforced condition · profile cadence 4

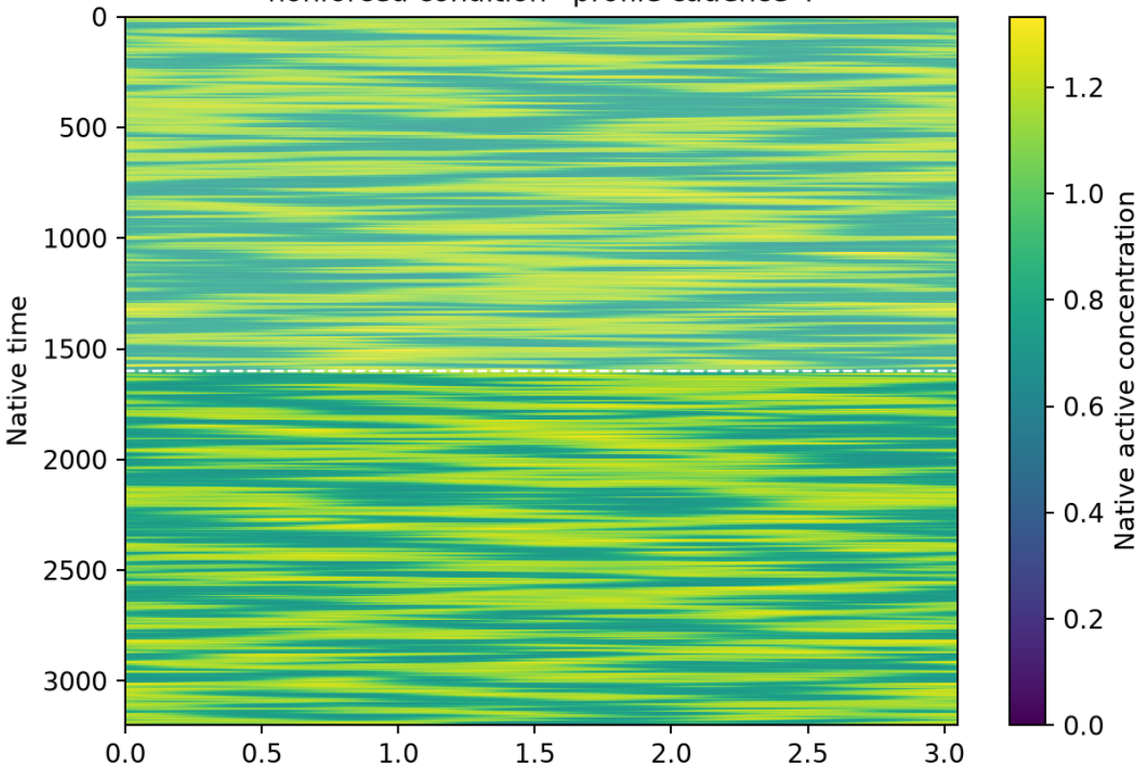


Deterministic distinct random · seed 202610192320605
nonforced condition · profile cadence 4

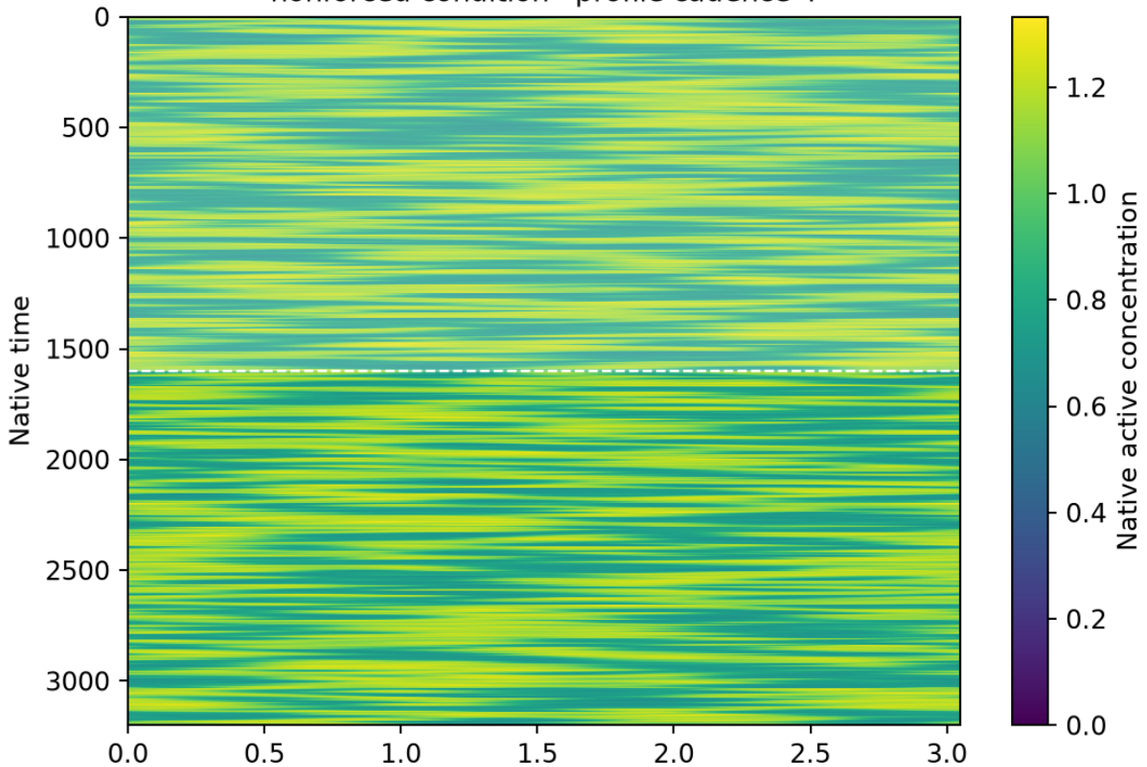



Physical arc from fixed material origin

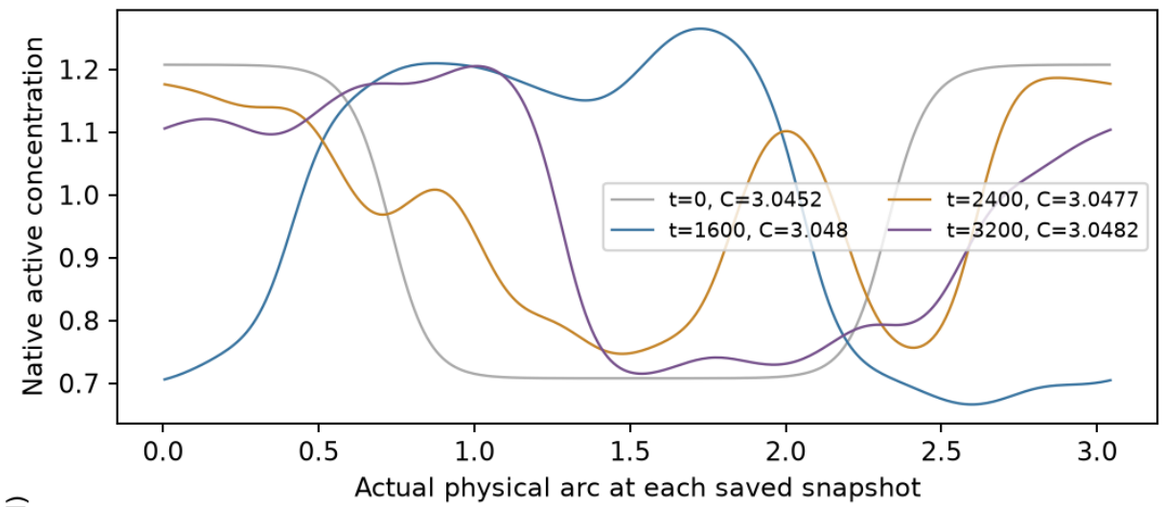

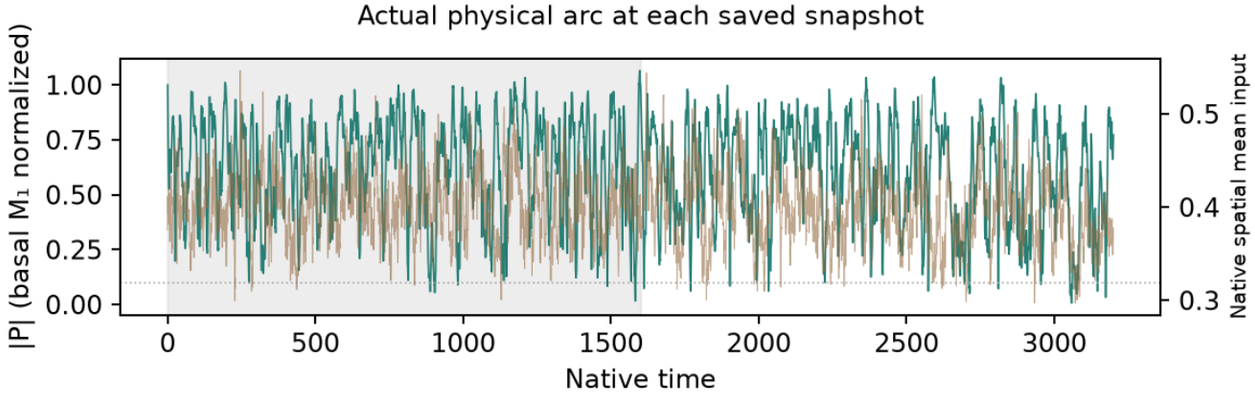

Physical arc from fixed material origin

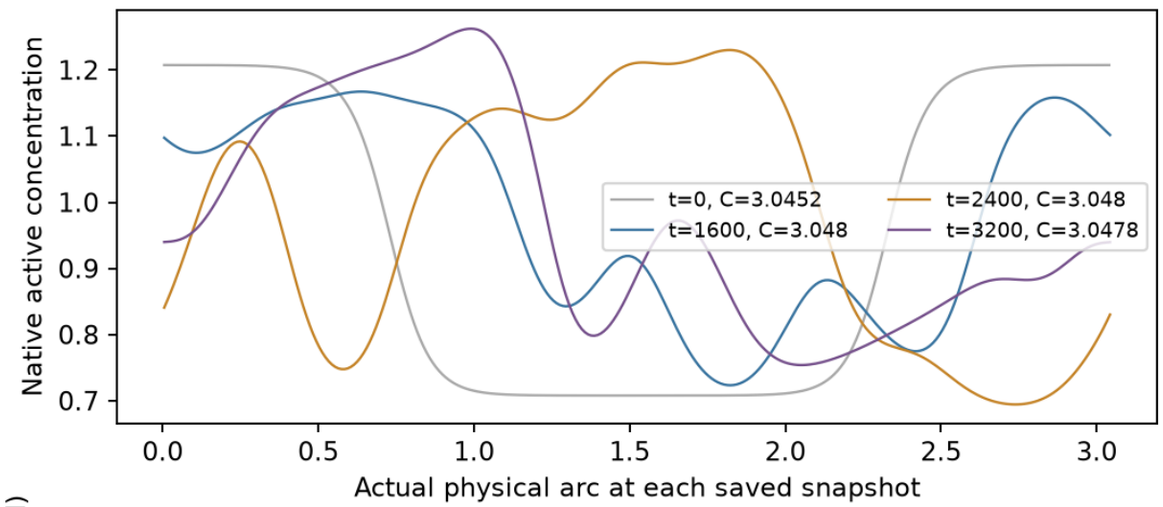


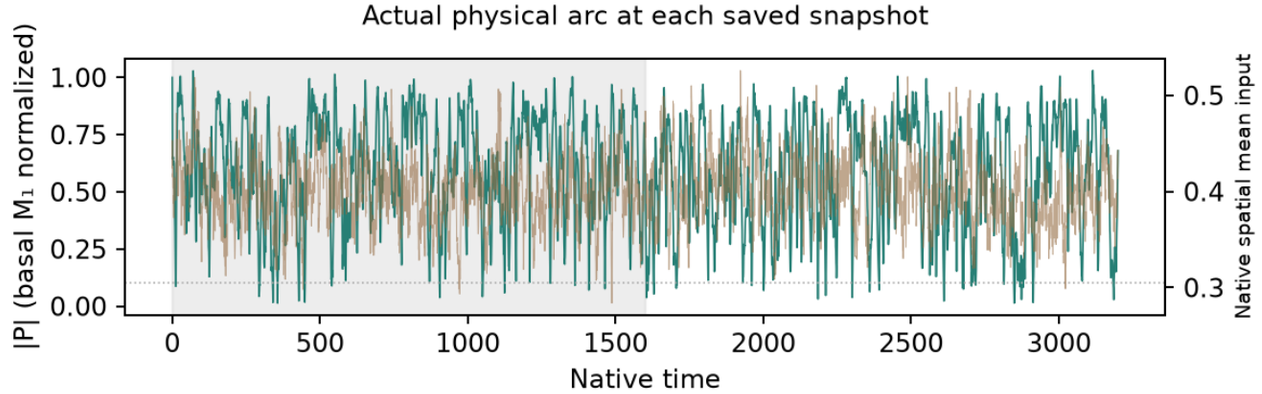


Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Spring · size label 3 · f=0.1 · noise
context E1_extra · σ=0.5 · horizon=3200 · n=12 independent noisy realizations


Summary-feature medoid · seed 202610192320610
nonforced condition · profile cadence 4

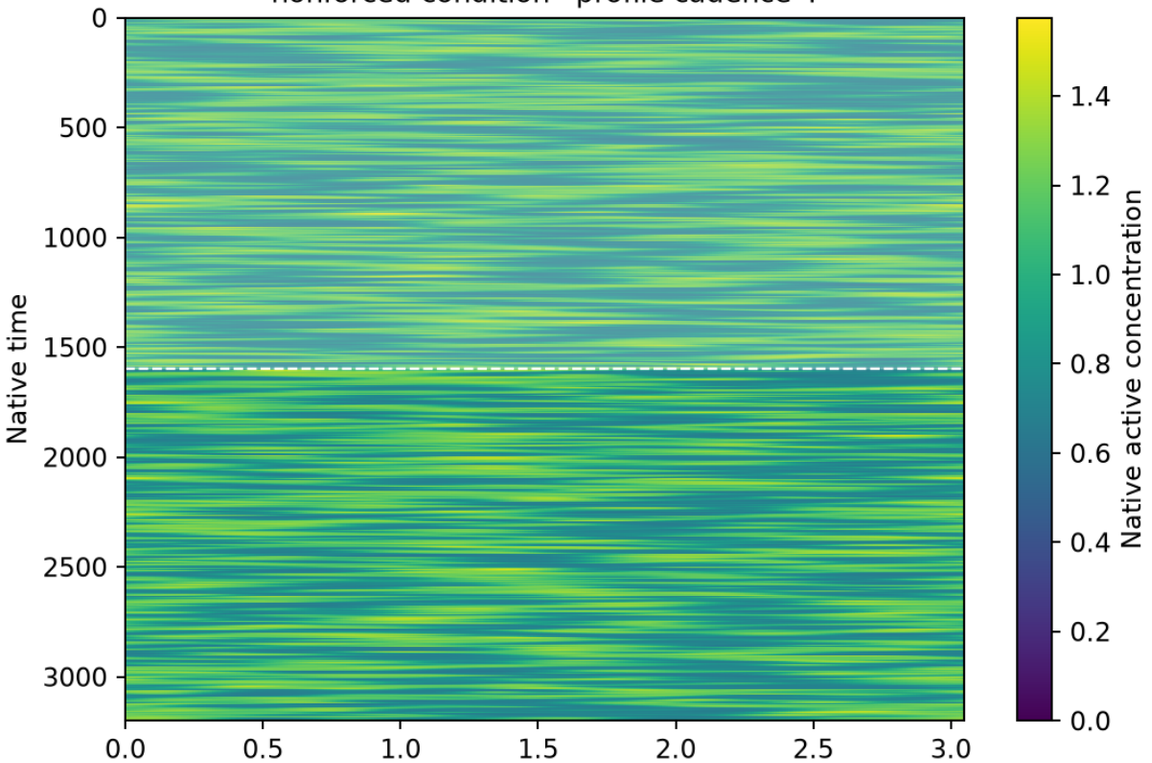


Deterministic distinct random · seed 202610192320608
nonforced condition · profile cadence 4

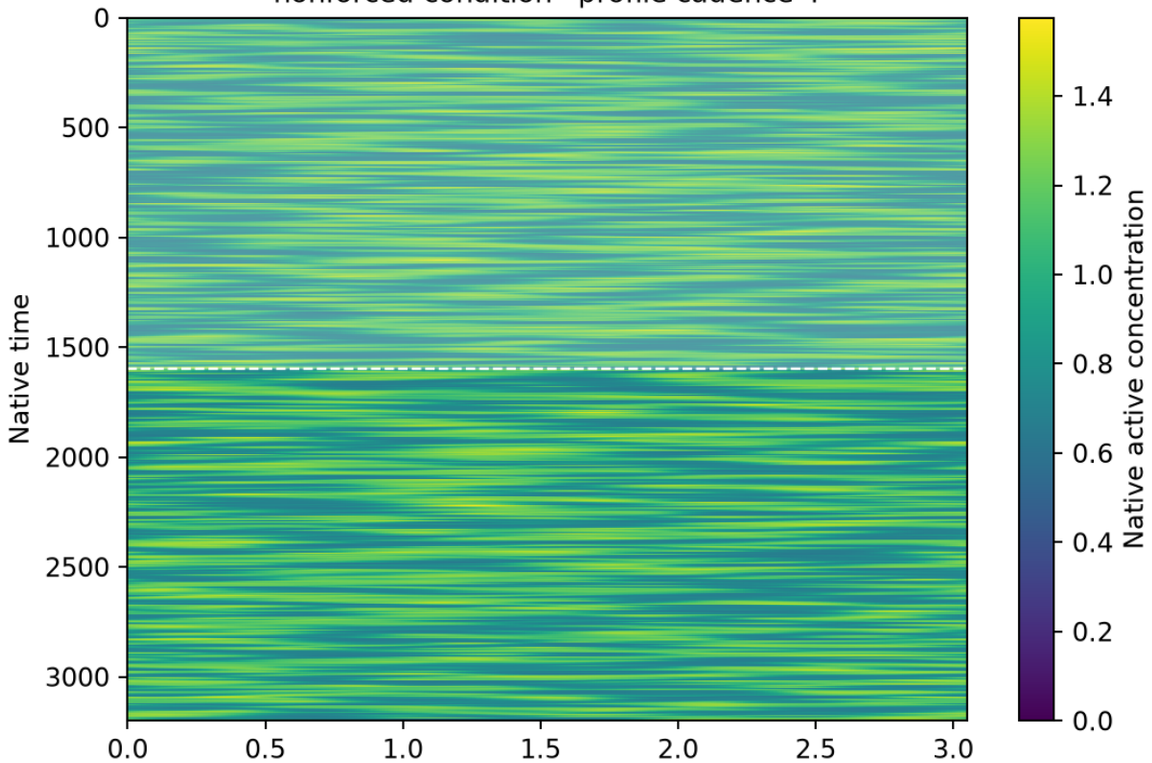



Physical arc from fixed material origin

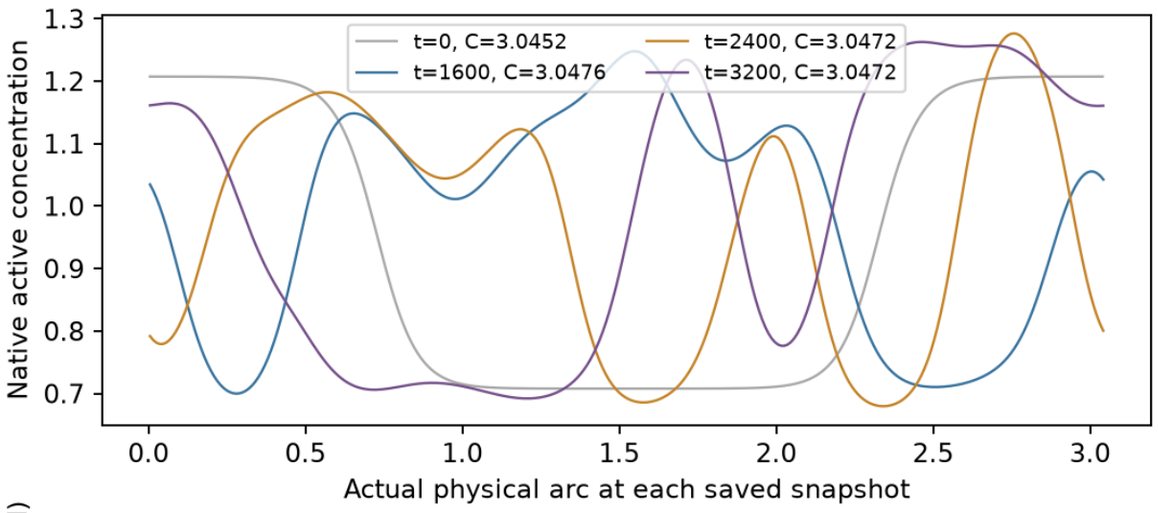

Physical arc from fixed material origin

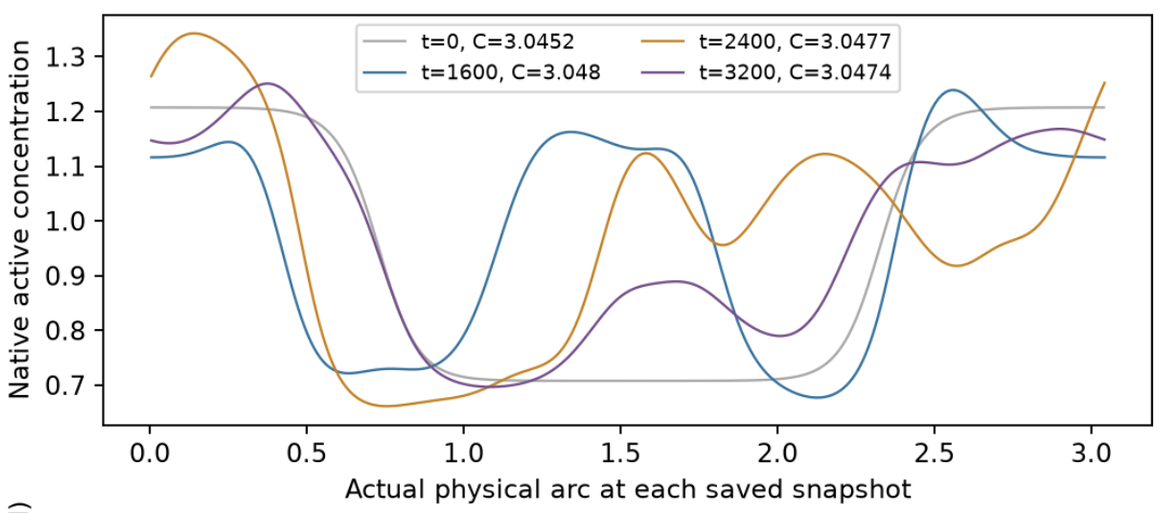


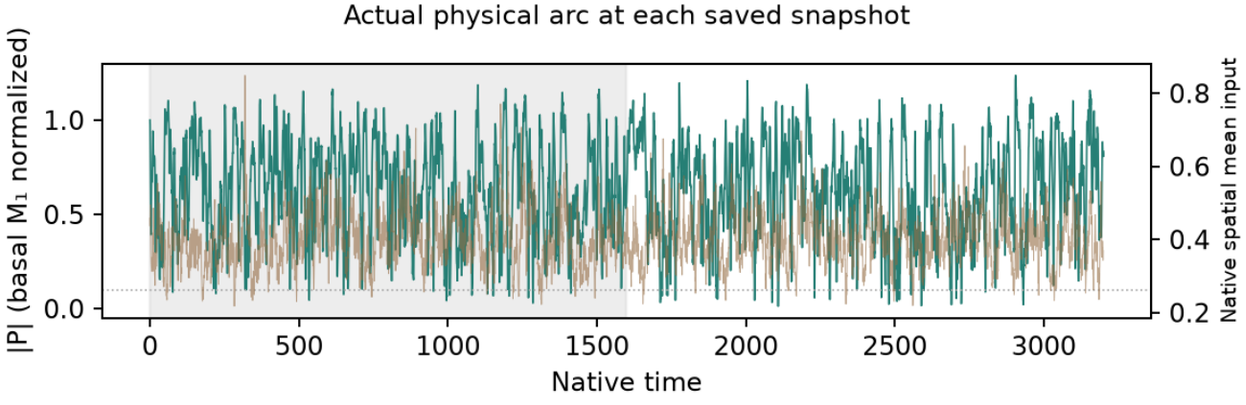

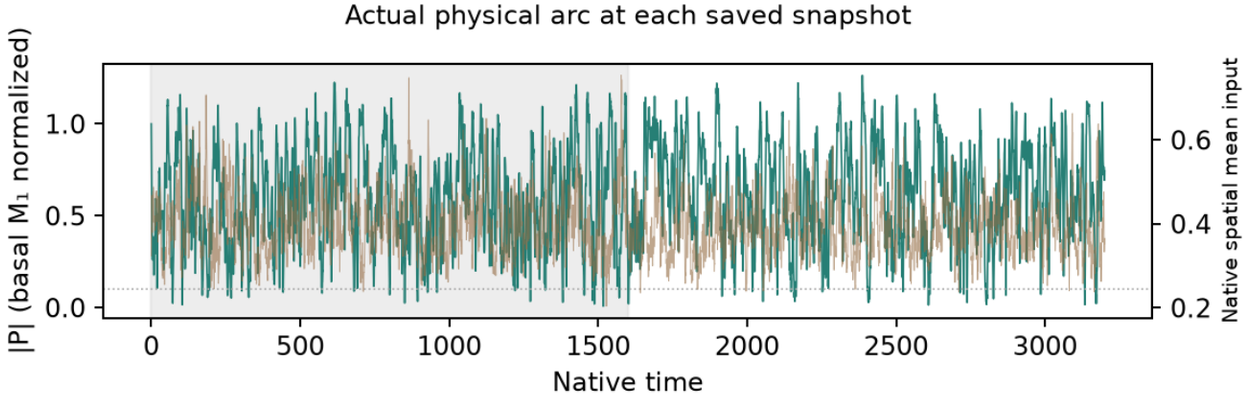


Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Spring · size label 3 · f=0.1 · noise
context E1_extra · σ=2 · horizon=3200 · n=12 independent noisy realizations

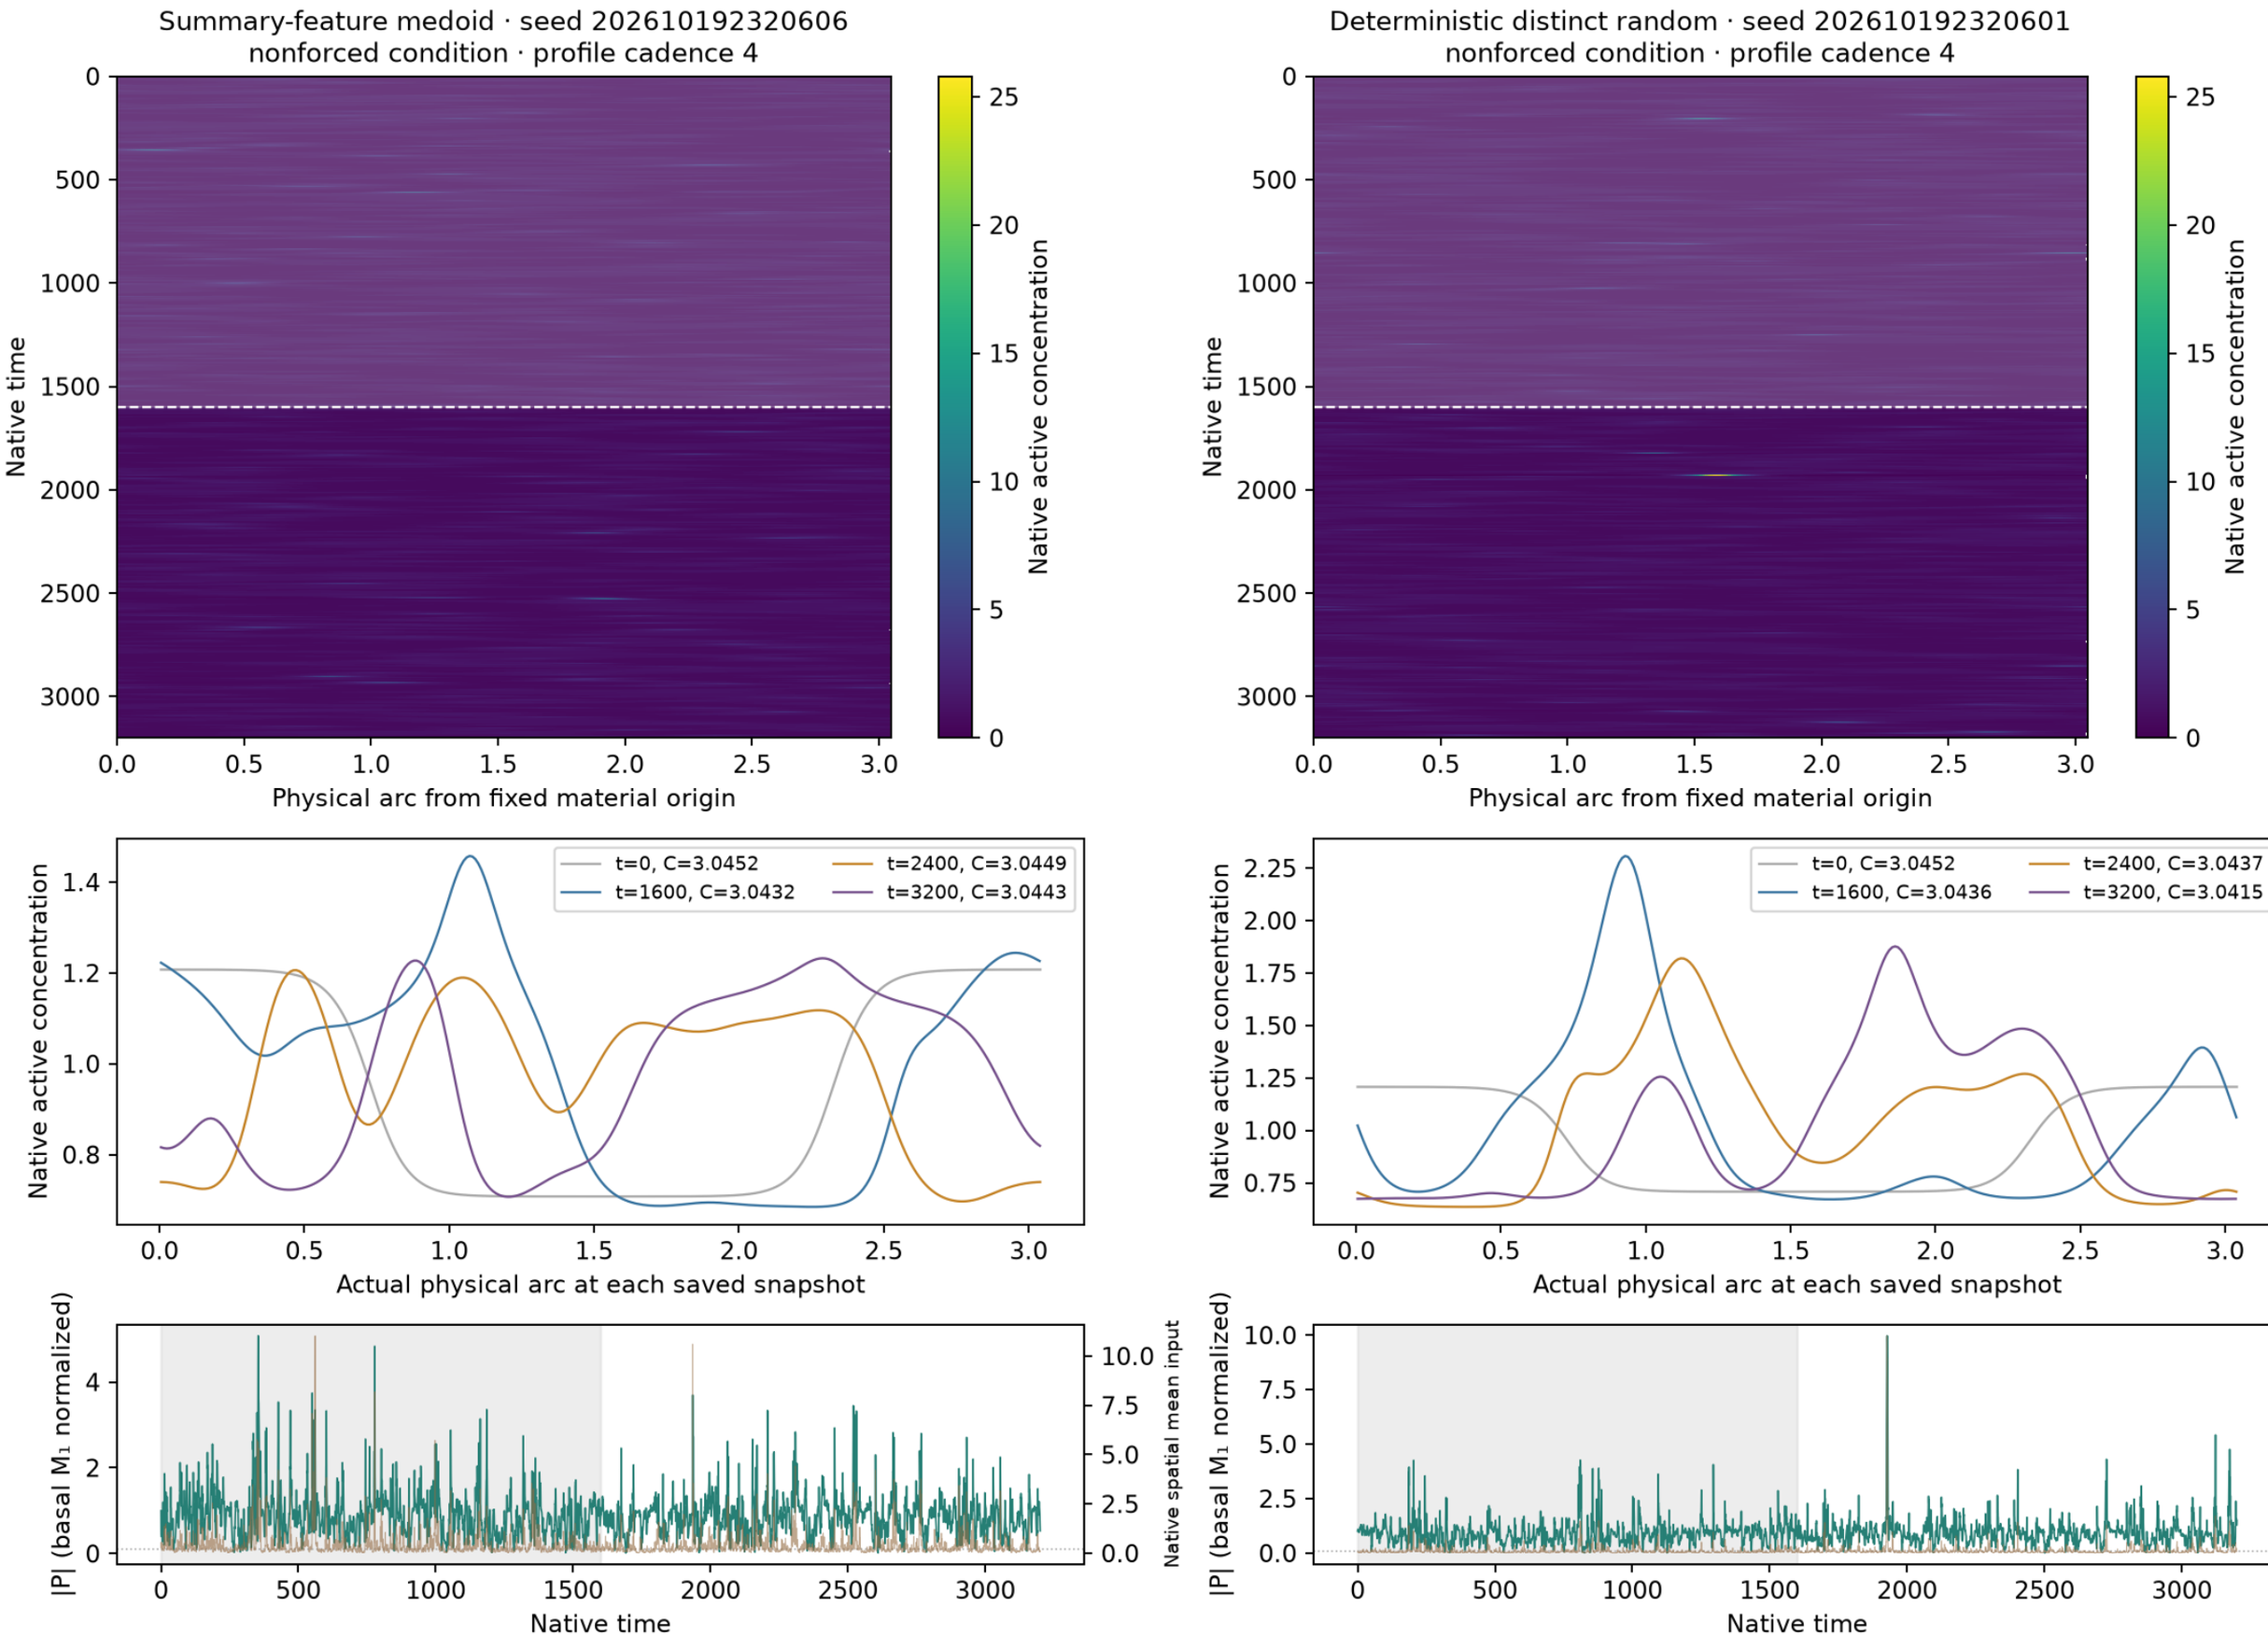


Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M_1 normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.


S11 · Wave-pinning · size label 20 · f=0.03 · noise
context E1_extra · σ=0.25 · horizon=32000 · n=12 independent noisy realizations

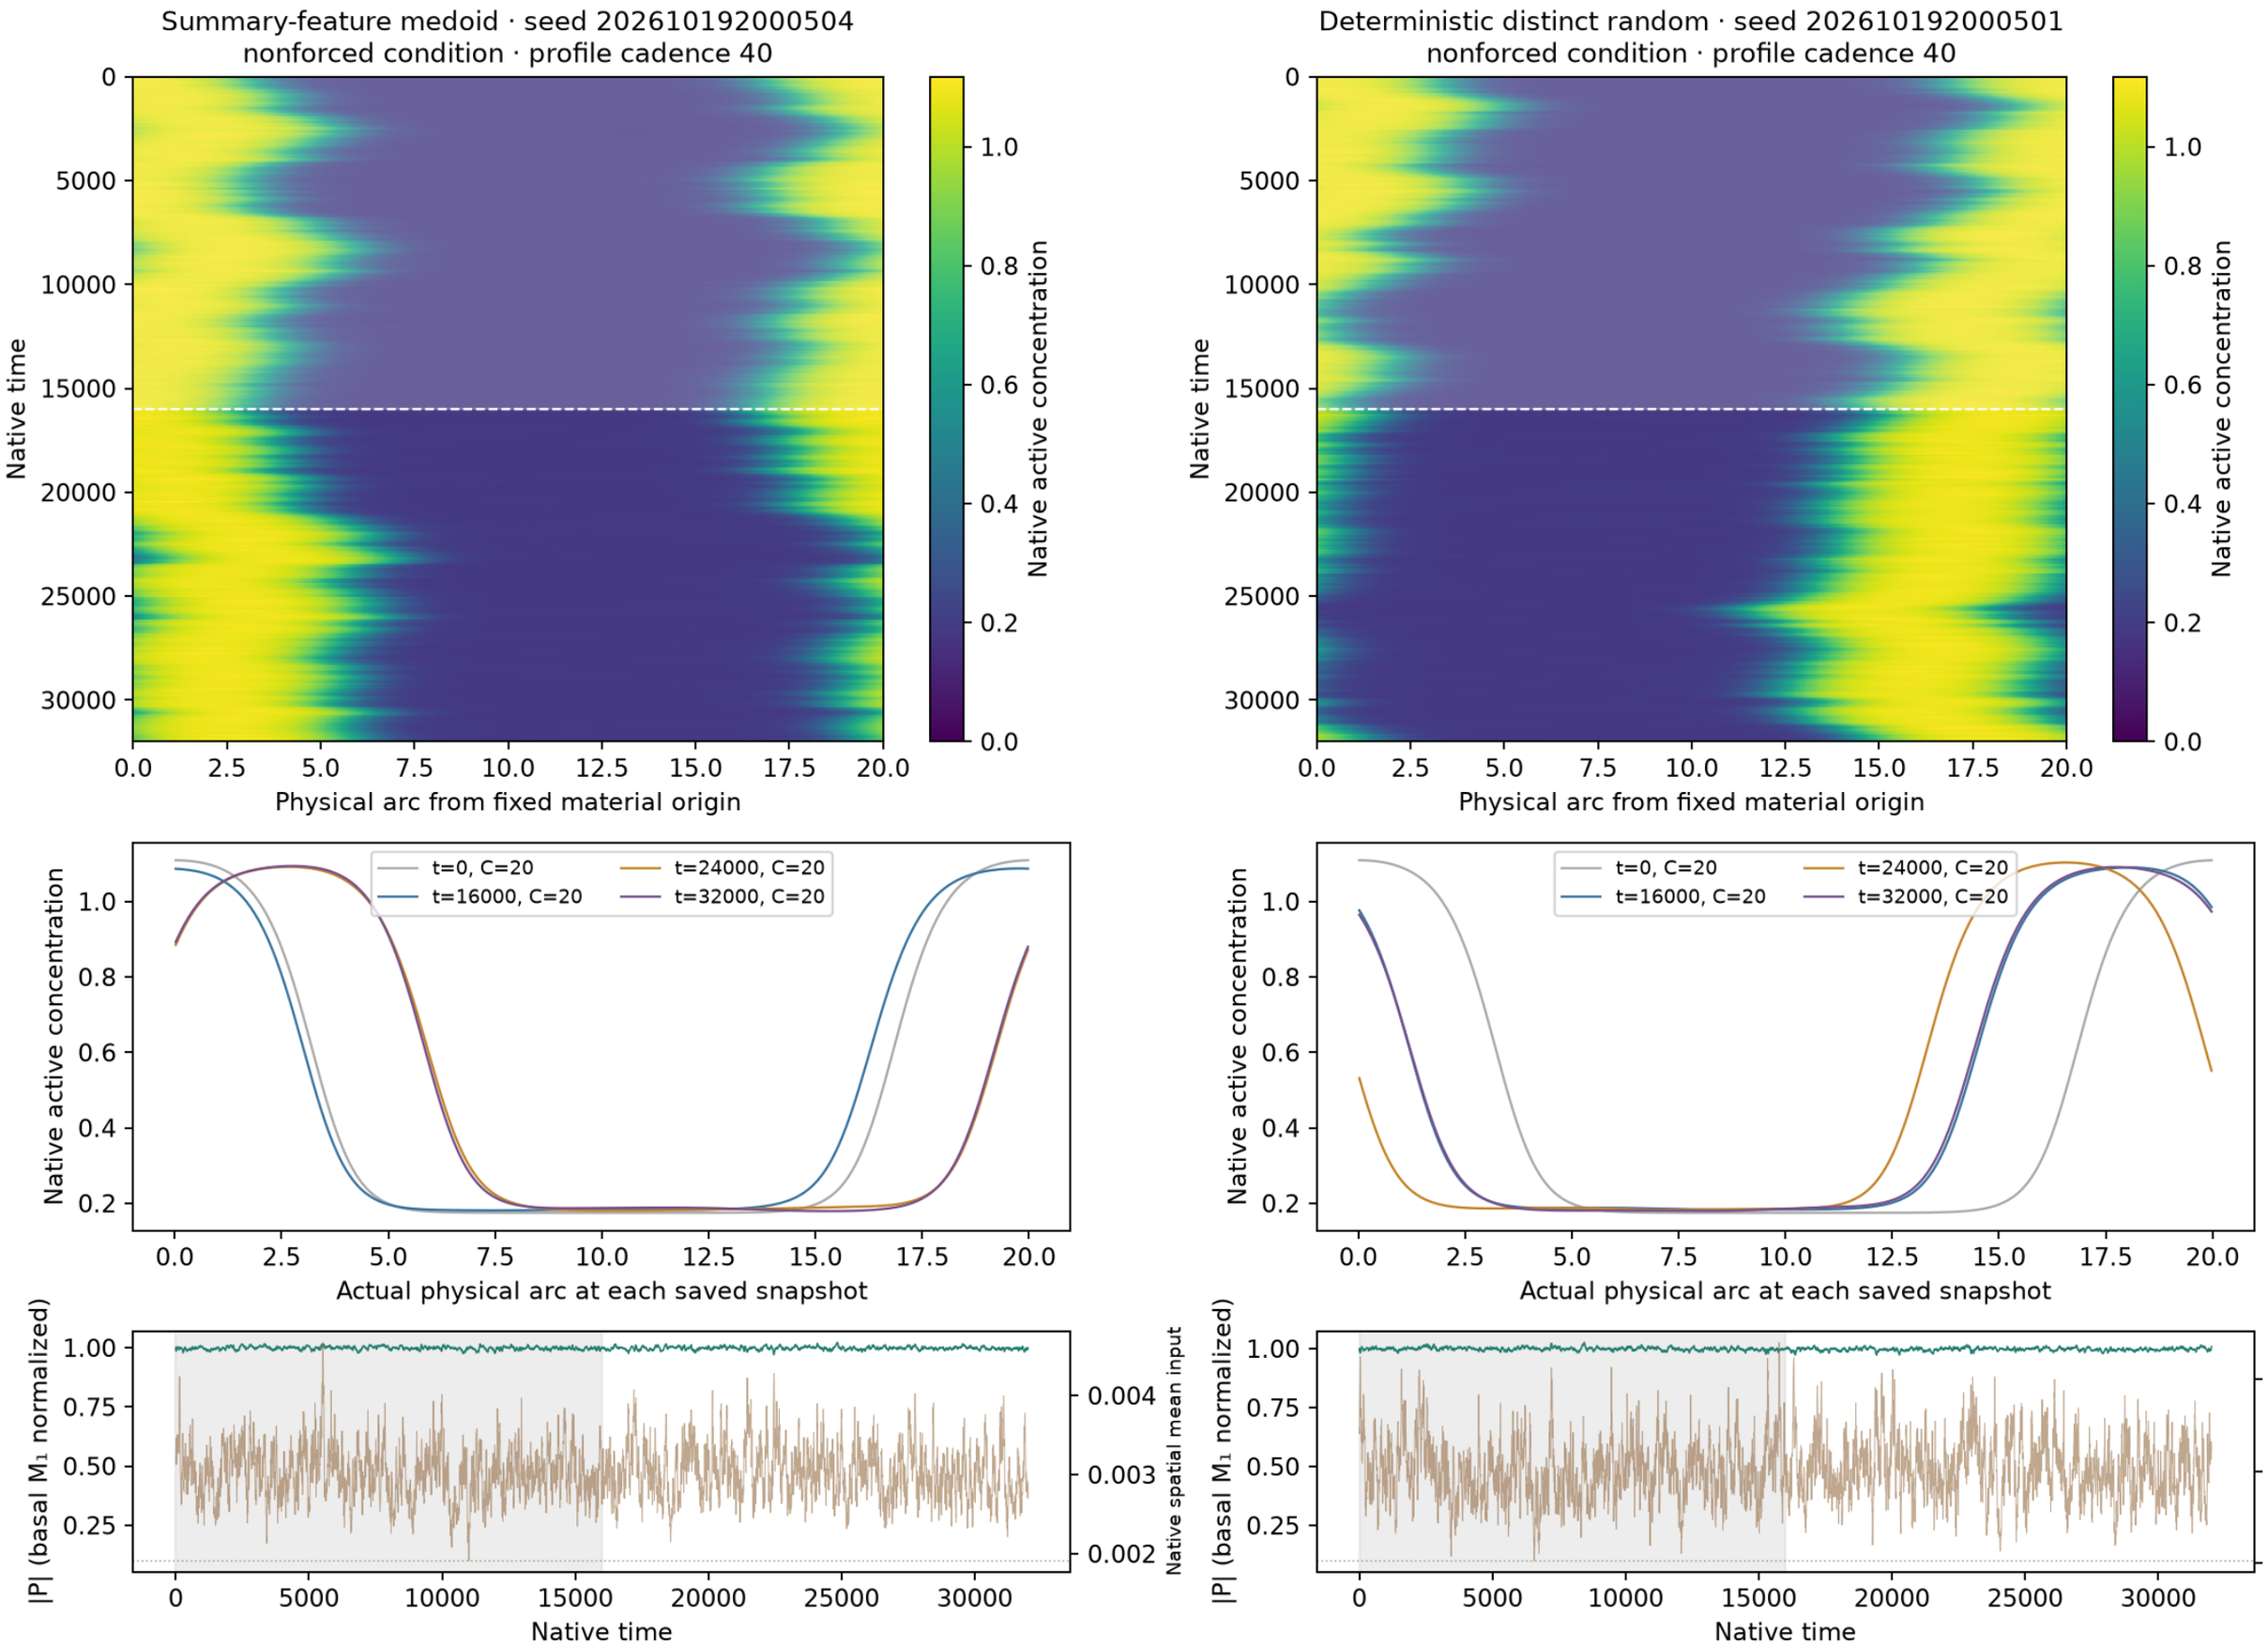

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.


S11 · Wave-pinning · size label 20 · f=0.03 · noise
context E1_extra · σ=0.5 · horizon=32000 · n=12 independent noisy realizations

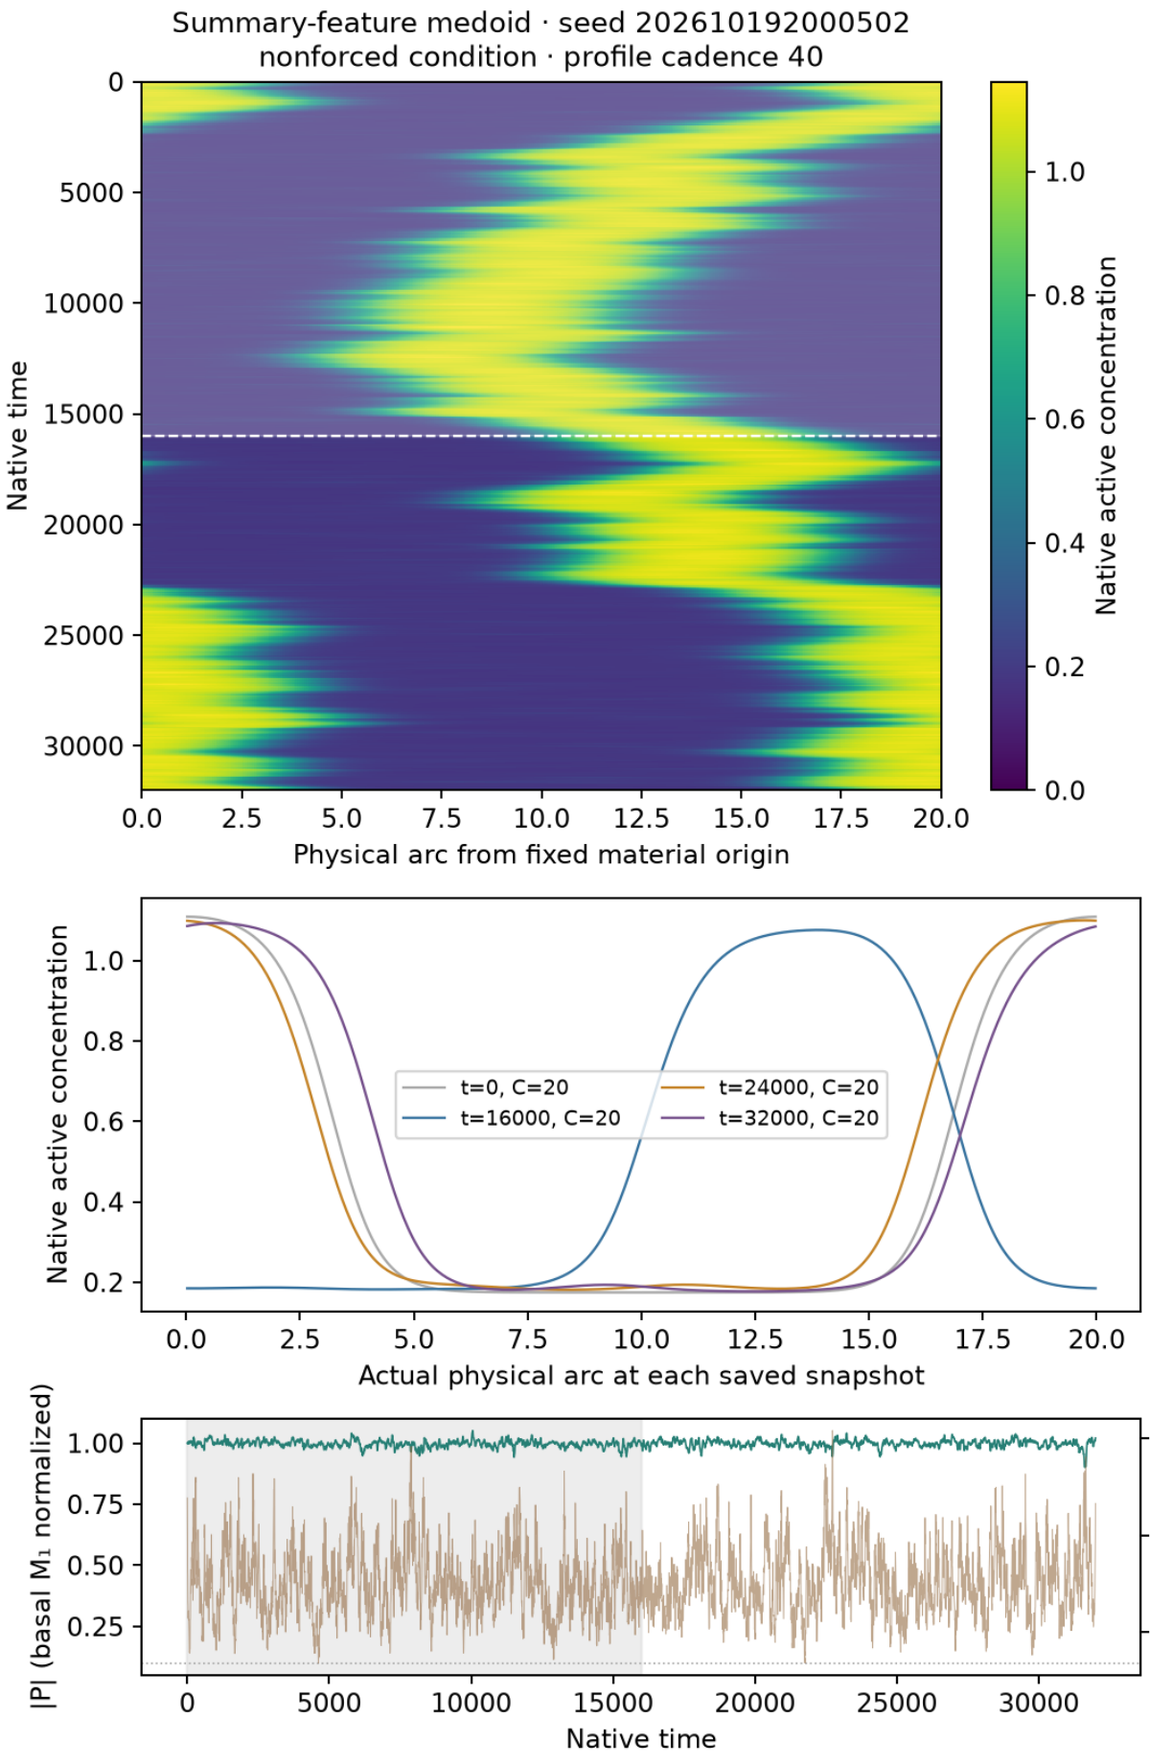


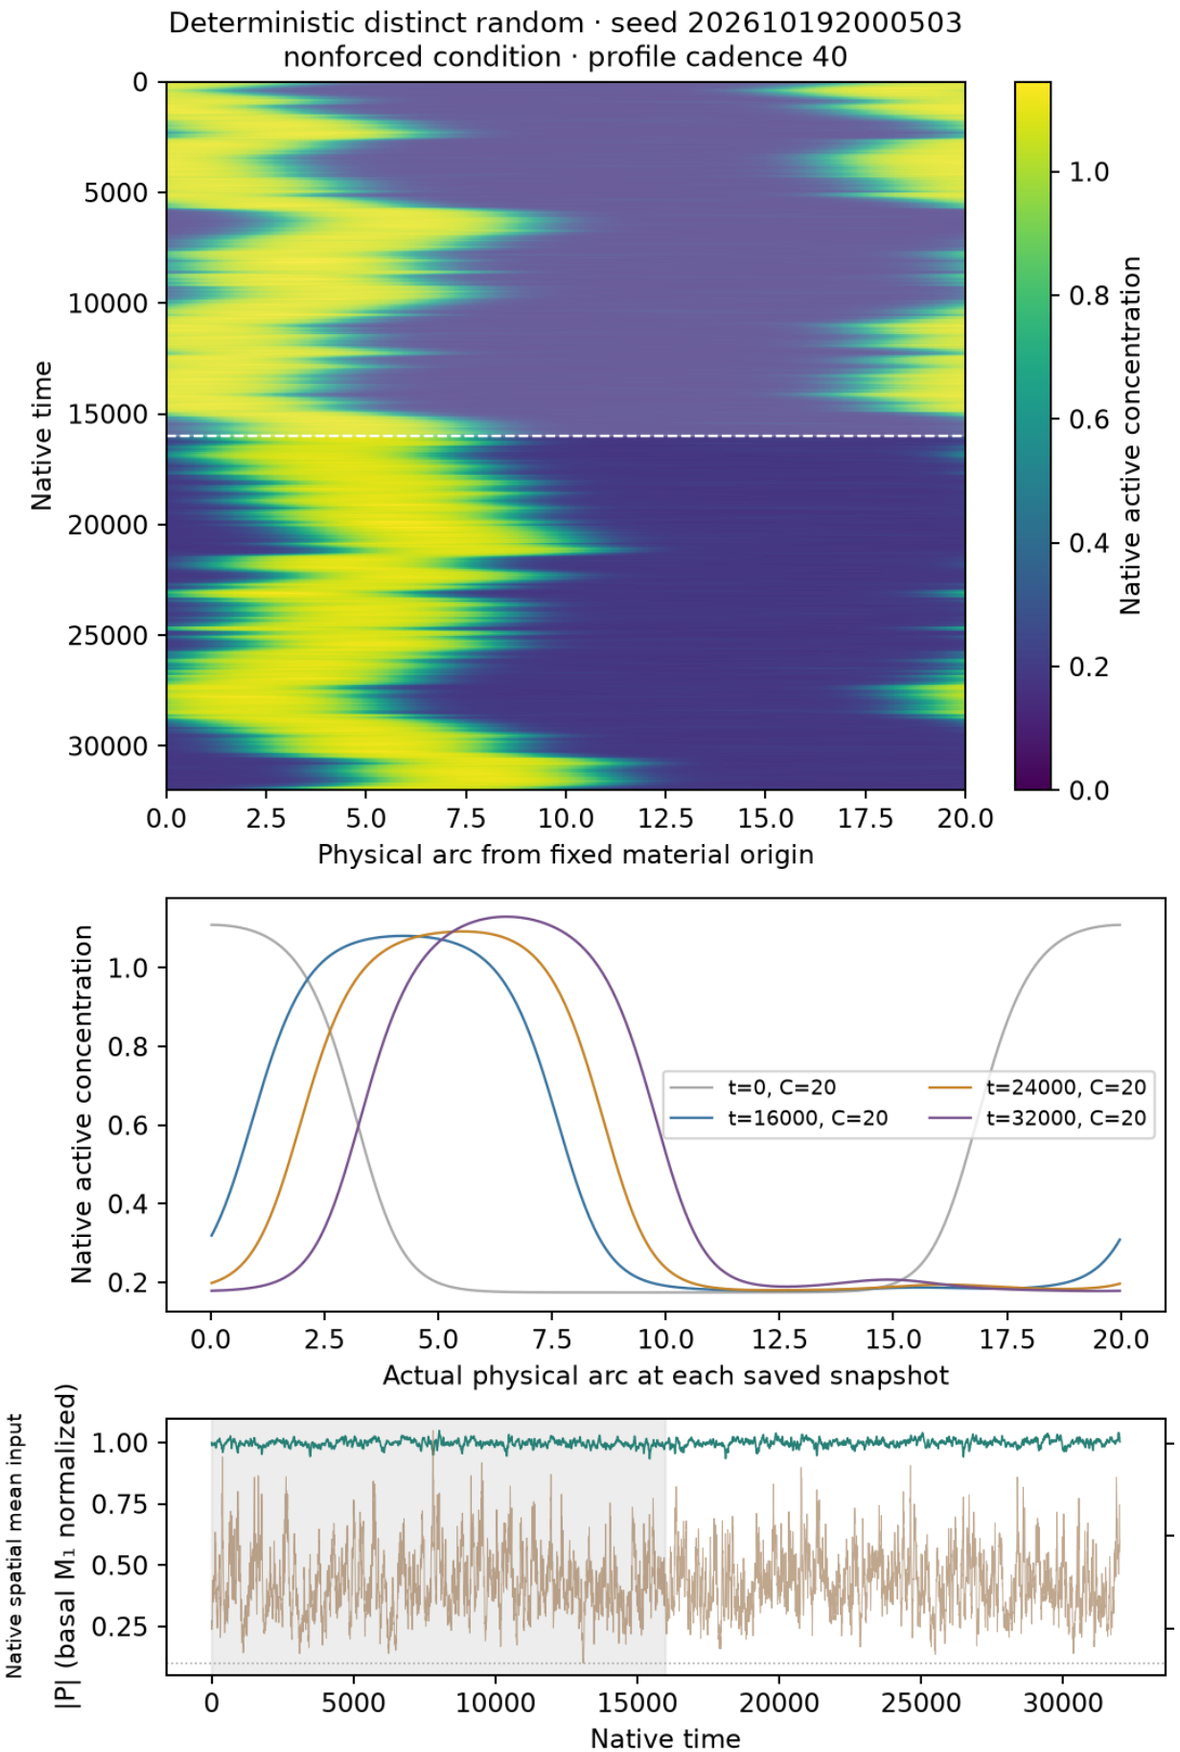

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.


S11 · Wave-pinning · size label 20 · f=0.03 · noise
context E1_extra · σ=2 · horizon=32000 · n=12 independent noisy realizations

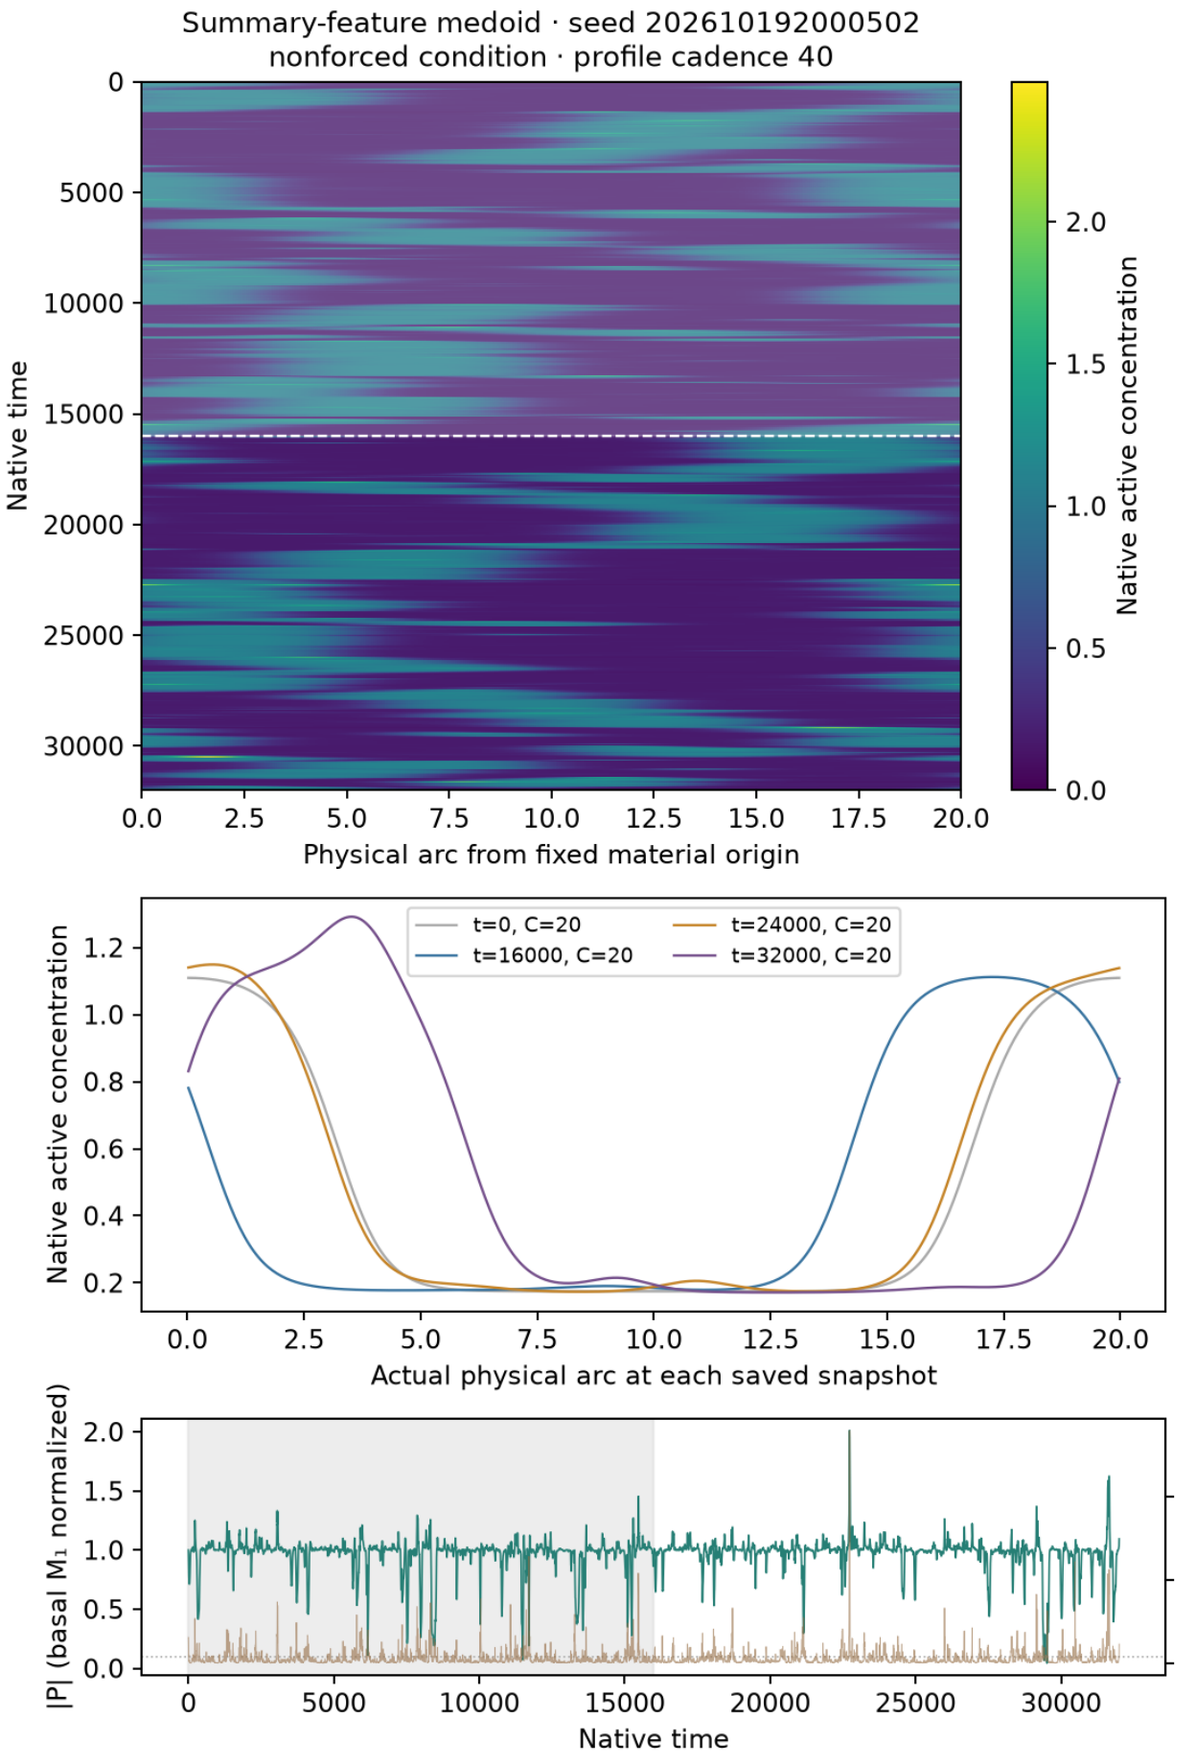

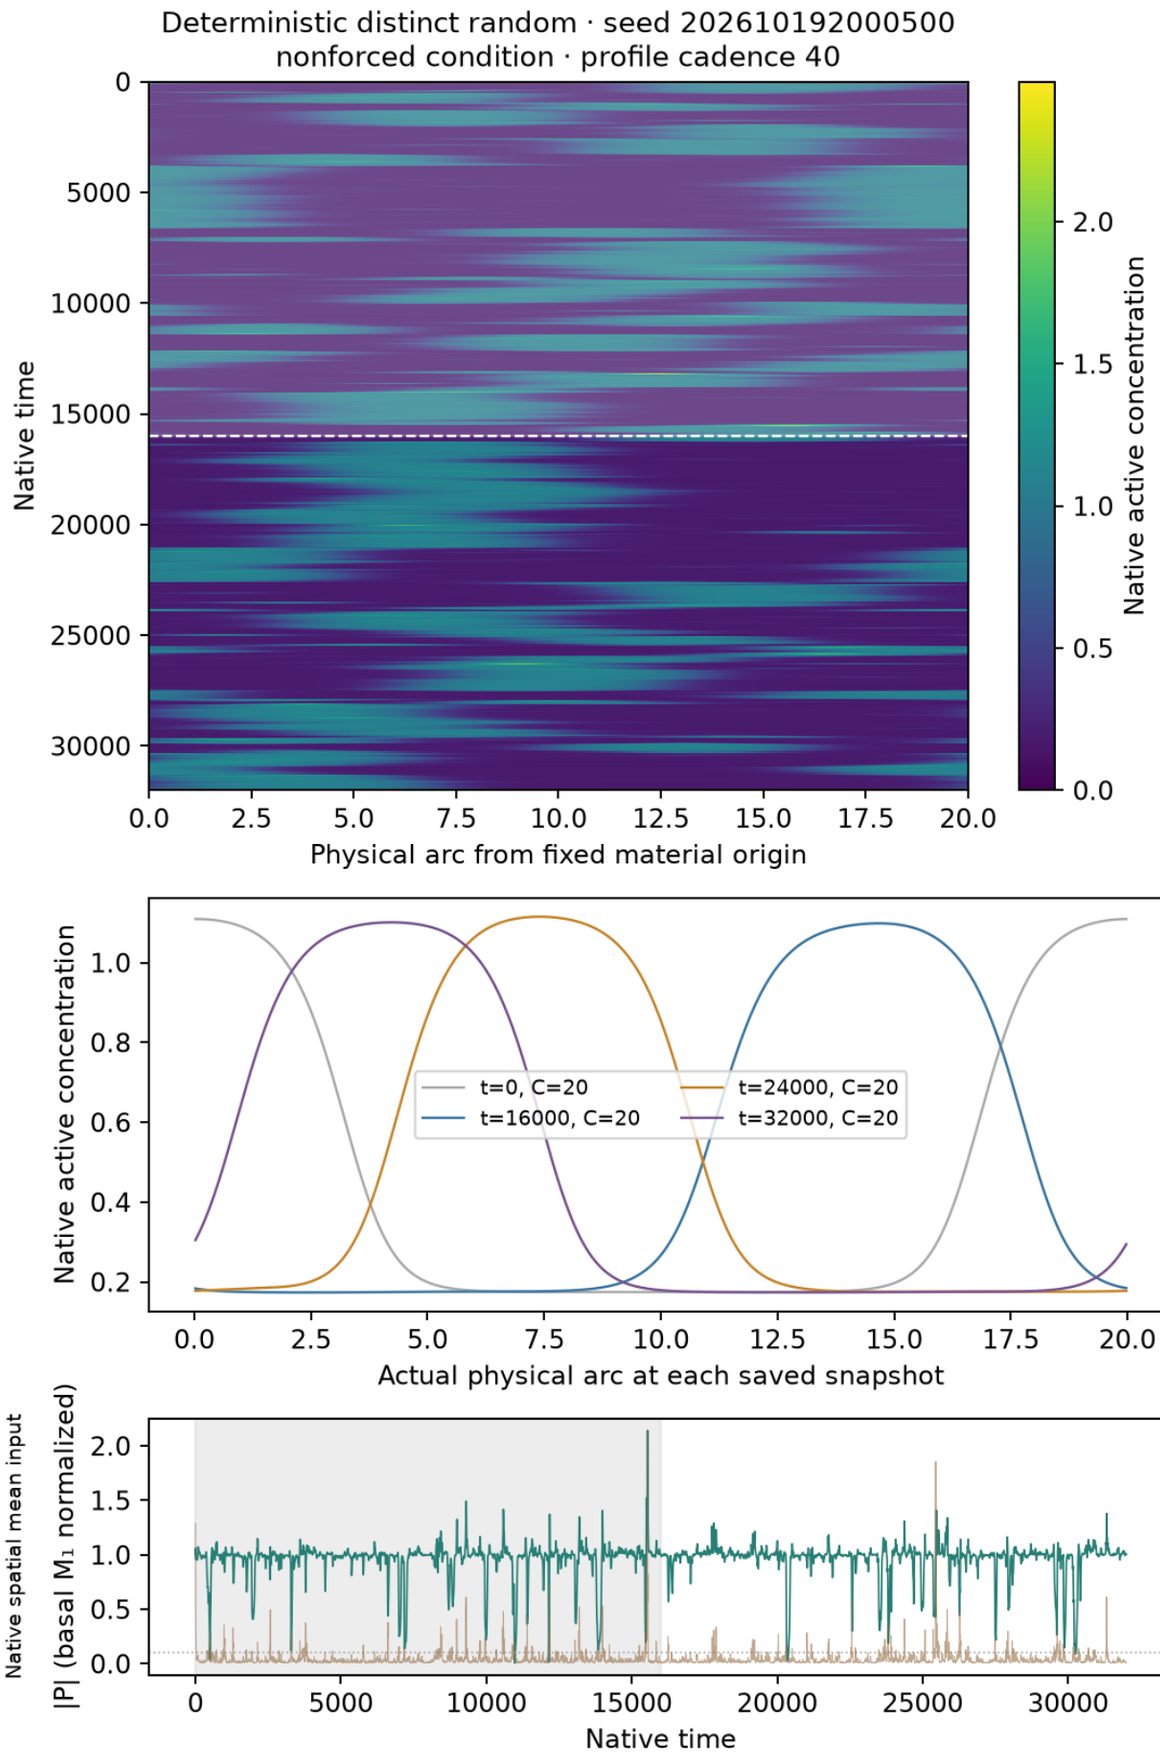


Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Wave-pinning · size label 20 · f=0.1 · noise
context E1_extra · σ=0.25 · horizon=32000 · n=12 independent noisy realizations

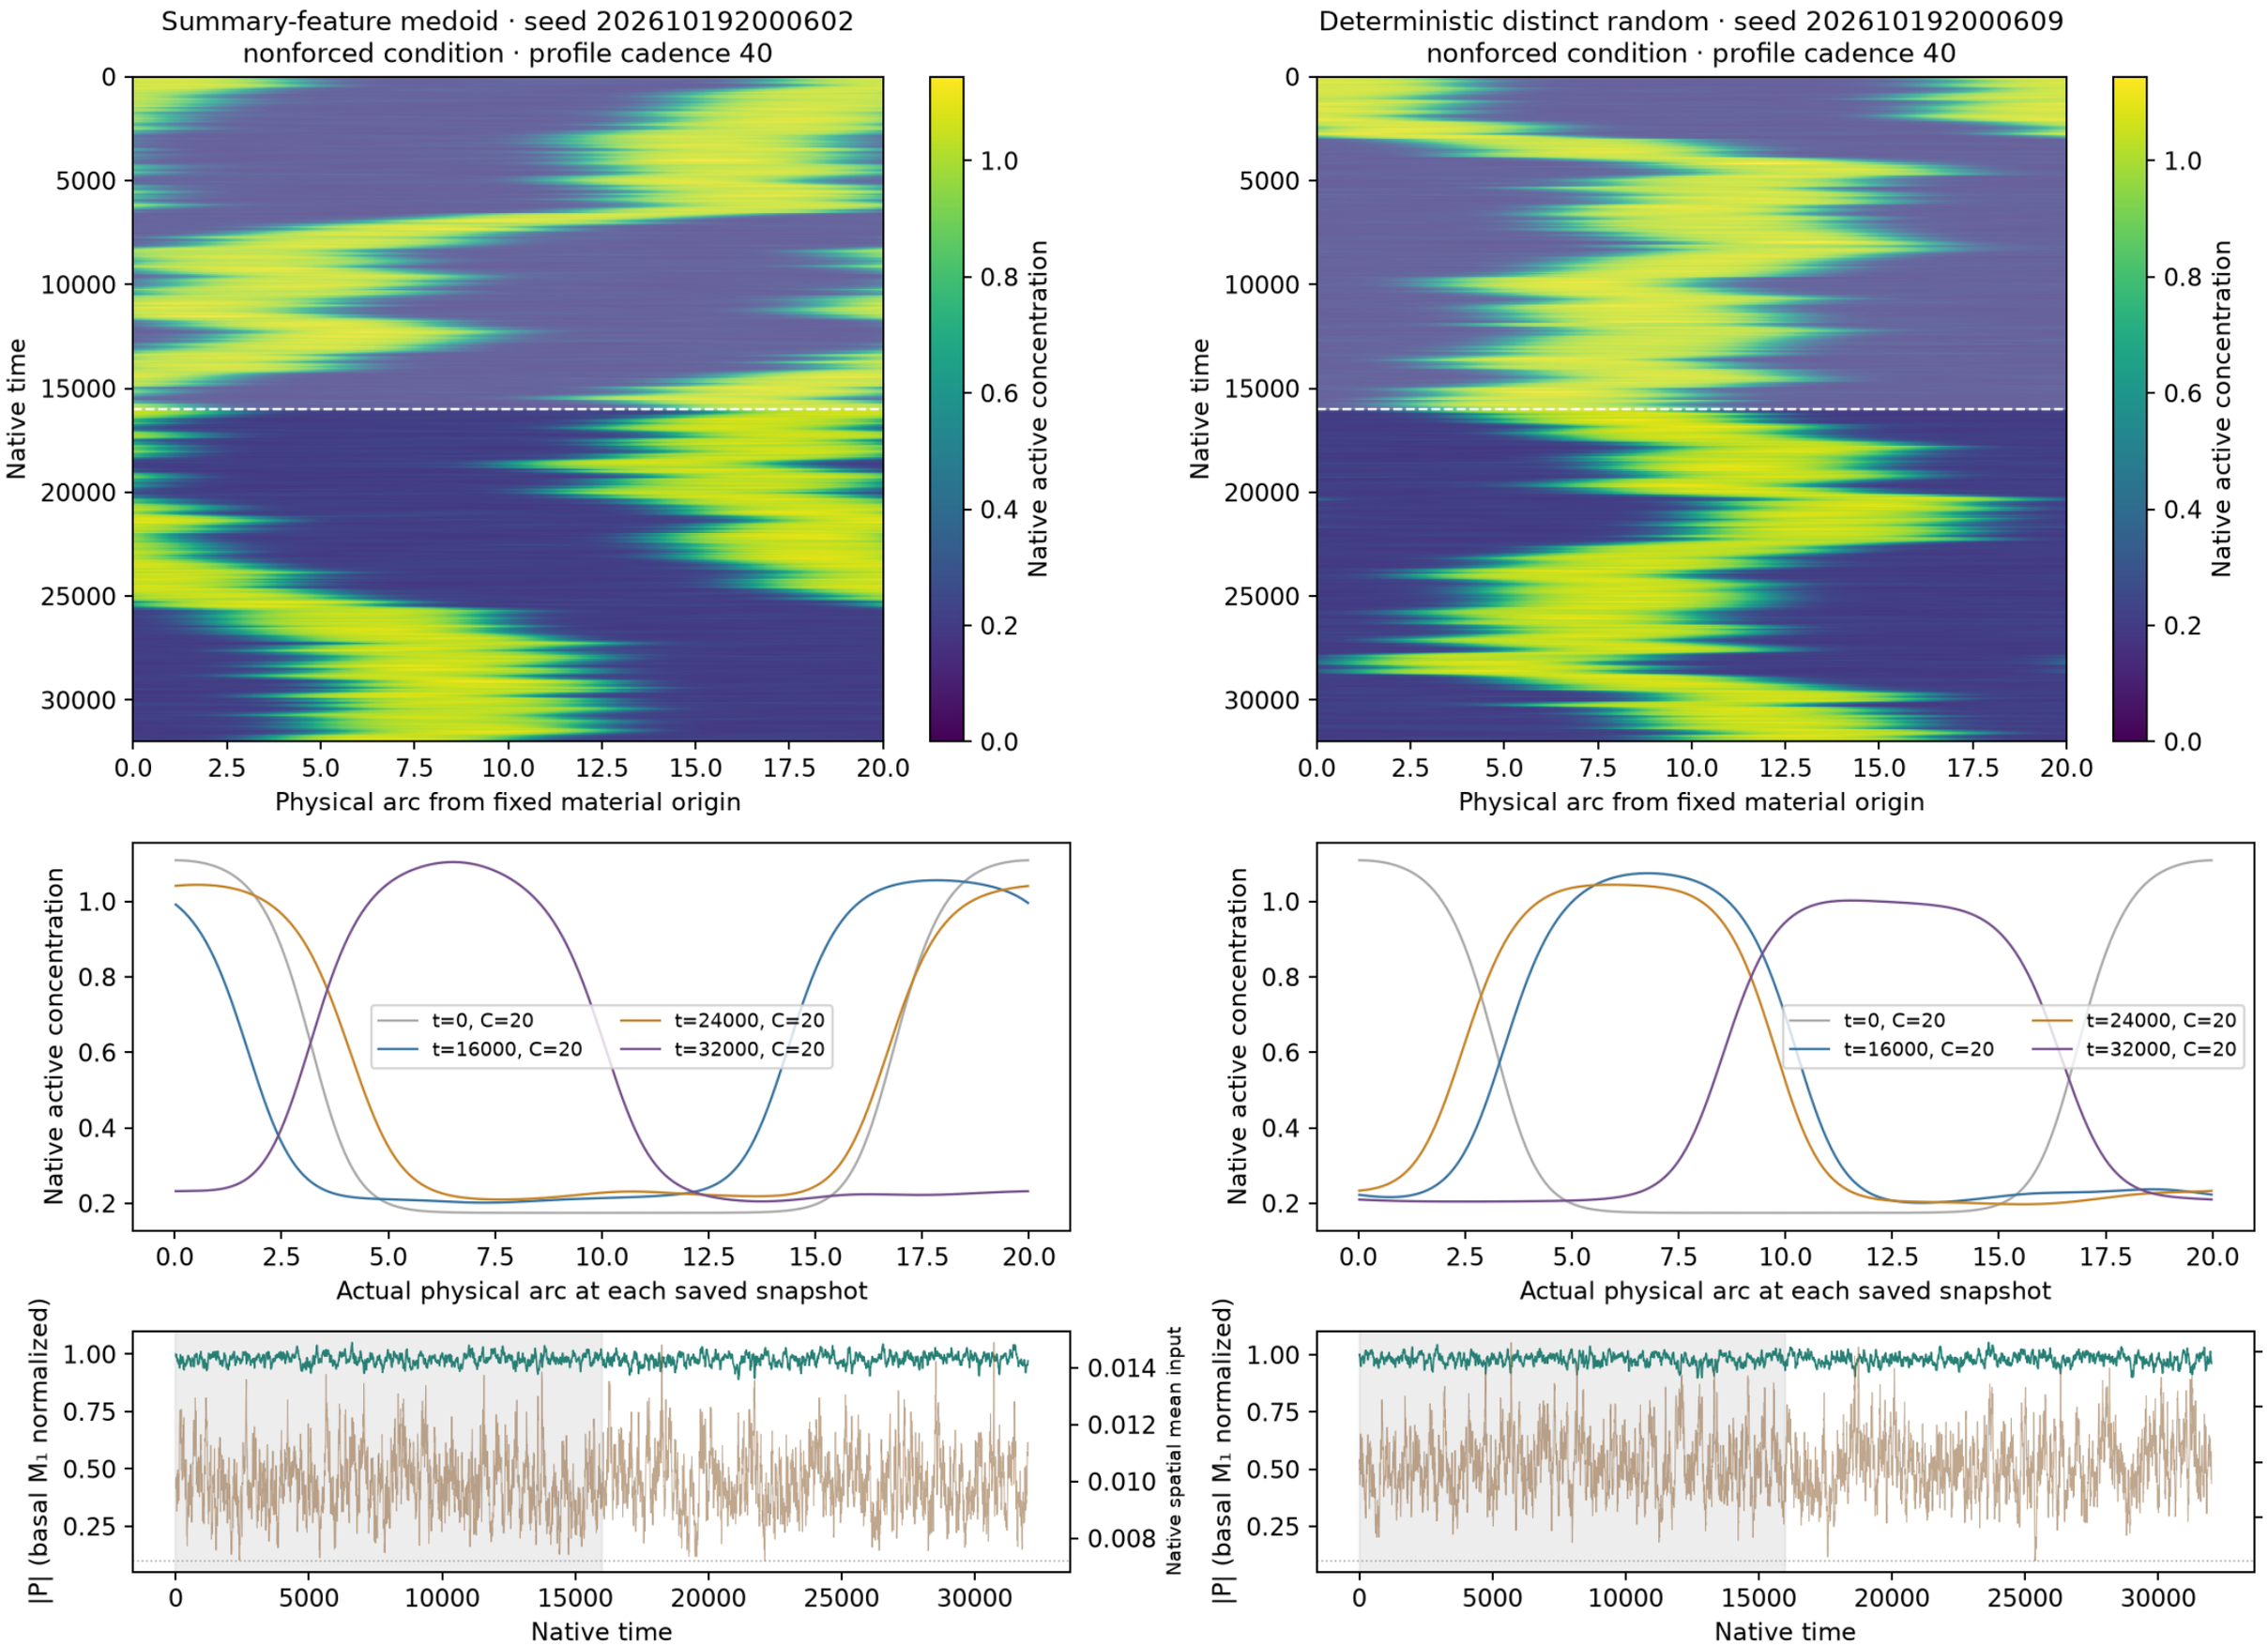

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.


S11 · Wave-pinning · size label 20 · f=0.1 · noise
context E1_extra · σ=0.5 · horizon=32000 · n=12 independent noisy realizations

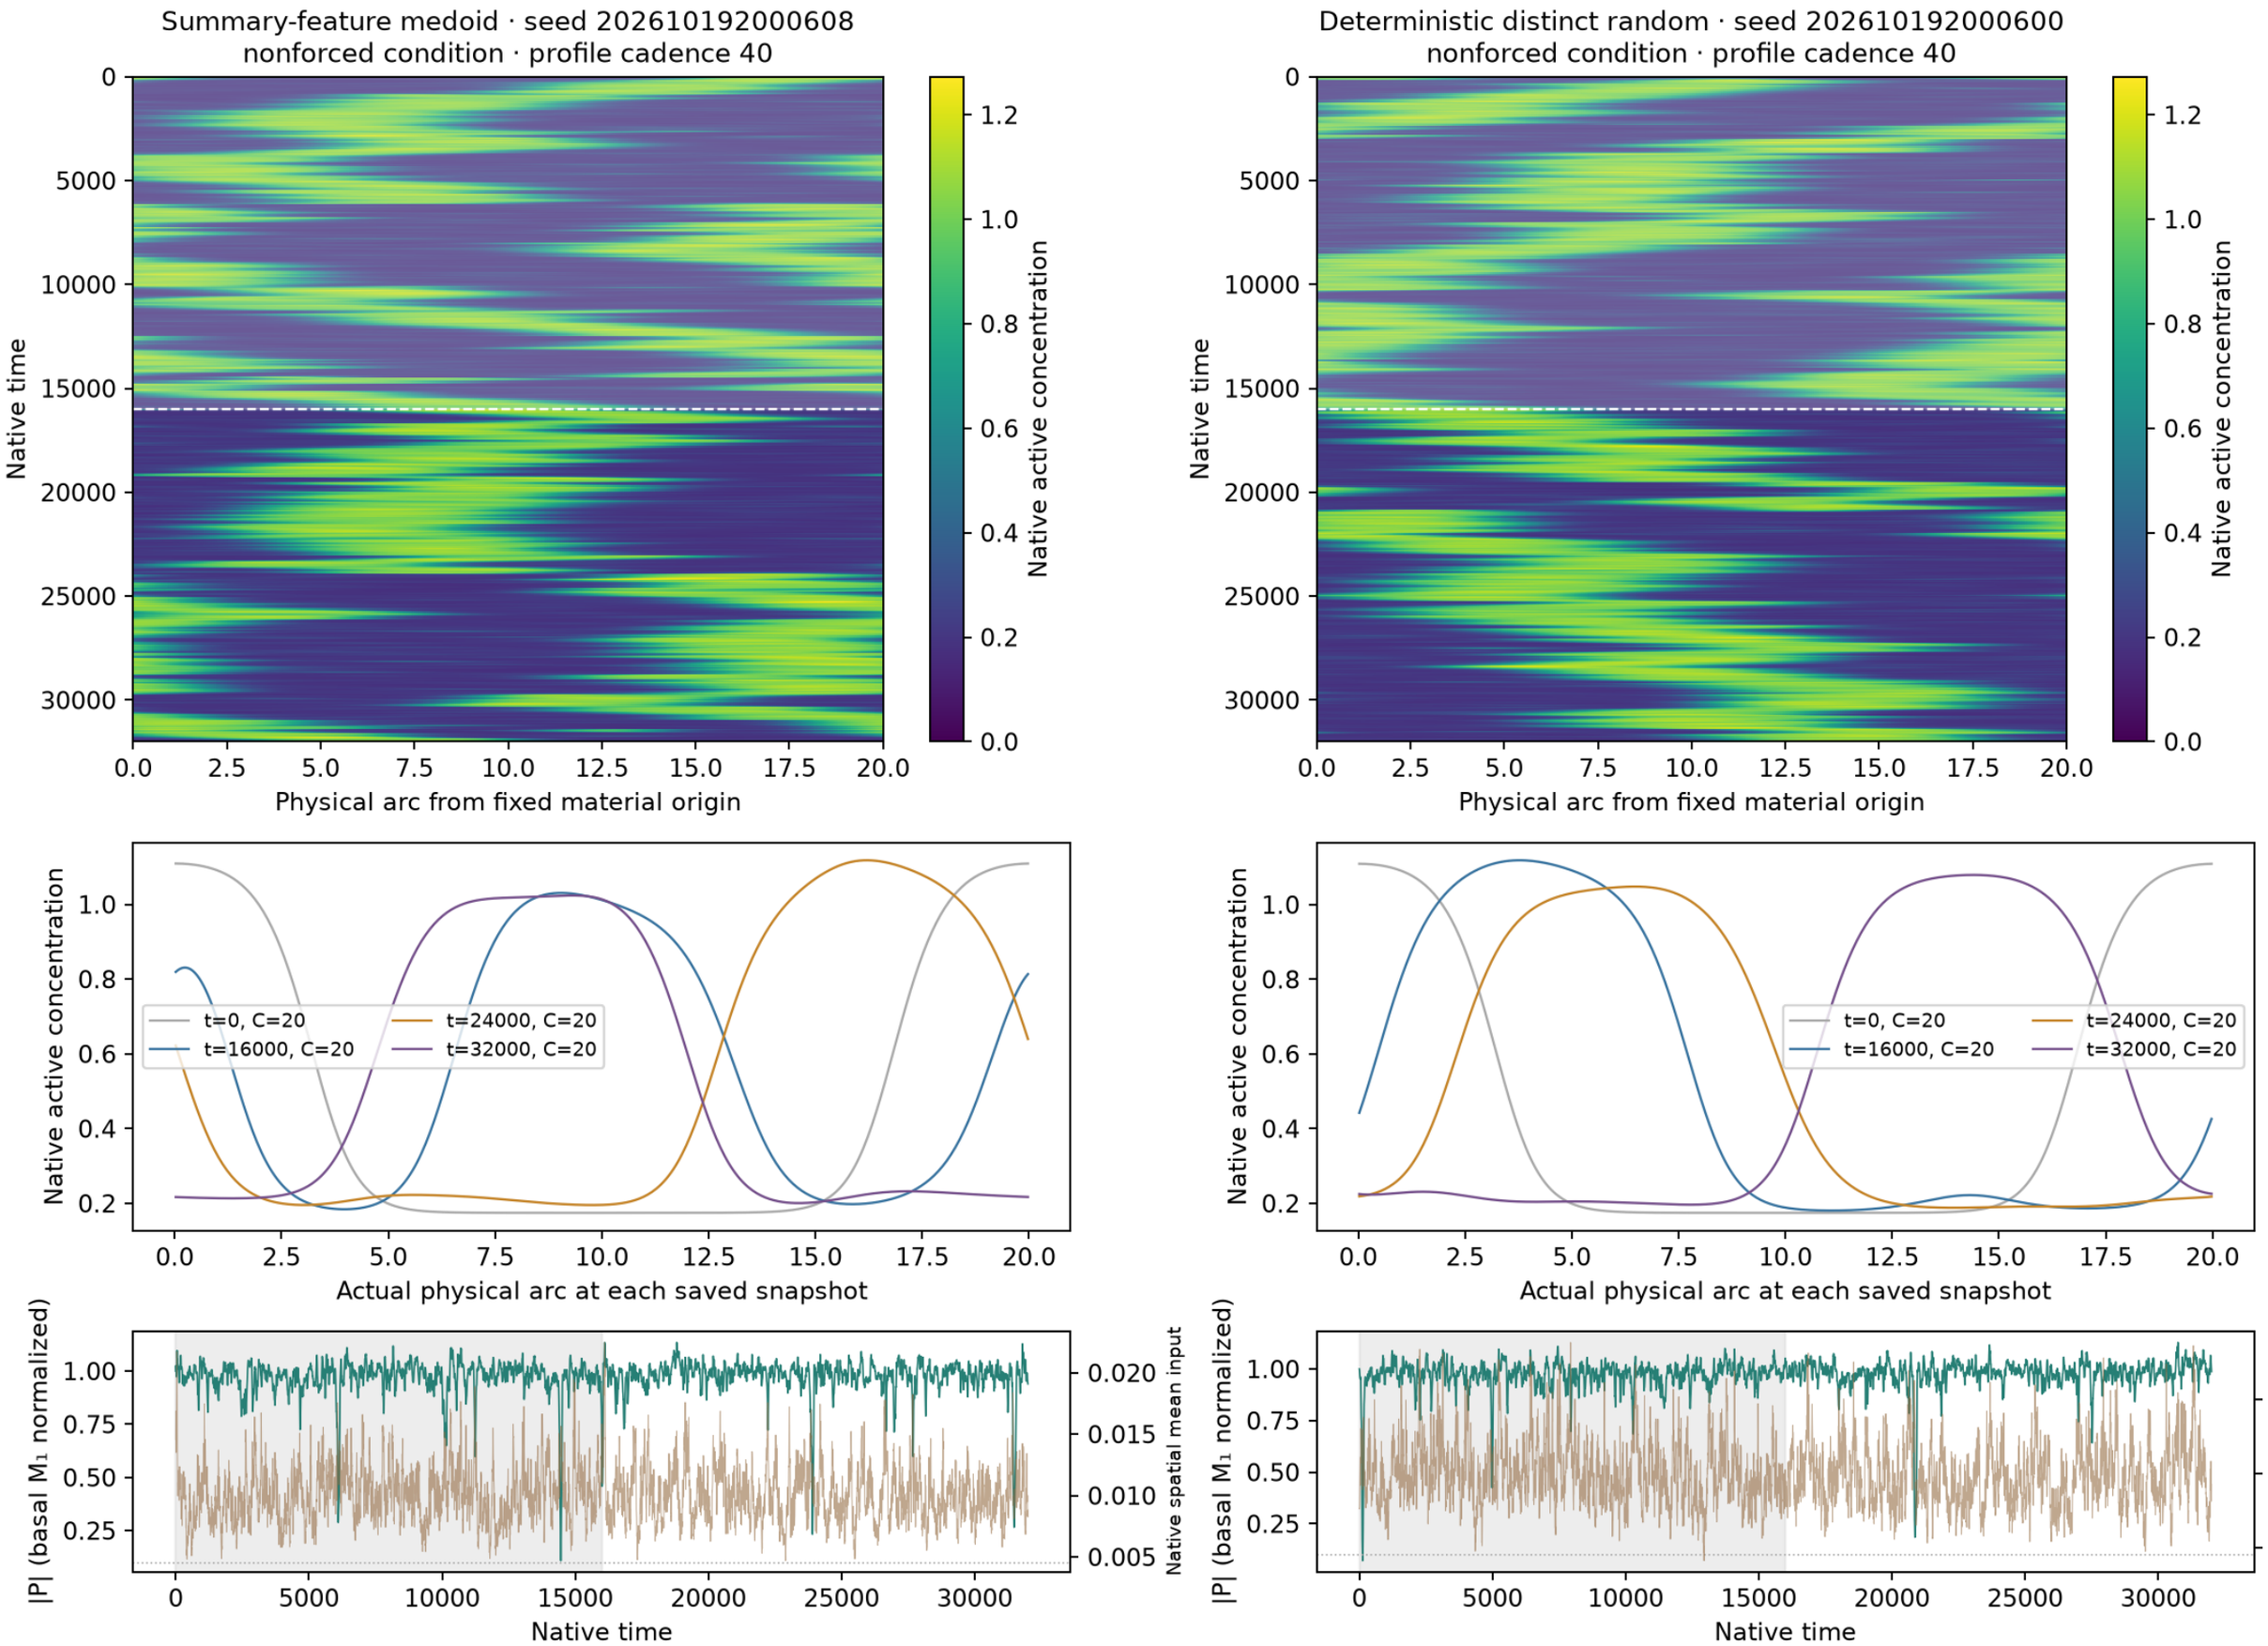


Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Wave-pinning · size label 20 · f=0.1 · noise
context E1_extra · σ=2 · horizon=32000 · n=12 independent noisy realizations


Summary-feature medoid · seed 202610192000601
nonforced condition · profile cadence 40

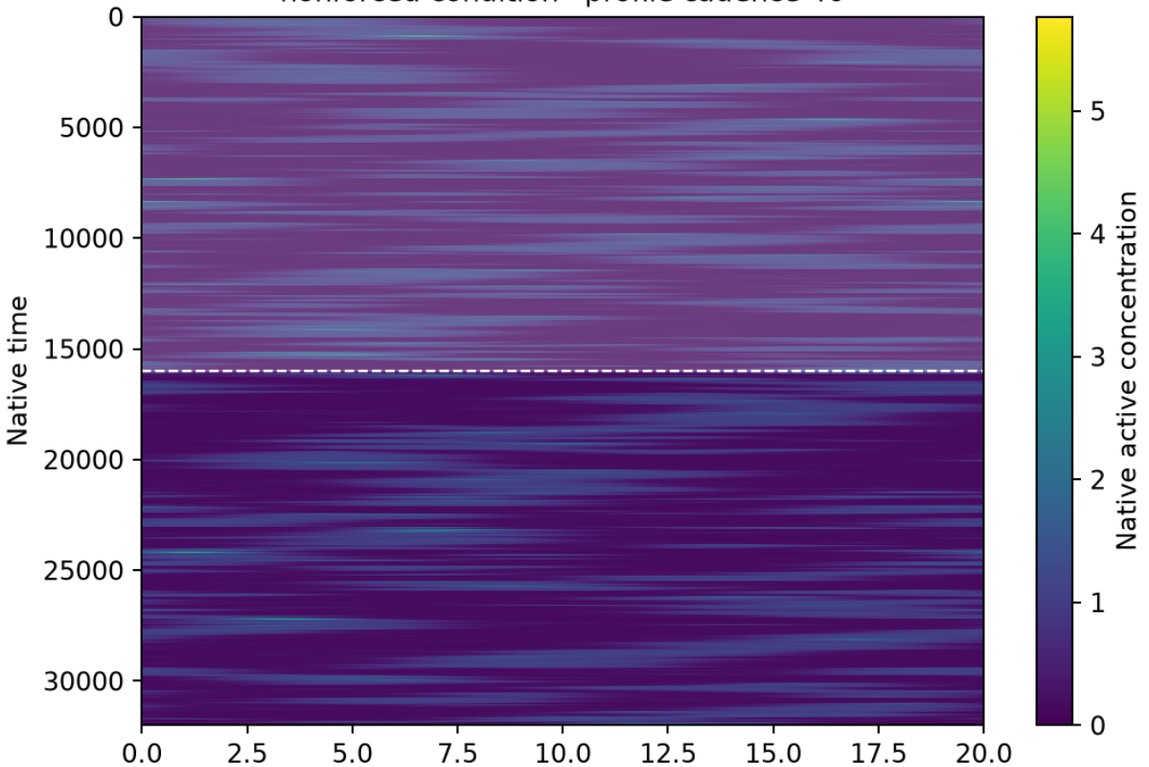


Deterministic distinct random · seed 202610192000605
nonforced condition · profile cadence 40

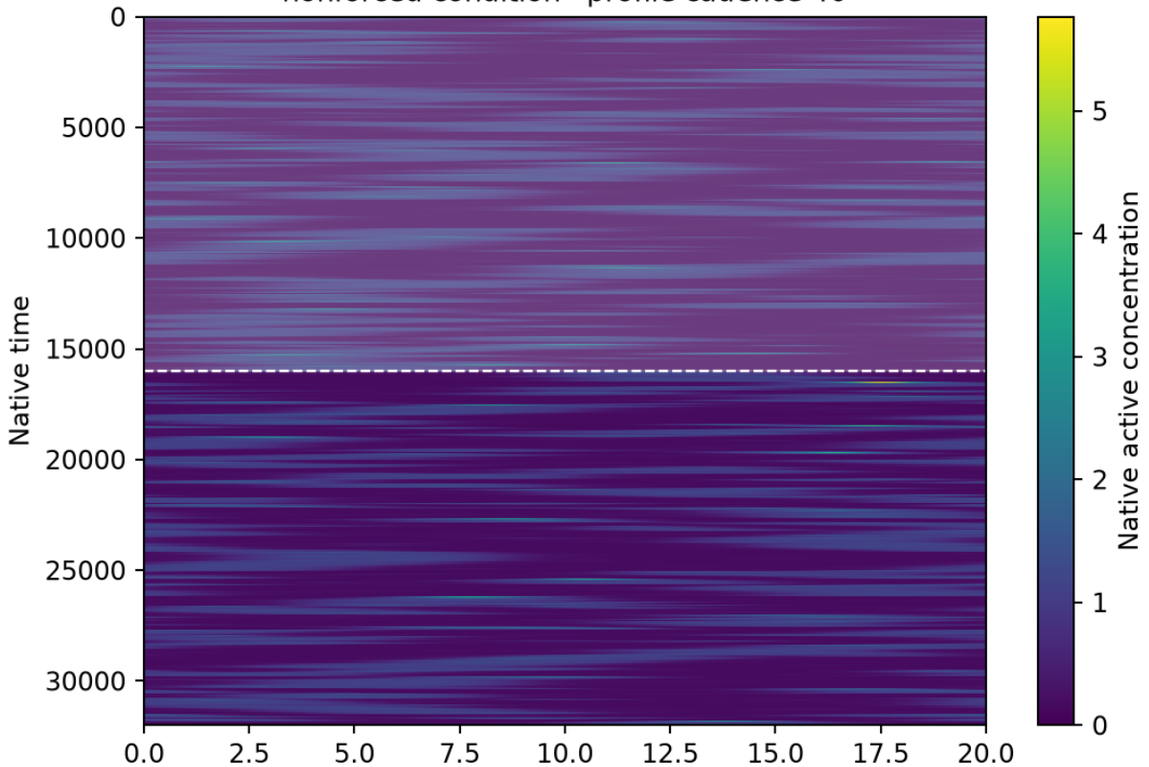



Physical arc from fixed material origin

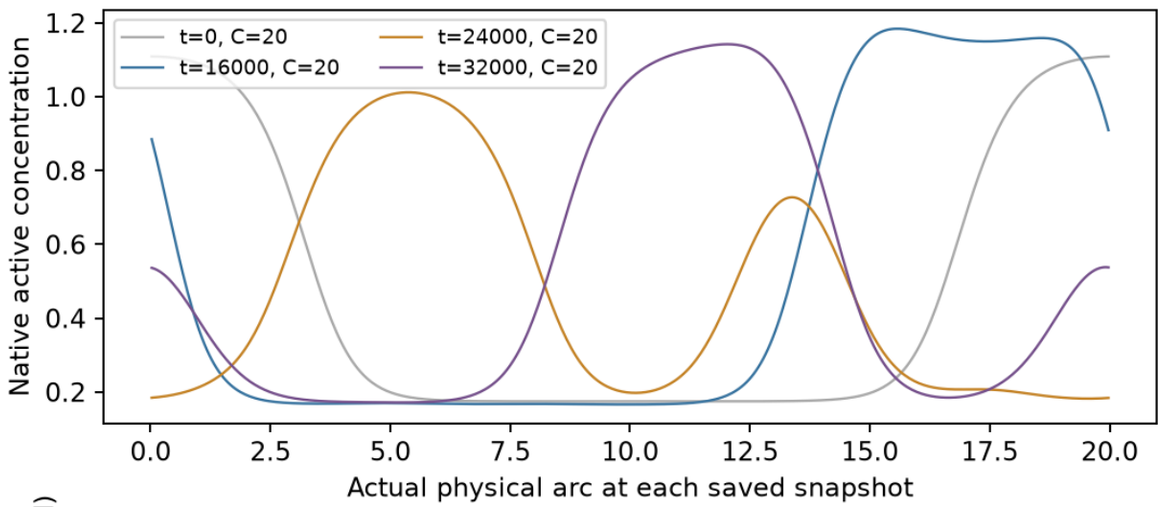

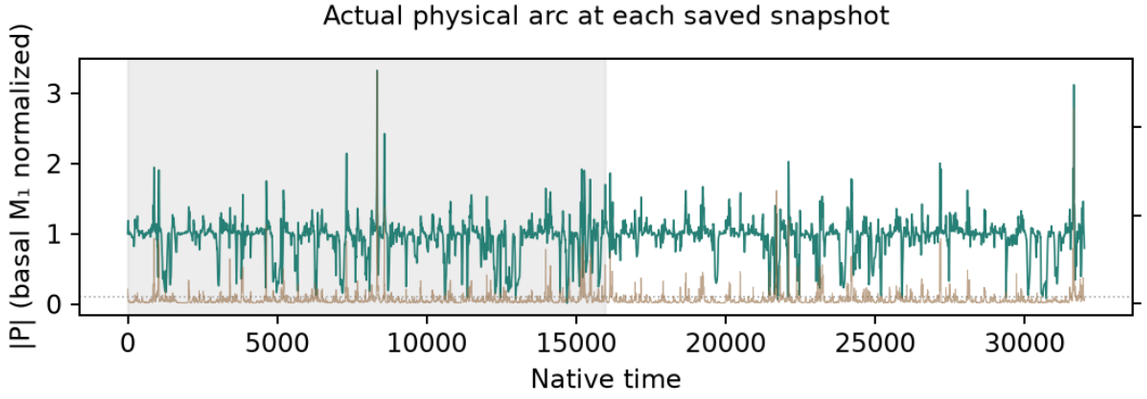


Physical arc from fixed material origin

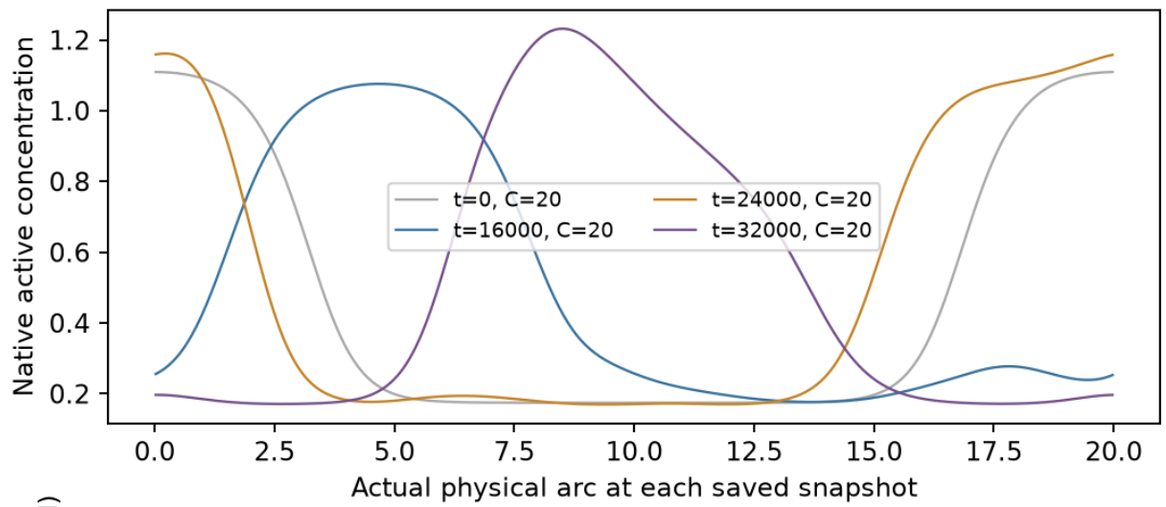

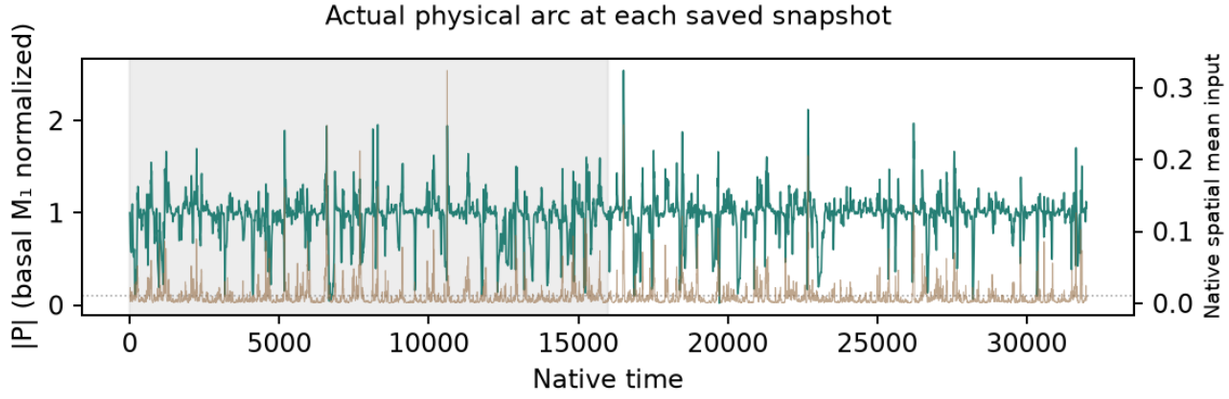


Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.


S11 · Wave-pinning · size label 40 · f=0.03 · noise
context E1_extra · σ=0.25 · horizon=32000 · n=12 independent noisy realizations

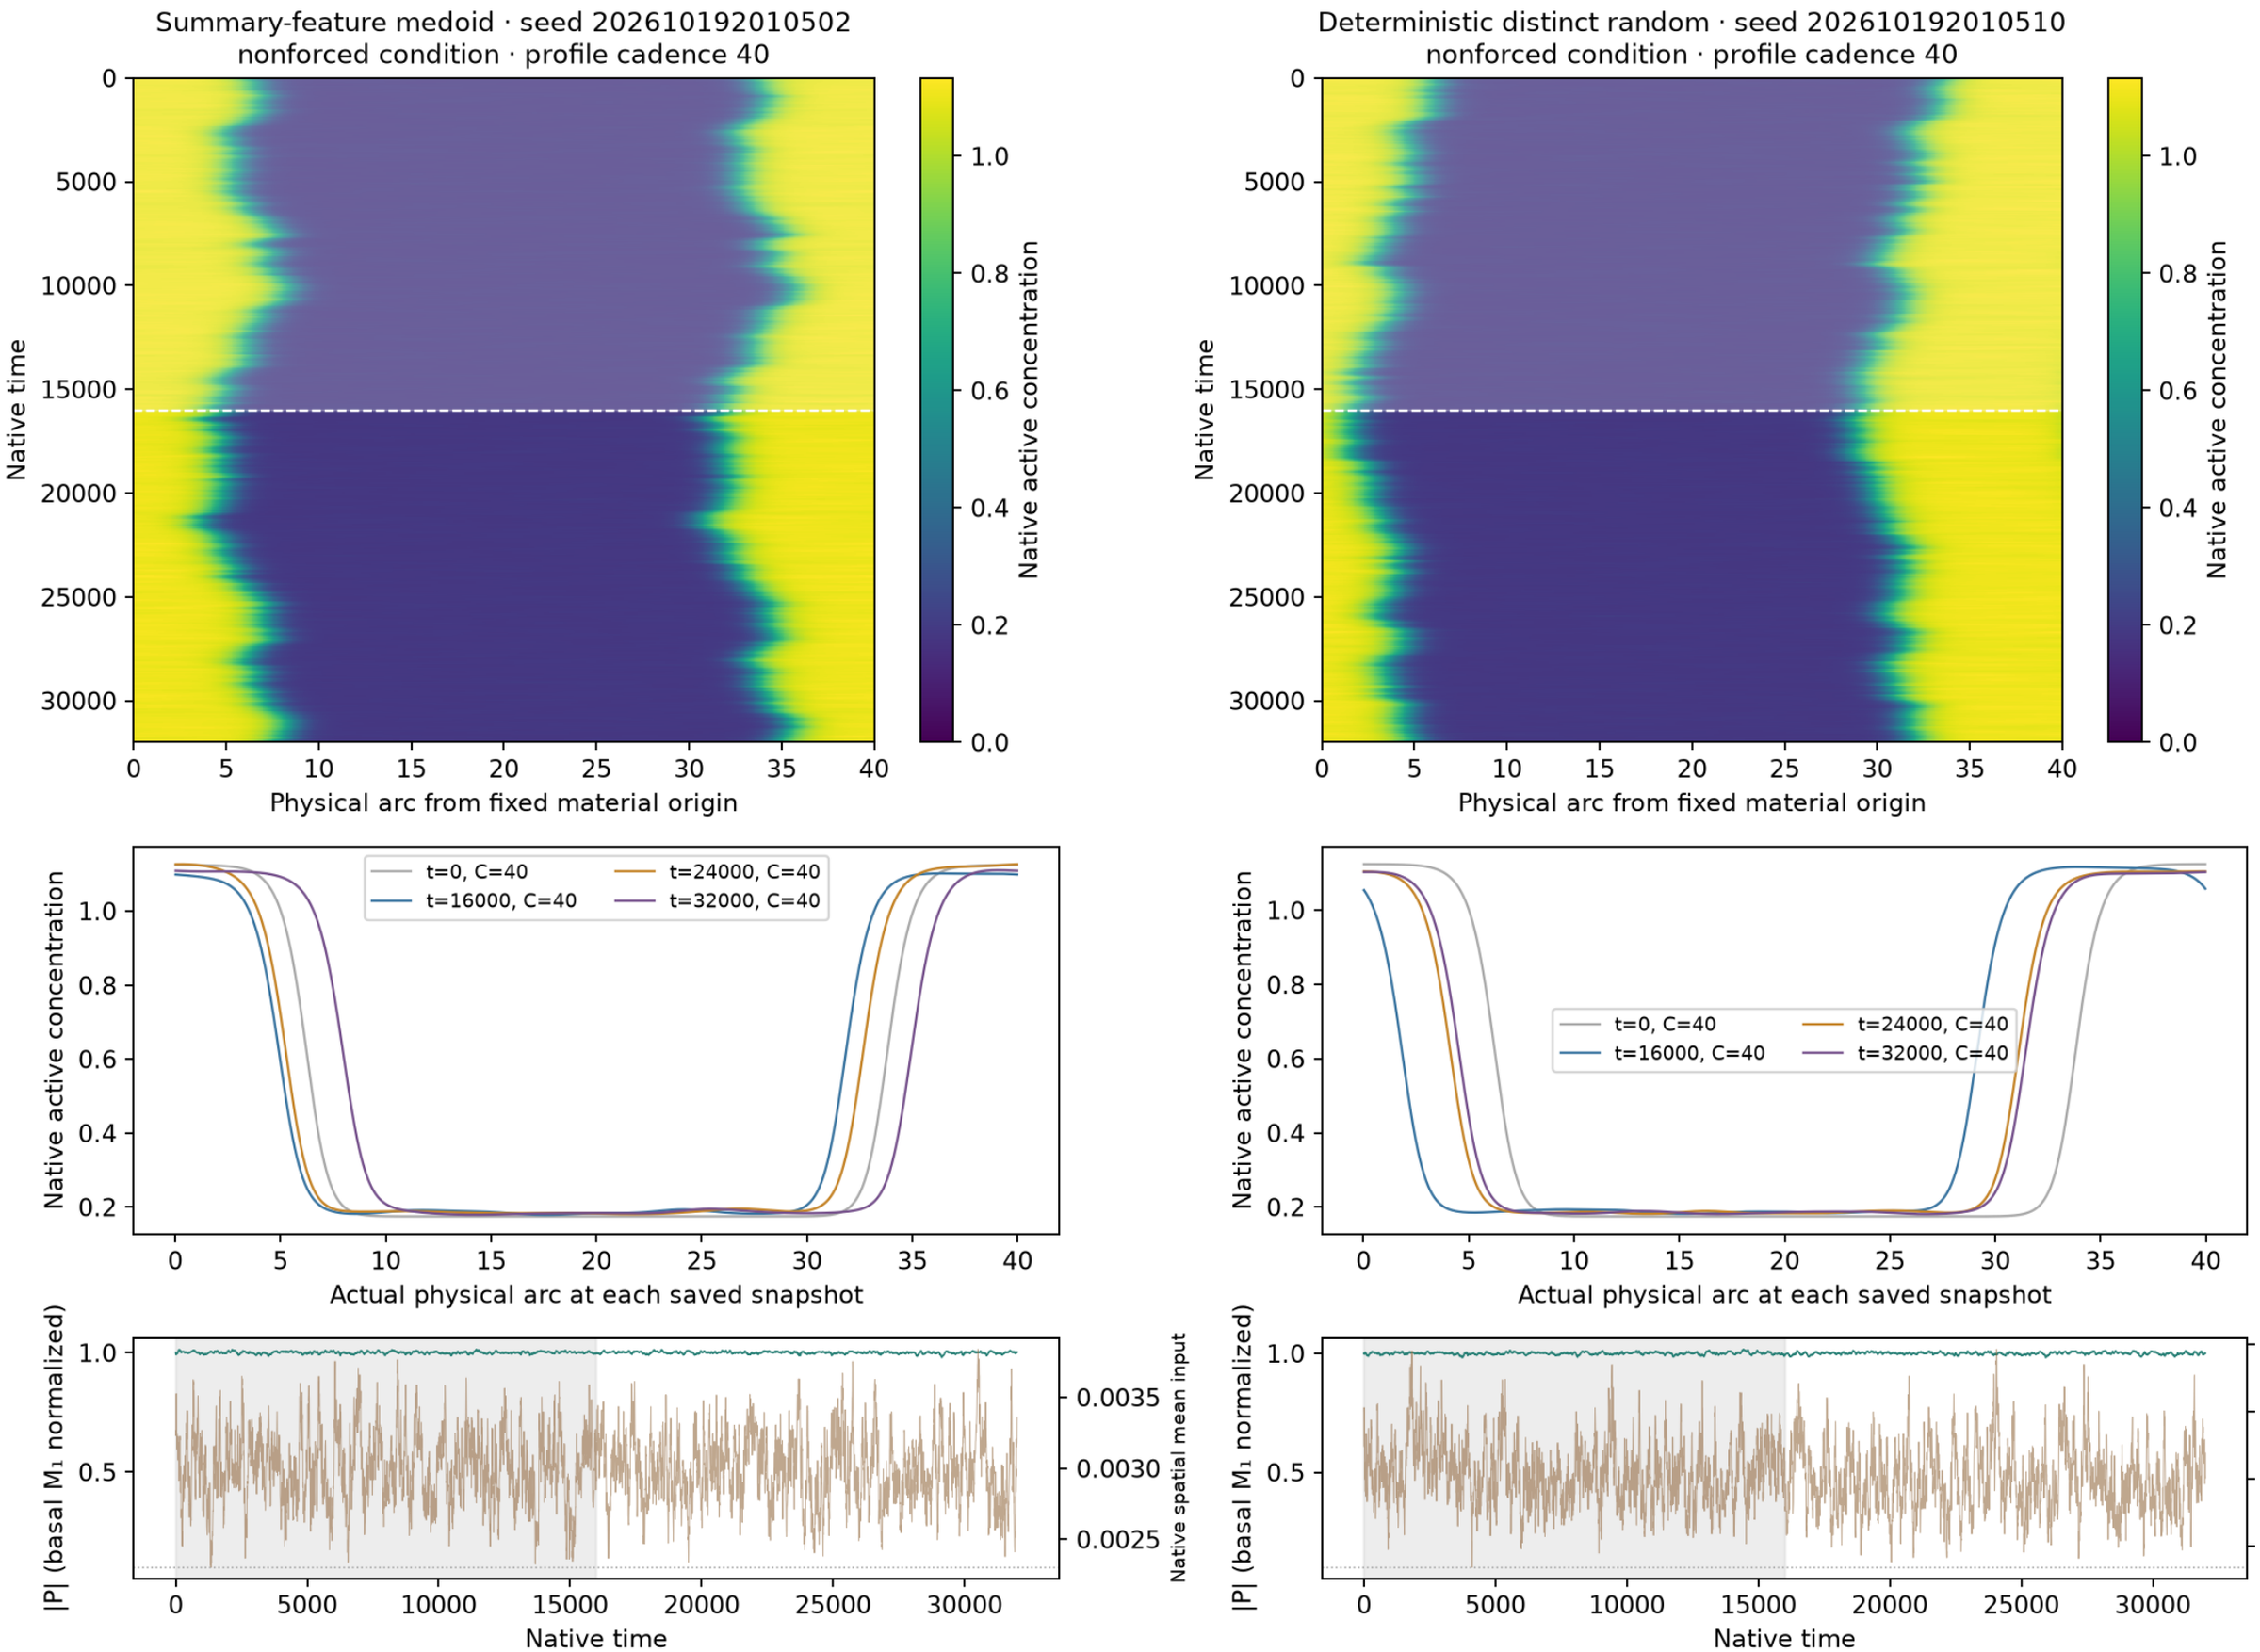

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M_1 normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.


S11 · Wave-pinning · size label 40 · f=0.03 · noise
context E1_extra · σ=0.5 · horizon=32000 · n=12 independent noisy realizations

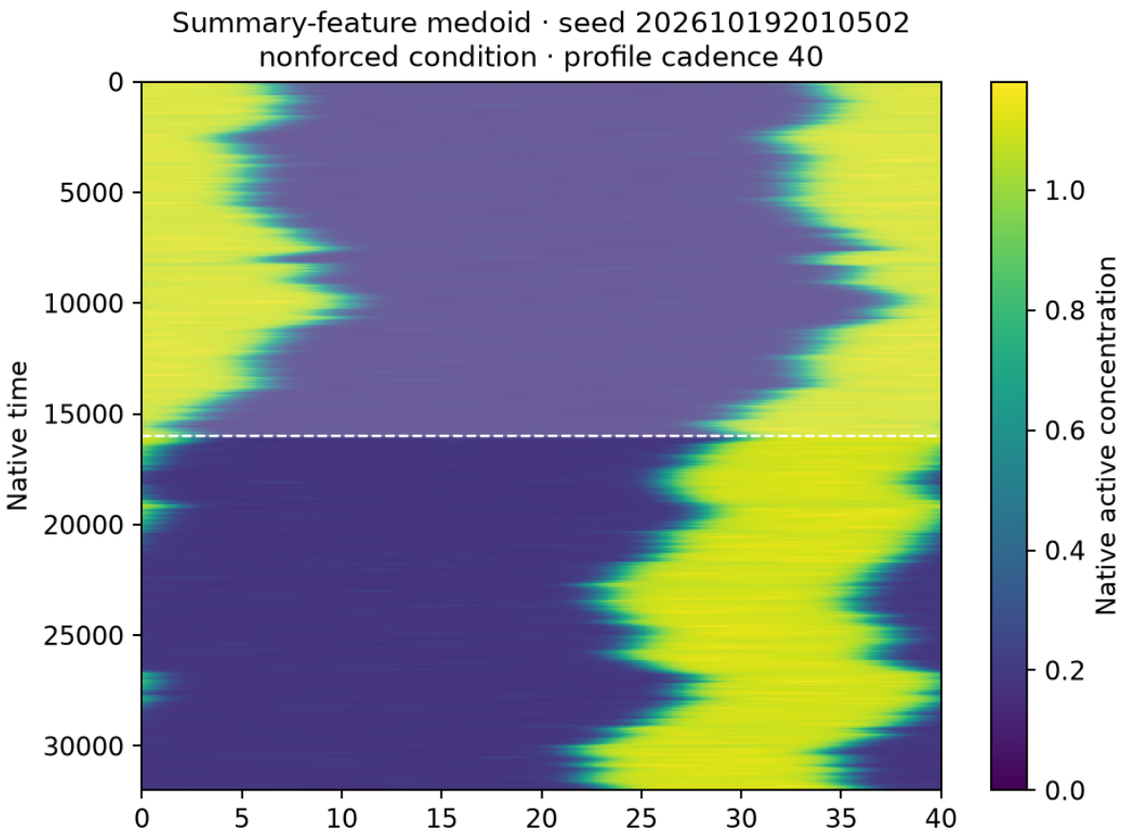

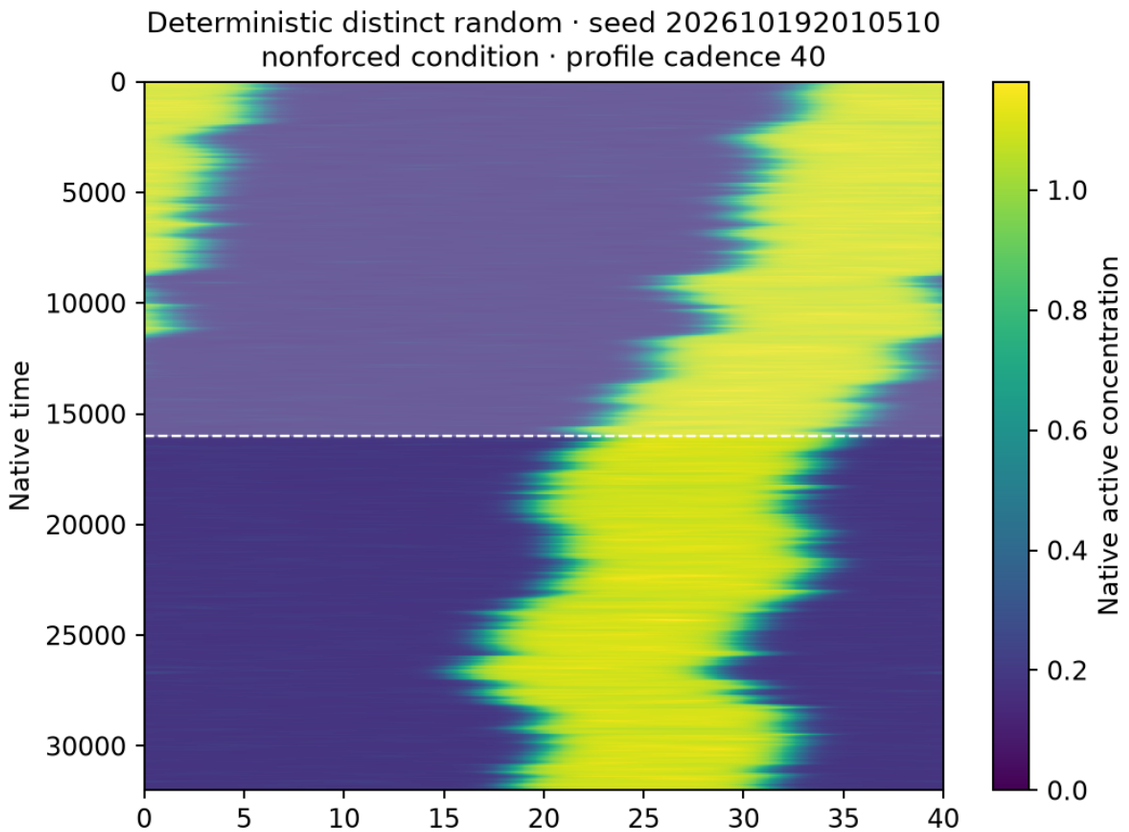

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.


S11 · Wave-pinning · size label 40 · f=0.03 · noise
context E1_extra · σ=2 · horizon=32000 · n=12 independent noisy realizations

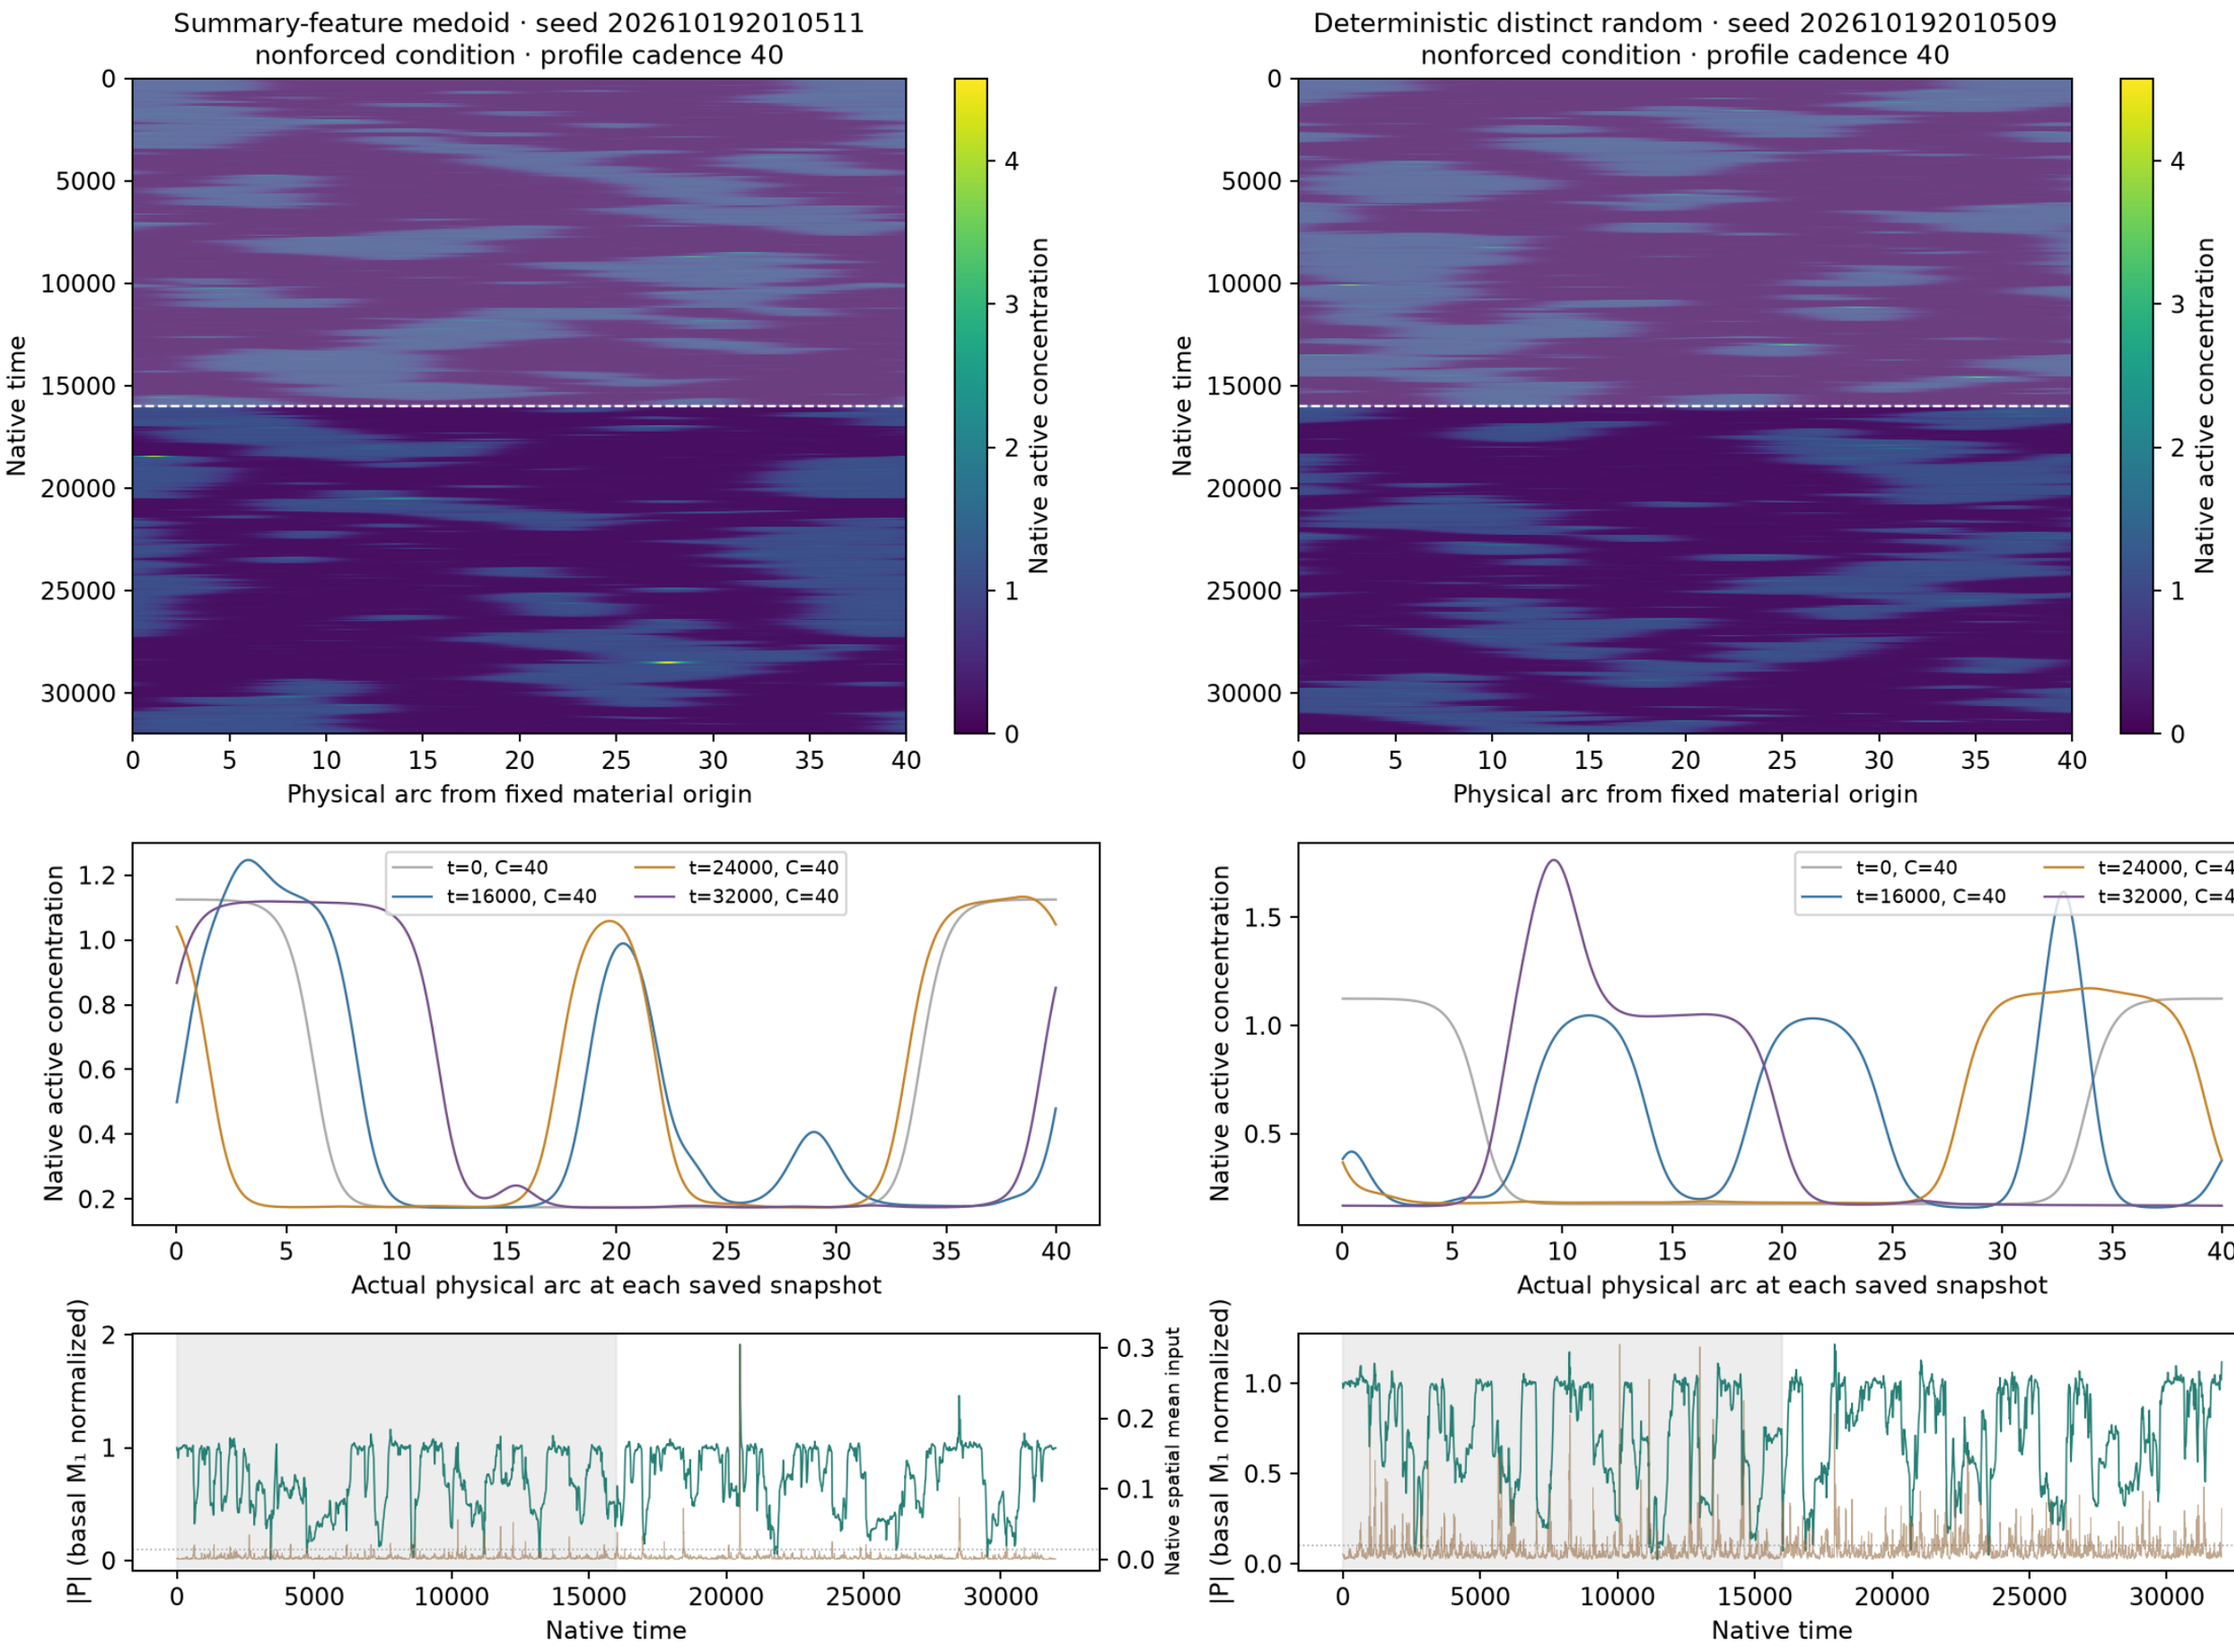


Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Wave-pinning · size label 40 · f=0.1 · noise
context E1_extra · σ=0.25 · horizon=32000 · n=12 independent noisy realizations


Summary-feature medoid · seed 202610192010603
nonforced condition · profile cadence 40

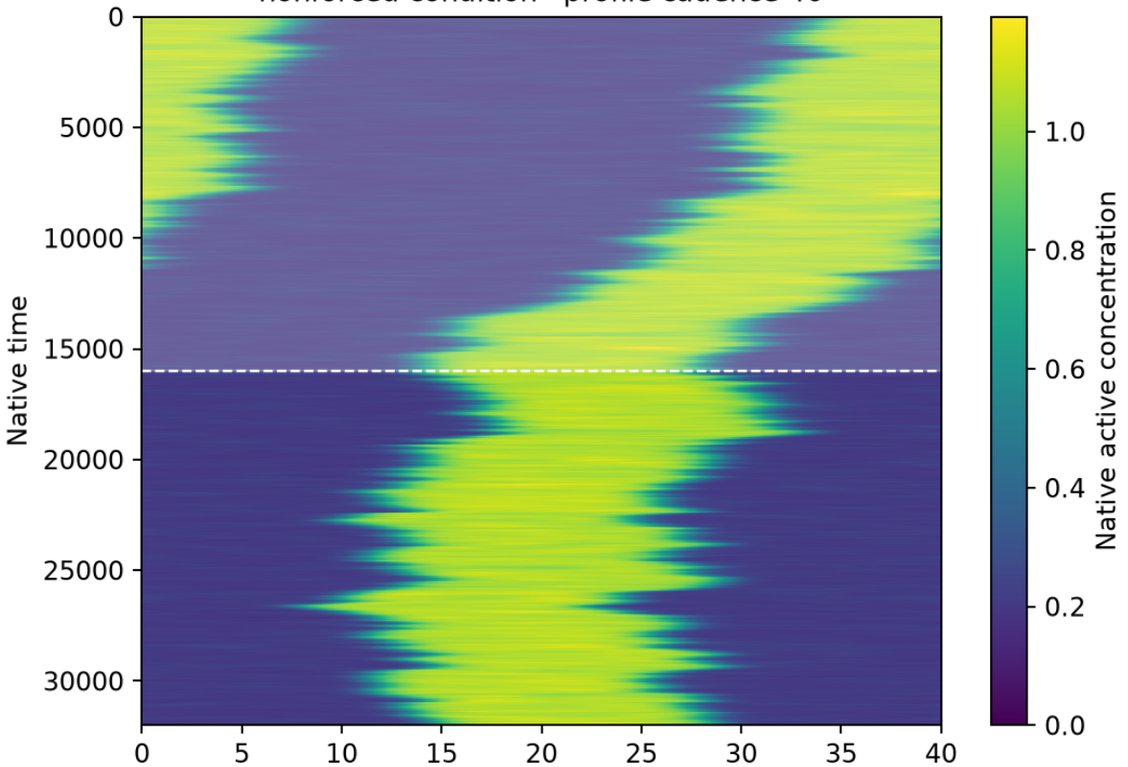


Deterministic distinct random · seed 202610192010607
nonforced condition · profile cadence 40

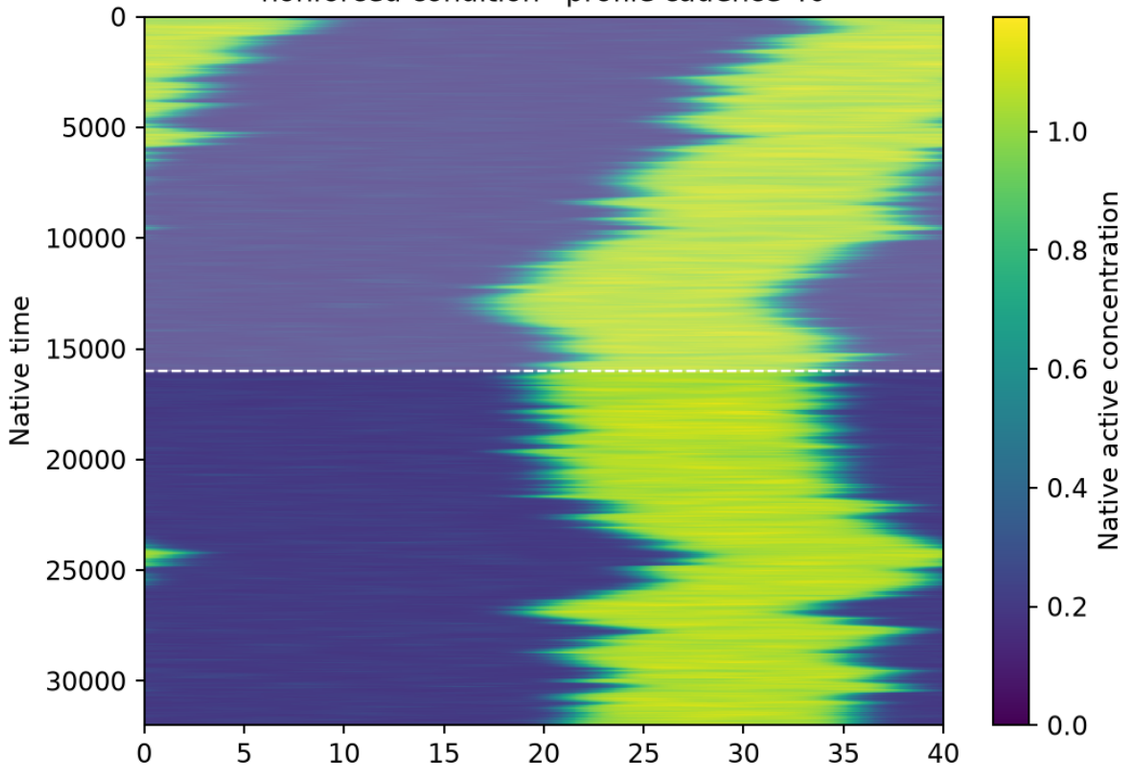



Physical arc from fixed material origin

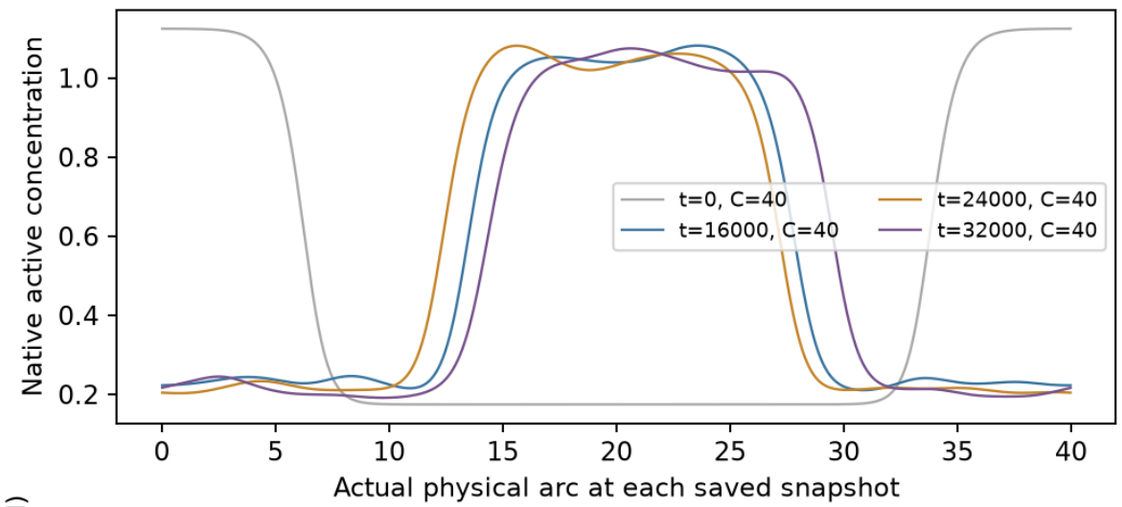

Physical arc from fixed material origin

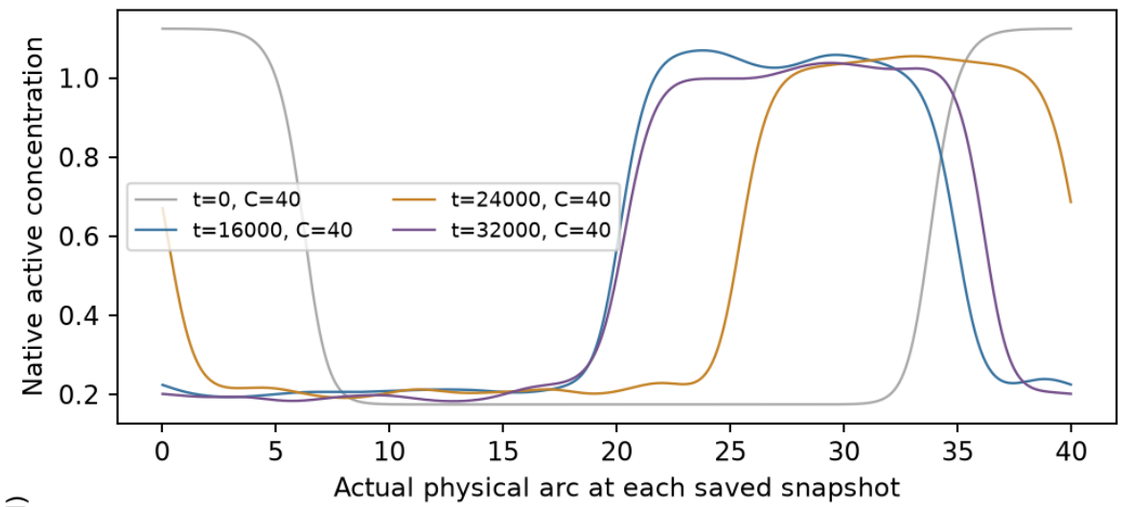


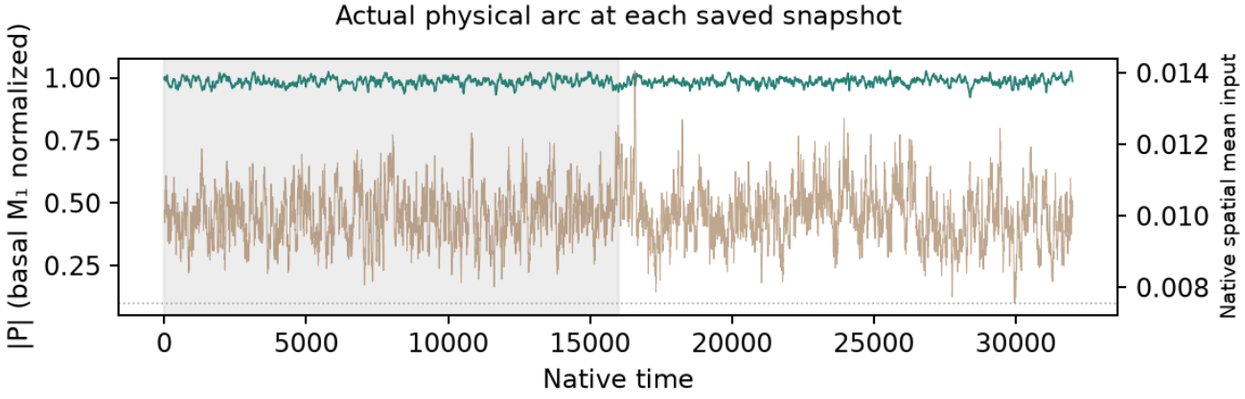

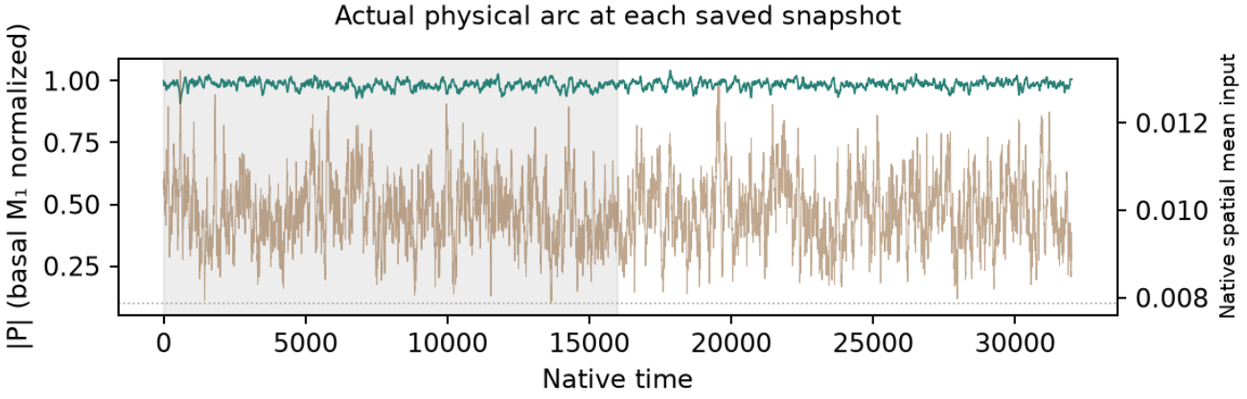


Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Wave-pinning · size label 40 · f=0.1 · noise
context E1_extra · σ=0.5 · horizon=32000 · n=12 independent noisy realizations

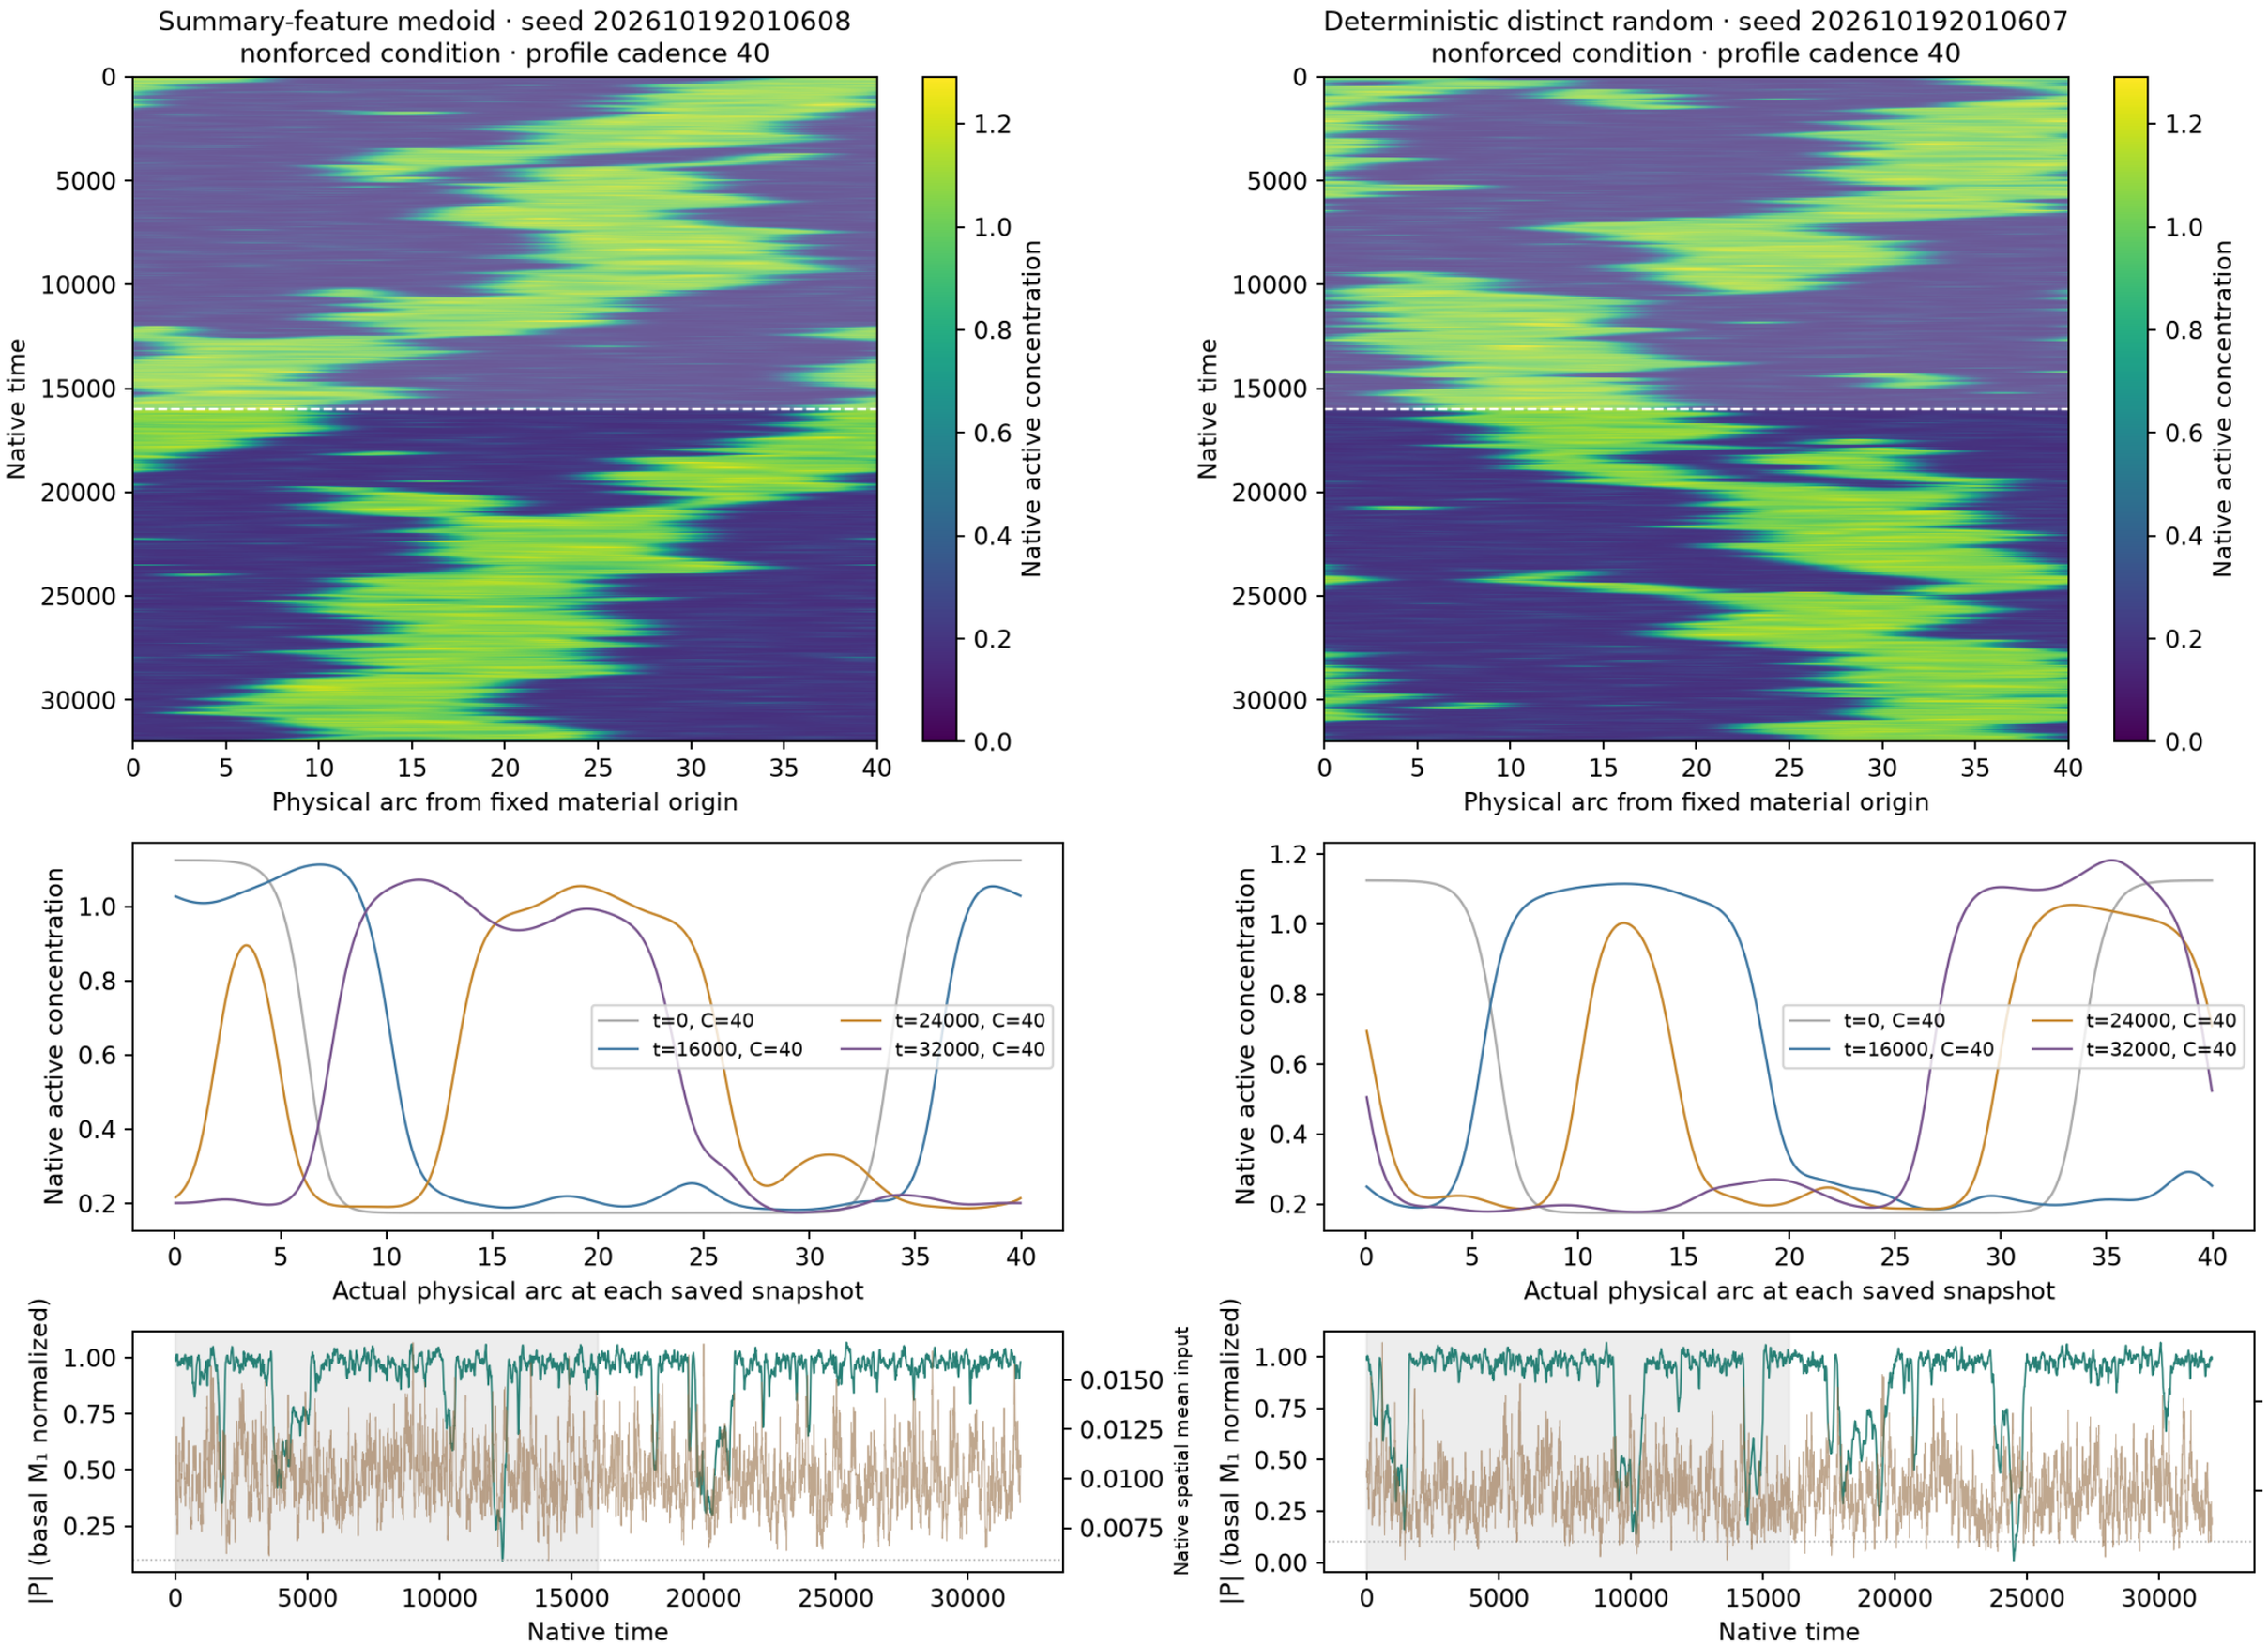


Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Wave-pinning · size label 40 · f=0.1 · noise
context E1_extra · σ=2 · horizon=32000 · n=12 independent noisy realizations

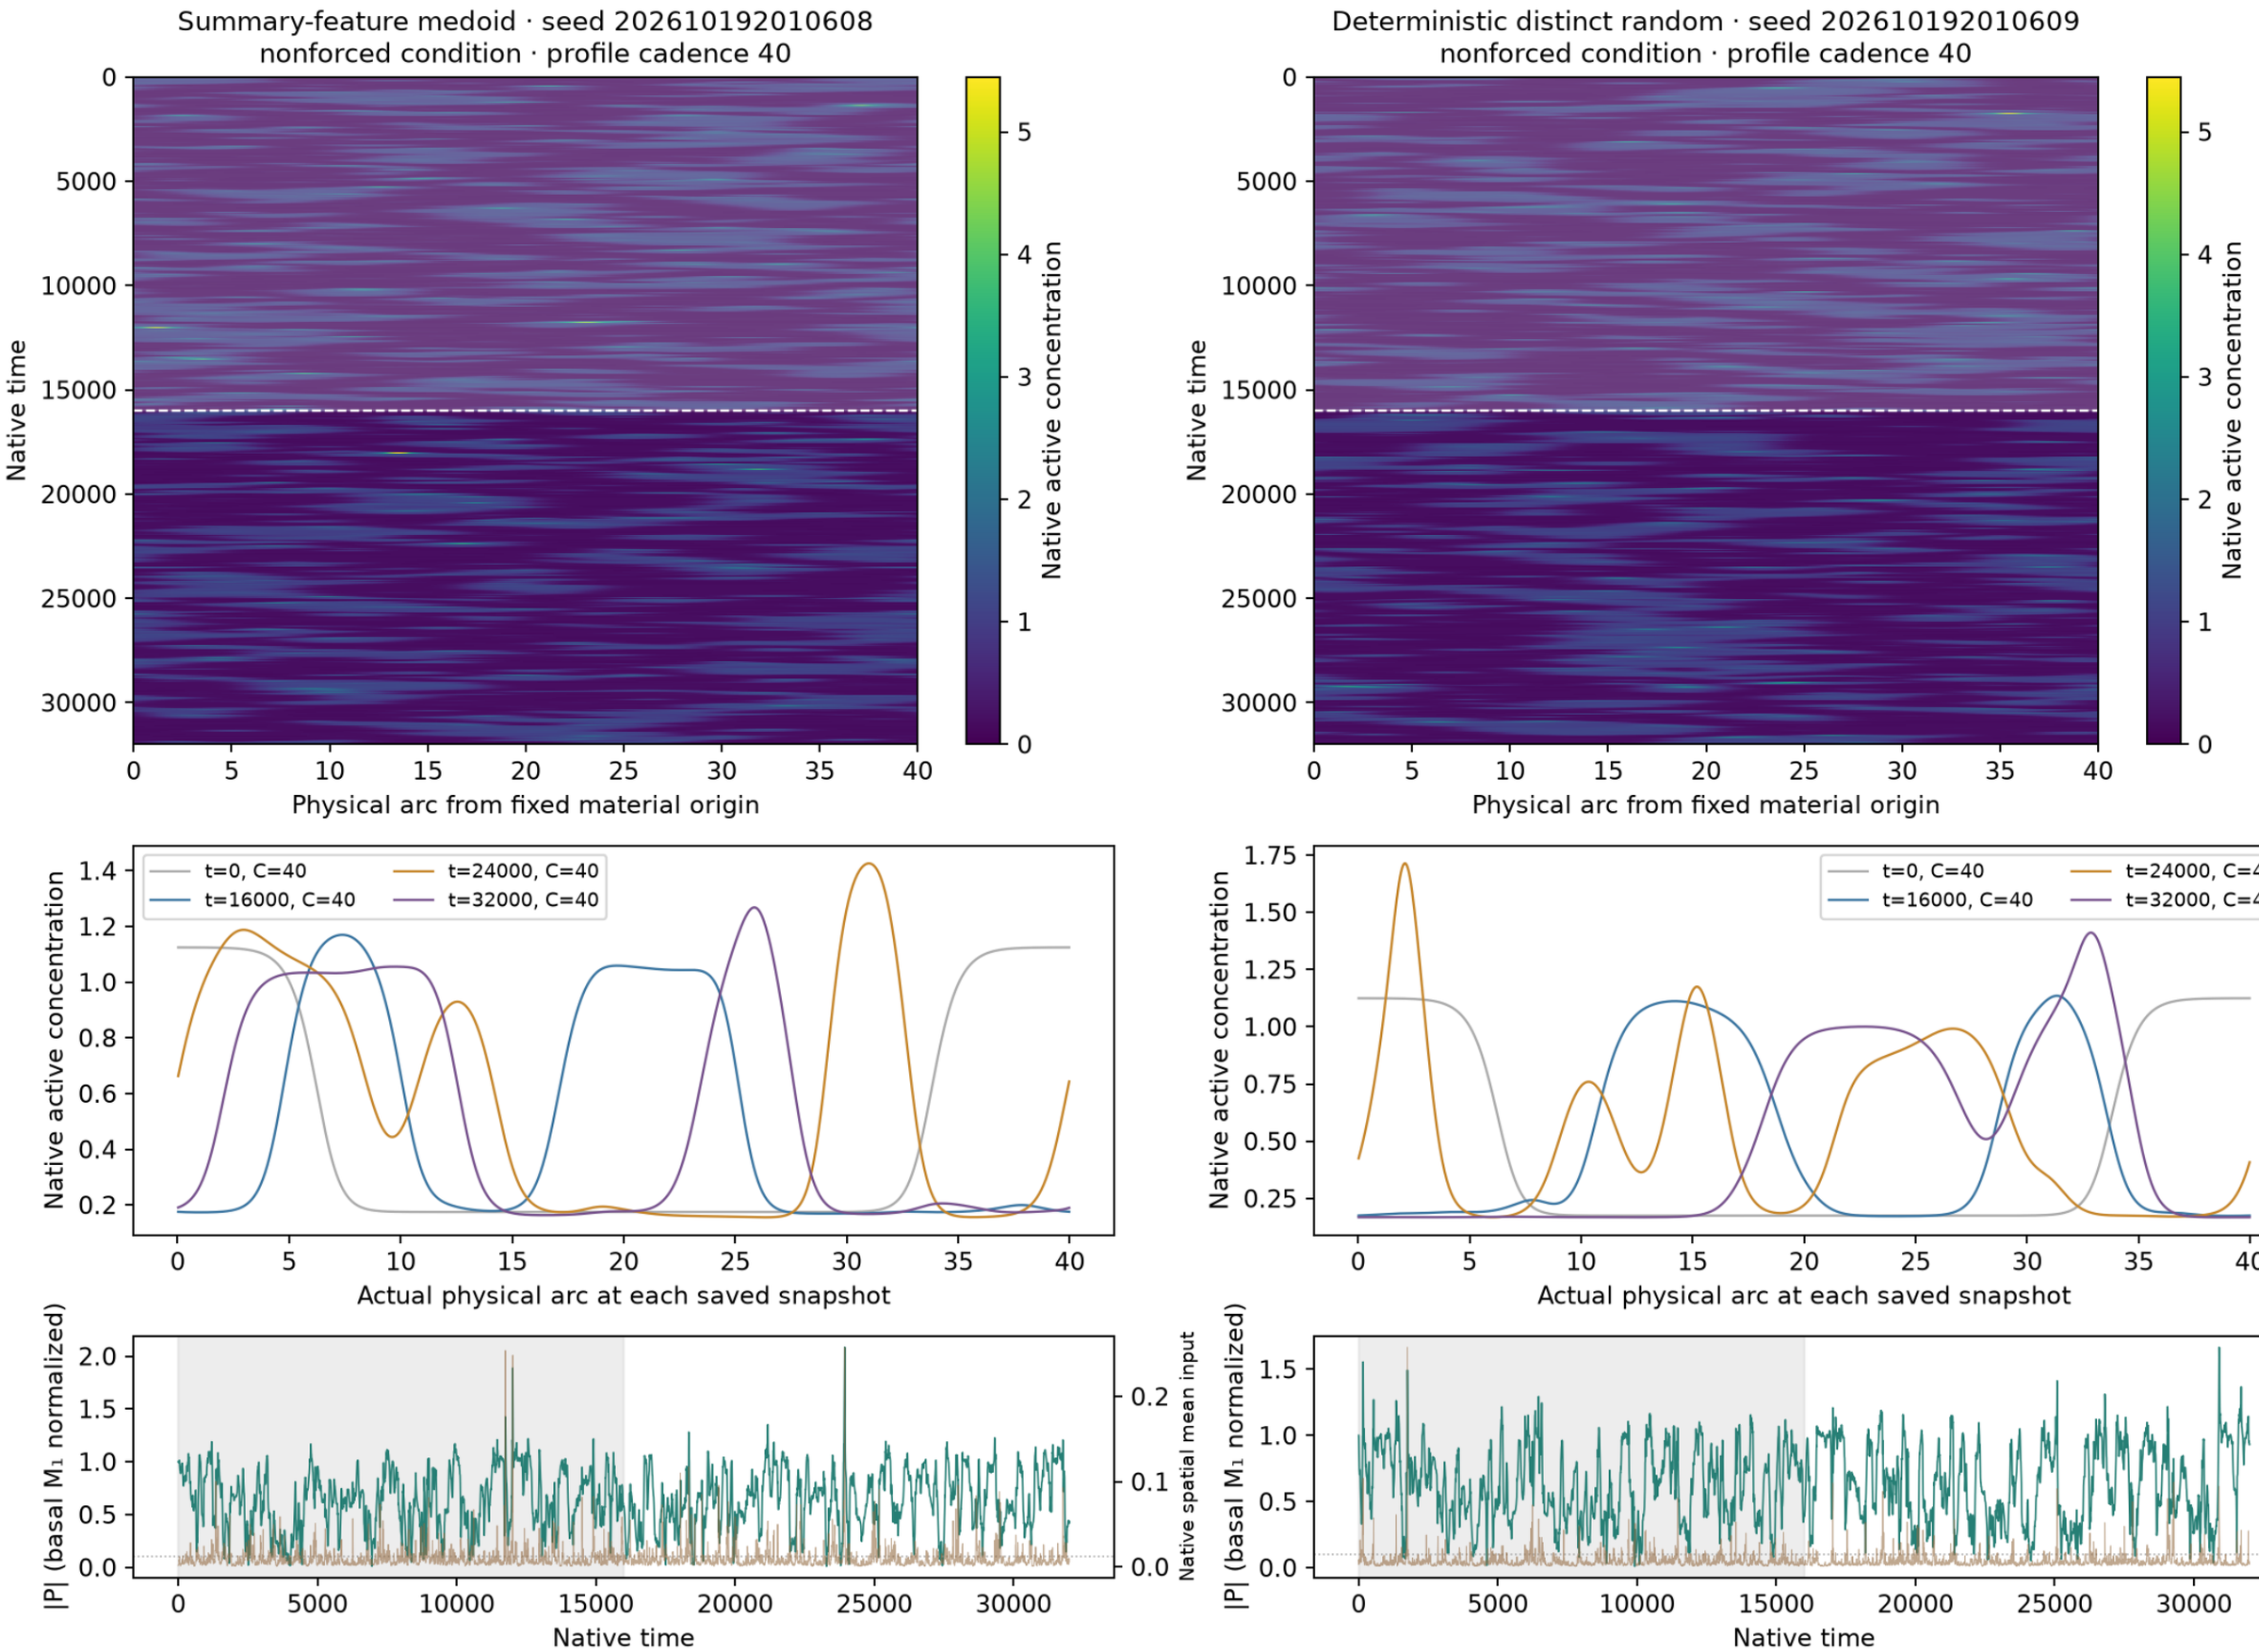


Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M_1 normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Wave-pinning · size label 60 · f=0.03 · noise
context E1_extra · σ=0.25 · horizon=32000 · n=12 independent noisy realizations

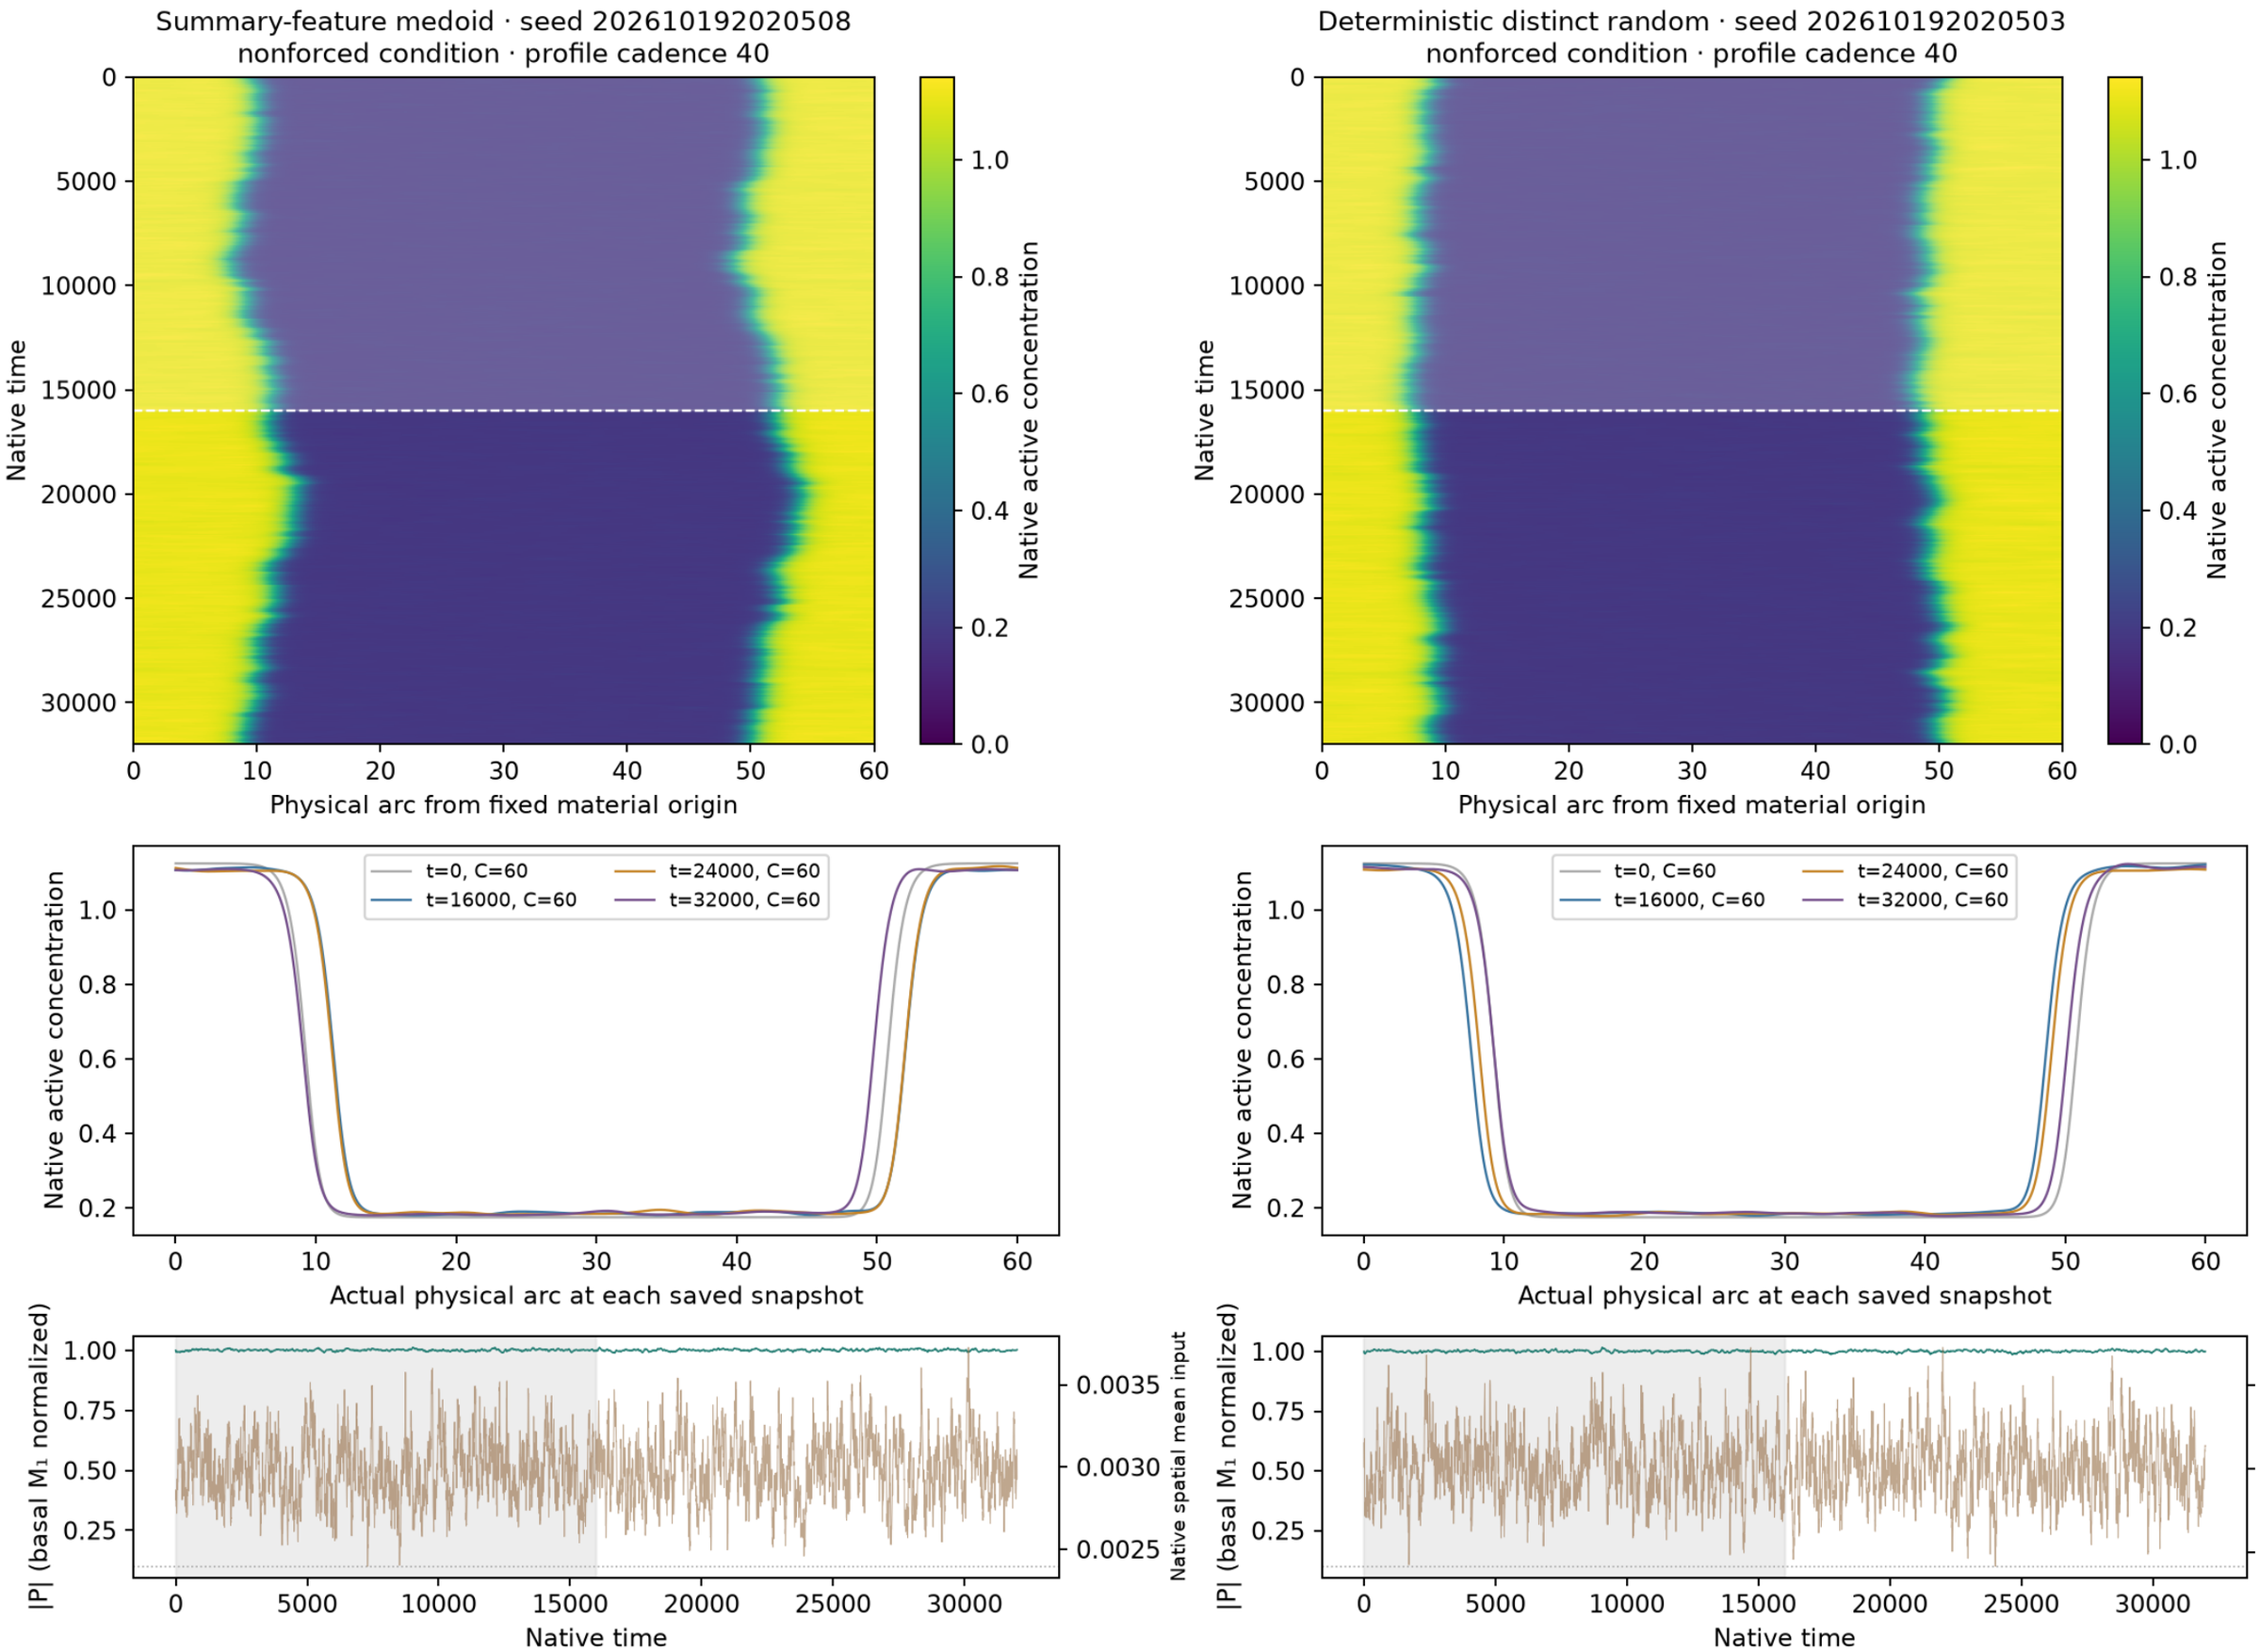


Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Wave-pinning · size label 60 · f=0.03 · noise
context E1_extra · σ=0.5 · horizon=32000 · n=12 independent noisy realizations

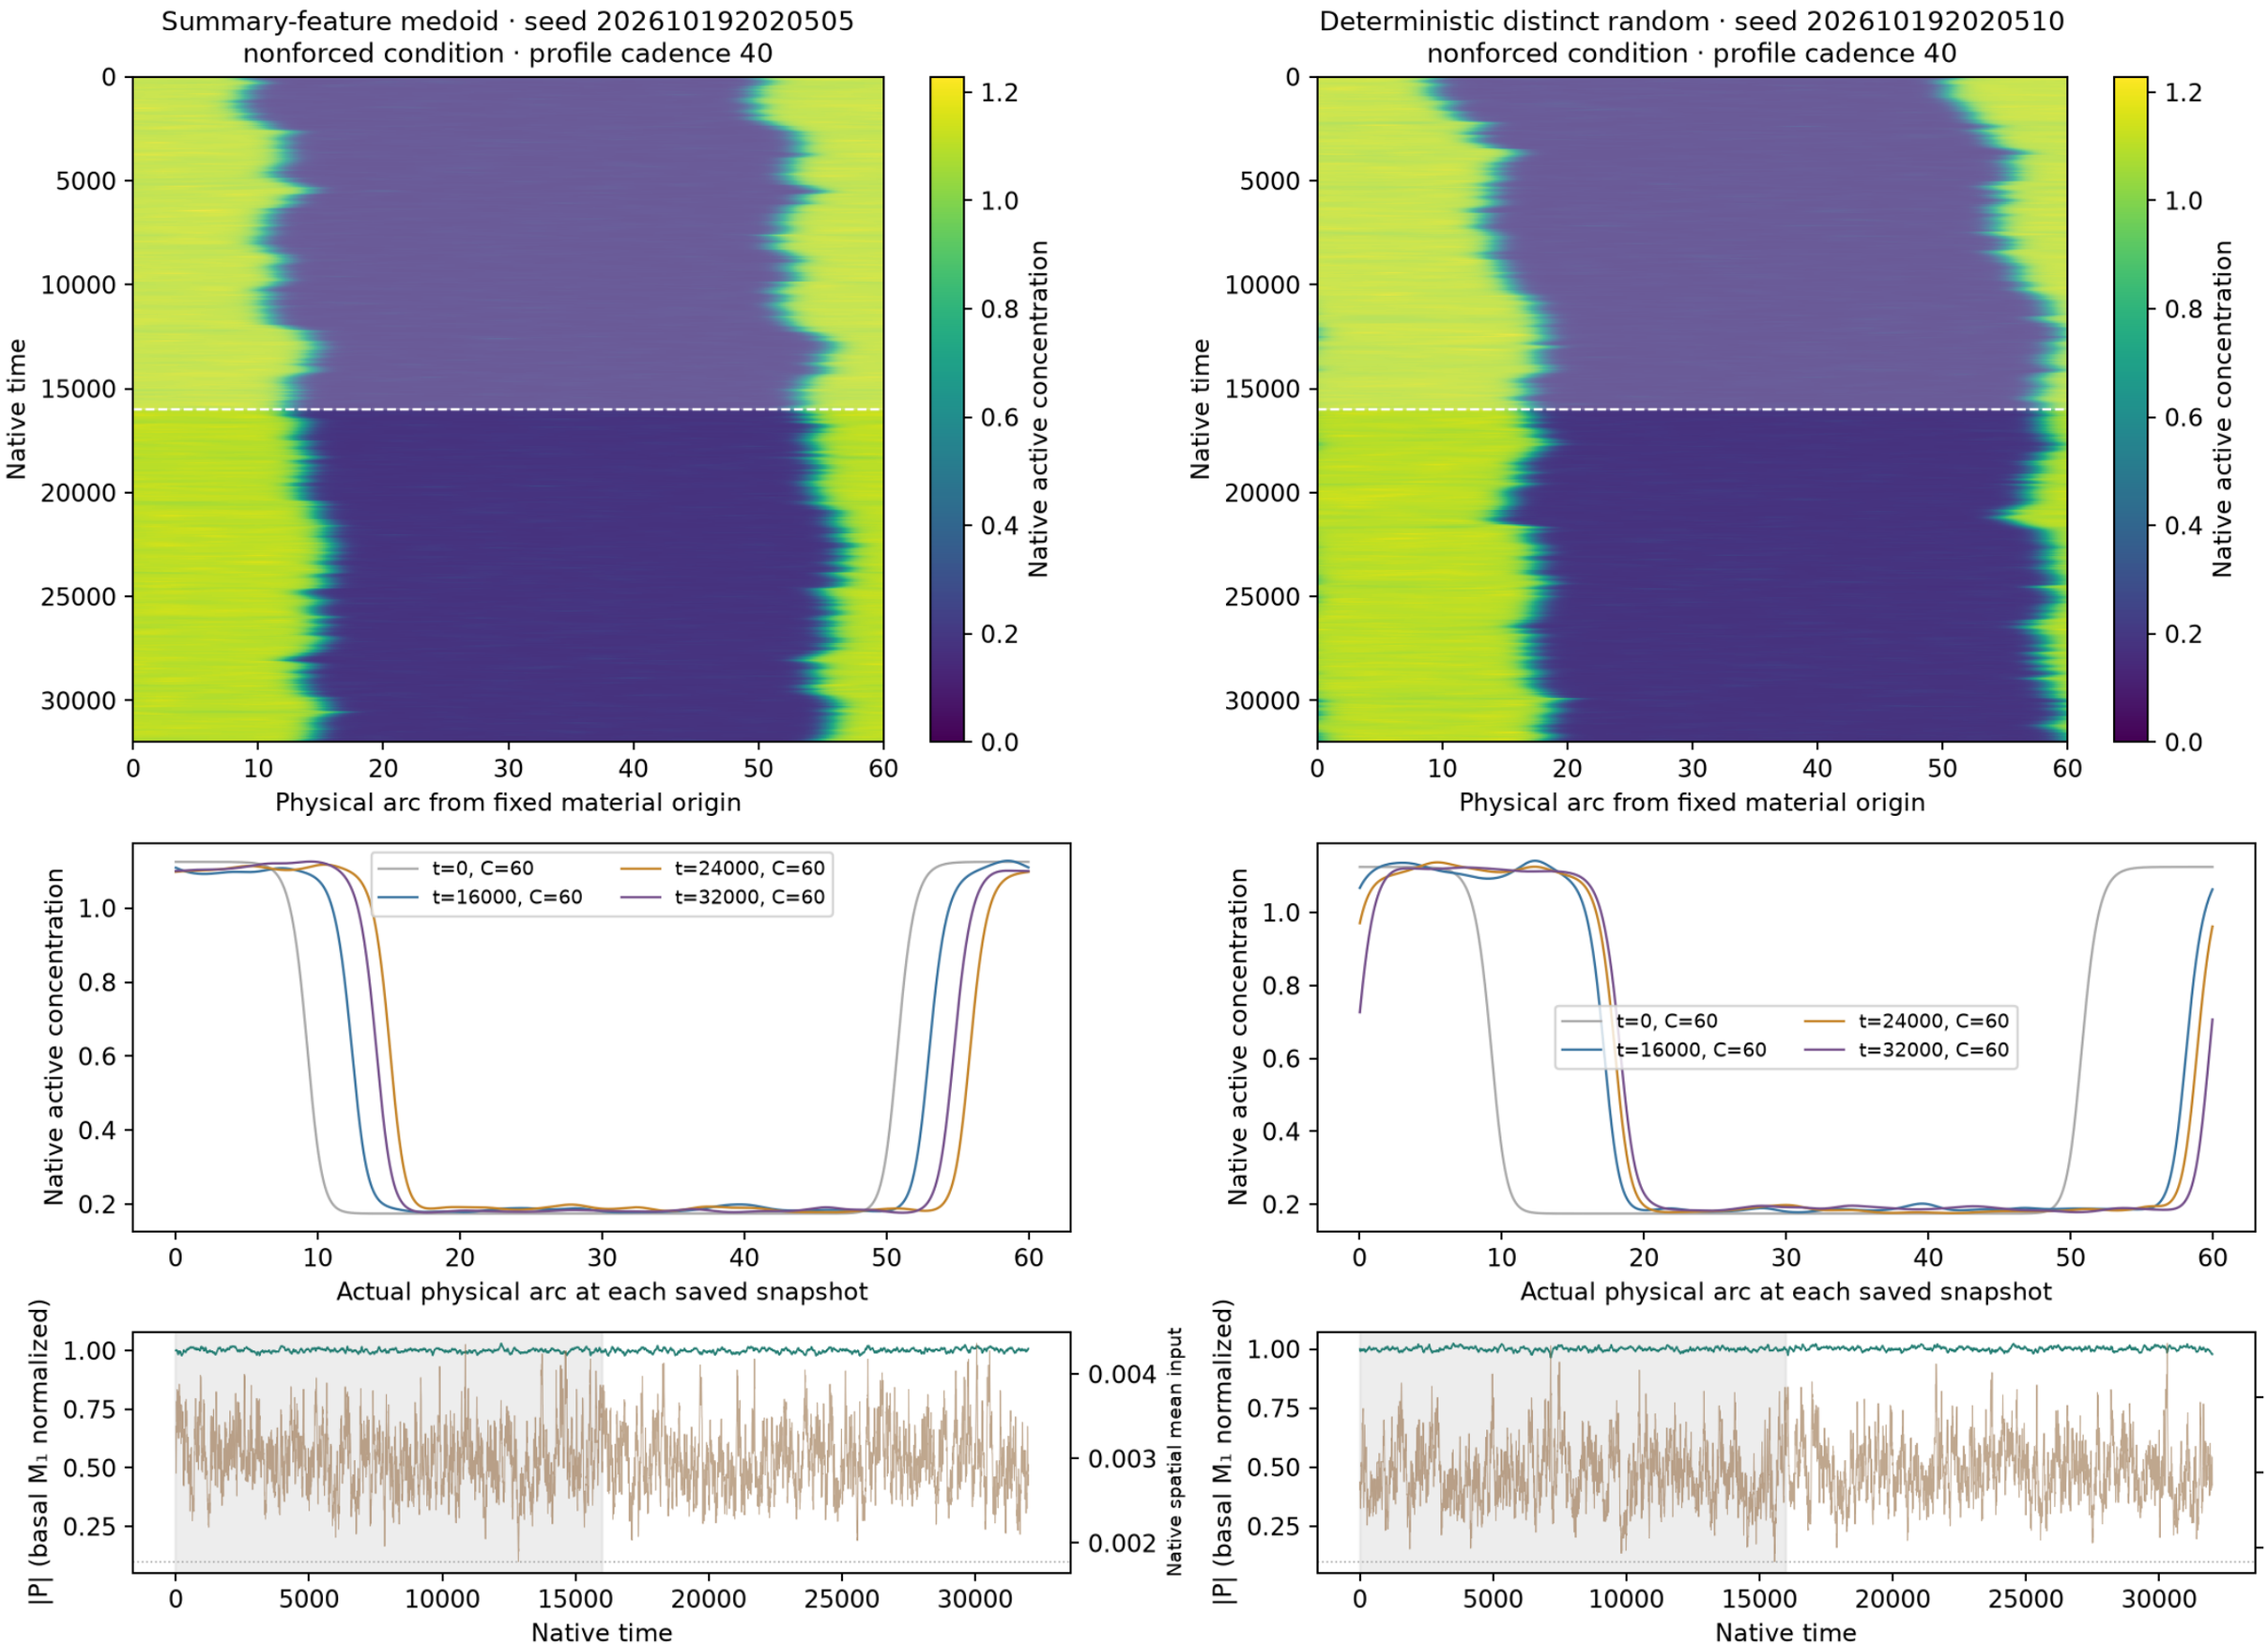

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M_1 normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.


S11 · Wave-pinning · size label 60 · f=0.03 · noise
context E1_extra · σ=2 · horizon=32000 · n=12 independent noisy realizations

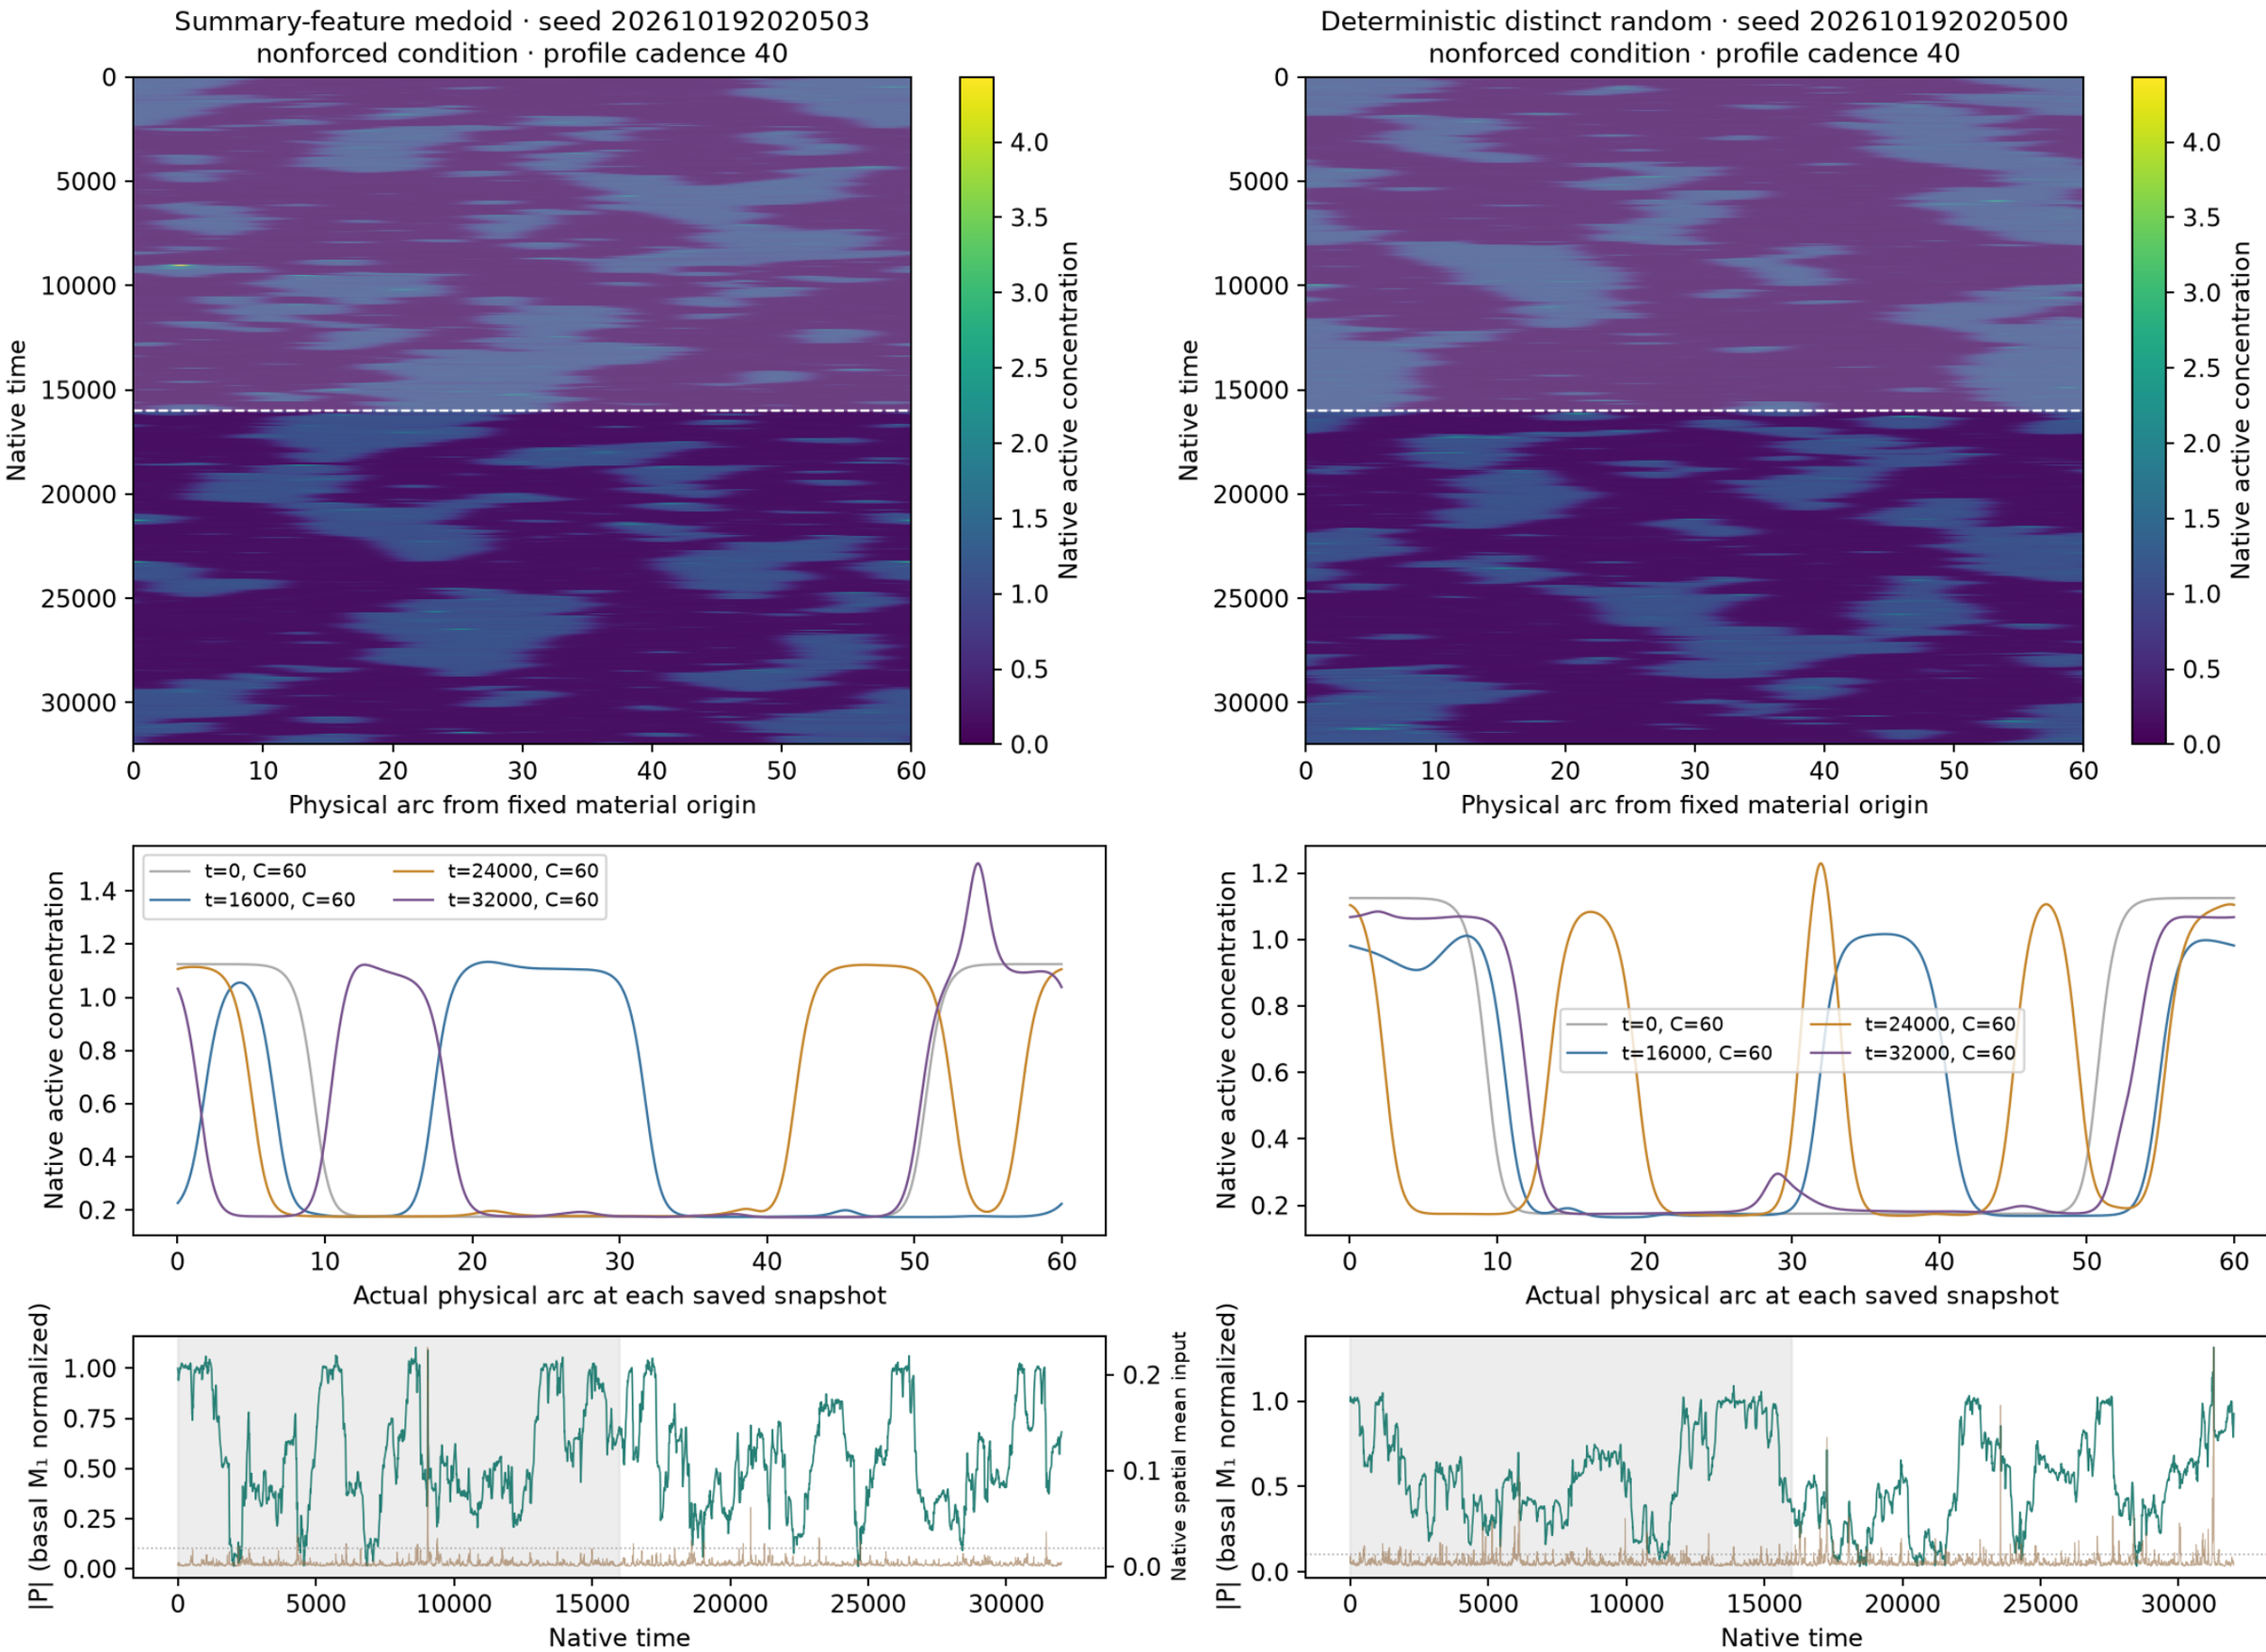


Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Wave-pinning · size label 60 · f=0.1 · noise
context E1_extra · σ=0.25 · horizon=32000 · n=12 independent noisy realizations


Summary-feature medoid · seed 202610192020603
nonforced condition · profile cadence 40

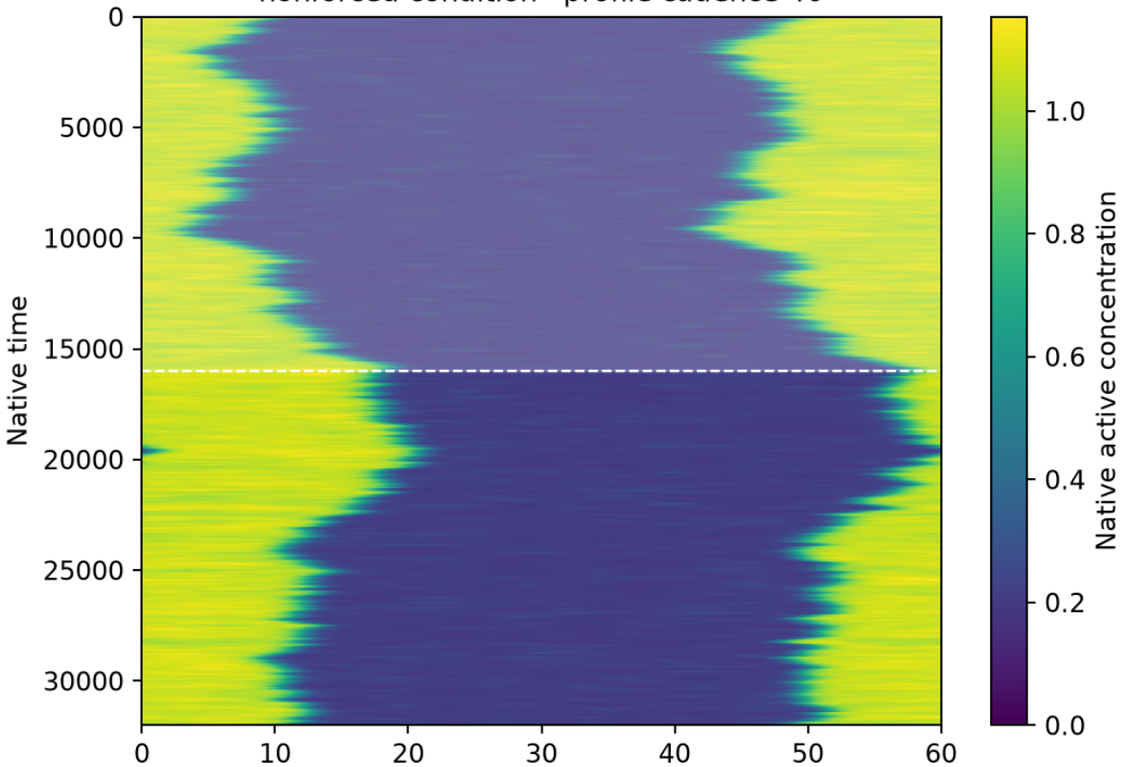


Deterministic distinct random · seed 202610192020602
nonforced condition · profile cadence 40

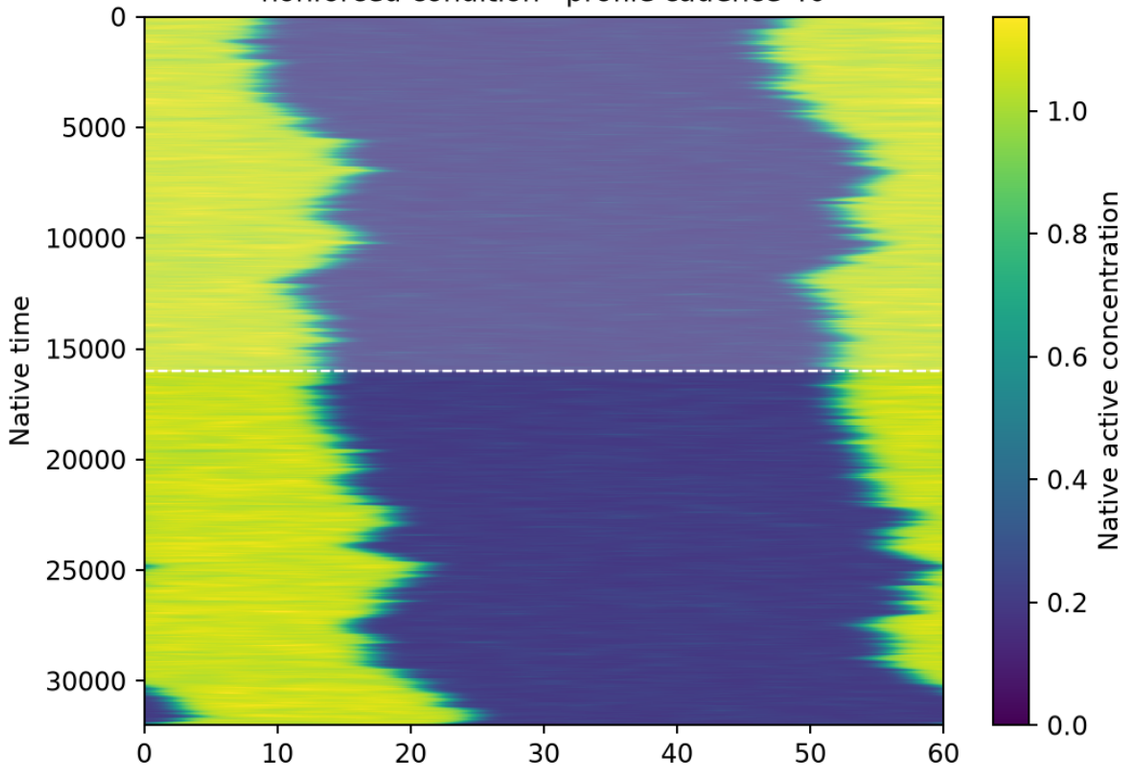



Physical arc from fixed material origin

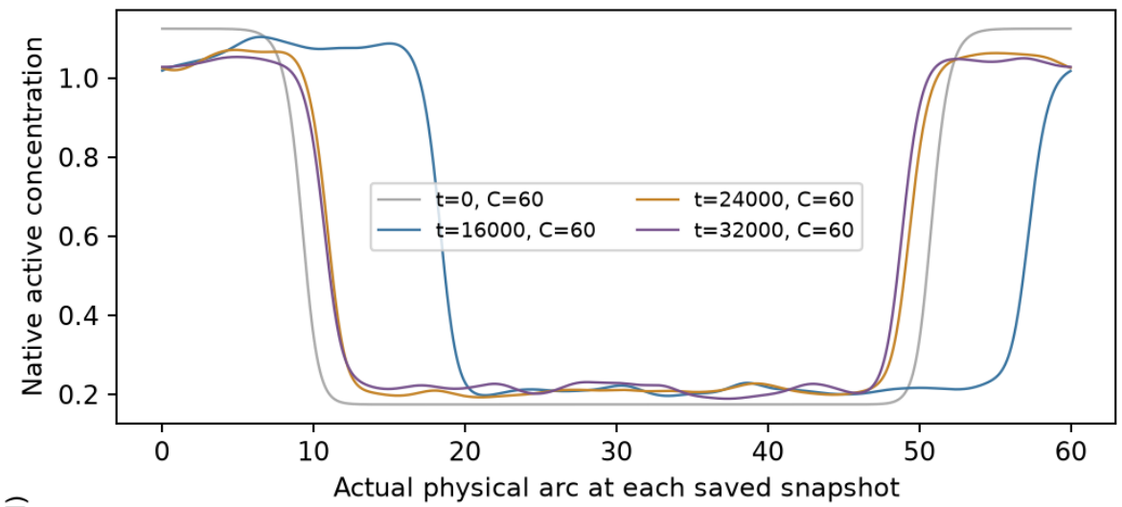

Physical arc from fixed material origin

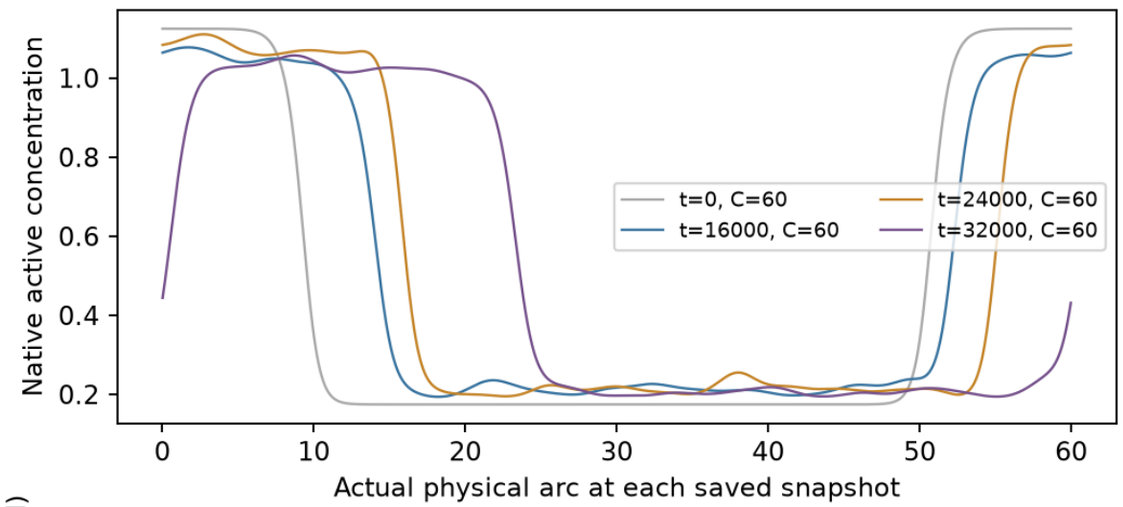


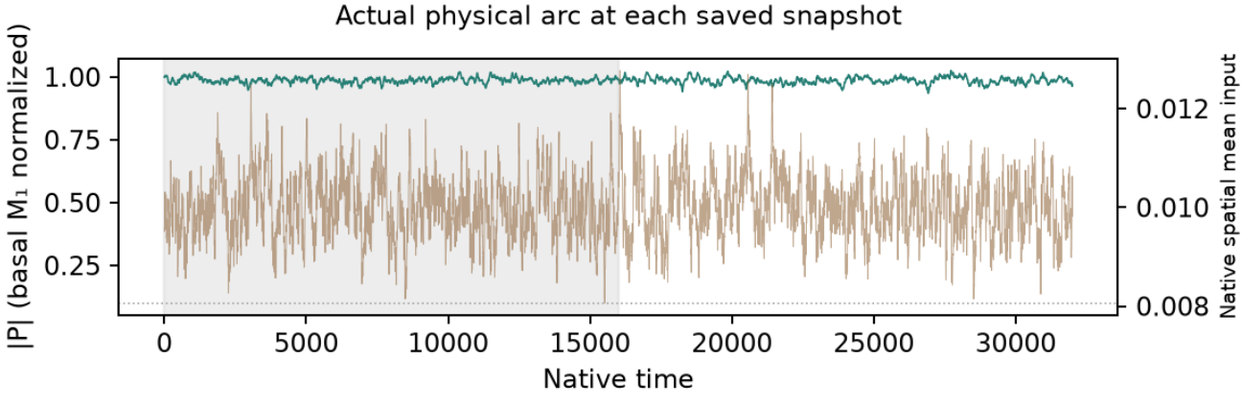


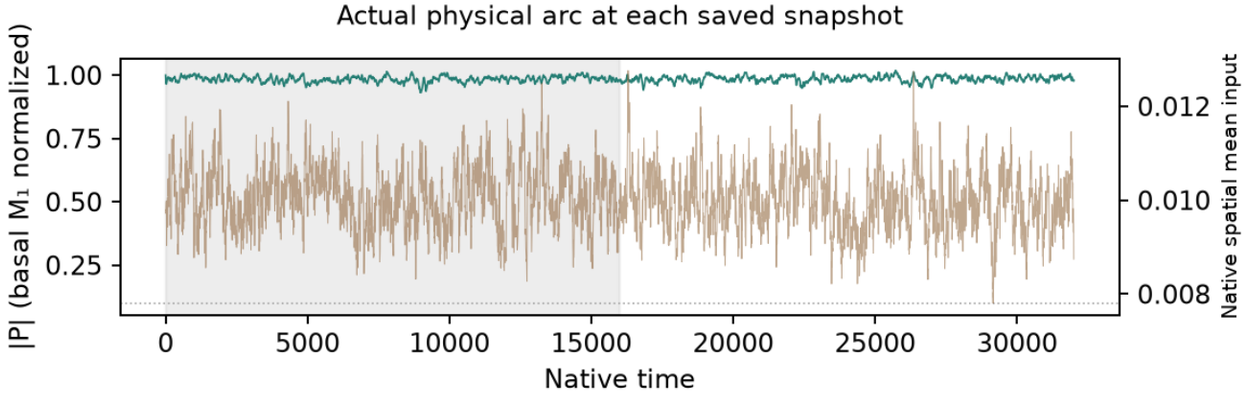

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M_1 normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.


S11 · Wave-pinning · size label 60 · f=0.1 · noise
context E1_extra · σ=0.5 · horizon=32000 · n=12 independent noisy realizations

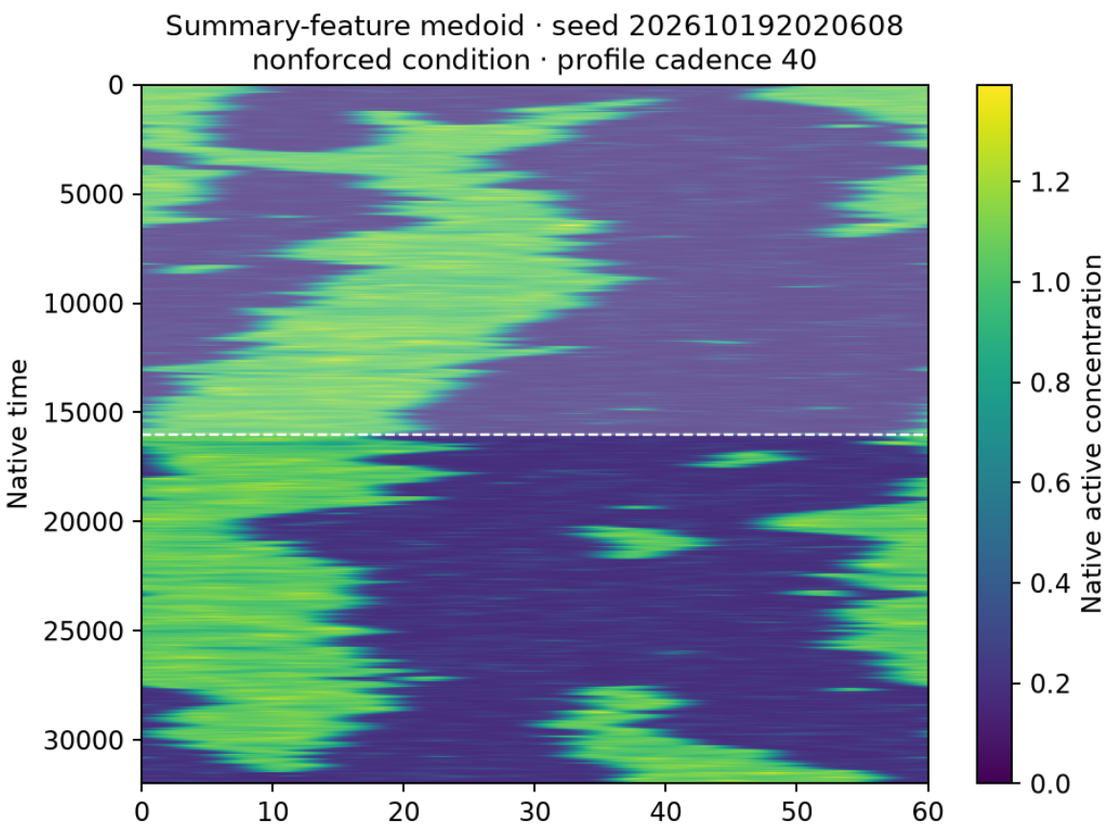

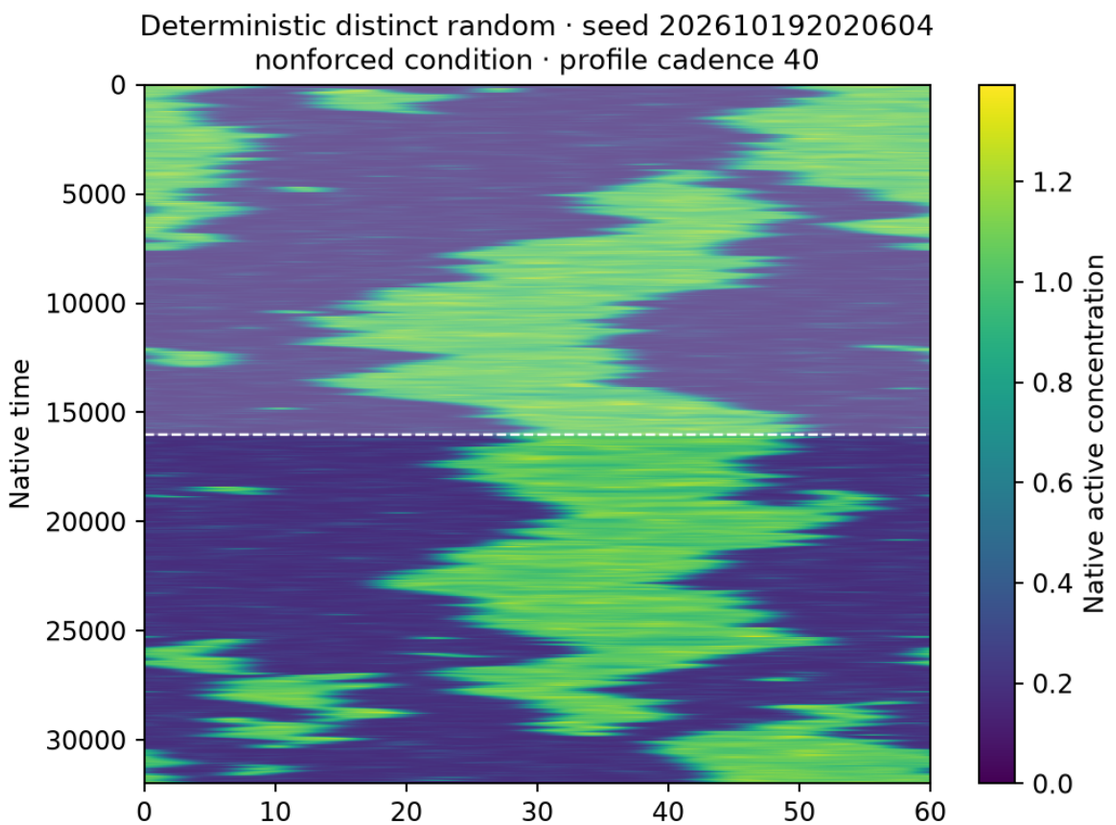

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M_1 normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Wave-pinning · size label 60 · f=0.1 · noise
context E1_extra · σ=2 · horizon=32000 · n=12 independent noisy realizations

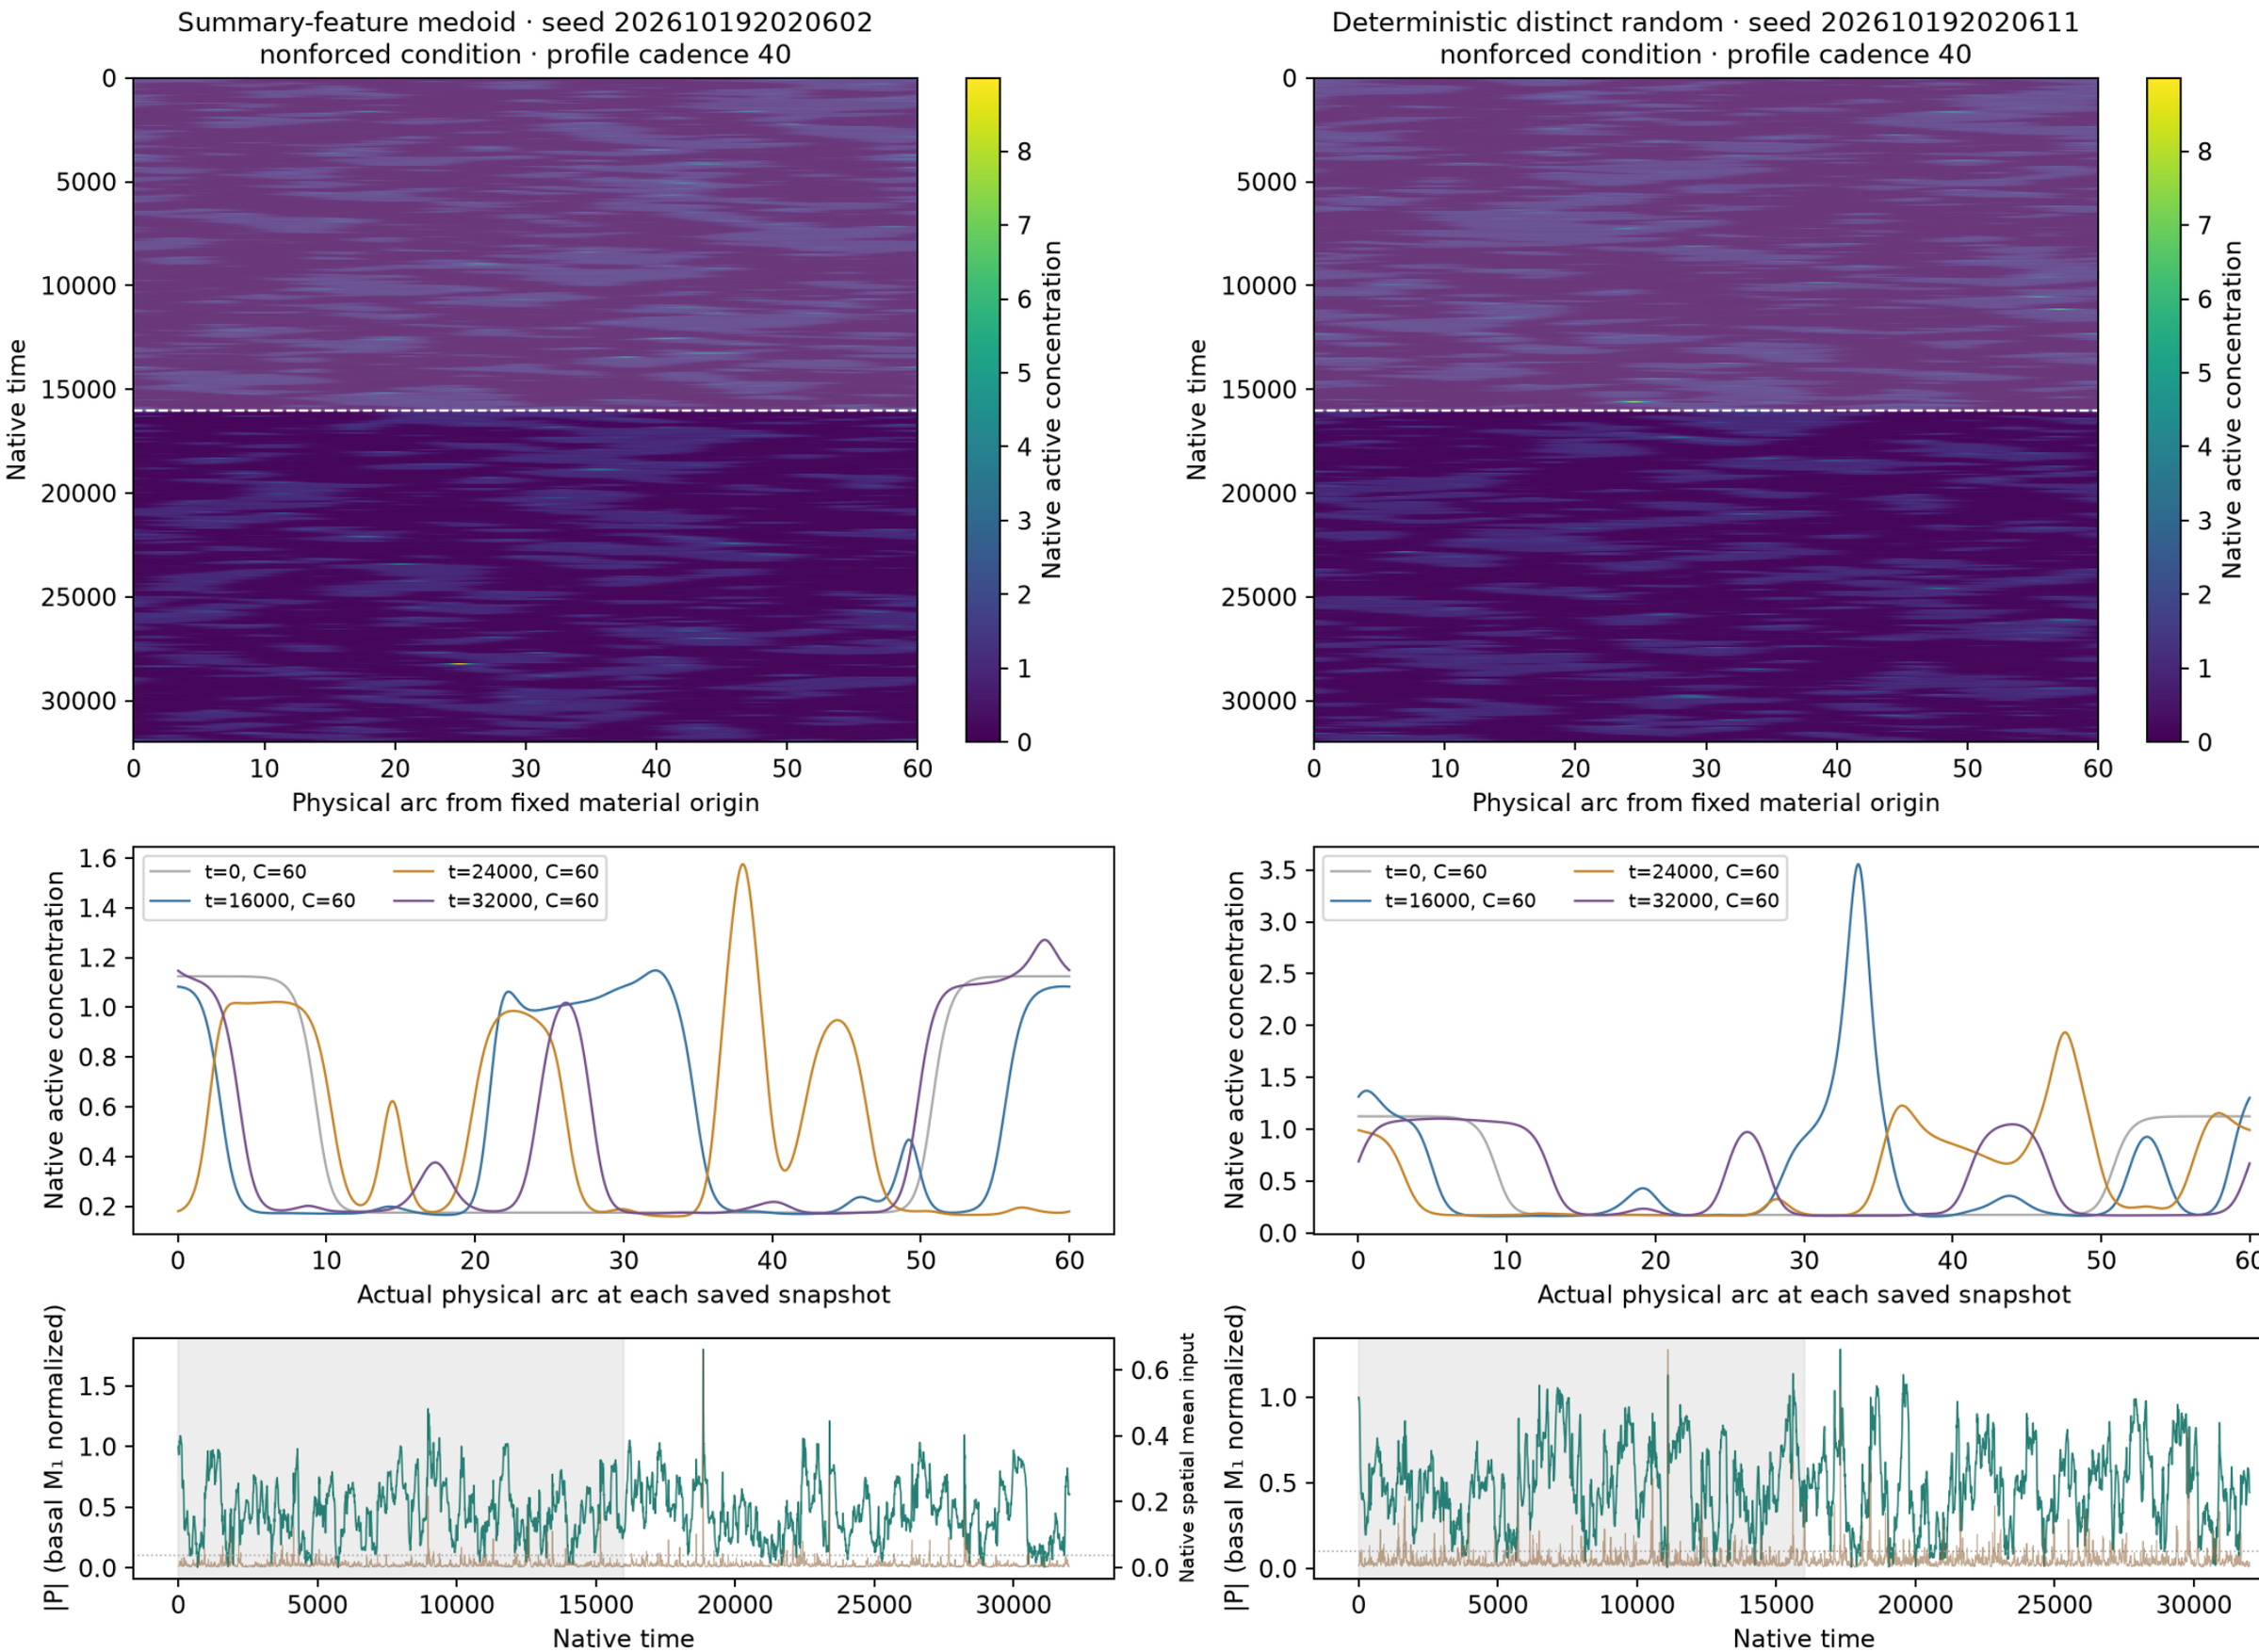

Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M_1 normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.