


S11 · Goryachev · size label 20 · f=0 · zero
context E4_long · σ=0 · horizon=128000 · 1 deterministic control

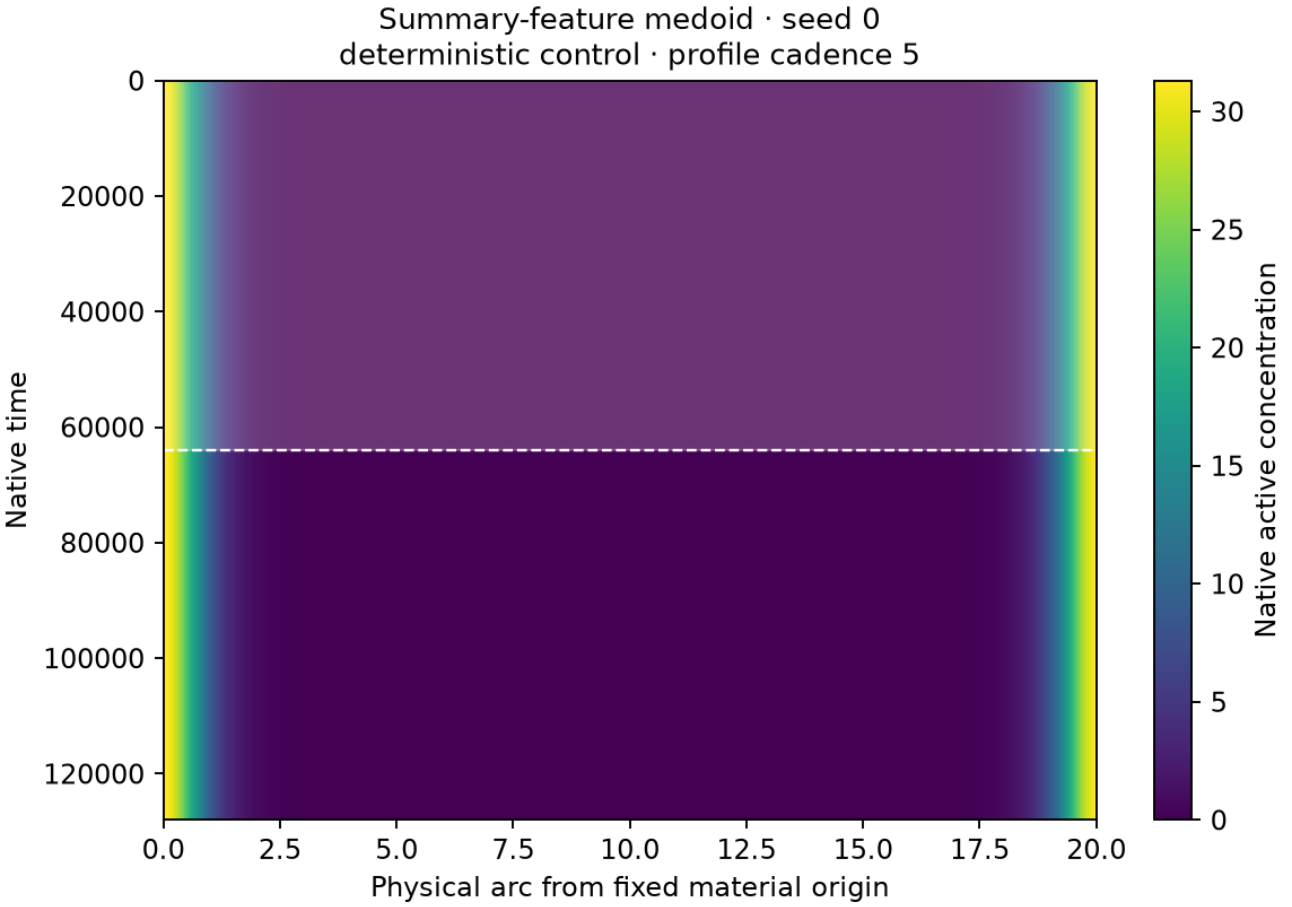


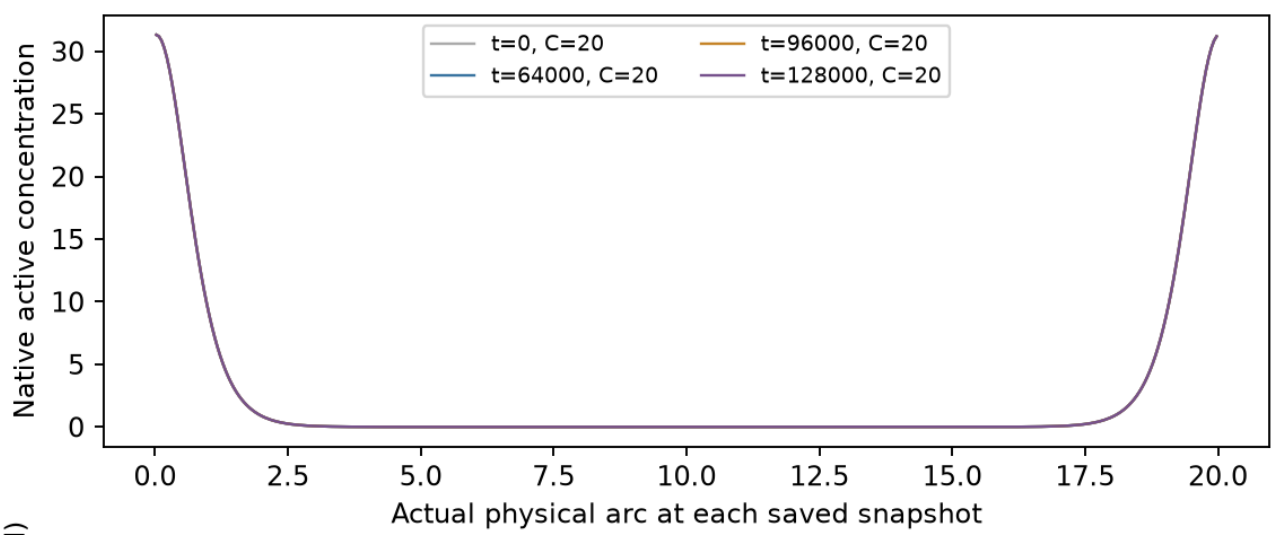


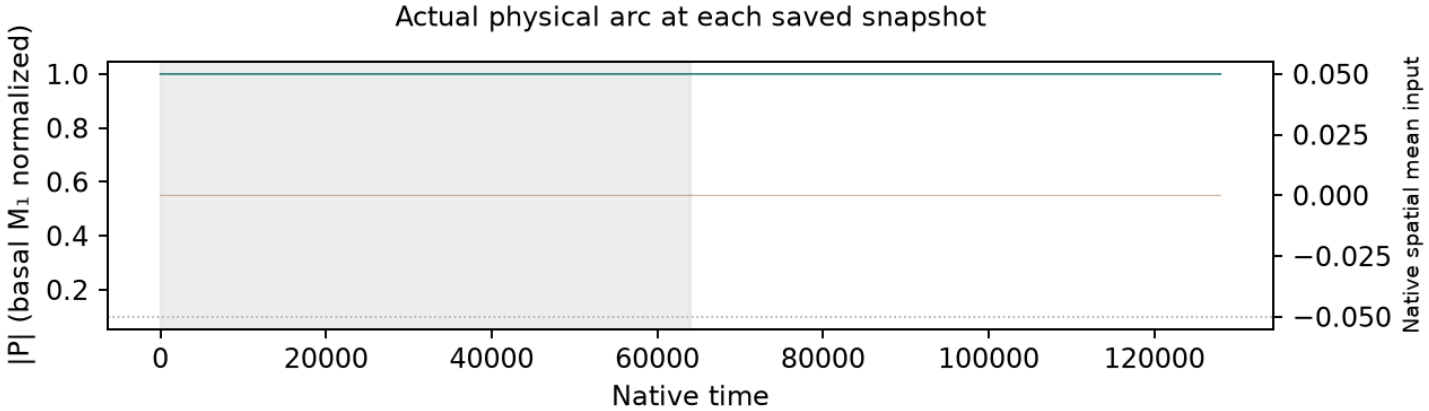


Native concentrations and every retained field frame are plotted without spatial resampling.
First half shaded: excluded from summary selection.
Spring mesh-face interpolation changes only boundary geometry; snapshots use actual saved C(t).
P uses basal M_1 normalization, distinct from instantaneous coherence.
Supplemental selection and controls; no main example is chosen.
Native NPZ/status links remain local/HPC data.

S11 · Goryachev · size label 20 · f=0.0001 · mean
context E4_long · σ=0 · horizon=128000 · 1 deterministic control

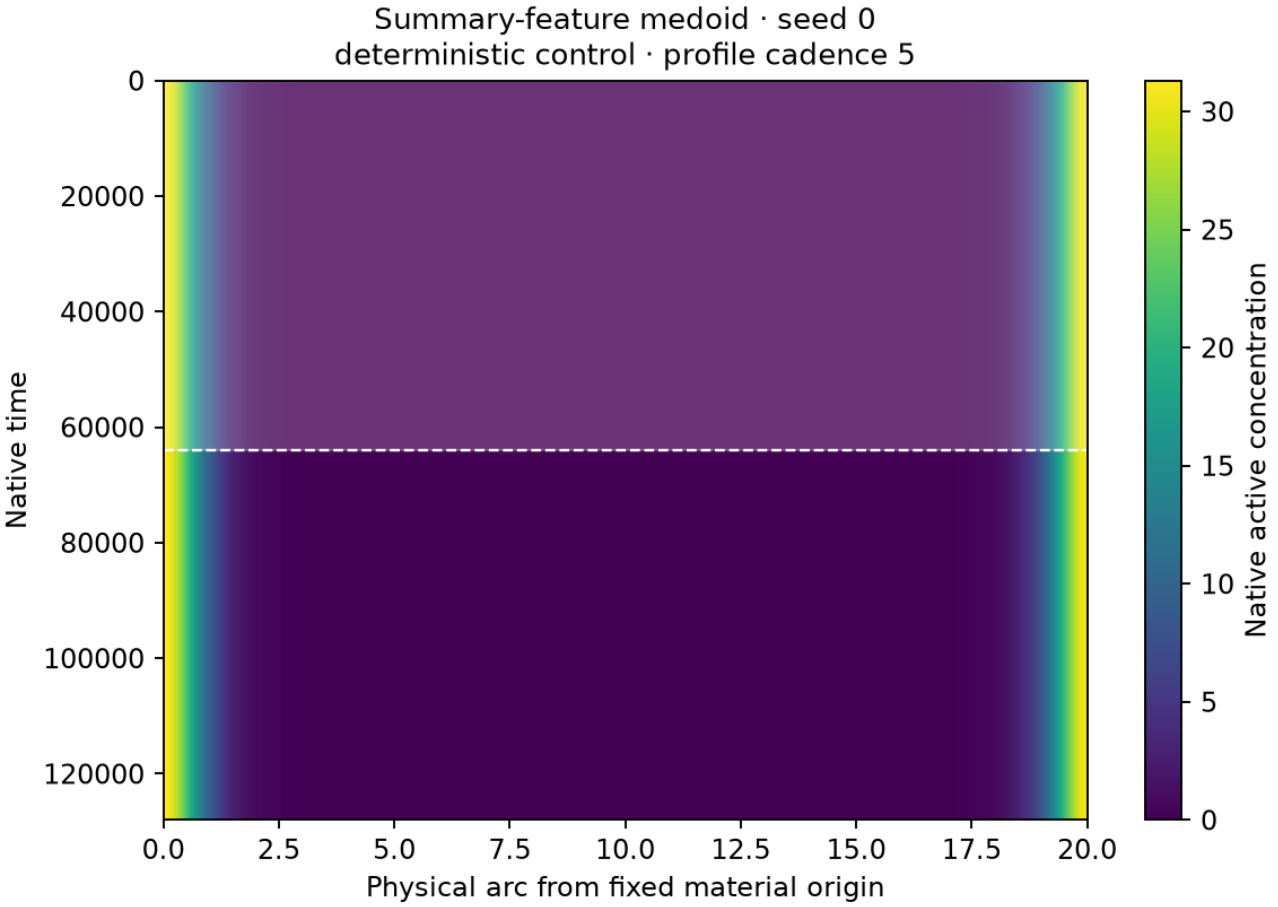


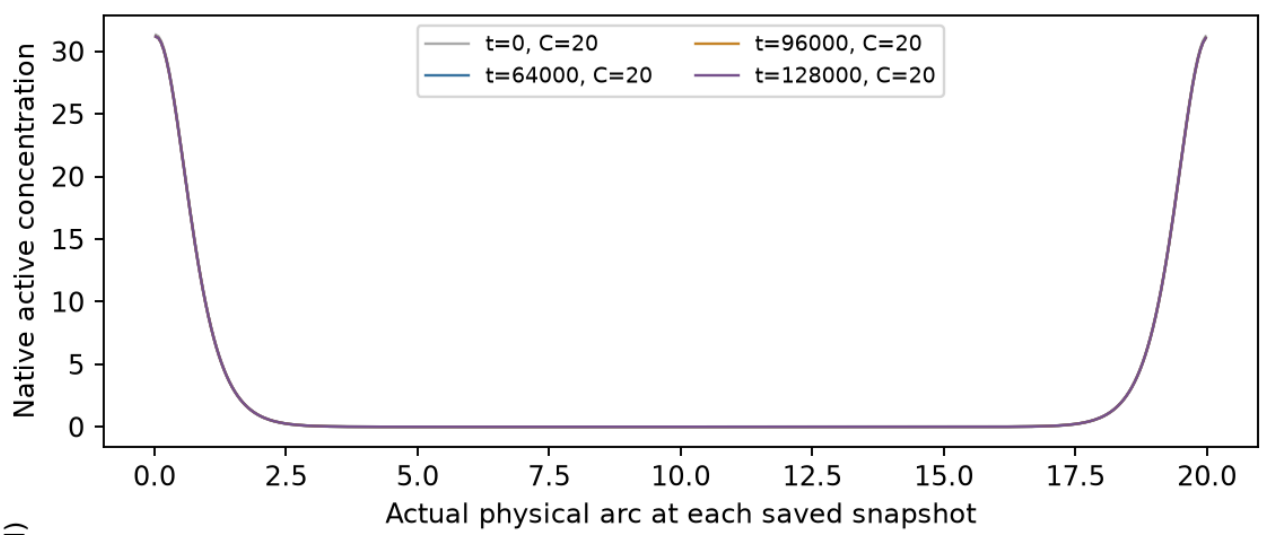

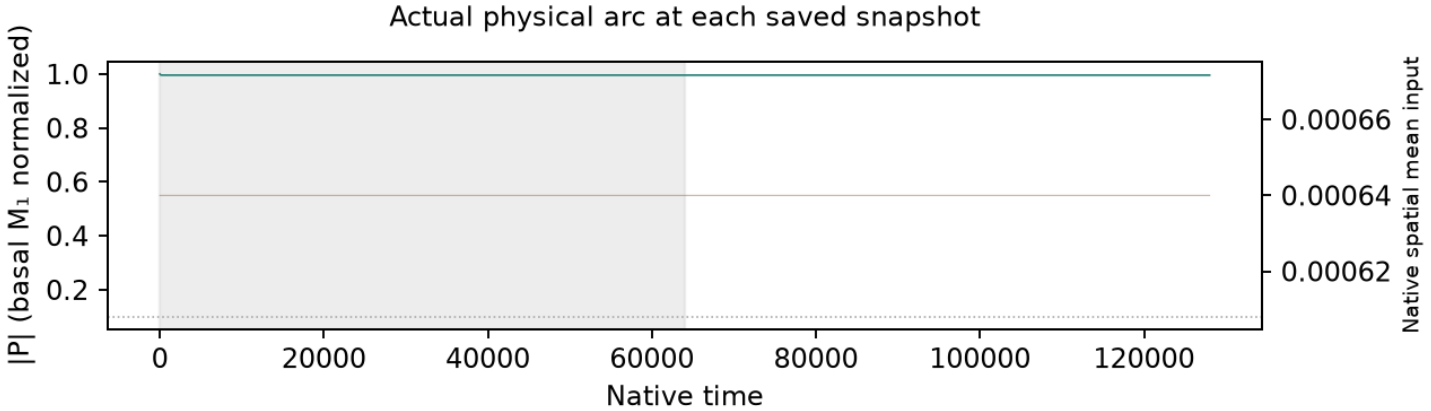


Native concentrations and every retained field frame are plotted without spatial resampling.
First half shaded: excluded from summary selection.
Spring mesh-face interpolation changes only boundary geometry; snapshots use actual saved C(t).
P uses basal M_1 normalization, distinct from instantaneous coherence.
Supplemental selection and controls; no main example is chosen.
Native NPZ/status links remain local/HPC data.


S11 · Goryachev · size label 20 · f=0.0001 · noise
context E4_long · σ=1 · horizon=128000 · n=12 independent noisy realizations

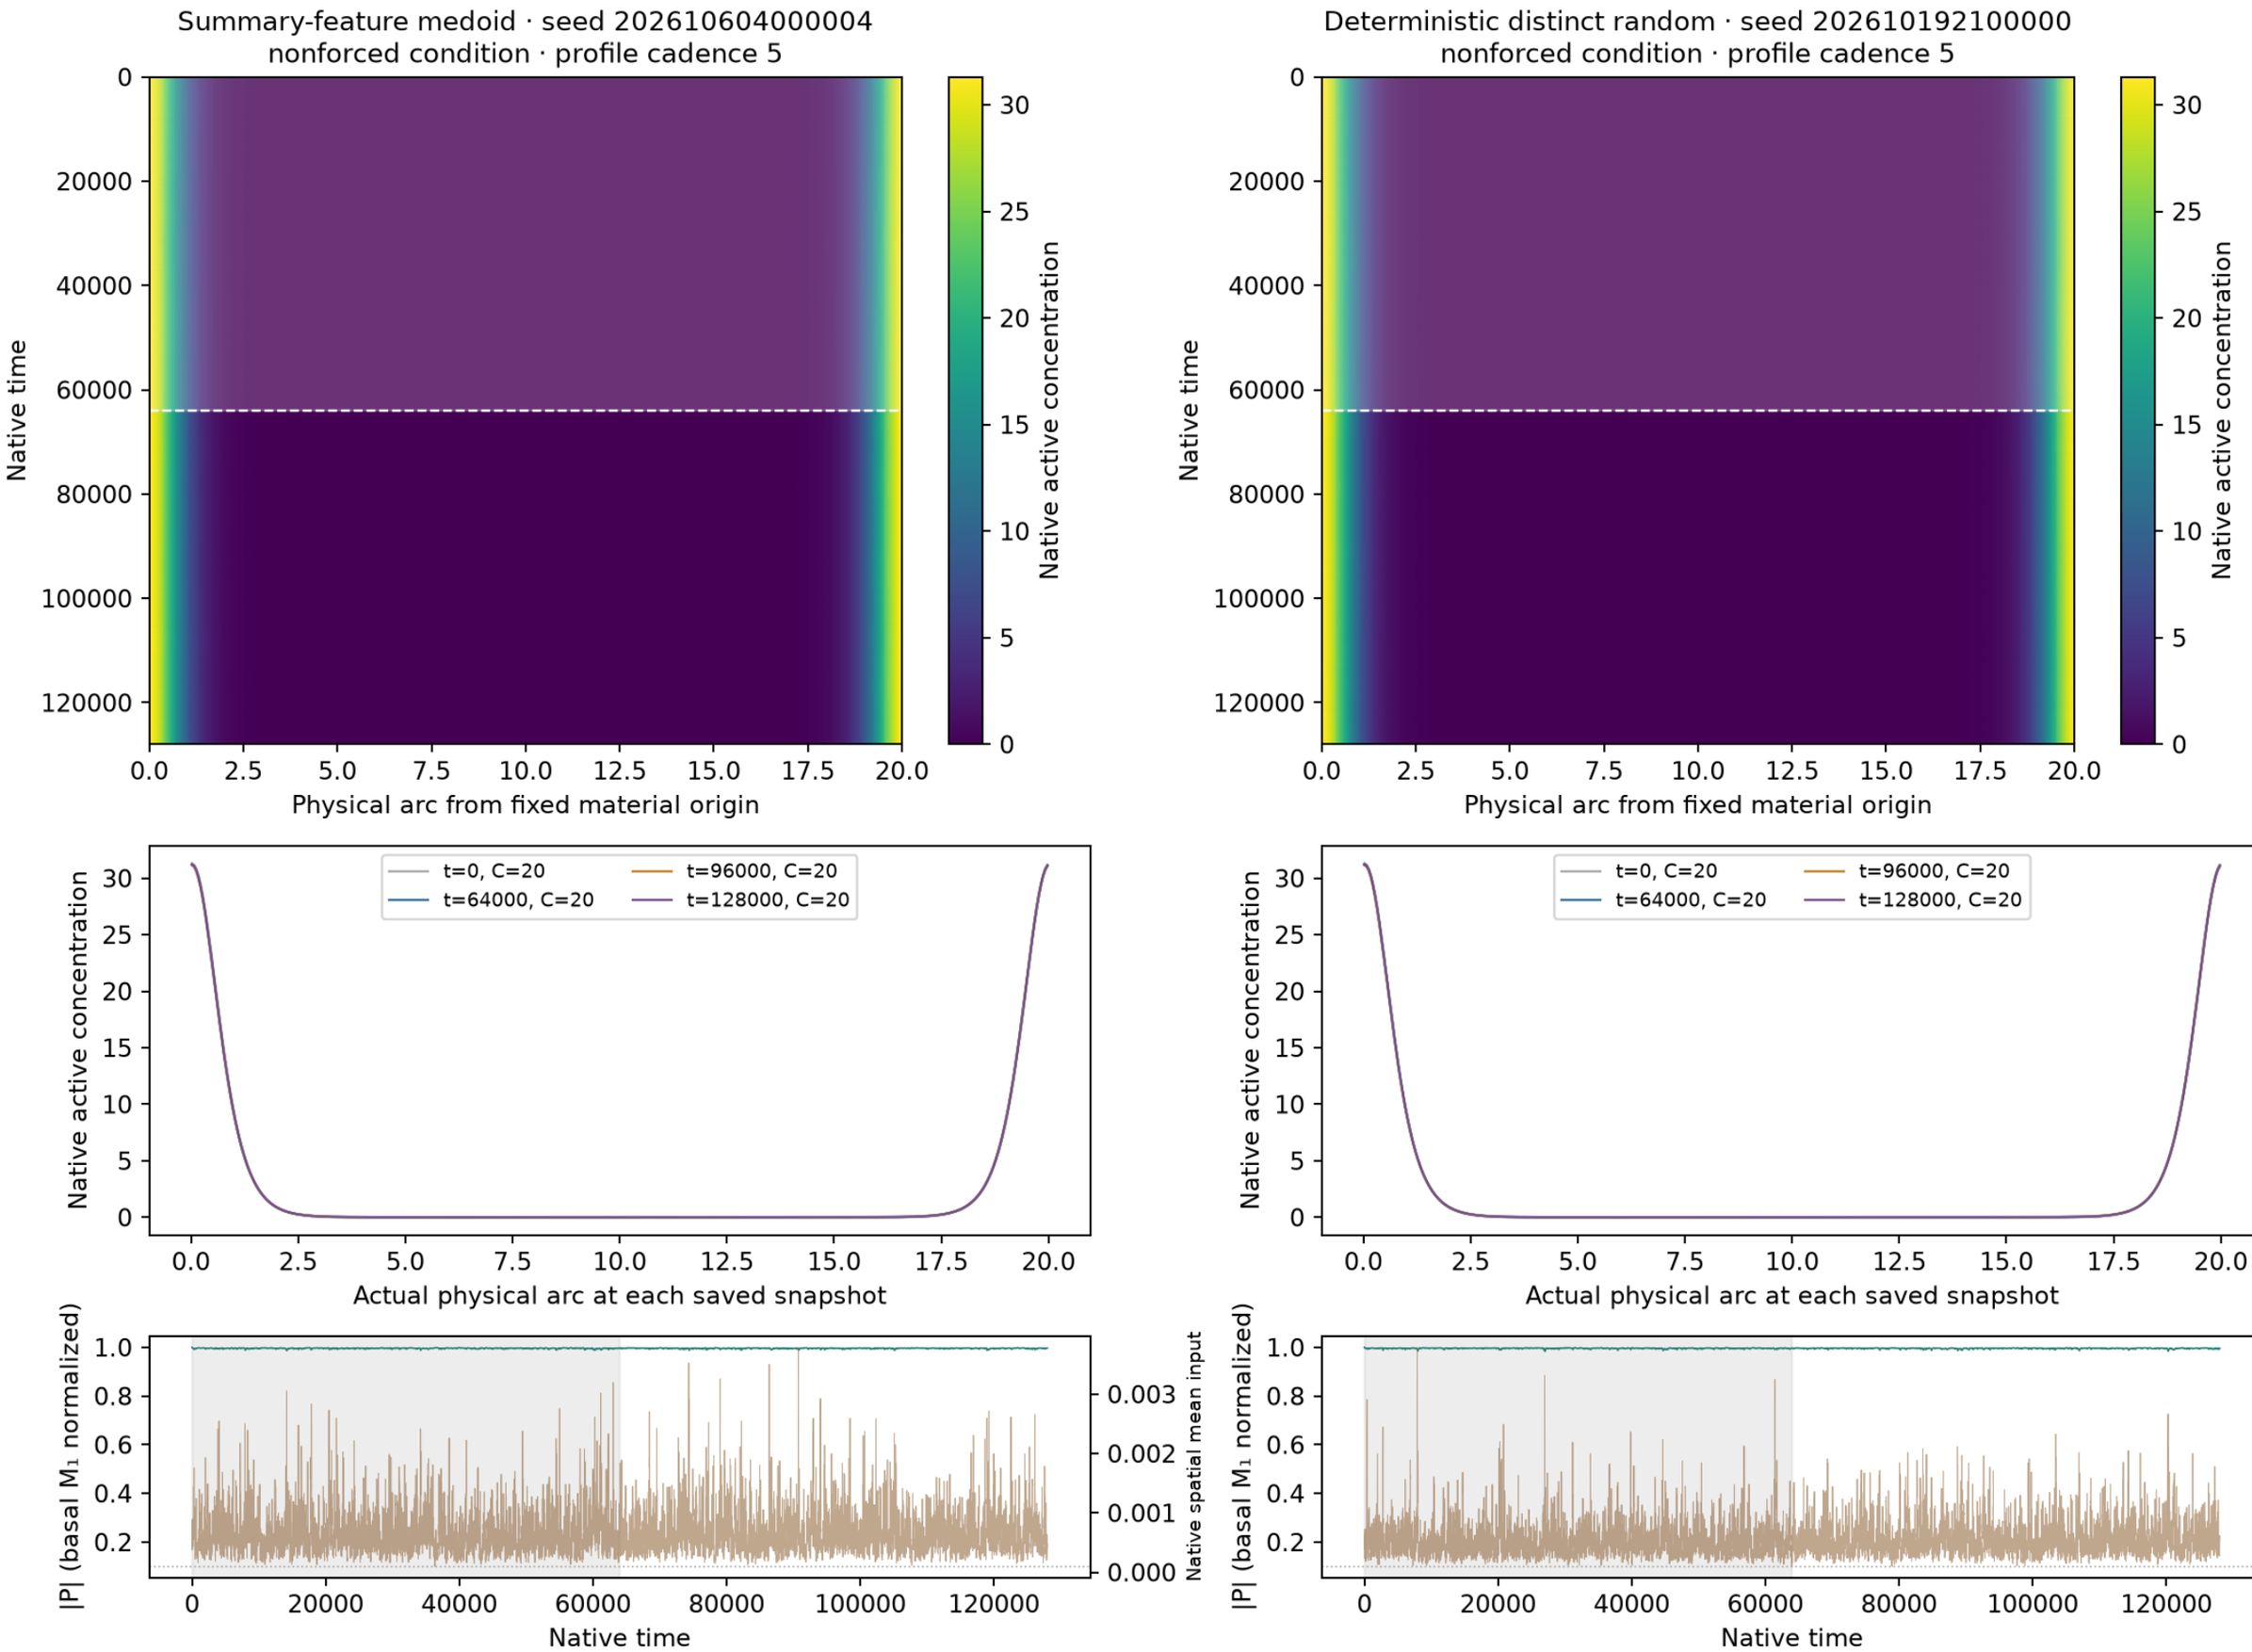


Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Goryachev · size label 20 · f=0.0003 · mean
context E4_long · σ=0 · horizon=128000 · 1 deterministic control

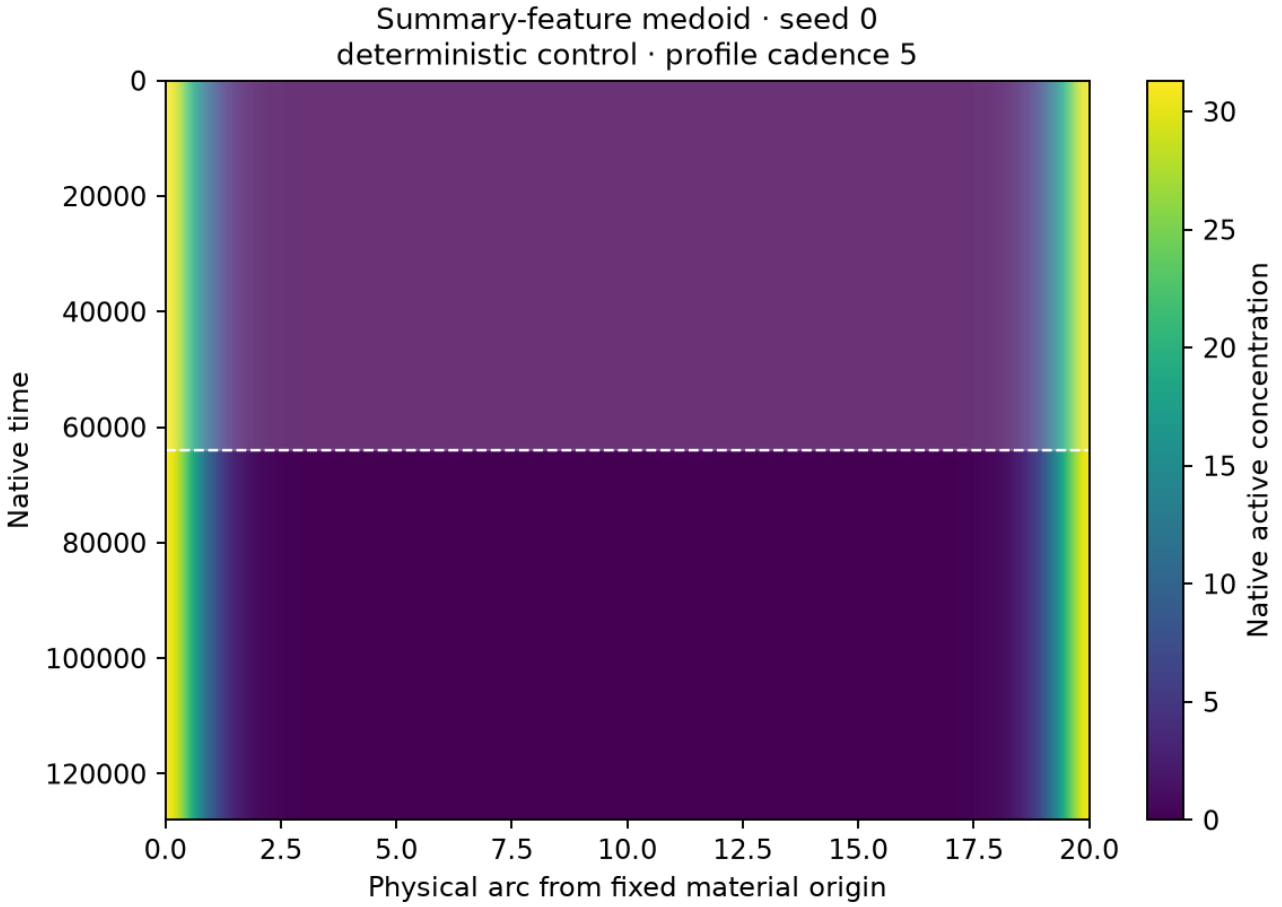


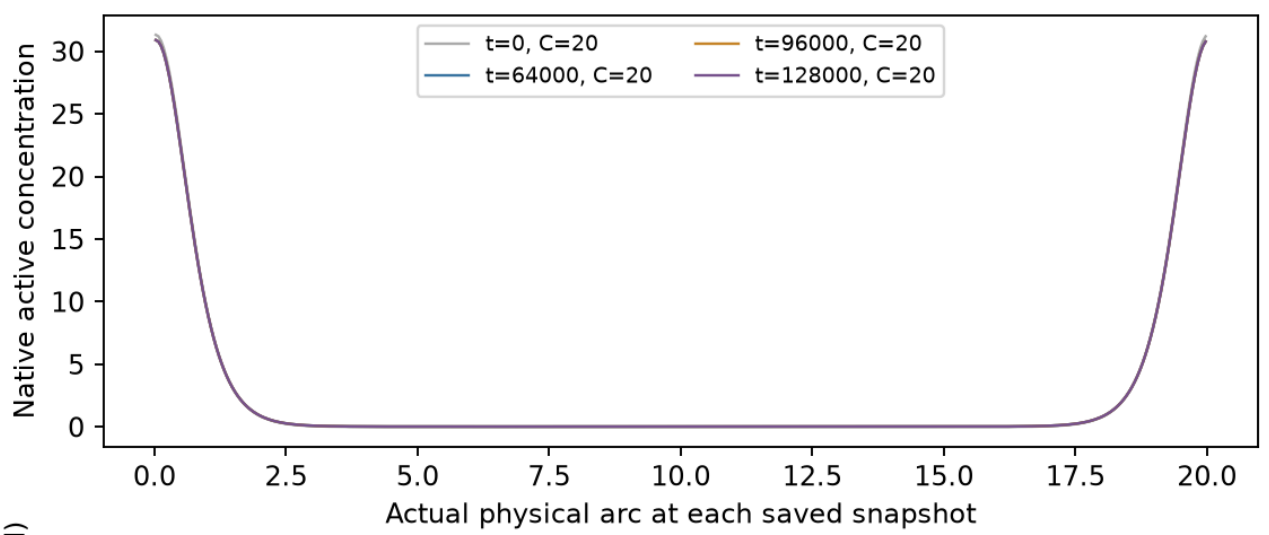

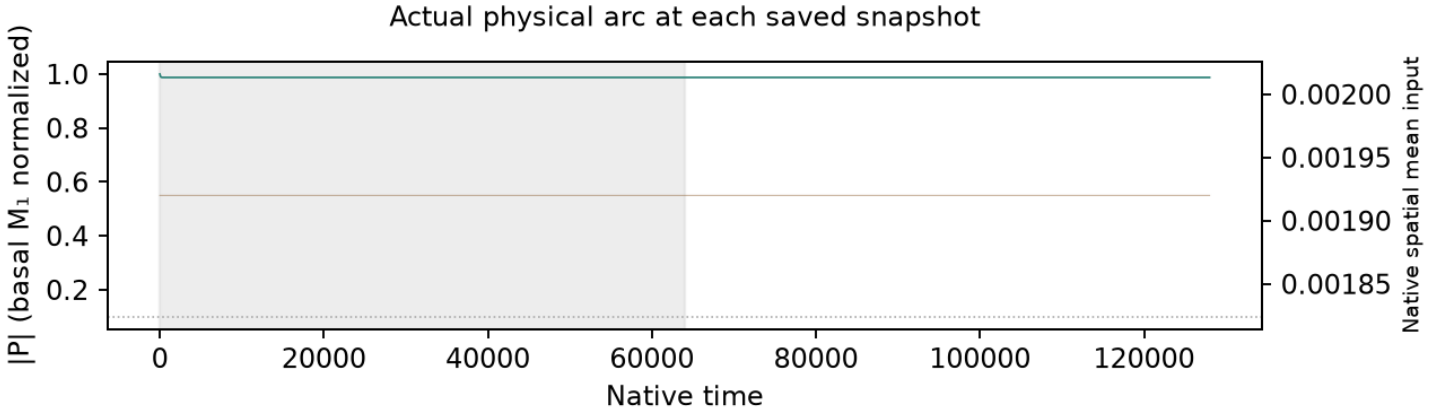


Native concentrations and every retained field frame are plotted without spatial resampling.
First half shaded: excluded from summary selection.
Spring mesh-face interpolation changes only boundary geometry; snapshots use actual saved C(t).
P uses basal M_1 normalization, distinct from instantaneous coherence.
Supplemental selection and controls; no main example is chosen.
Native NPZ/status links remain local/HPC data.


S11 · Goryachev · size label 20 · f=0.0003 · noise
context E4_long · σ=1 · horizon=128000 · n=12 independent noisy realizations

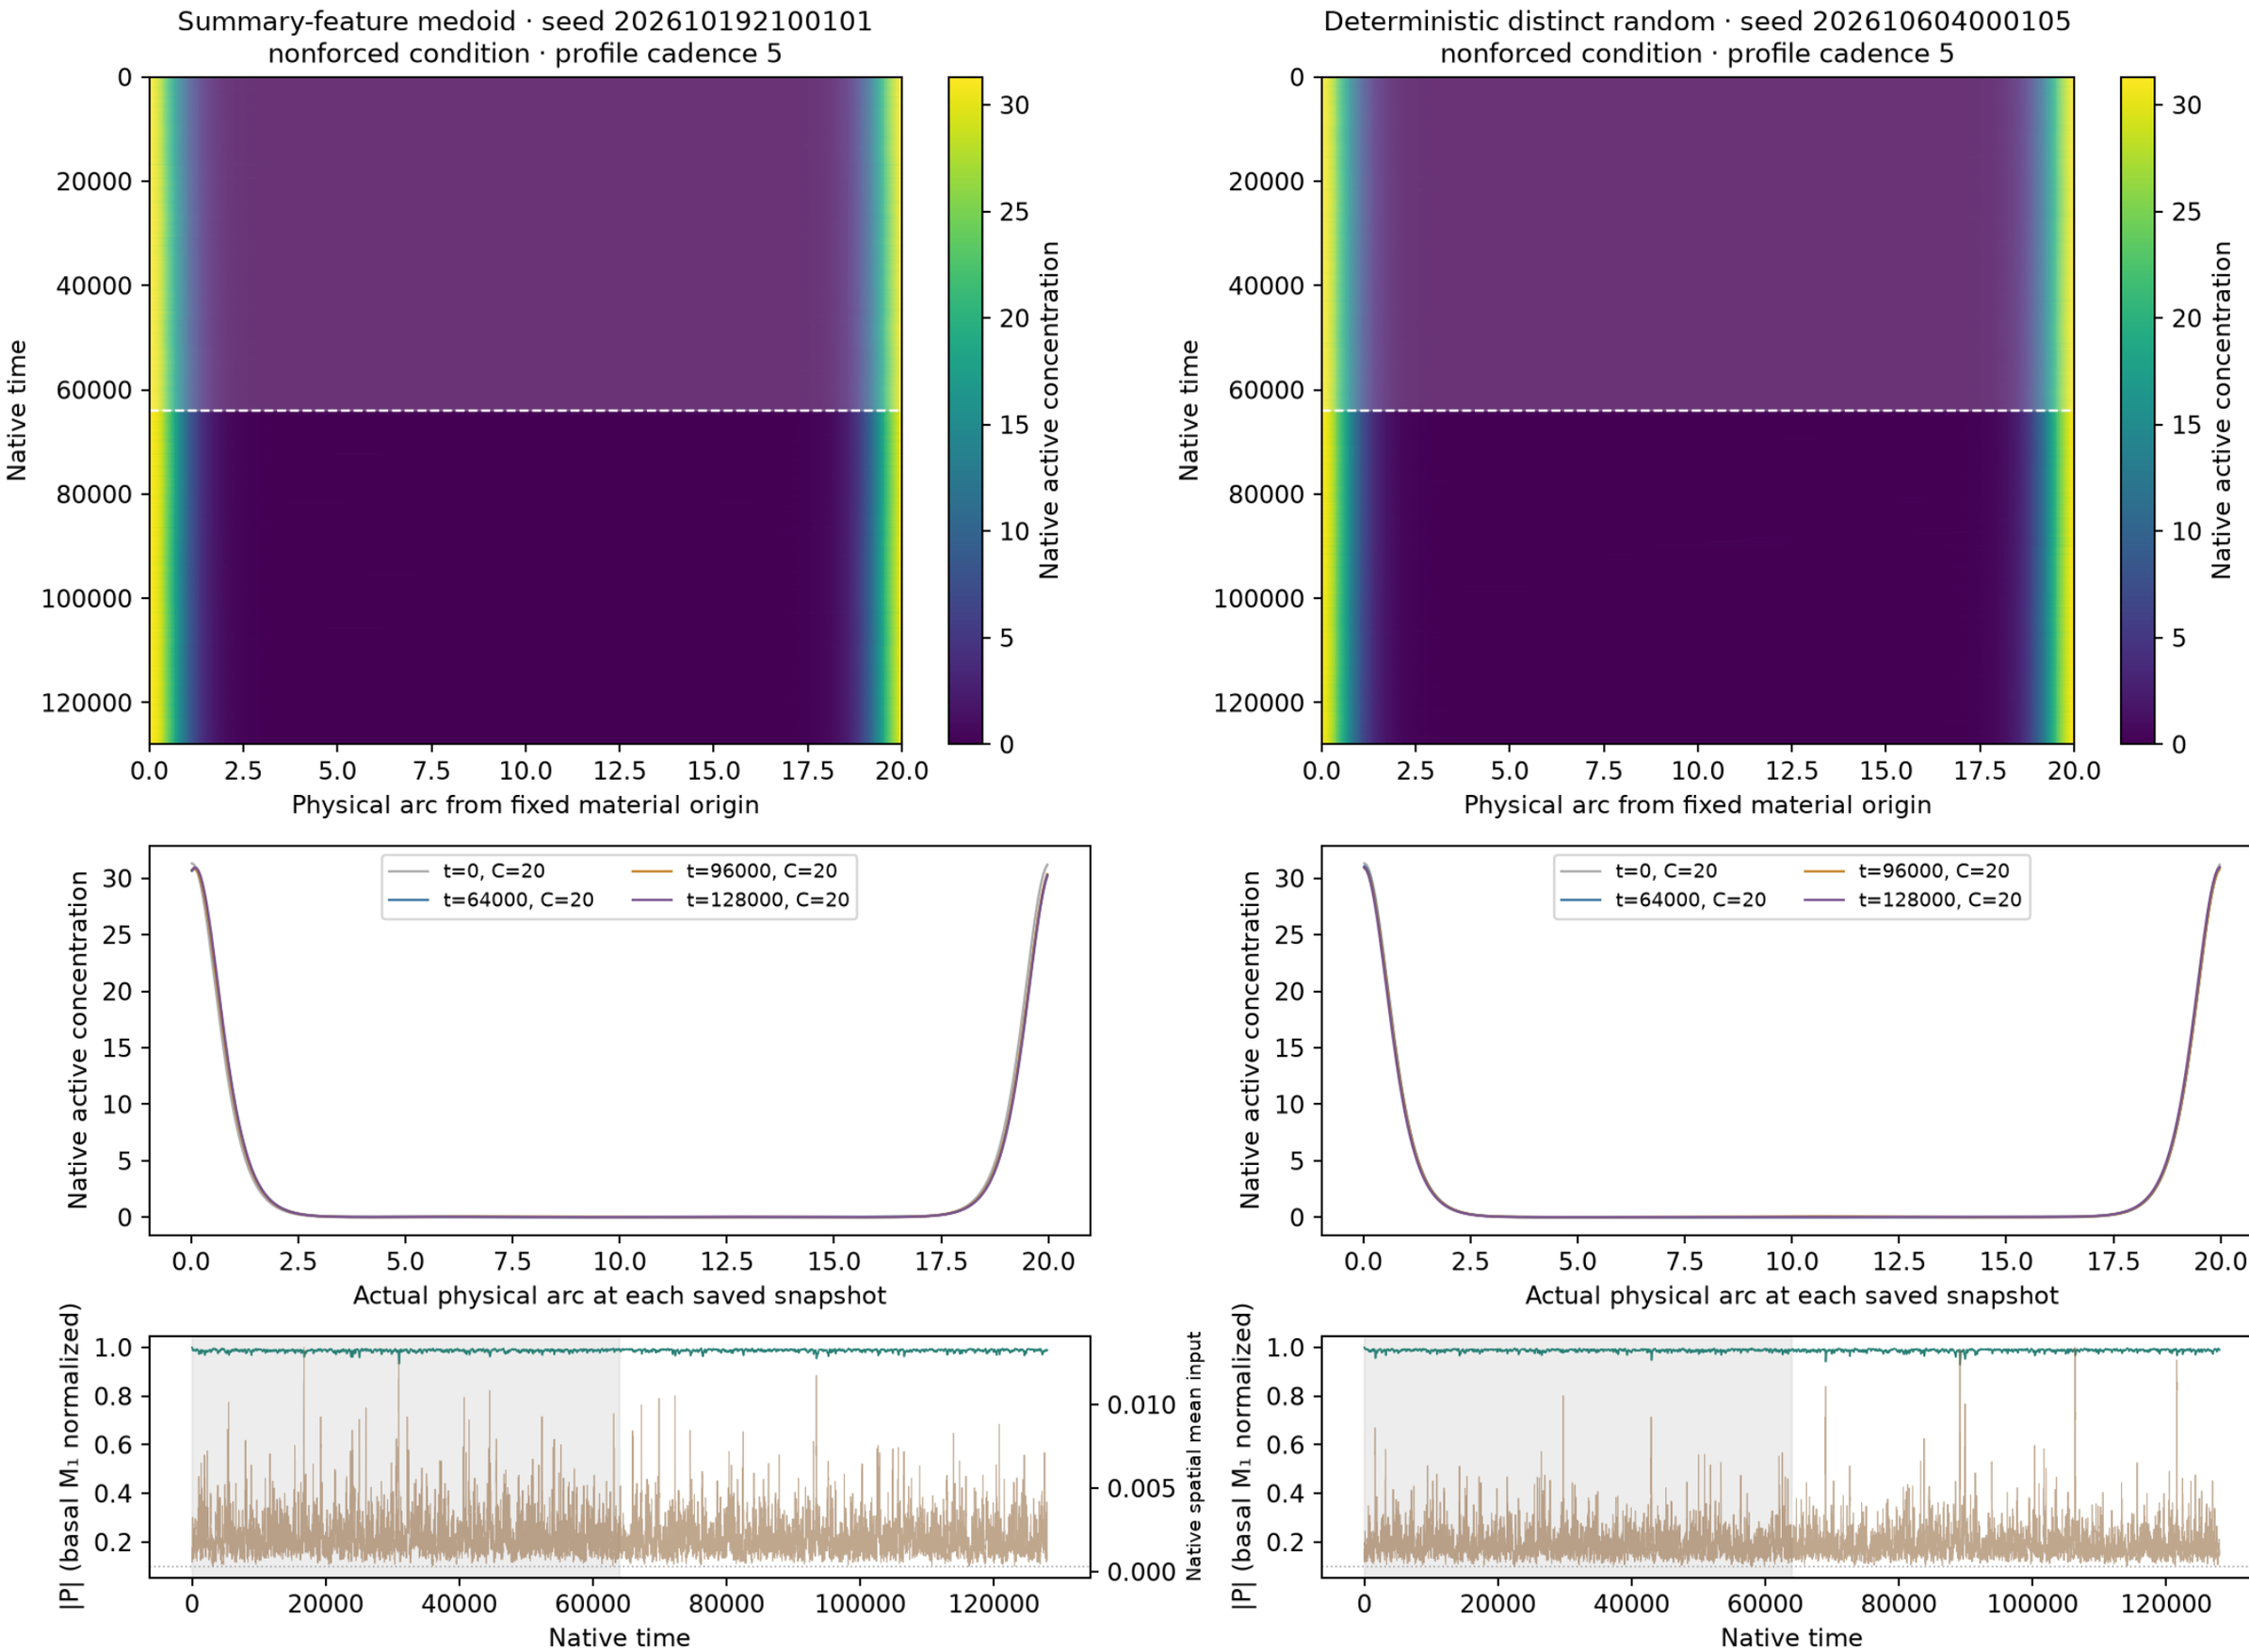


Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Goryachev · size label 20 · f=0.001 · mean
context E4_long · σ=0 · horizon=128000 · 1 deterministic control

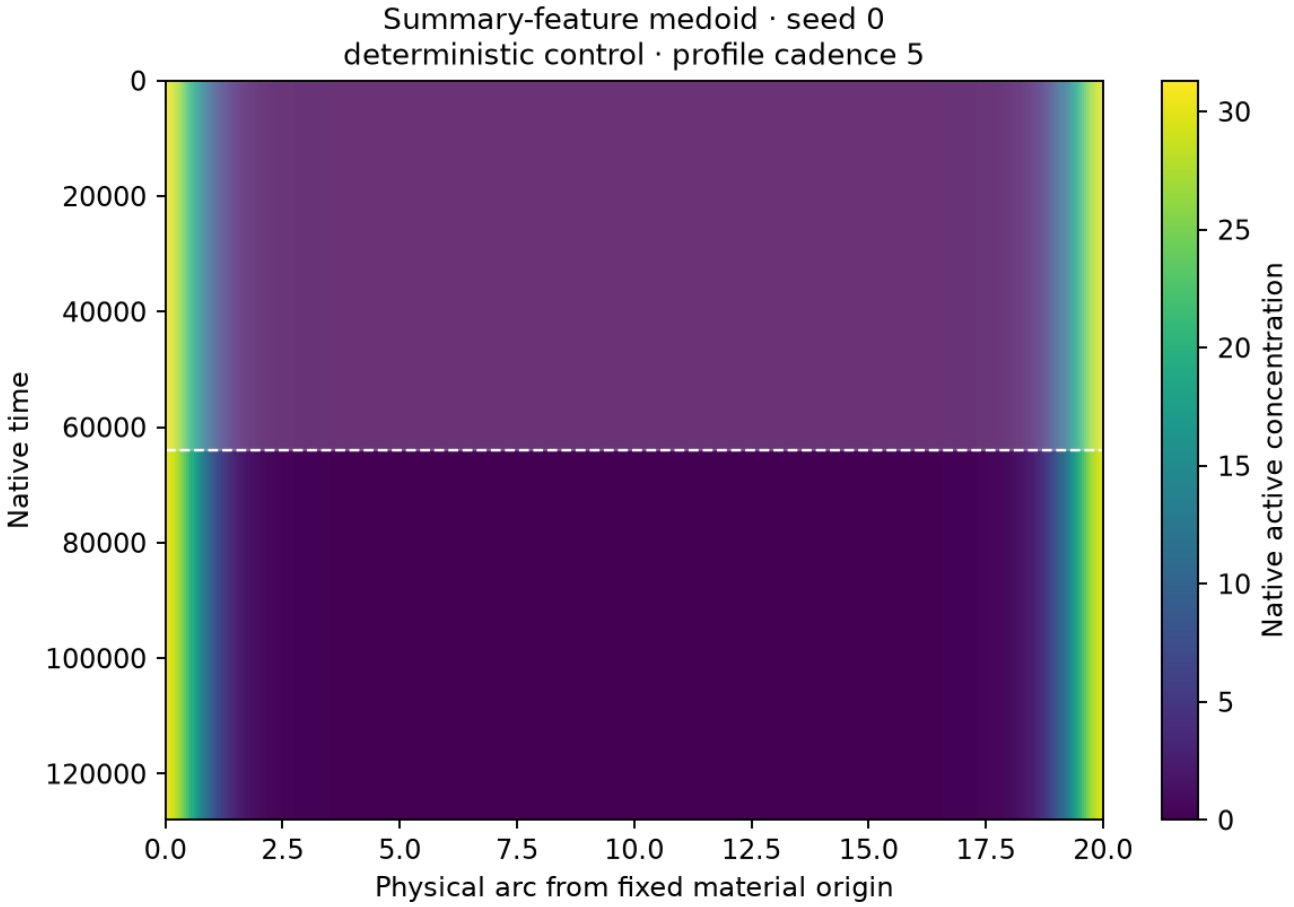


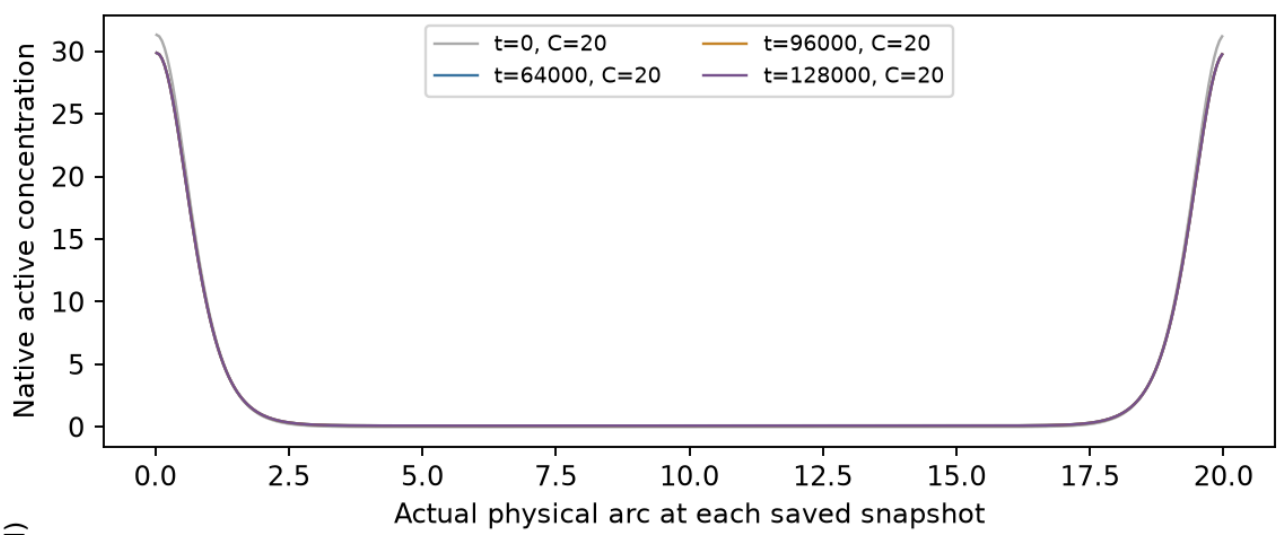


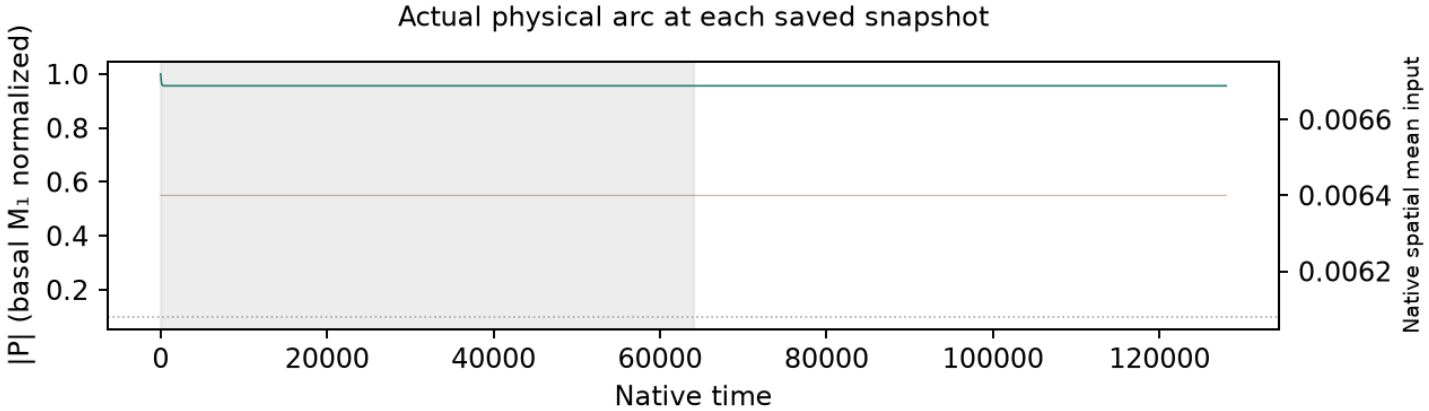



Native concentrations and every retained field frame are plotted without spatial resampling.
First half shaded: excluded from summary selection.
Spring mesh-face interpolation changes only boundary geometry; snapshots use actual saved C(t).
P uses basal M_1 normalization, distinct from instantaneous coherence.
Supplemental selection and controls; no main example is chosen.
Native NPZ/status links remain local/HPC data.


S11 · Goryachev · size label 20 · f=0.001 · noise
context E4_long · σ=1 · horizon=128000 · n=12 independent noisy realizations

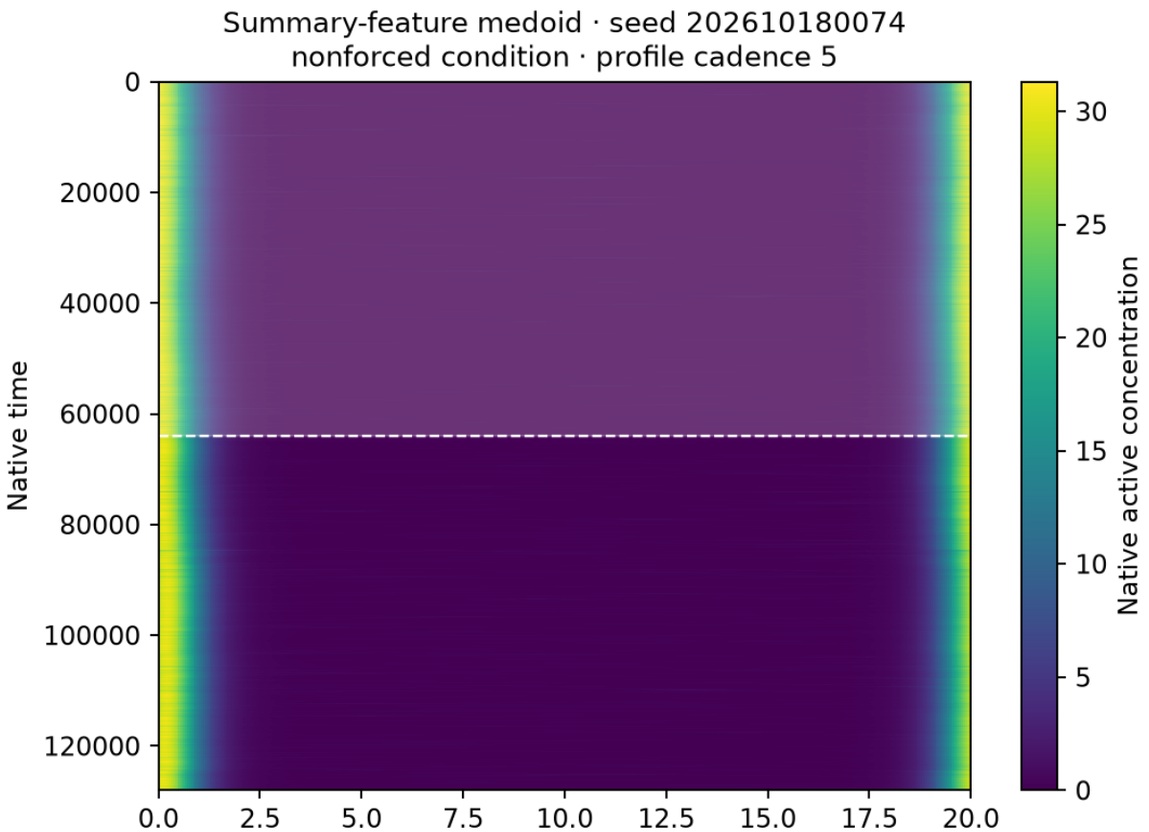


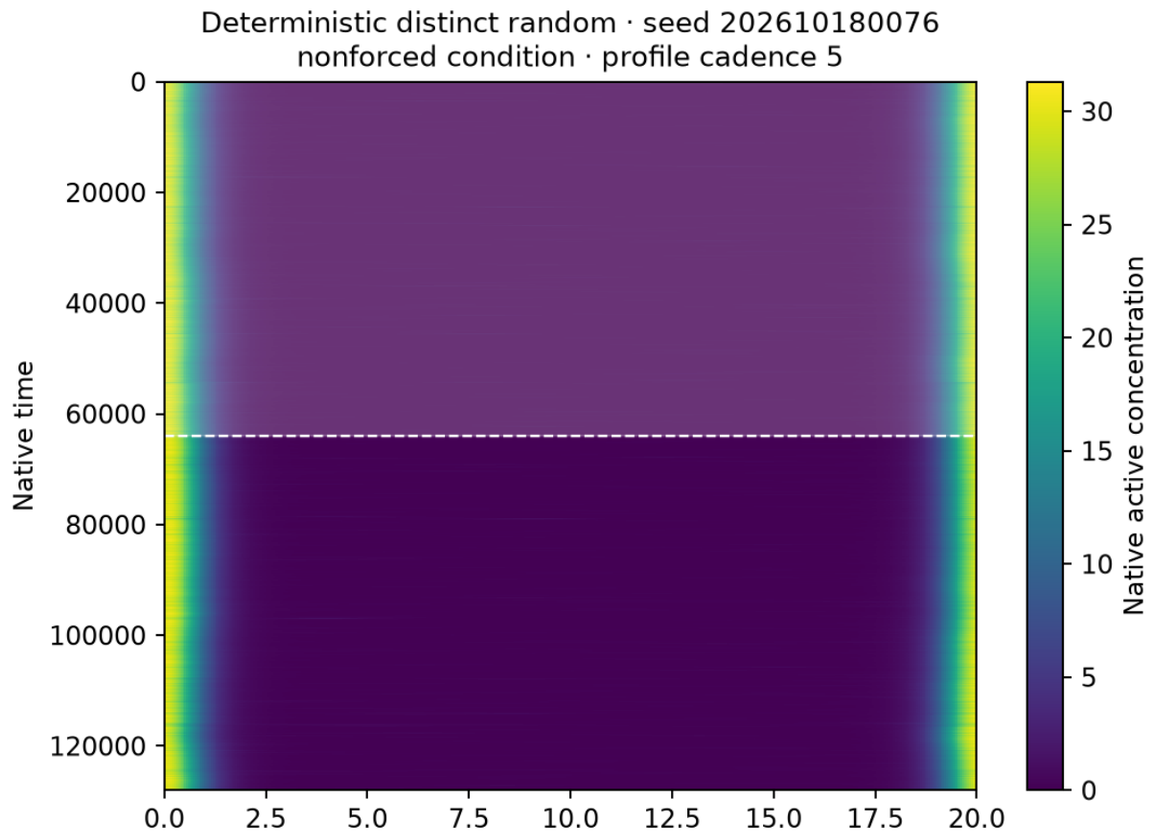

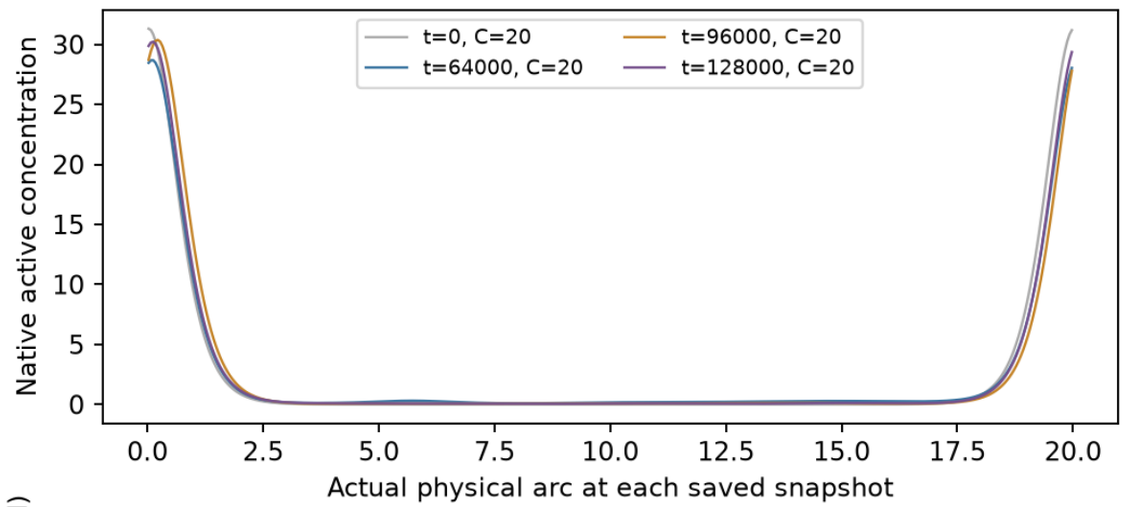

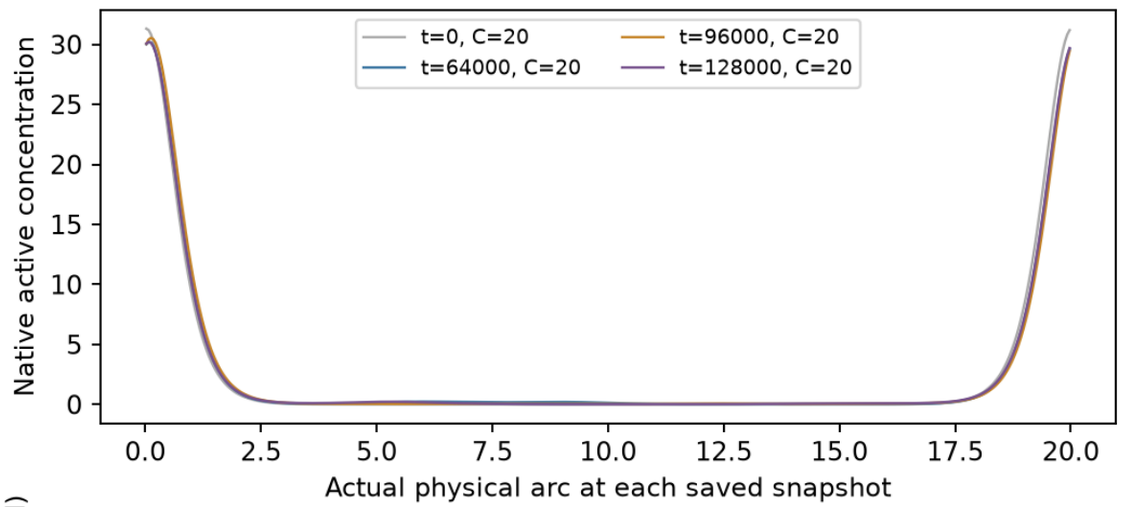


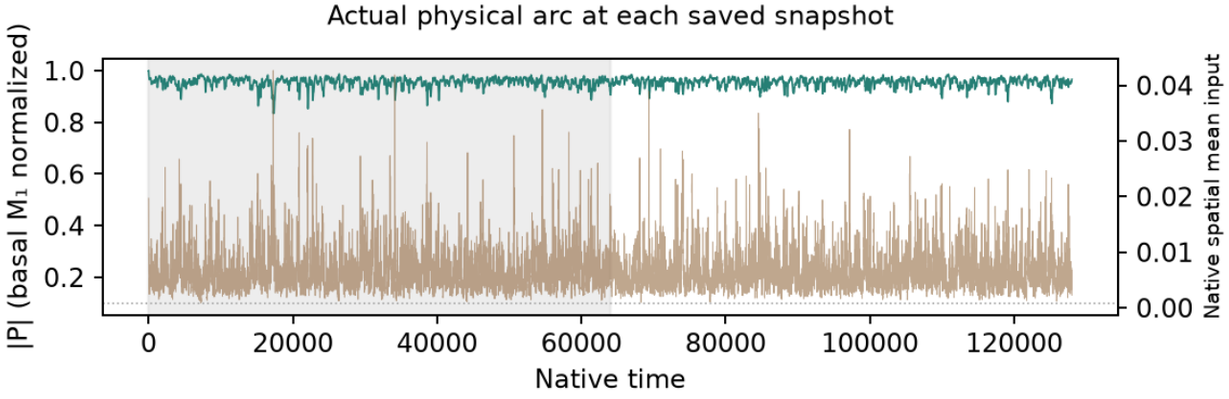


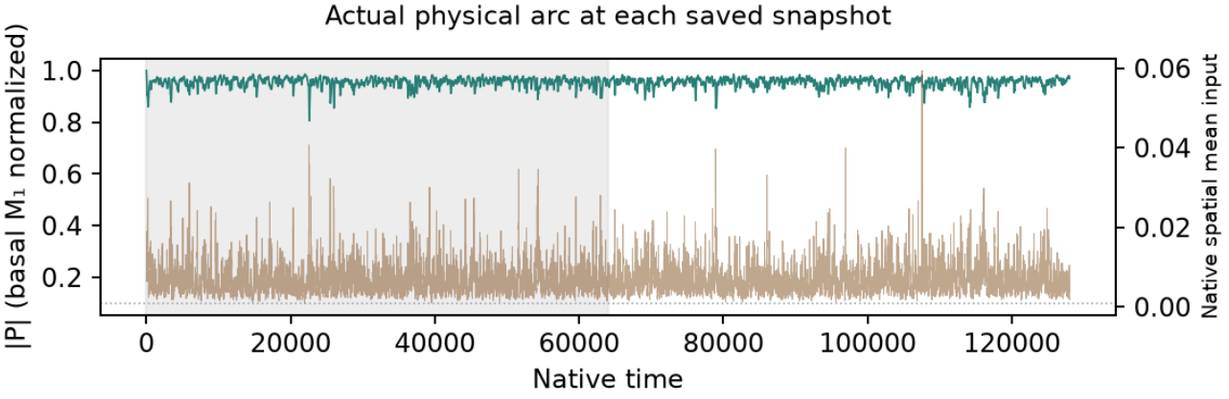


Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M_1 normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Goryachev · size label 20 · f=0.003 · mean
context E4_long · σ=0 · horizon=128000 · 1 deterministic control

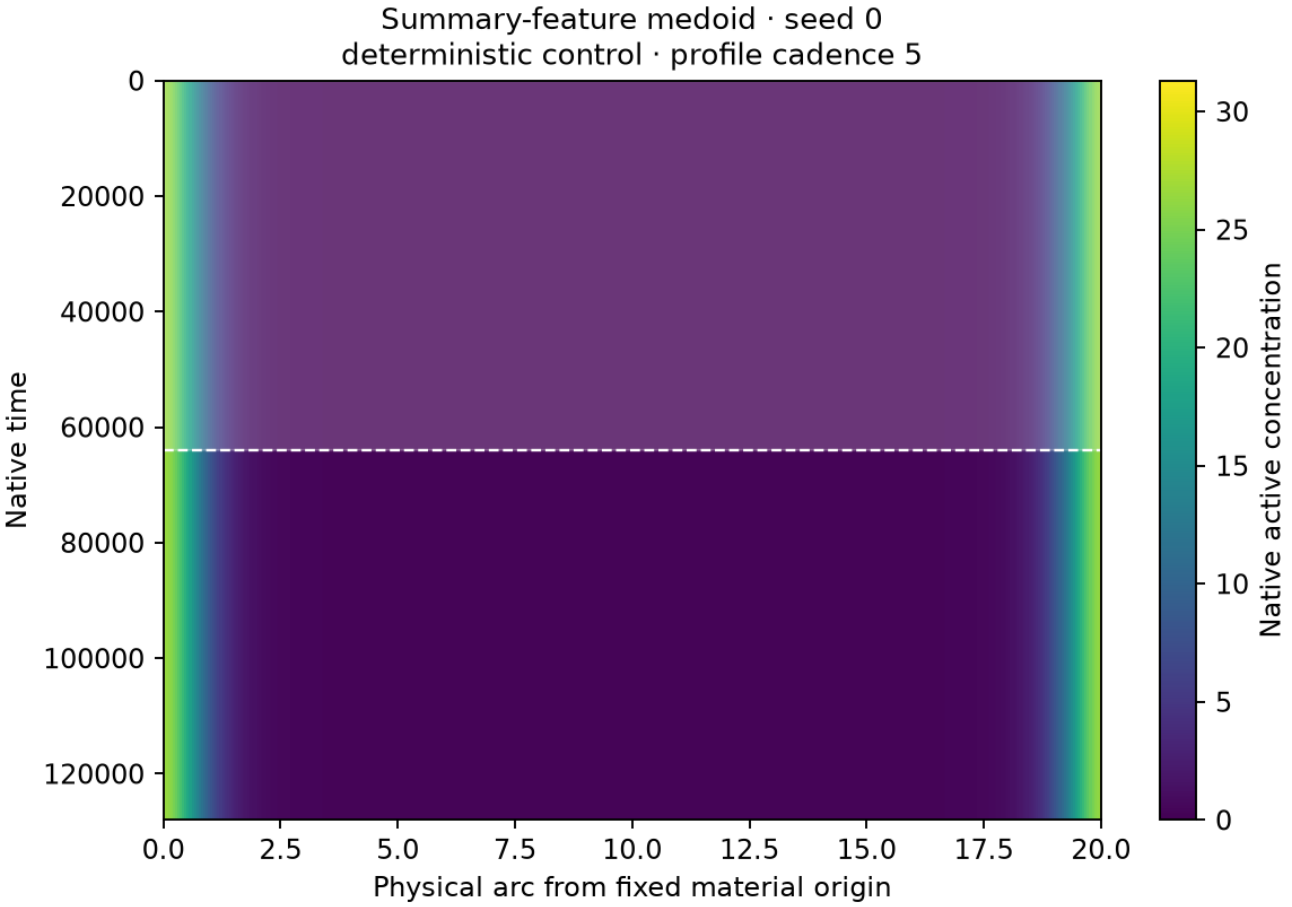


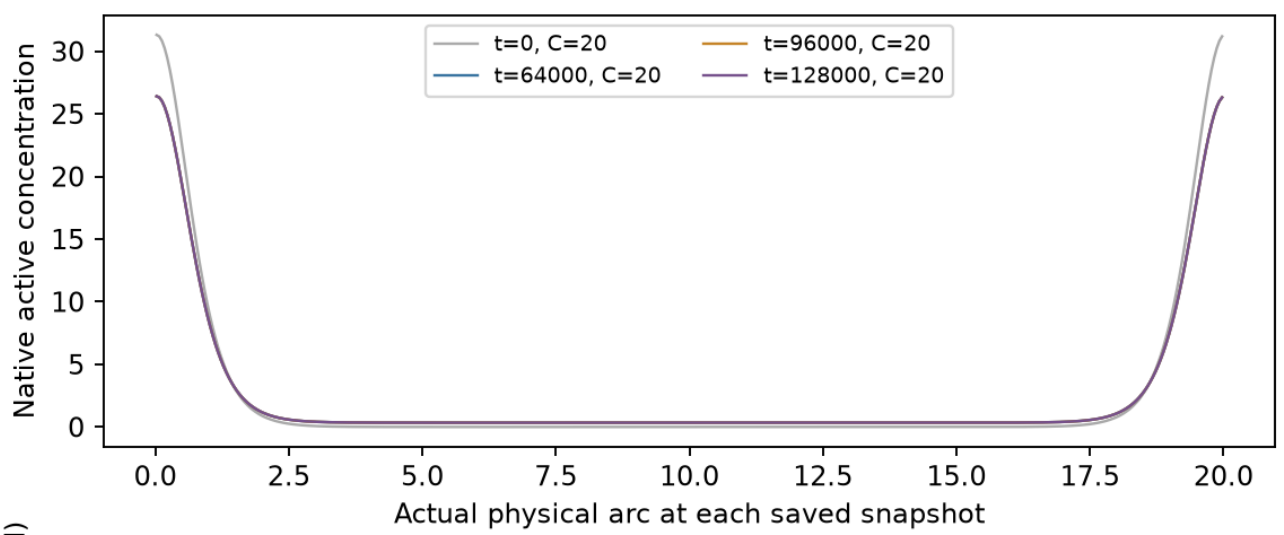

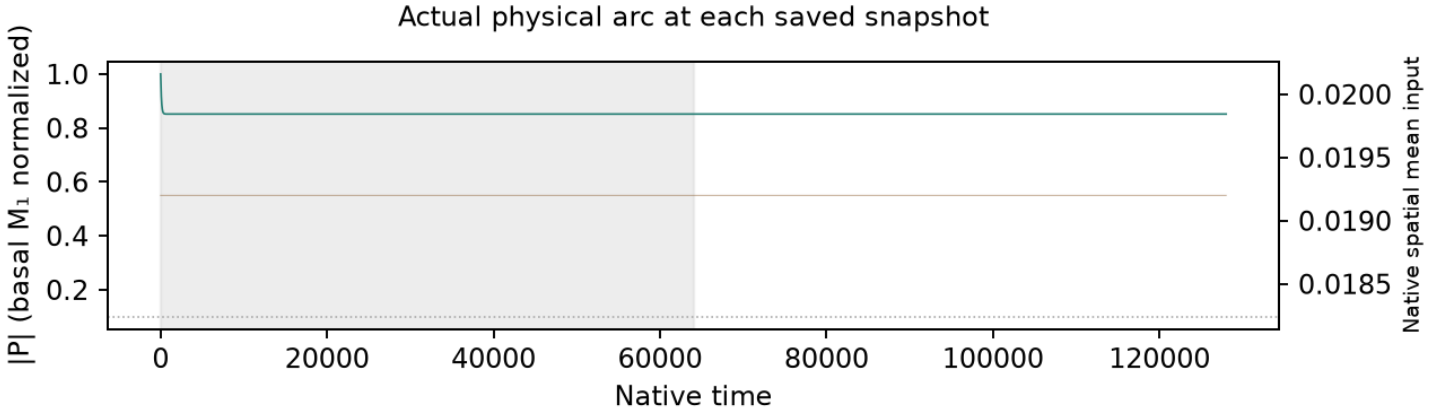


Native concentrations and every retained field frame are plotted without spatial resampling.
First half shaded: excluded from summary selection.
Spring mesh-face interpolation changes only boundary geometry; snapshots use actual saved C(t).
P uses basal M_1 normalization, distinct from instantaneous coherence.
Supplemental selection and controls; no main example is chosen.
Native NPZ/status links remain local/HPC data.

S11 · Goryachev · size label 20 · f=0.003 · noise
context E4_long · σ=1 · horizon=128000 · n=12 independent noisy realizations

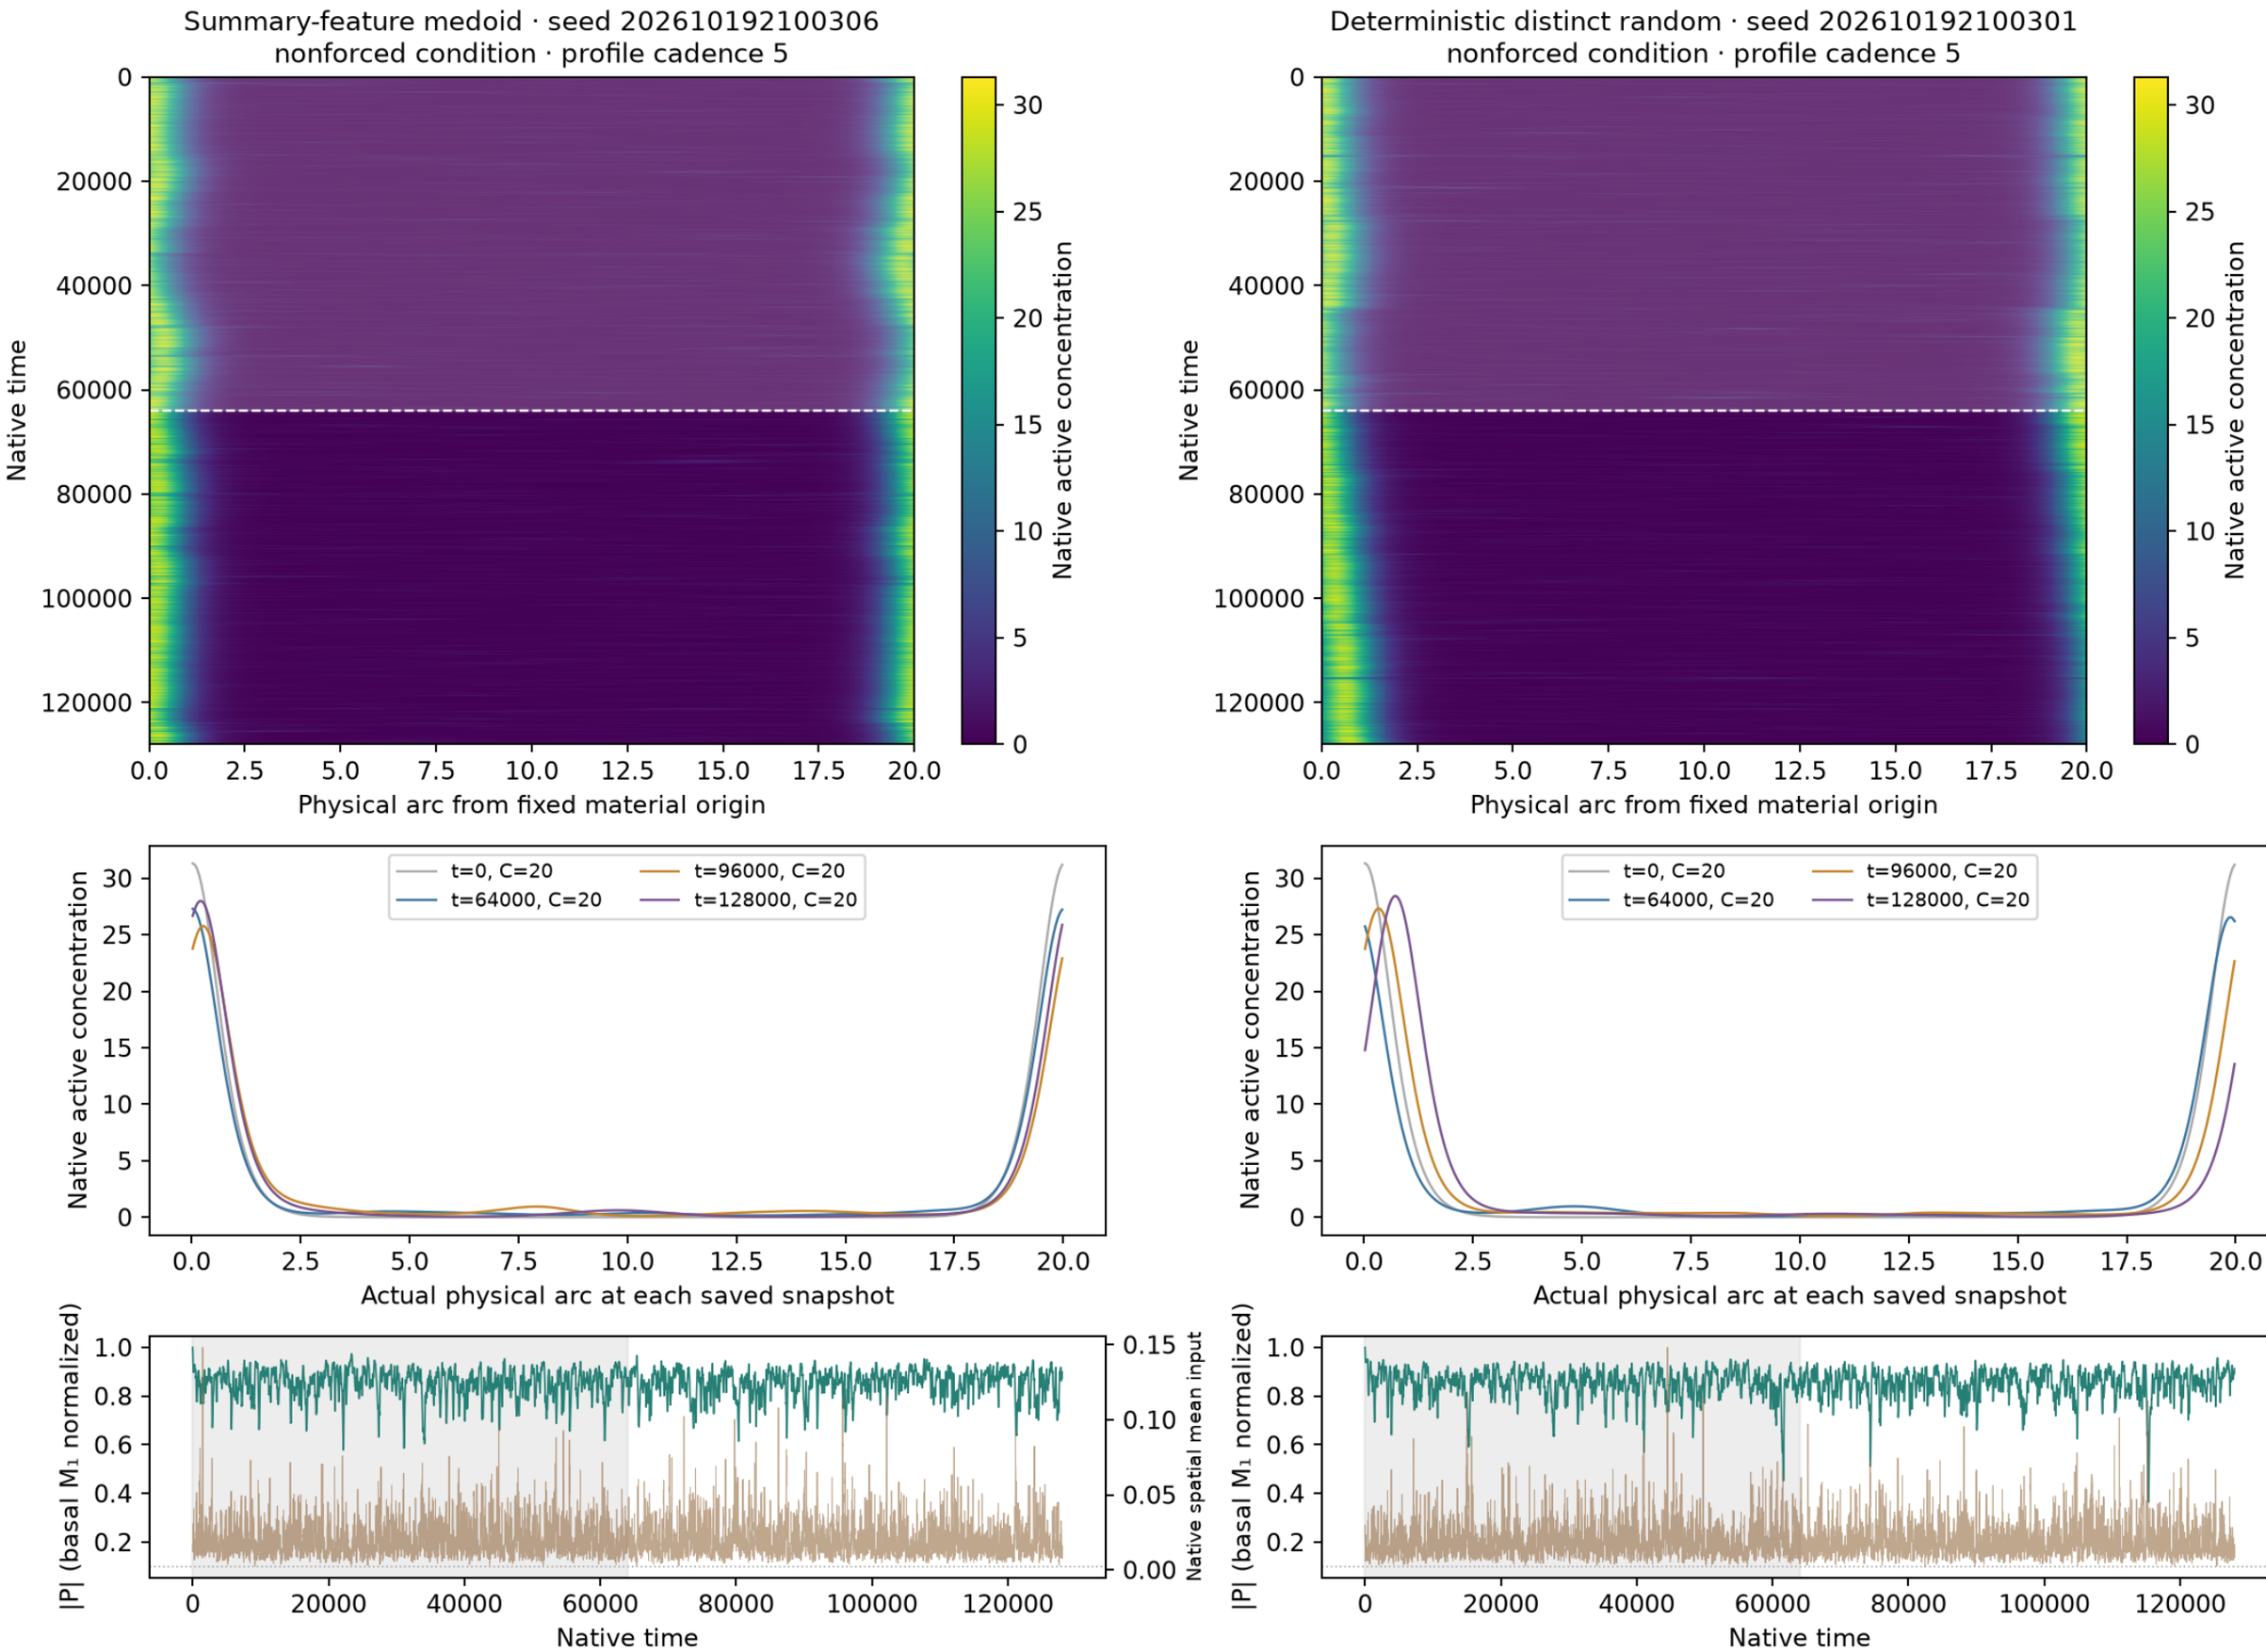


Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.


S11 · Goryachev · size label 20 · f=1 · mean
context E4_long · σ=0 · horizon=128000 · 1 deterministic control

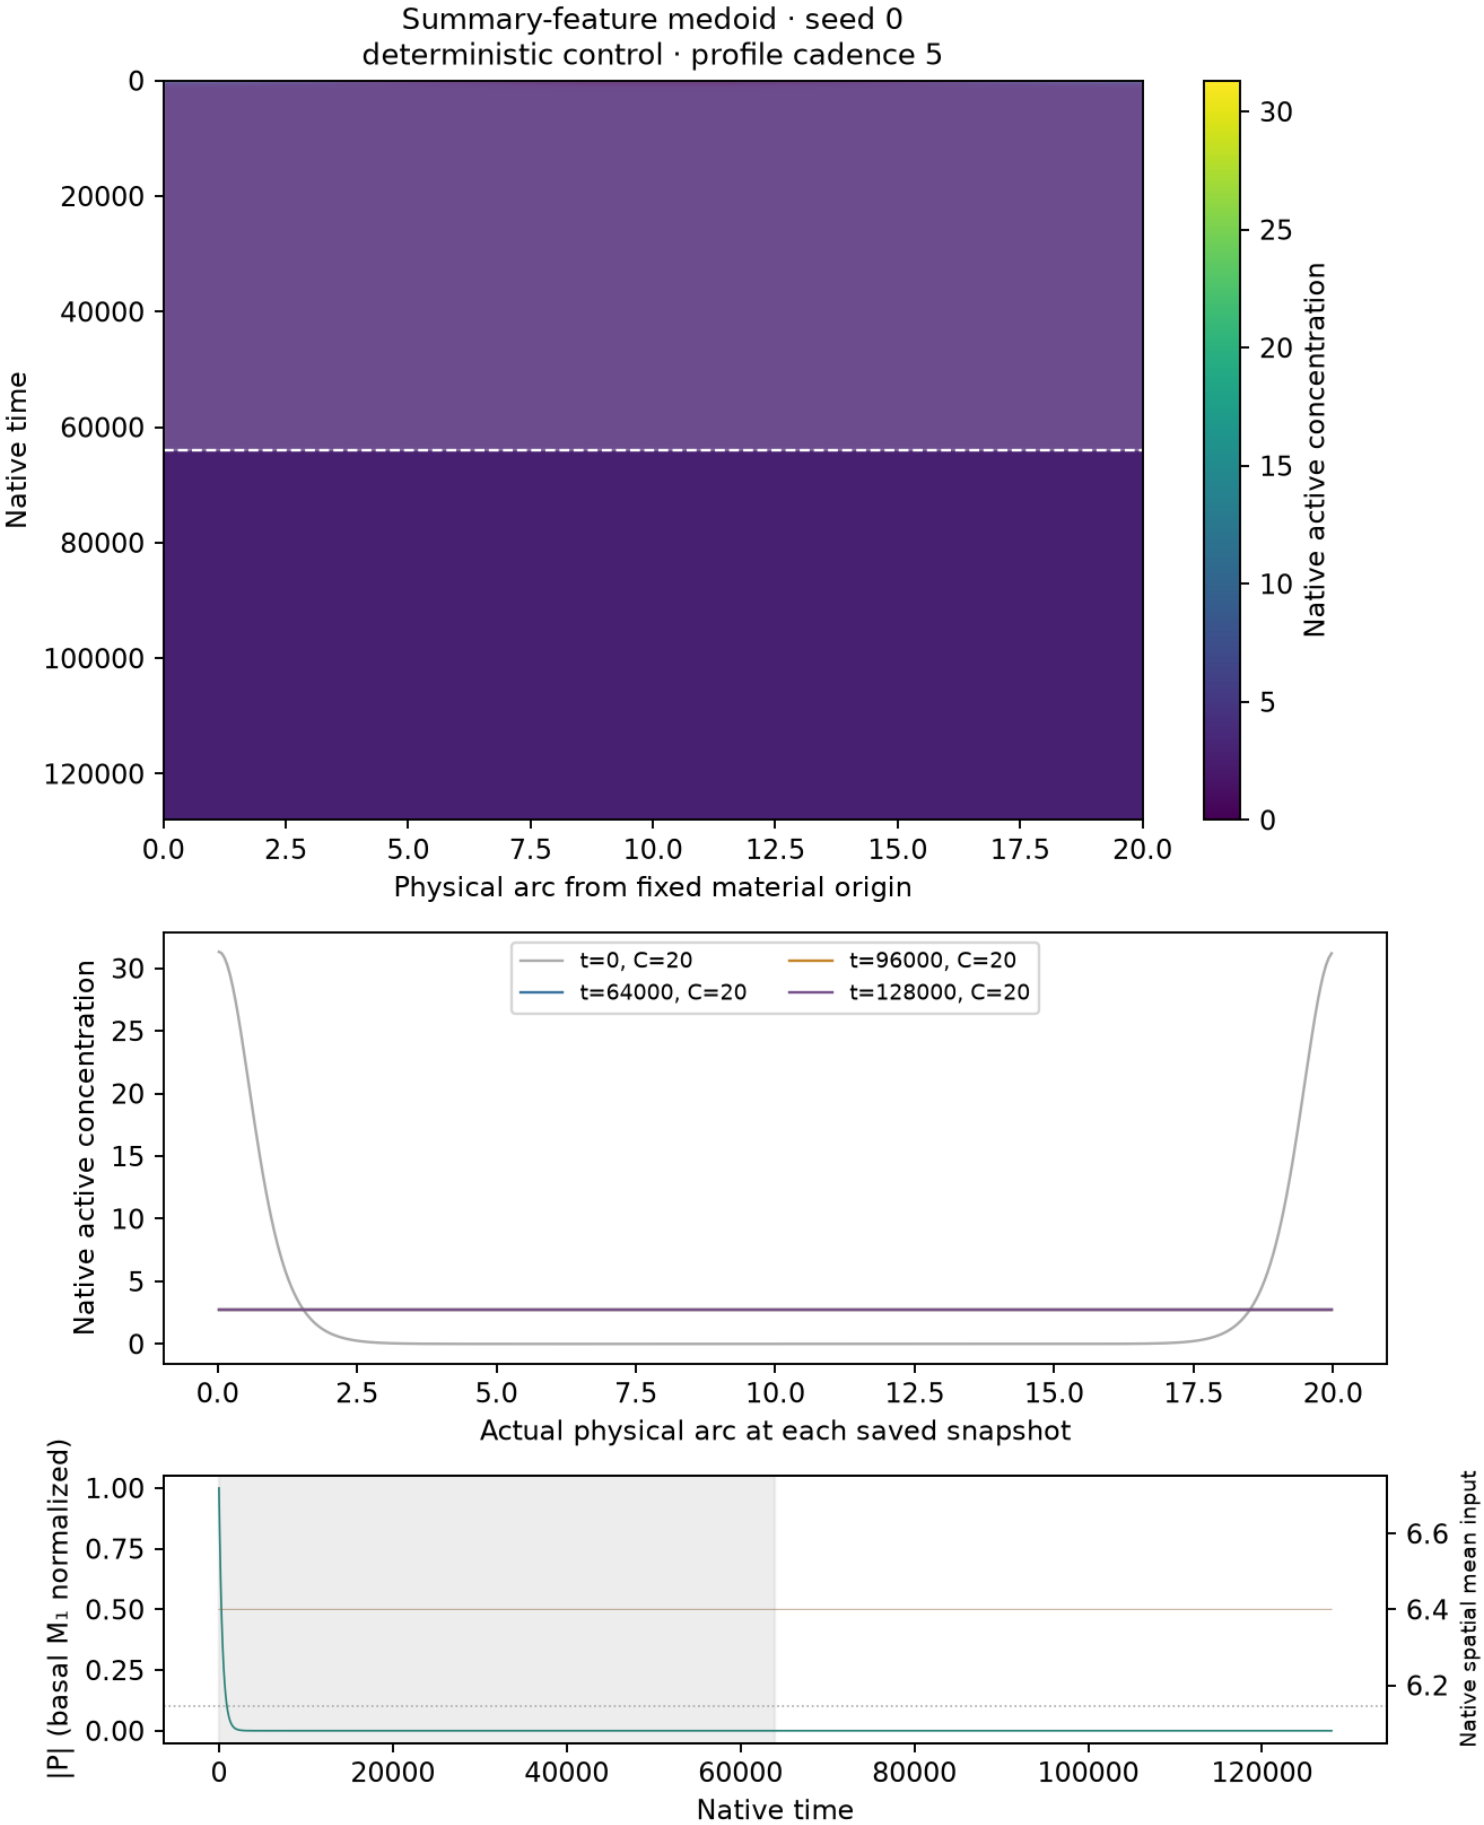

Native concentrations and every retained field frame are plotted without spatial resampling.
First half shaded: excluded from summary selection.
Spring mesh-face interpolation changes only boundary geometry; snapshots use actual saved C(t).
P uses basal M_1 normalization, distinct from instantaneous coherence.
Supplemental selection and controls; no main example is chosen.
Native NPZ/status links remain local/HPC data.


S11 · Goryachev · size label 20 · f=1 · noise
context E4_long · σ=1 · horizon=128000 · n=12 independent noisy realizations

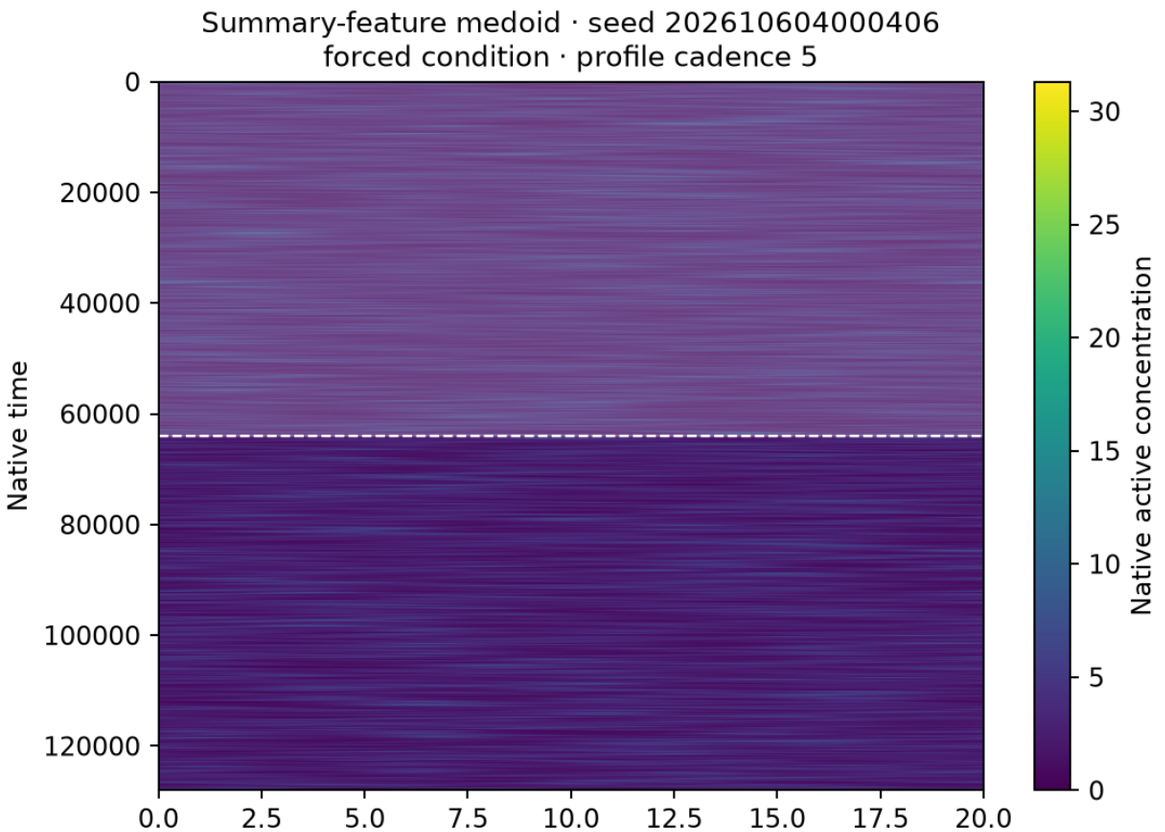


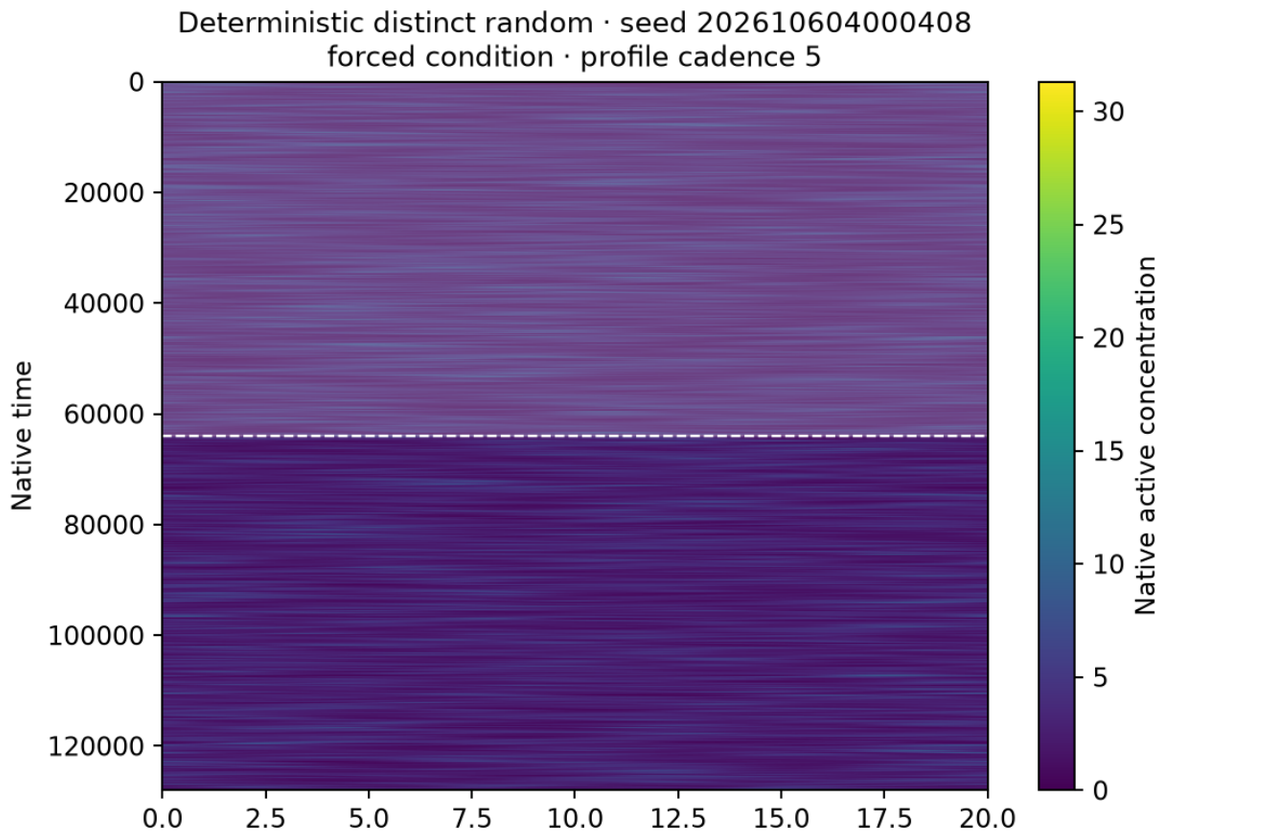


Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M_1 normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Goryachev · size label 40 · f=0 · zero
context E4_long · σ=0 · horizon=128000 · 1 deterministic control

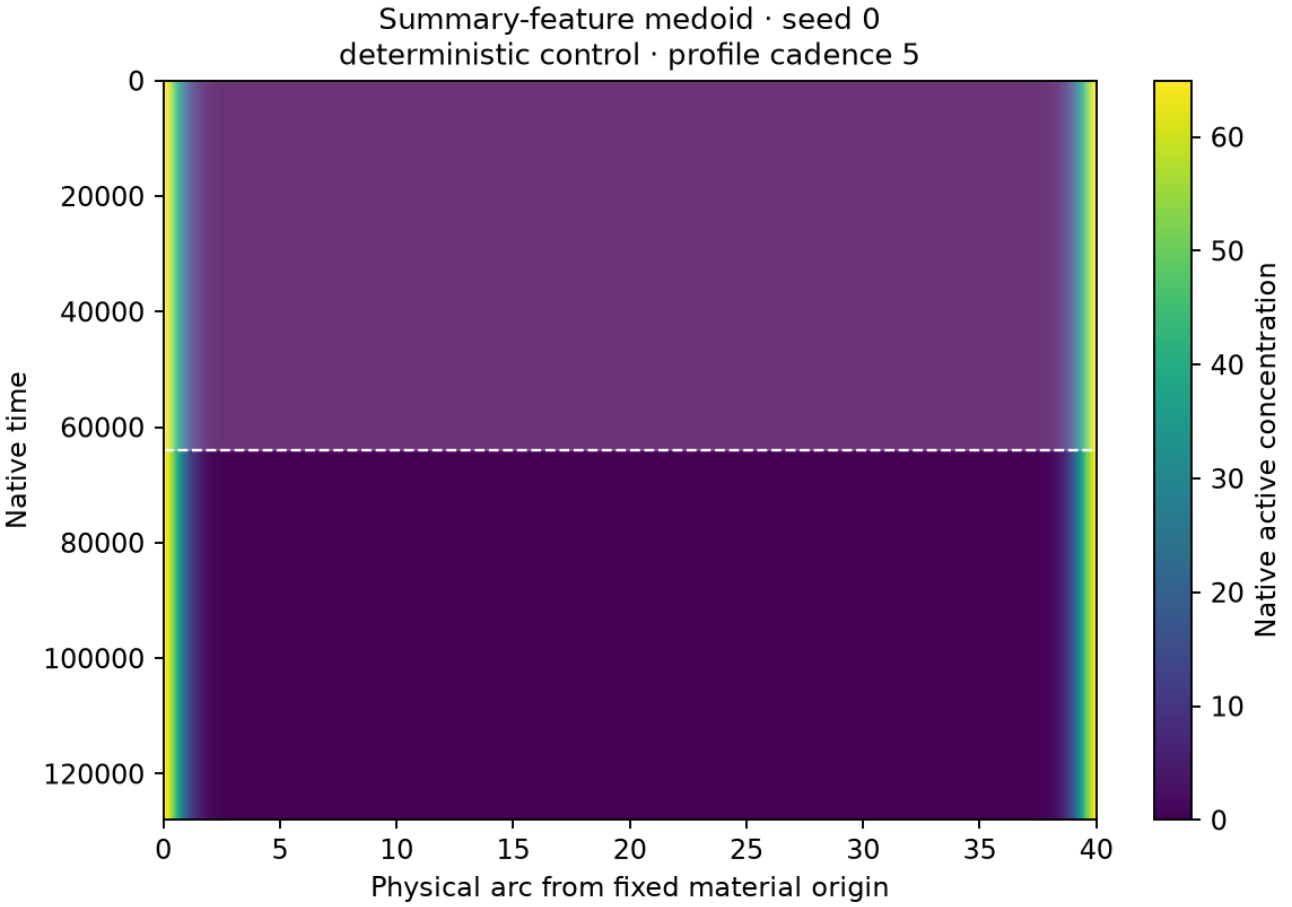


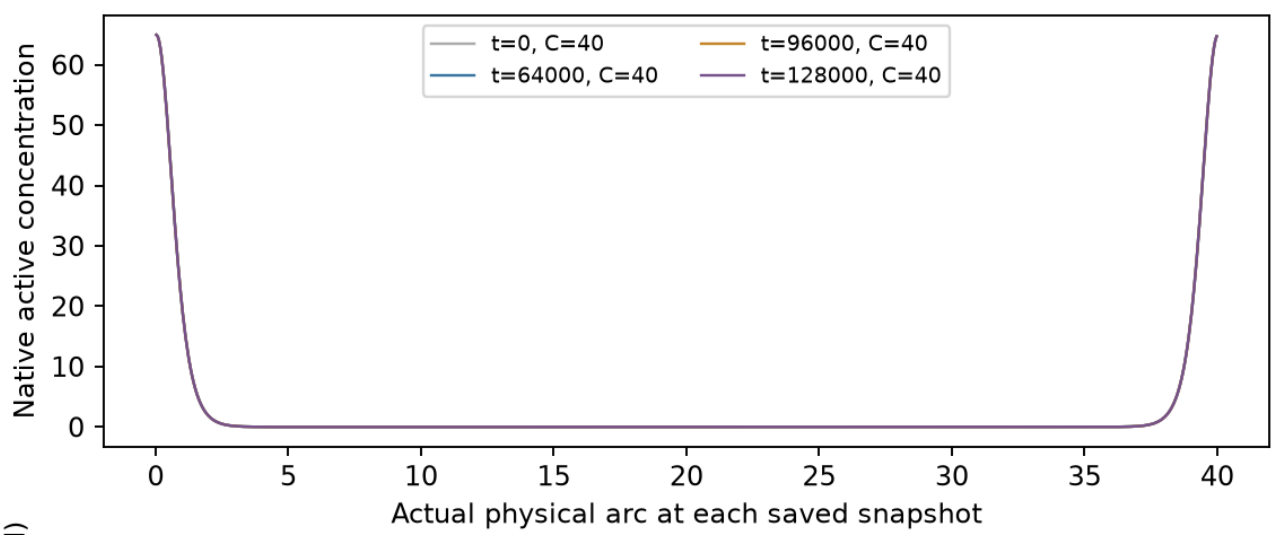


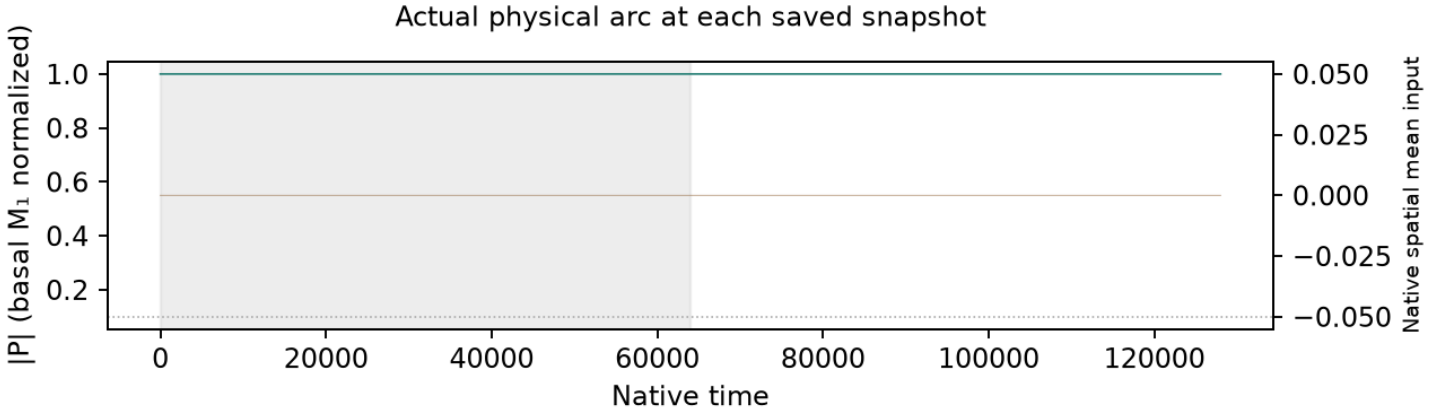


Native concentrations and every retained field frame are plotted without spatial resampling.
First half shaded: excluded from summary selection.
Spring mesh-face interpolation changes only boundary geometry; snapshots use actual saved C(t).
P uses basal M_1 normalization, distinct from instantaneous coherence.
Supplemental selection and controls; no main example is chosen.
Native NPZ/status links remain local/HPC data.

S11 · Goryachev · size label 40 · f=0.0001 · mean
context E4_long · σ=0 · horizon=128000 · 1 deterministic control

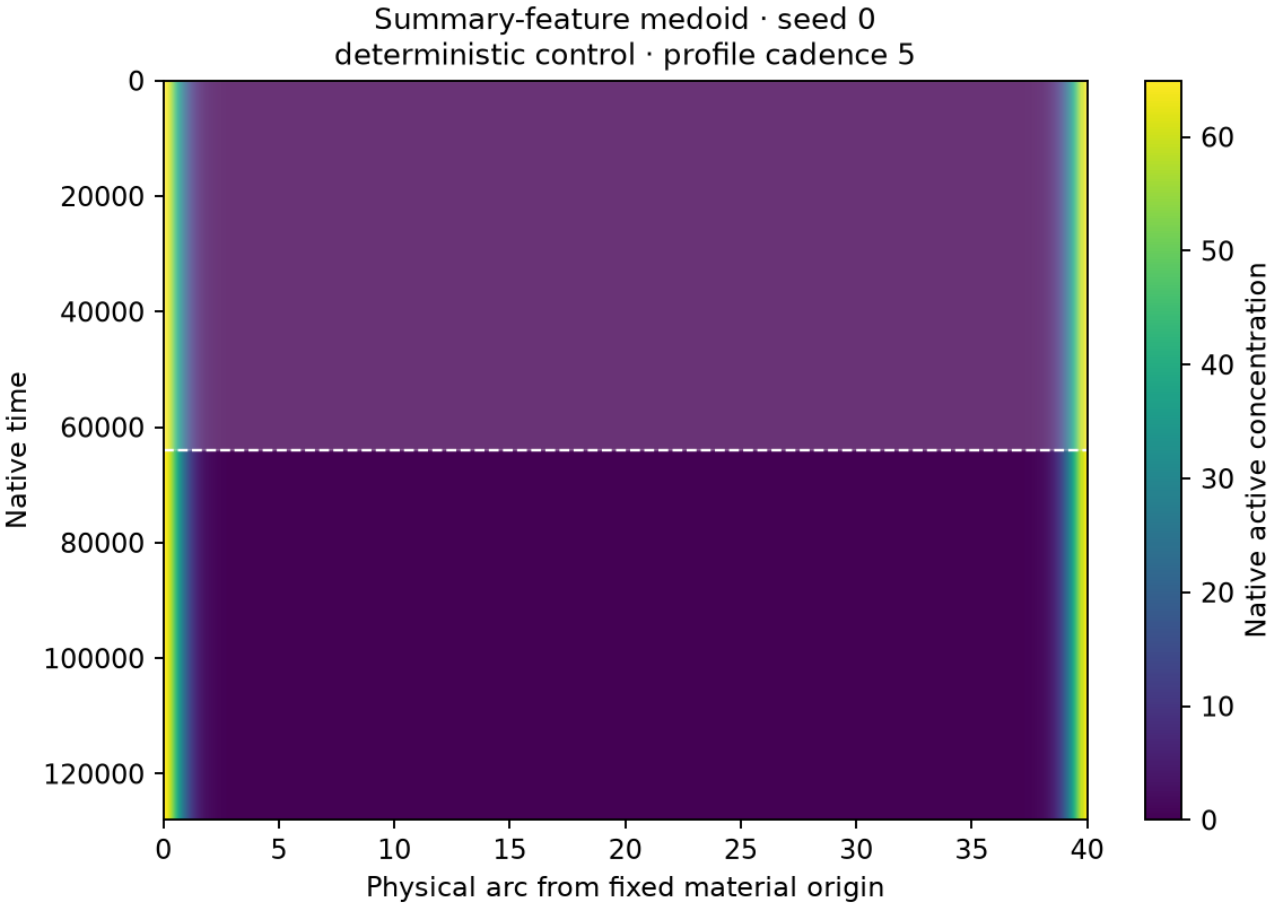


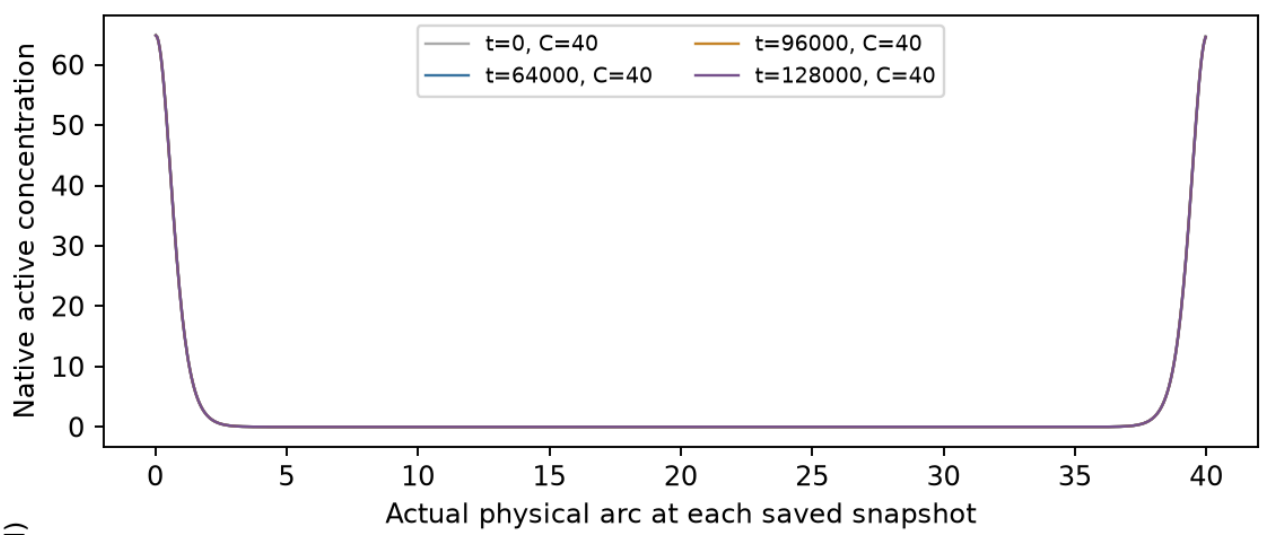


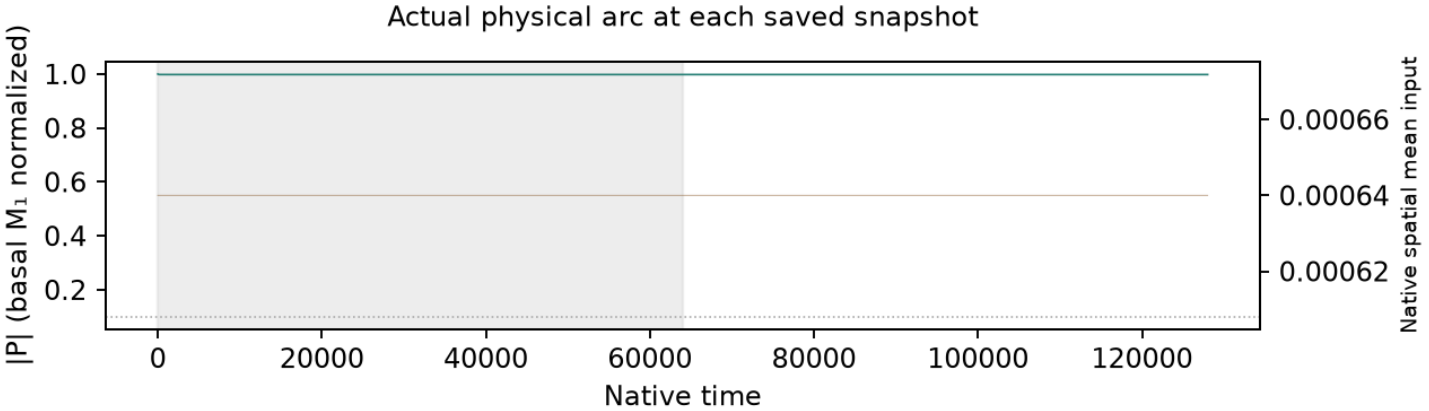

Native concentrations and every retained field frame are plotted without spatial resampling.
First half shaded: excluded from summary selection.
Spring mesh-face interpolation changes only boundary geometry; snapshots use actual saved C(t).
P uses basal M_1 normalization, distinct from instantaneous coherence.
Supplemental selection and controls; no main example is chosen.
Native NPZ/status links remain local/HPC data.


S11 · Goryachev · size label 40 · f=0.0001 · noise
context E4_long · σ=1 · horizon=128000 · n=12 independent noisy realizations

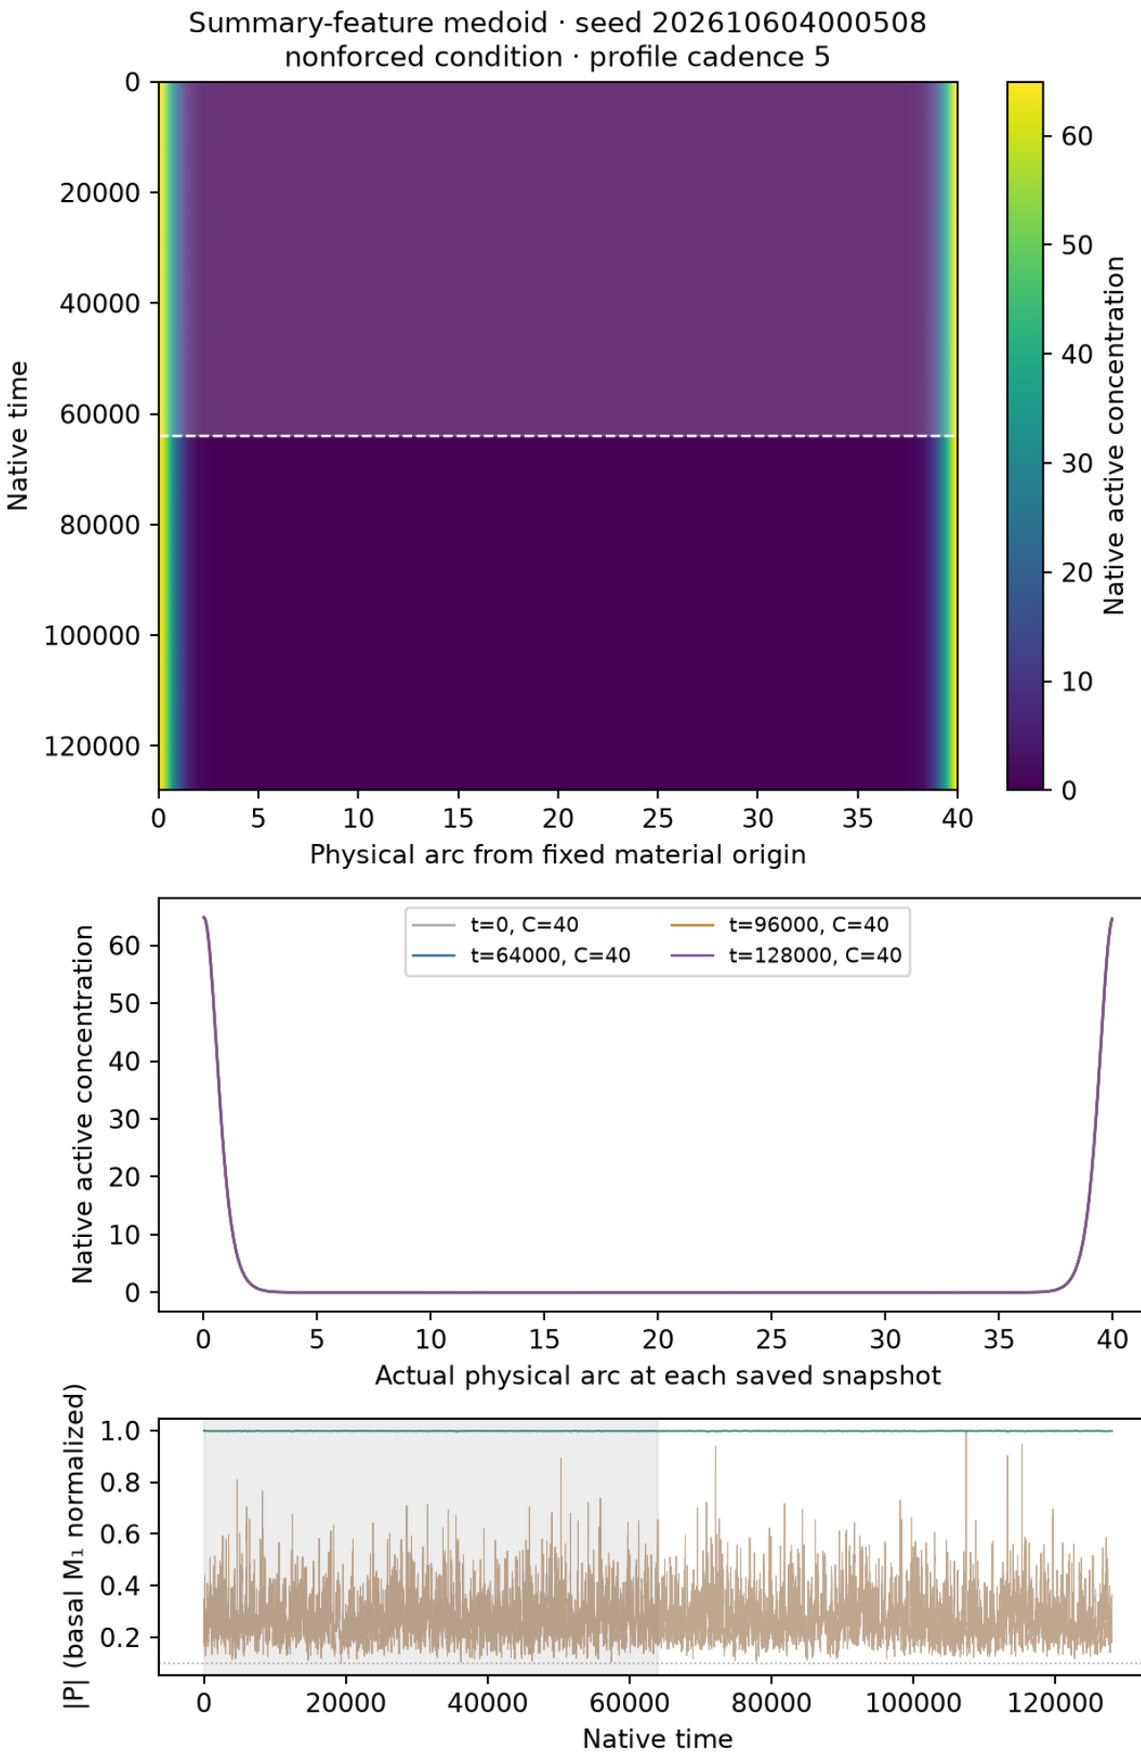


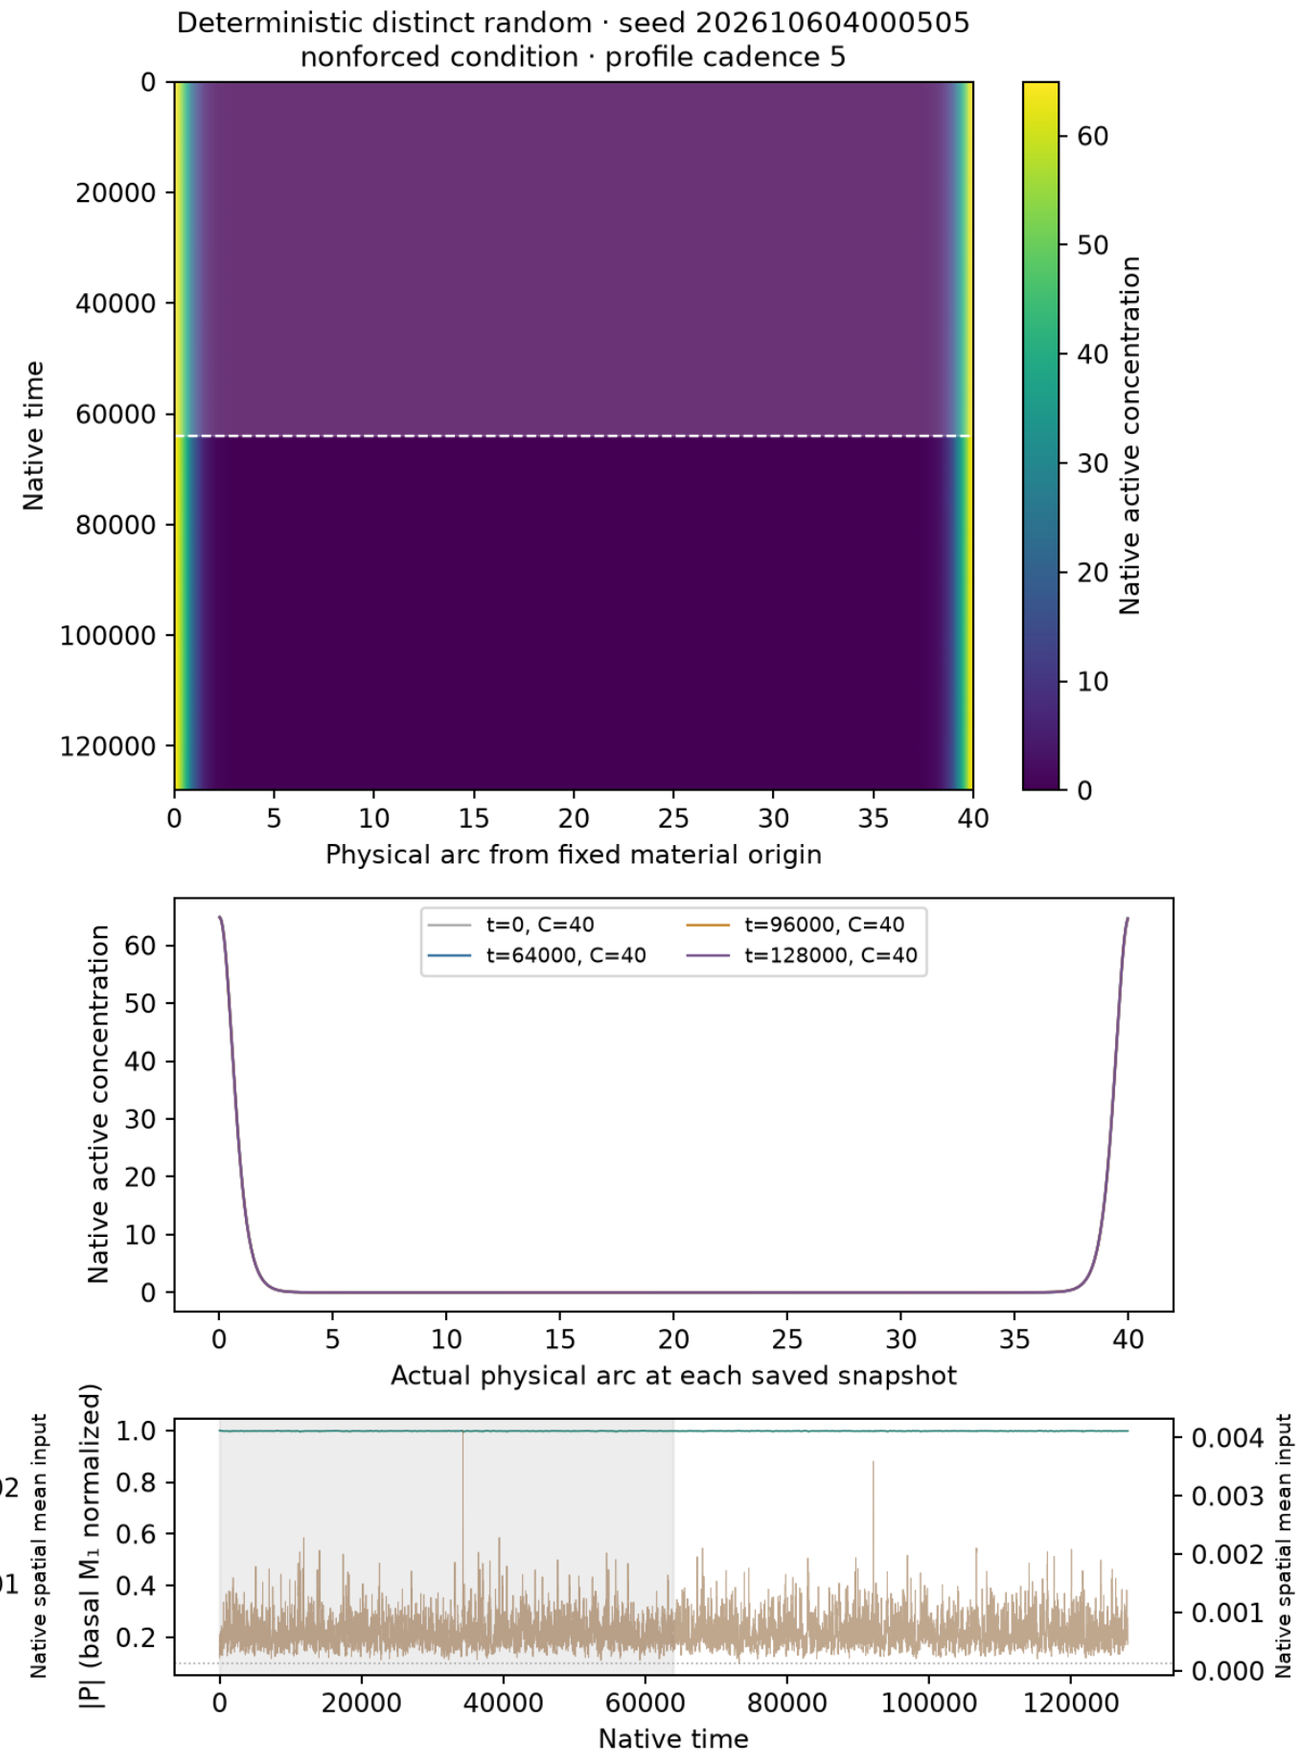


Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Goryachev · size label 40 · f=0.0003 · mean
context E4_long · σ=0 · horizon=128000 · 1 deterministic control

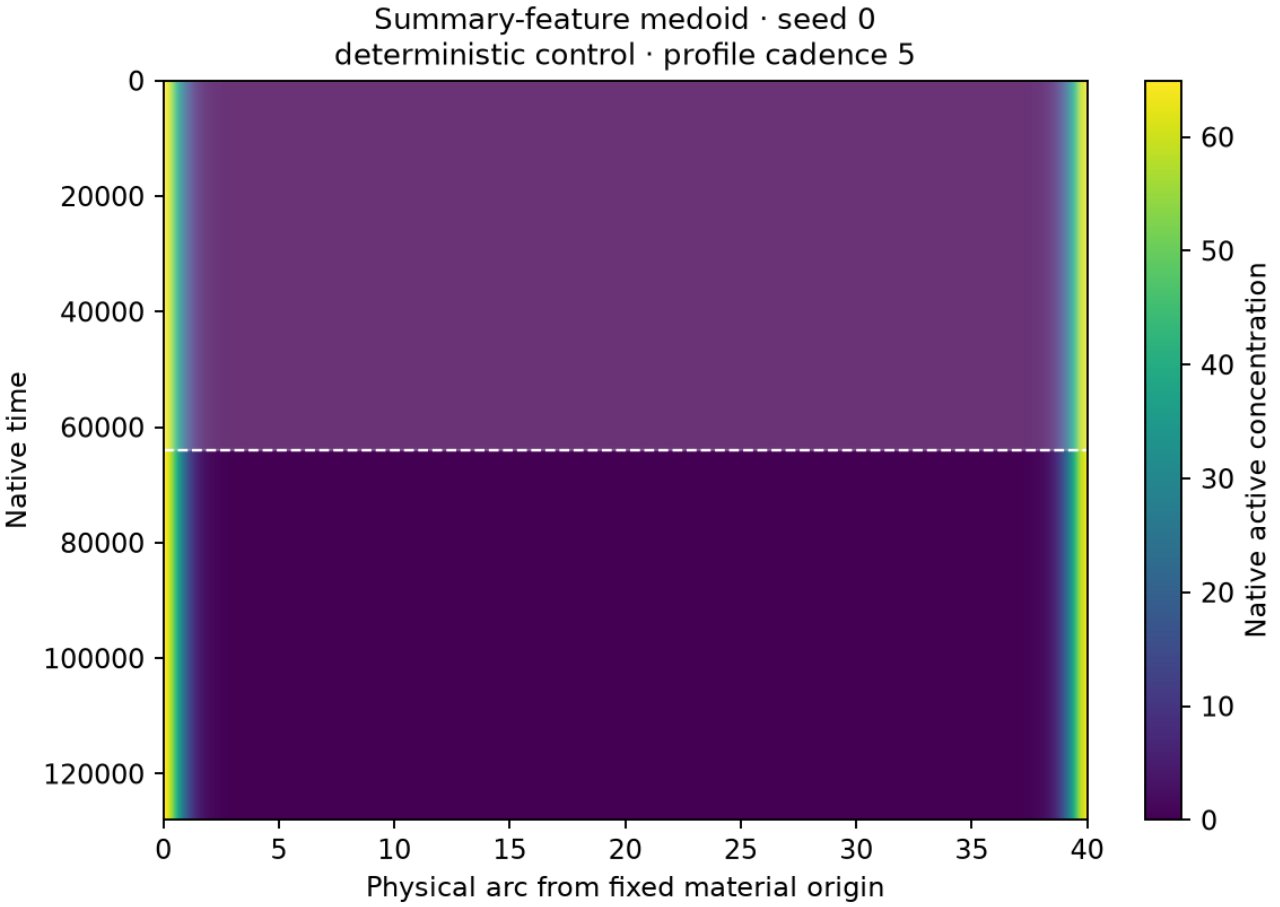


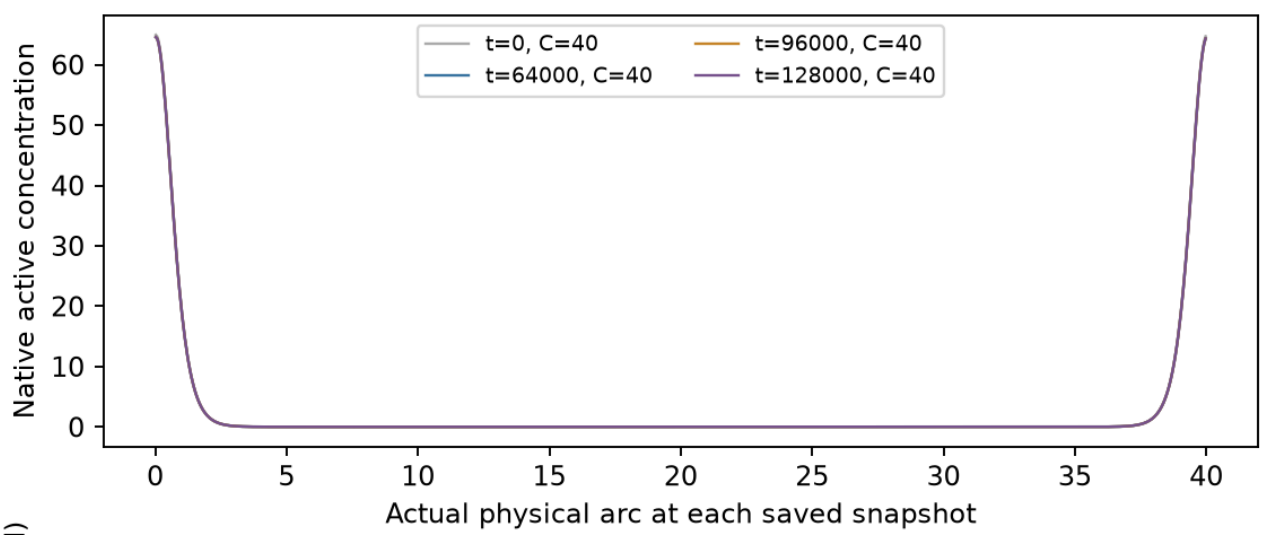

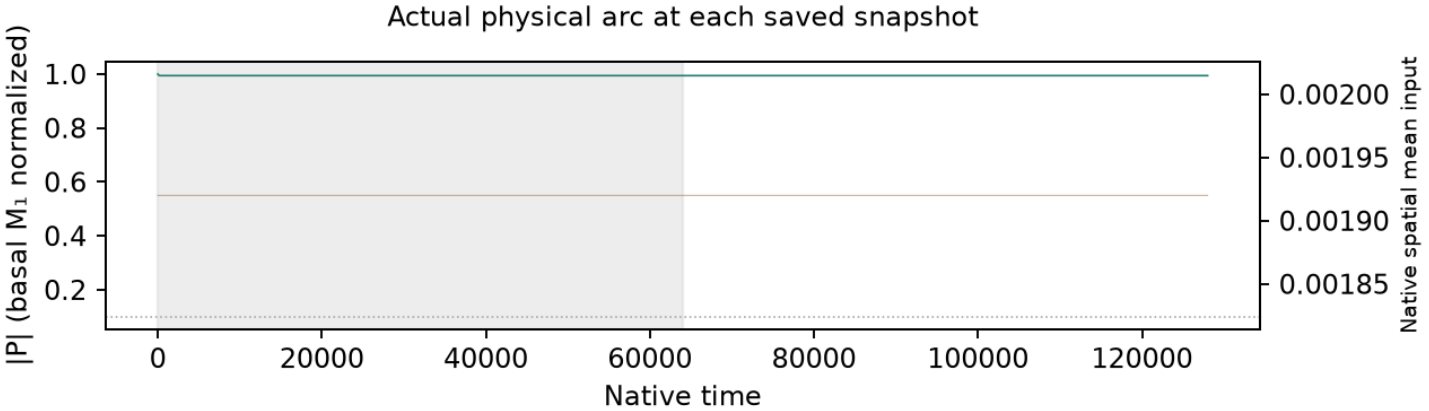


Native concentrations and every retained field frame are plotted without spatial resampling.
First half shaded: excluded from summary selection.
Spring mesh-face interpolation changes only boundary geometry; snapshots use actual saved C(t).
P uses basal M_1 normalization, distinct from instantaneous coherence.
Supplemental selection and controls; no main example is chosen.
Native NPZ/status links remain local/HPC data.


S11 · Goryachev · size label 40 · f=0.0003 · noise
context E4_long · σ=1 · horizon=128000 · n=12 independent noisy realizations

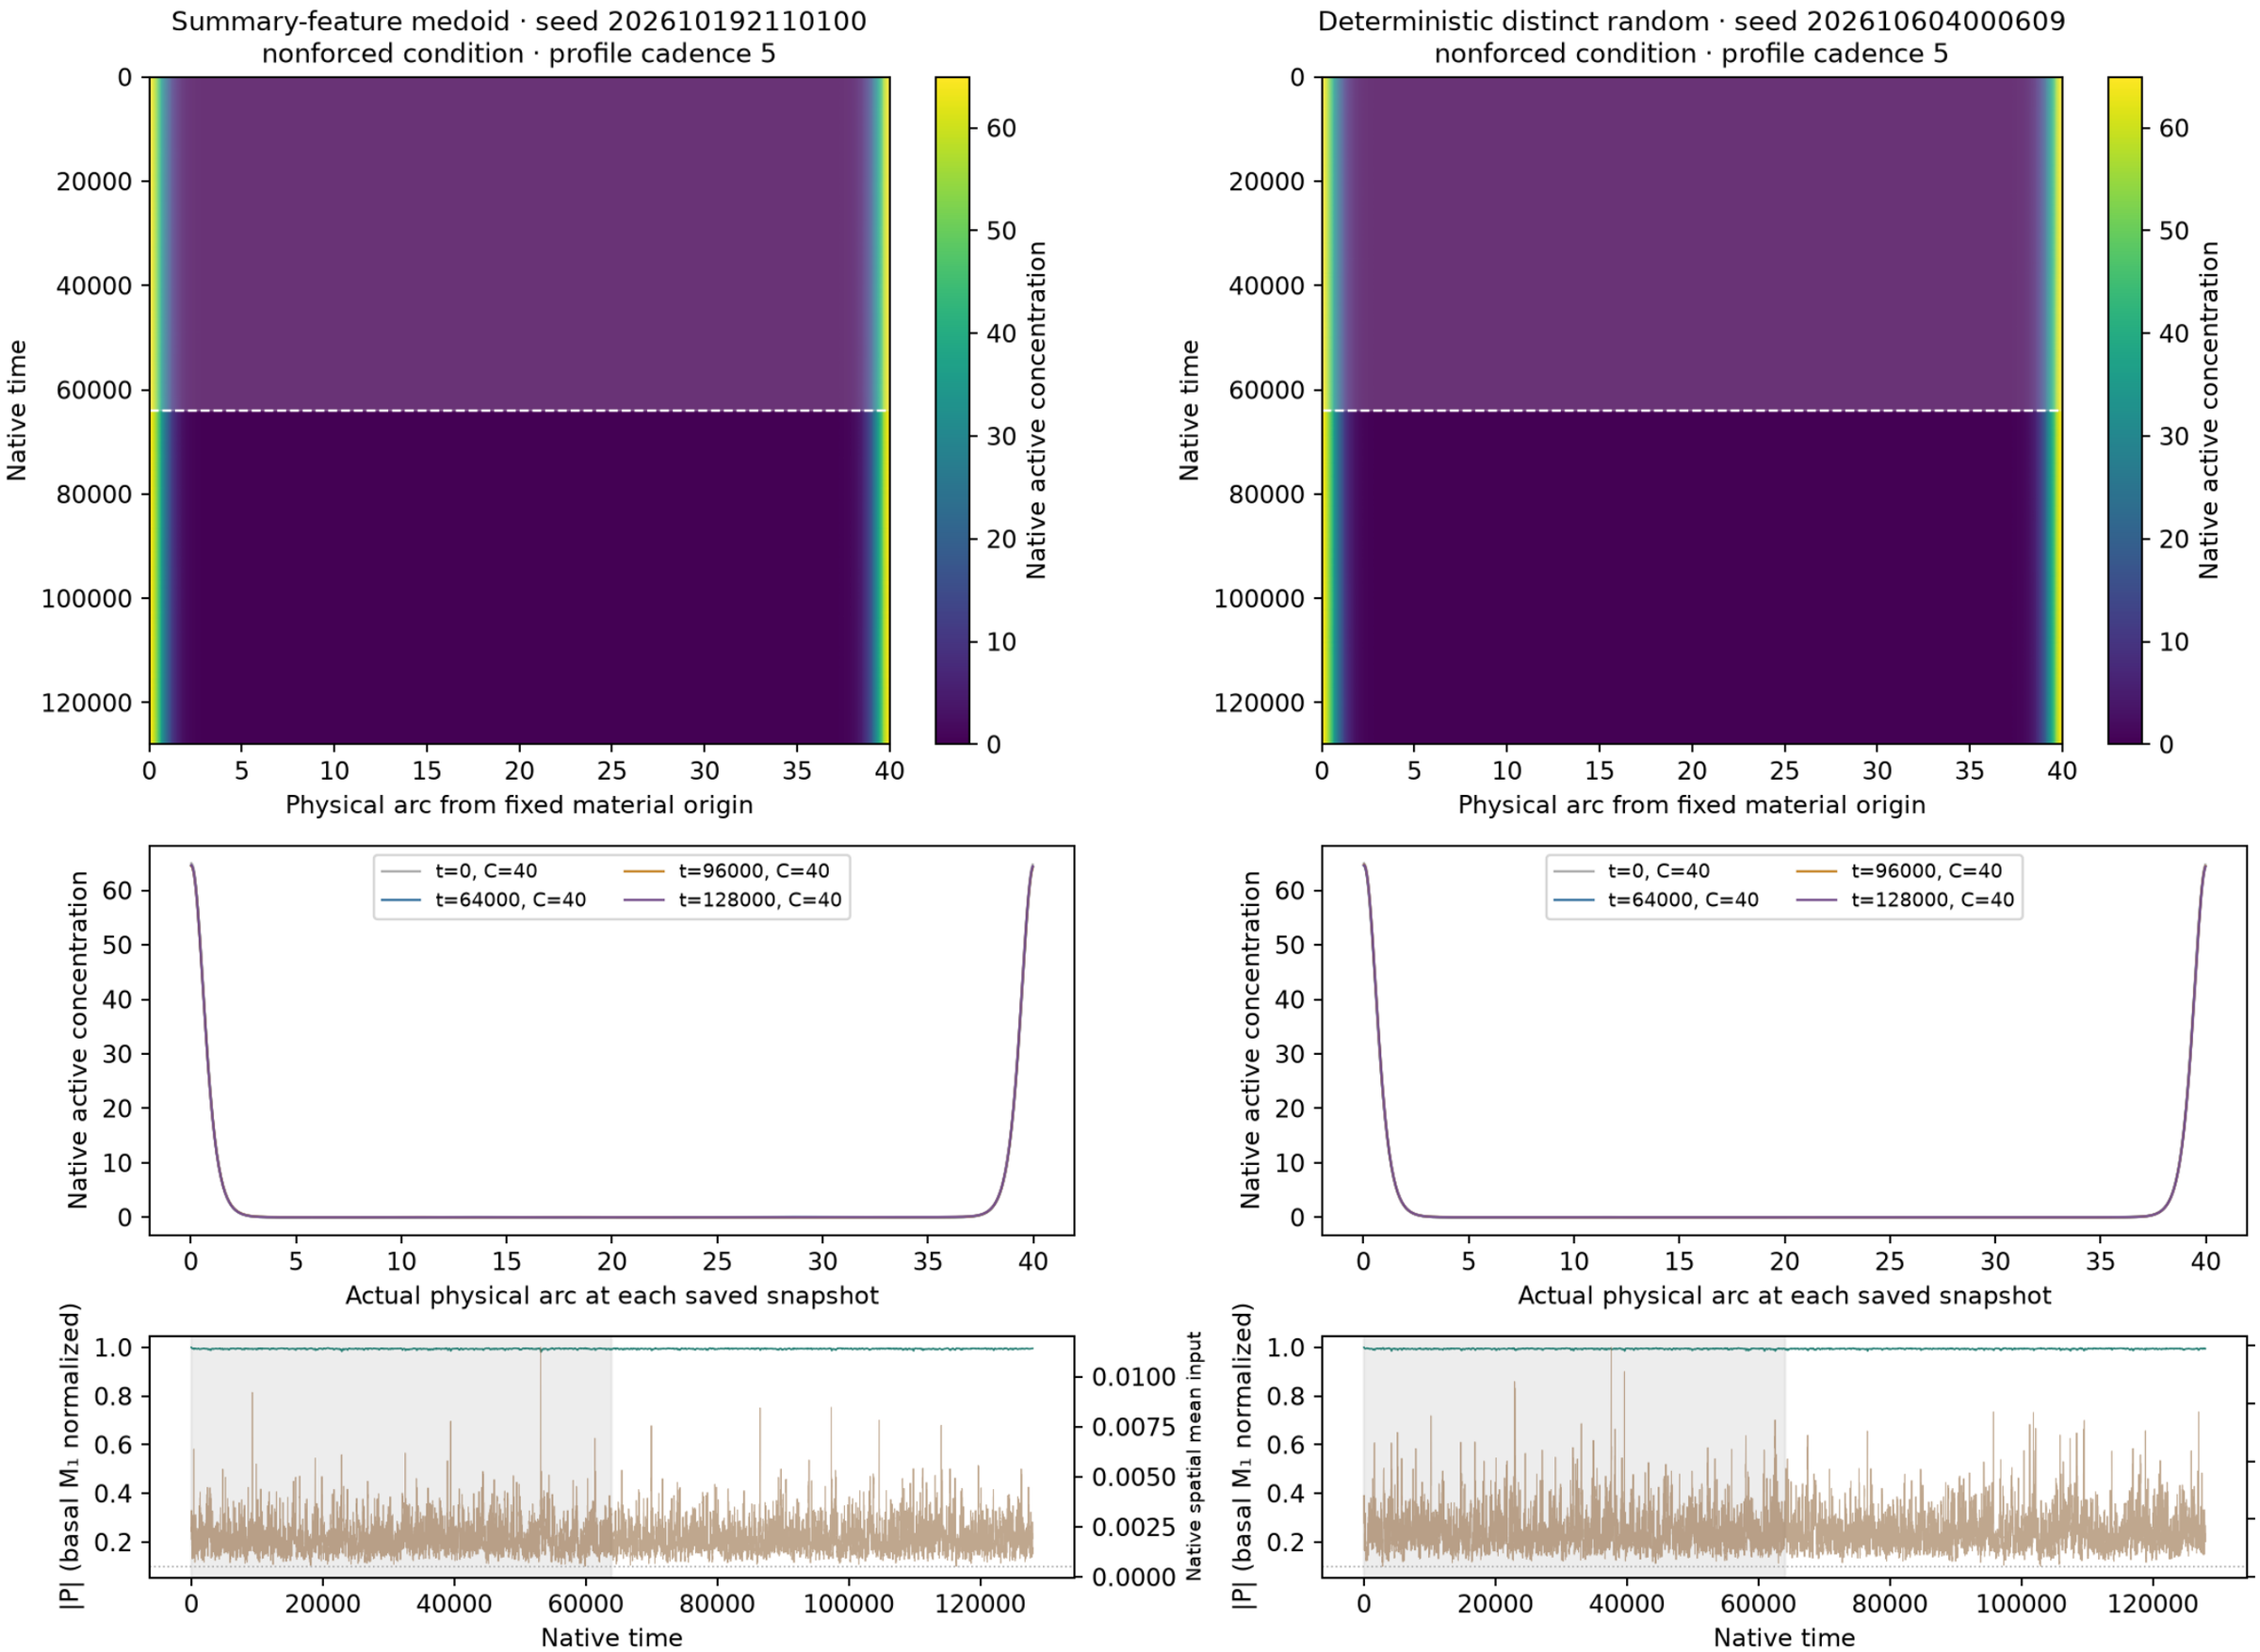


Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Goryachev · size label 40 · f=0.001 · mean
context E4_long · σ=0 · horizon=128000 · 1 deterministic control

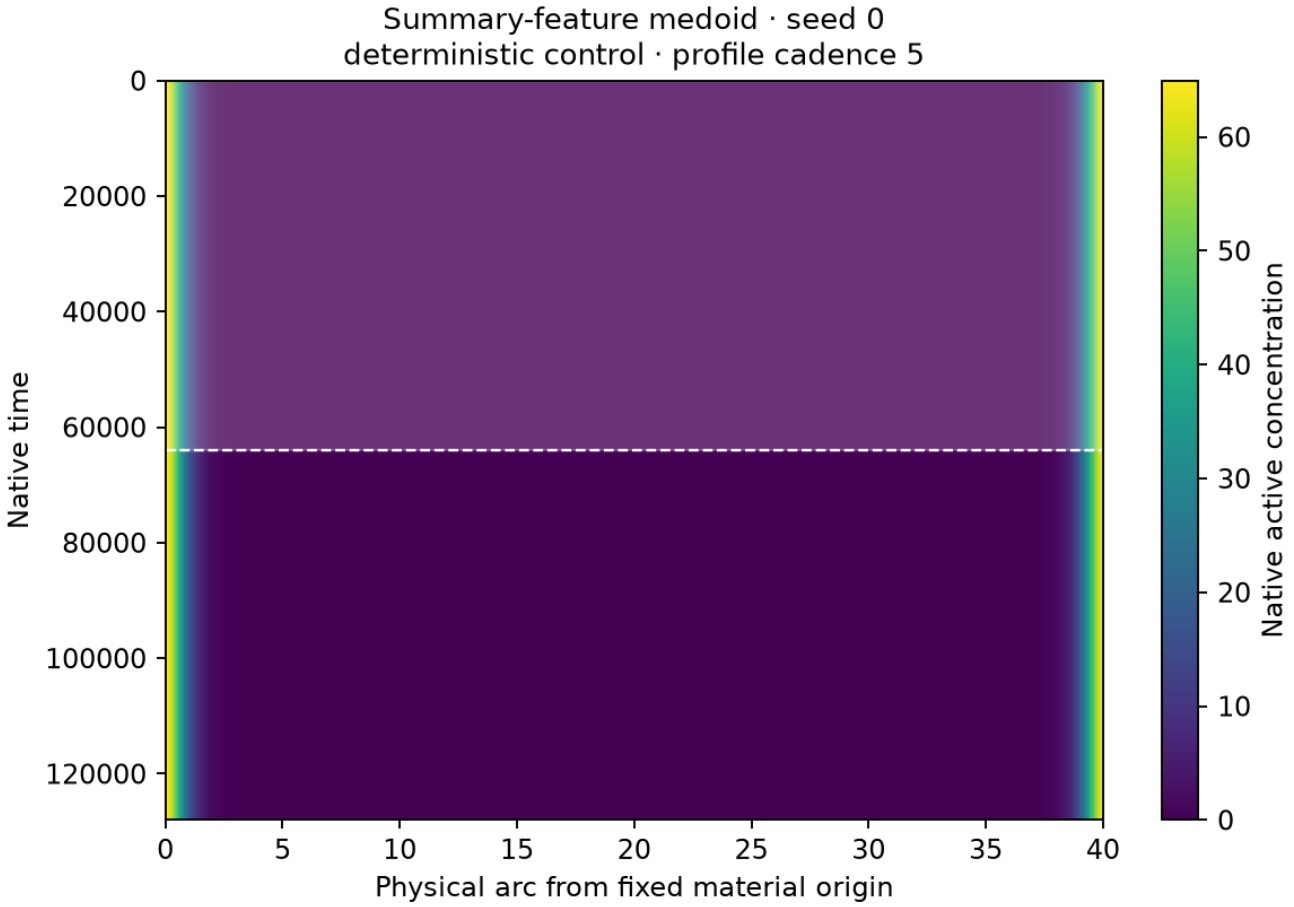


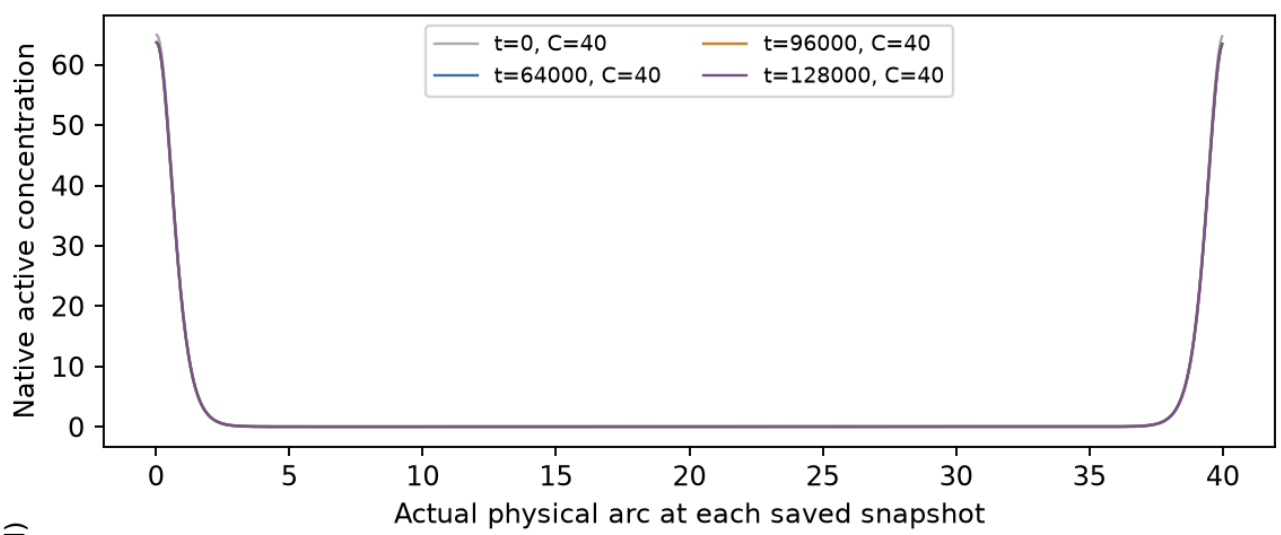

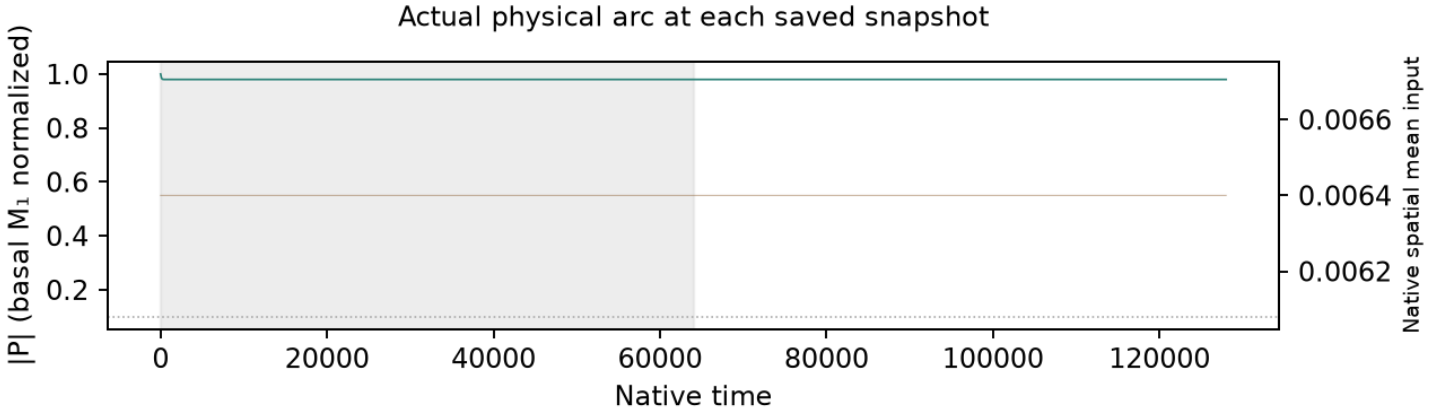


Native concentrations and every retained field frame are plotted without spatial resampling.
First half shaded: excluded from summary selection.
Spring mesh-face interpolation changes only boundary geometry; snapshots use actual saved C(t).
P uses basal M_1 normalization, distinct from instantaneous coherence.
Supplemental selection and controls; no main example is chosen.
Native NPZ/status links remain local/HPC data.


S11 · Goryachev · size label 40 · f=0.001 · noise
context E4_long · σ=1 · horizon=128000 · n=12 independent noisy realizations

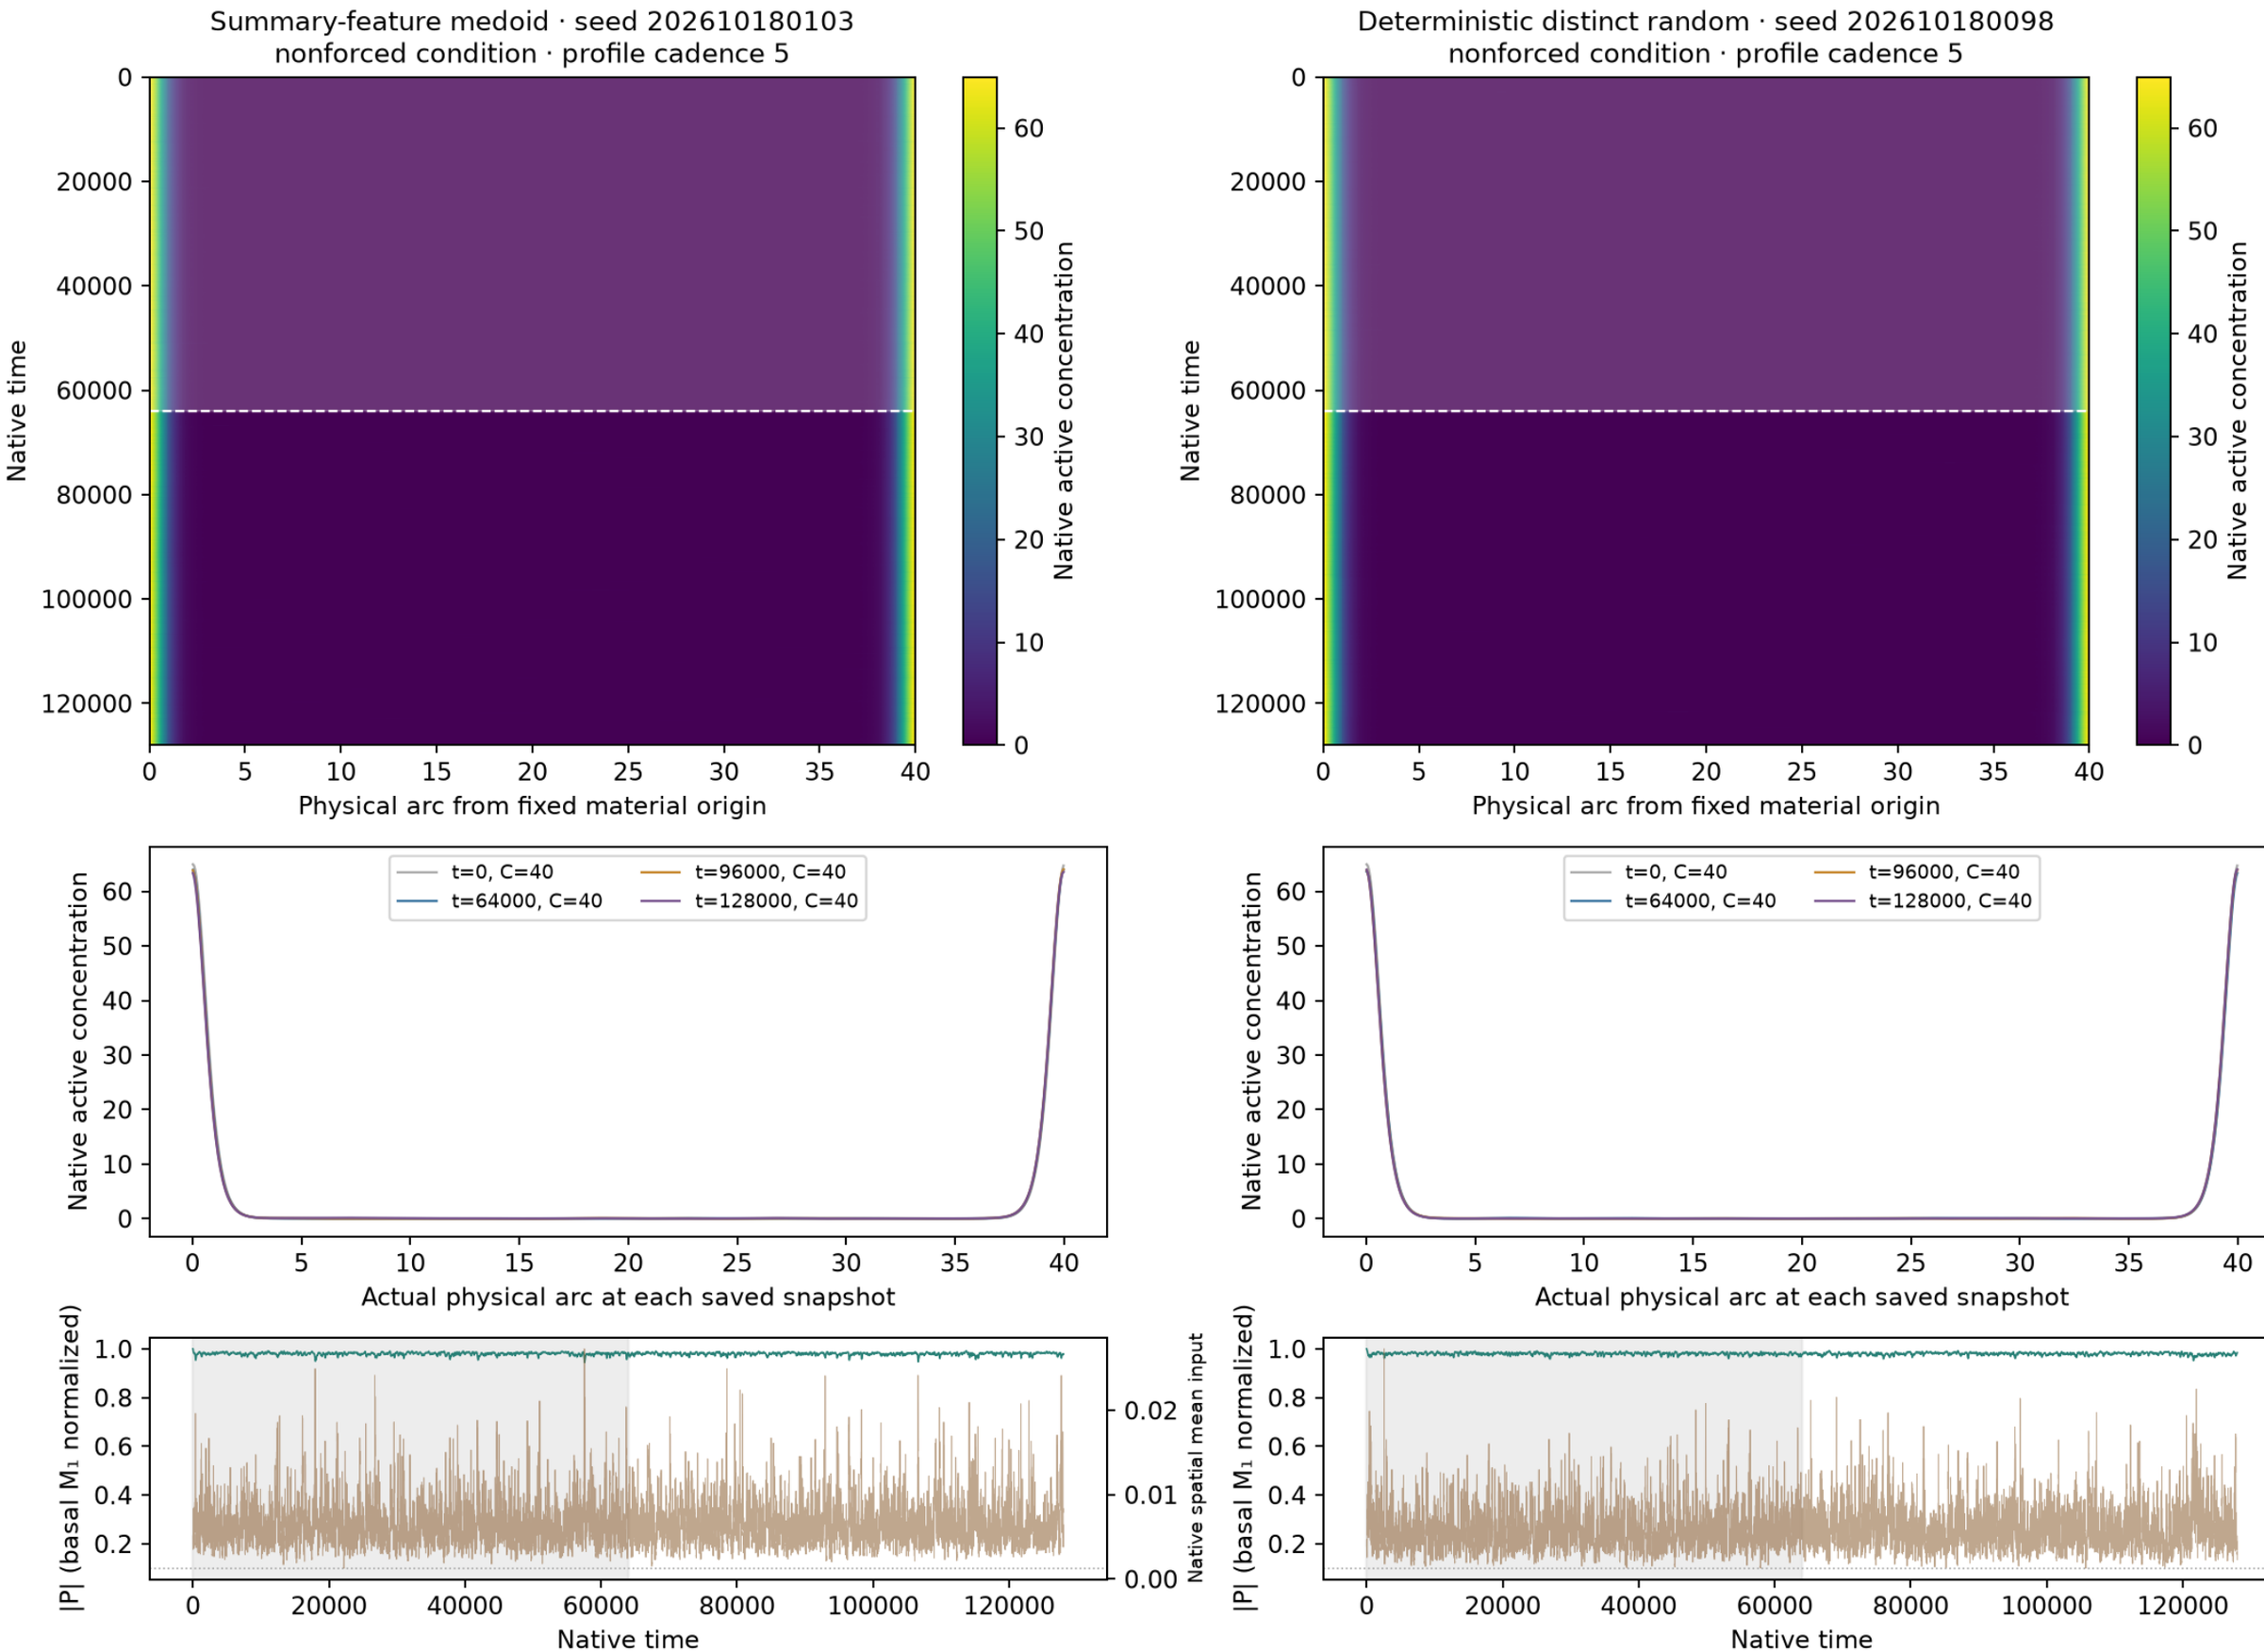


Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Goryachev · size label 40 · f=0.003 · mean
context E4_long · σ=0 · horizon=128000 · 1 deterministic control

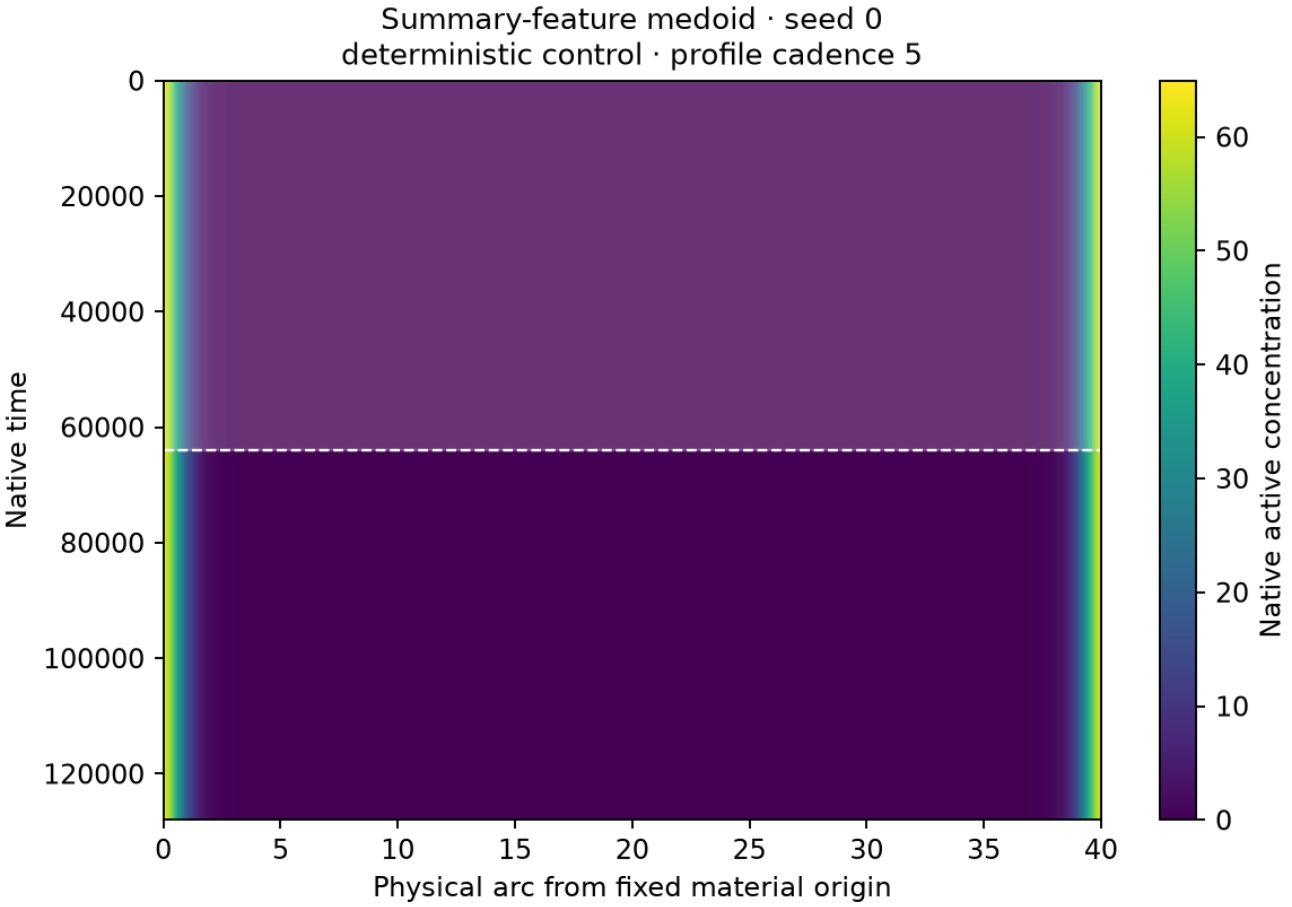

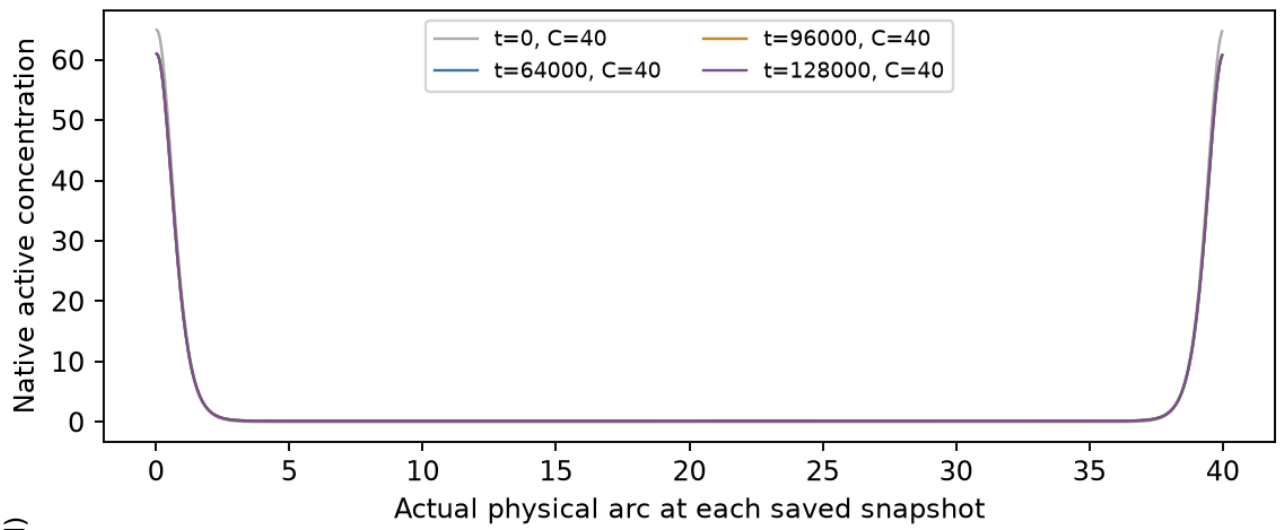


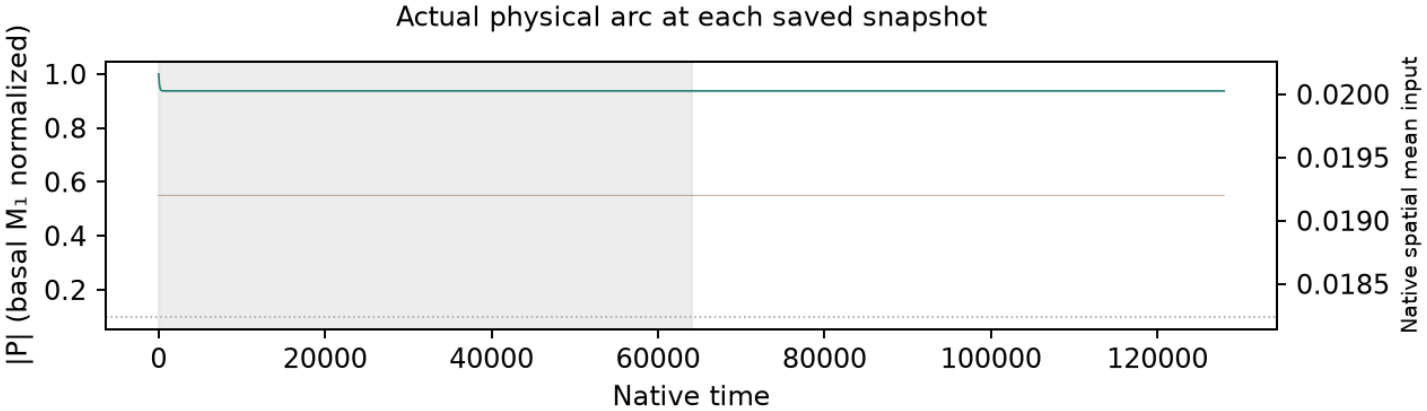


Native concentrations and every retained field frame are plotted without spatial resampling.
First half shaded: excluded from summary selection.
Spring mesh-face interpolation changes only boundary geometry; snapshots use actual saved C(t).
P uses basal M_1 normalization, distinct from instantaneous coherence.
Supplemental selection and controls; no main example is chosen.
Native NPZ/status links remain local/HPC data.

S11 · Goryachev · size label 40 · f=0.003 · noise
context E4_long · σ=1 · horizon=128000 · n=12 independent noisy realizations


Summary-feature medoid · seed 202610192110308
nonforced condition · profile cadence 5

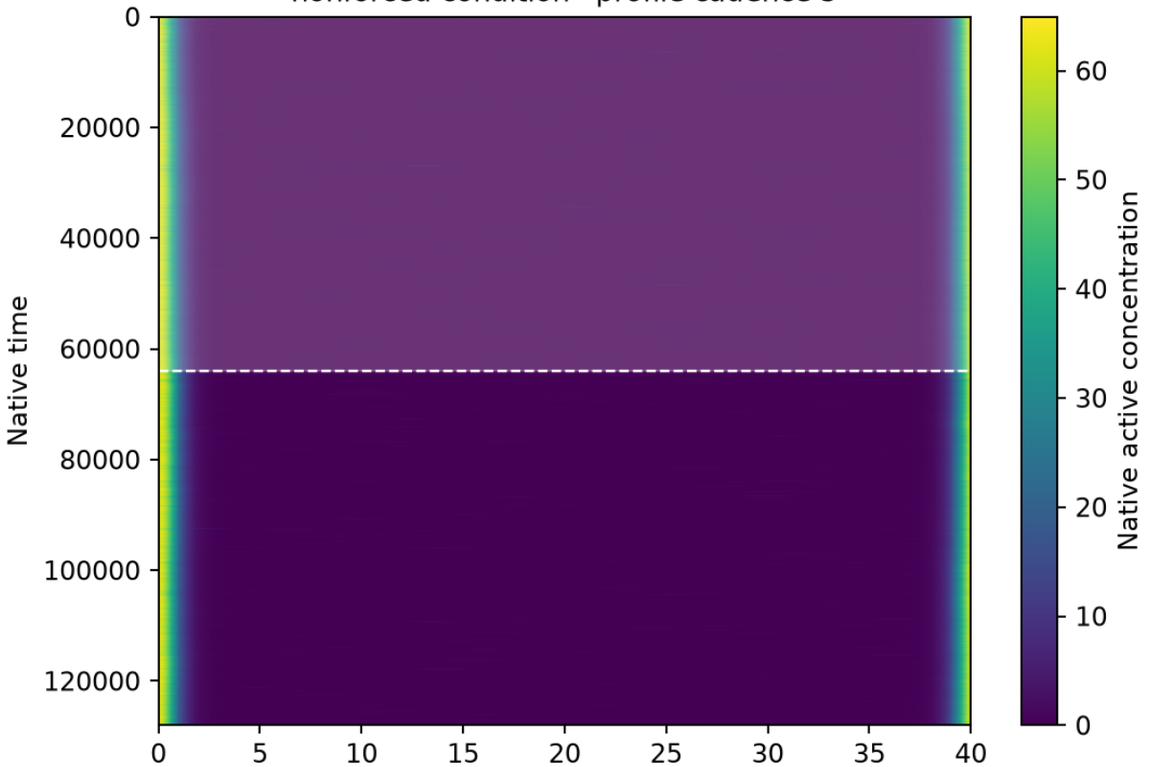


Deterministic distinct random · seed 202610192110309
nonforced condition · profile cadence 5

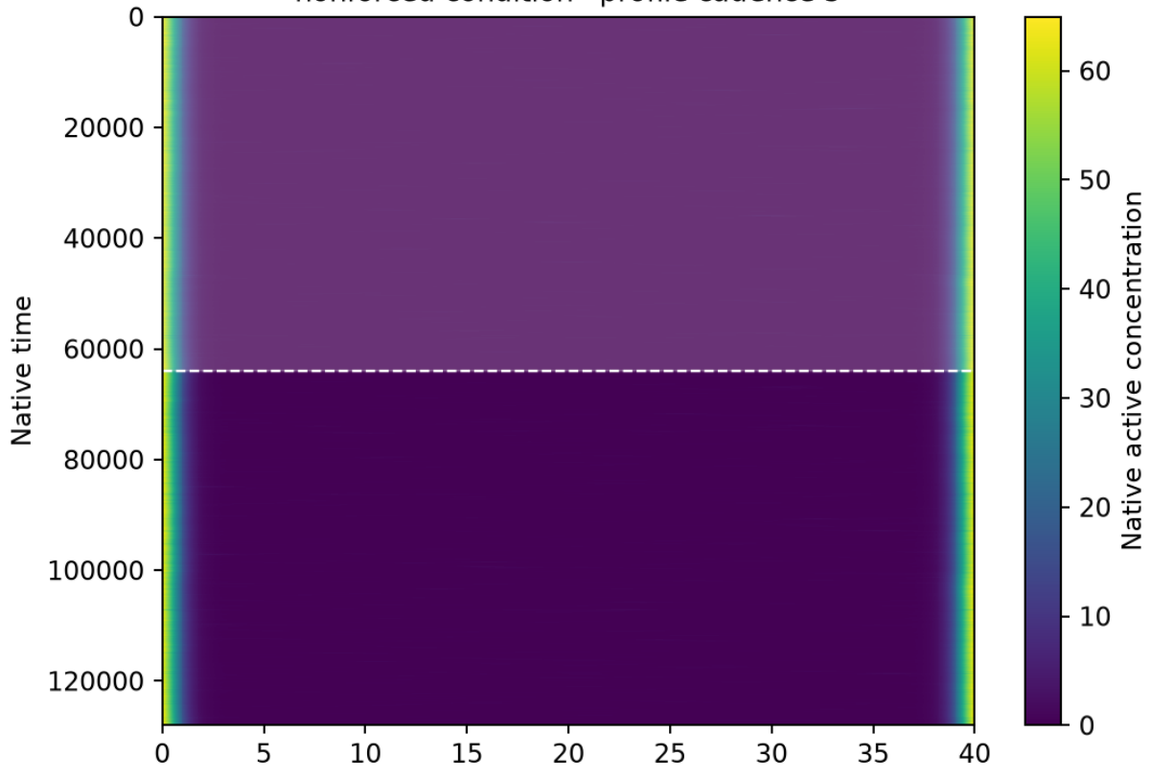



Physical arc from fixed material origin

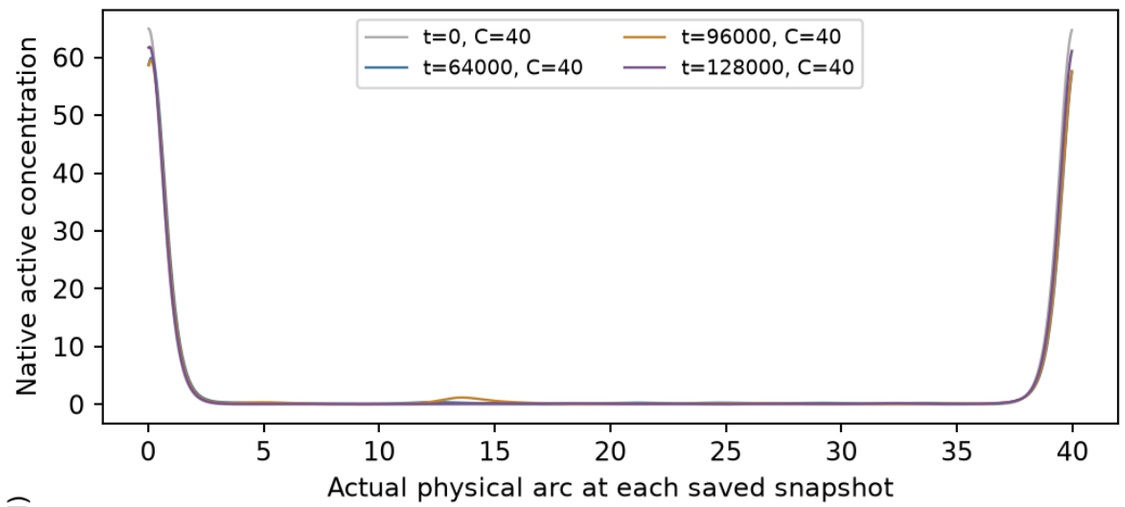

Physical arc from fixed material origin

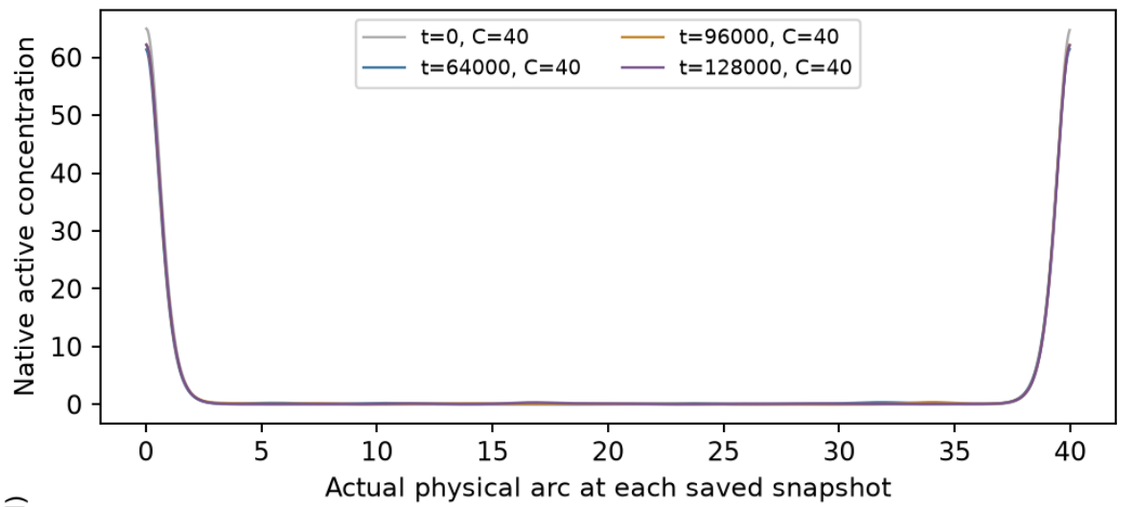


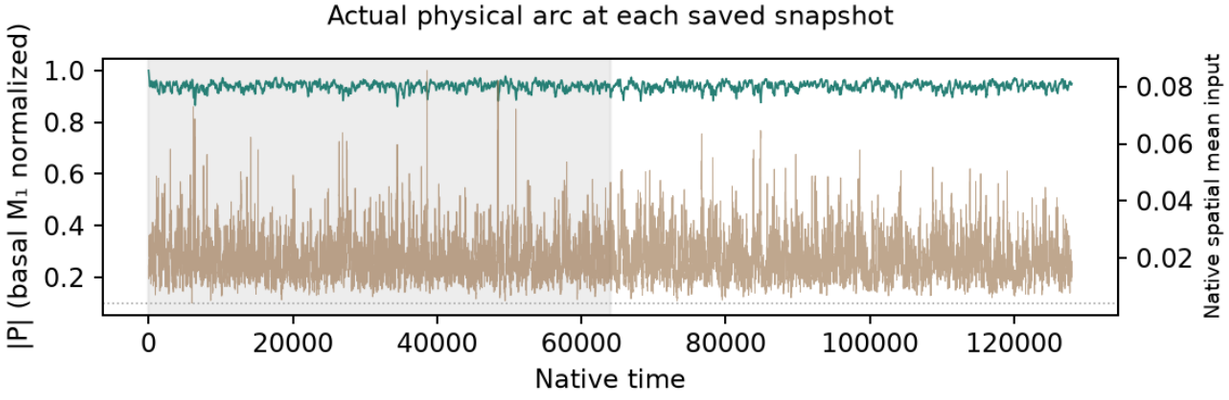


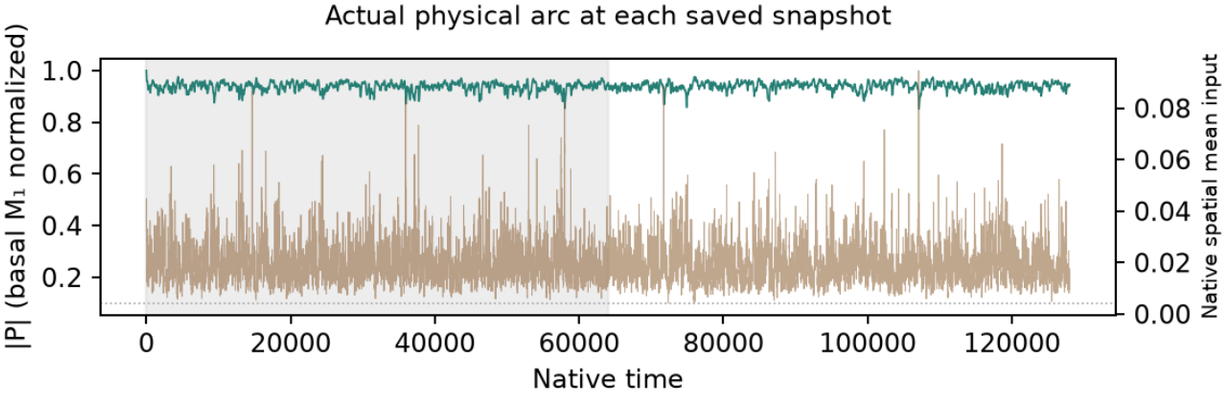


Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Goryachev · size label 40 · f=0.01 · mean
context E4_long · σ=0 · horizon=128000 · 1 deterministic control

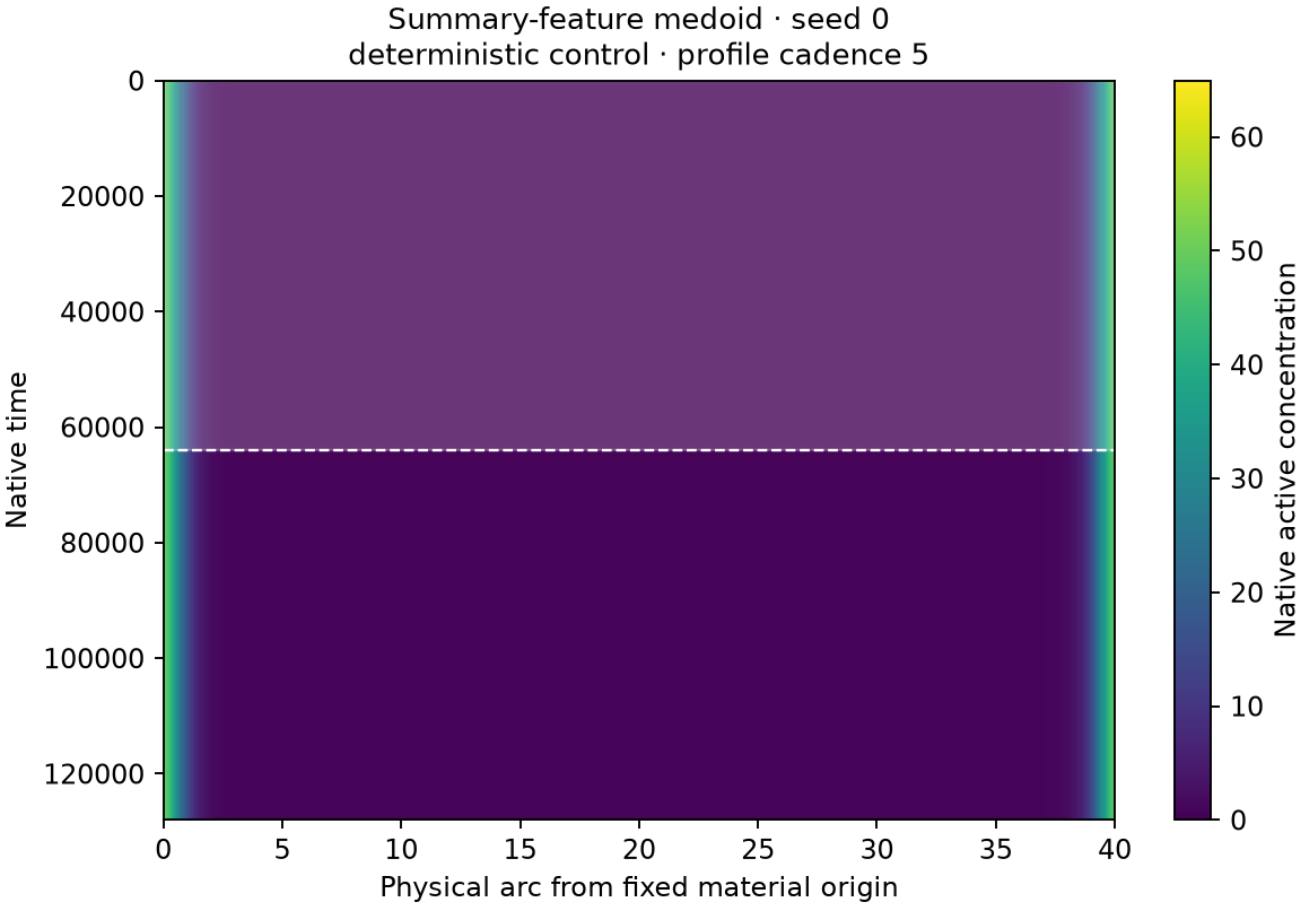

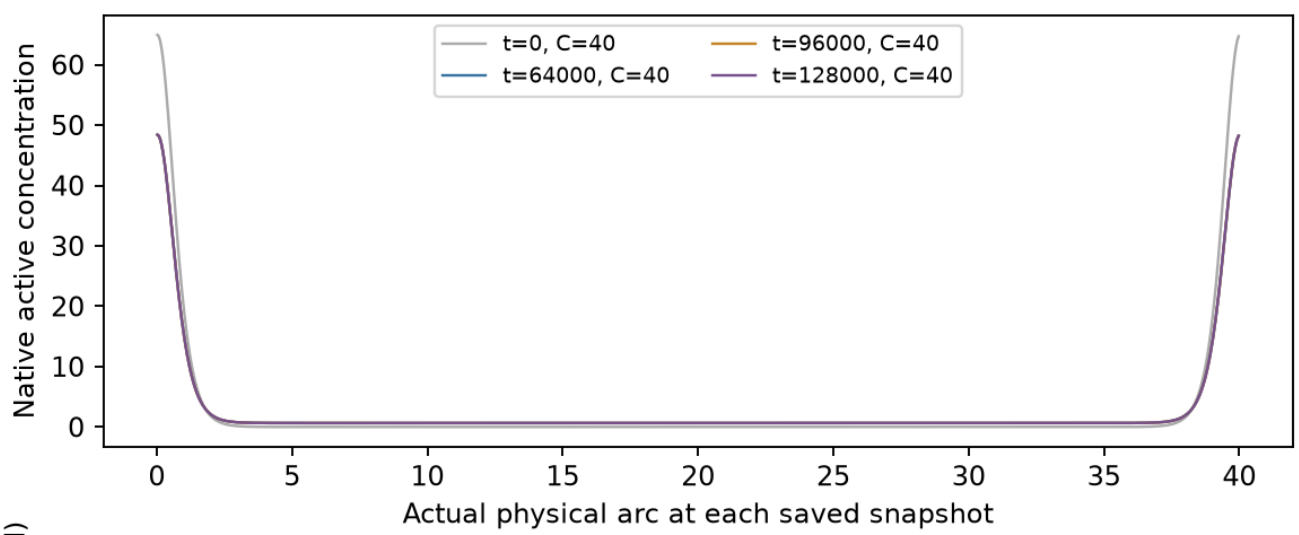


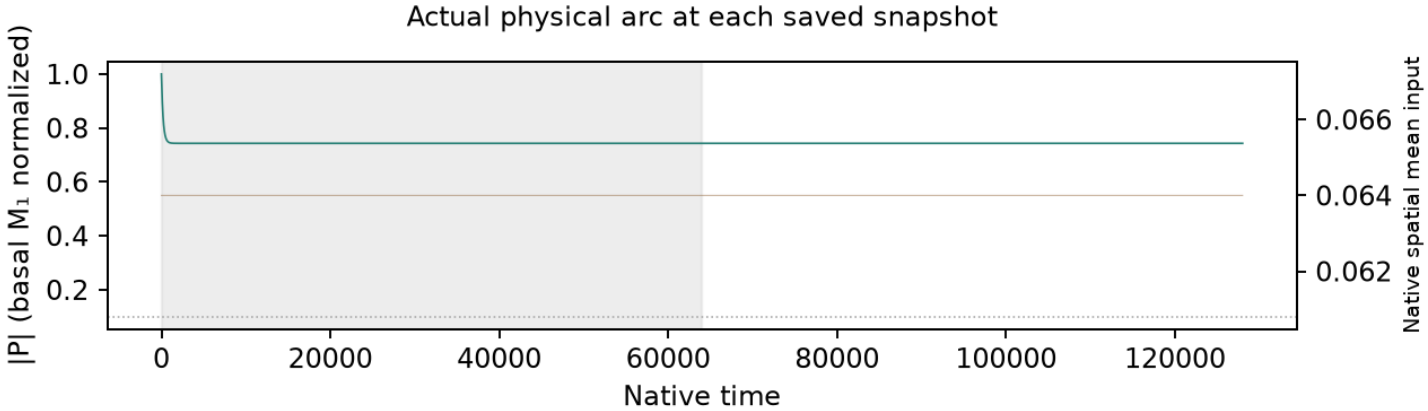


Native concentrations and every retained field frame are plotted without spatial resampling.
First half shaded: excluded from summary selection.
Spring mesh-face interpolation changes only boundary geometry; snapshots use actual saved C(t).
P uses basal M_1 normalization, distinct from instantaneous coherence.
Supplemental selection and controls; no main example is chosen.
Native NPZ/status links remain local/HPC data.

S11 · Goryachev · size label 40 · f=0.01 · noise
context E4_long · σ=1 · horizon=128000 · n=12 independent noisy realizations


Summary-feature medoid · seed 202610180110
nonforced condition · profile cadence 5

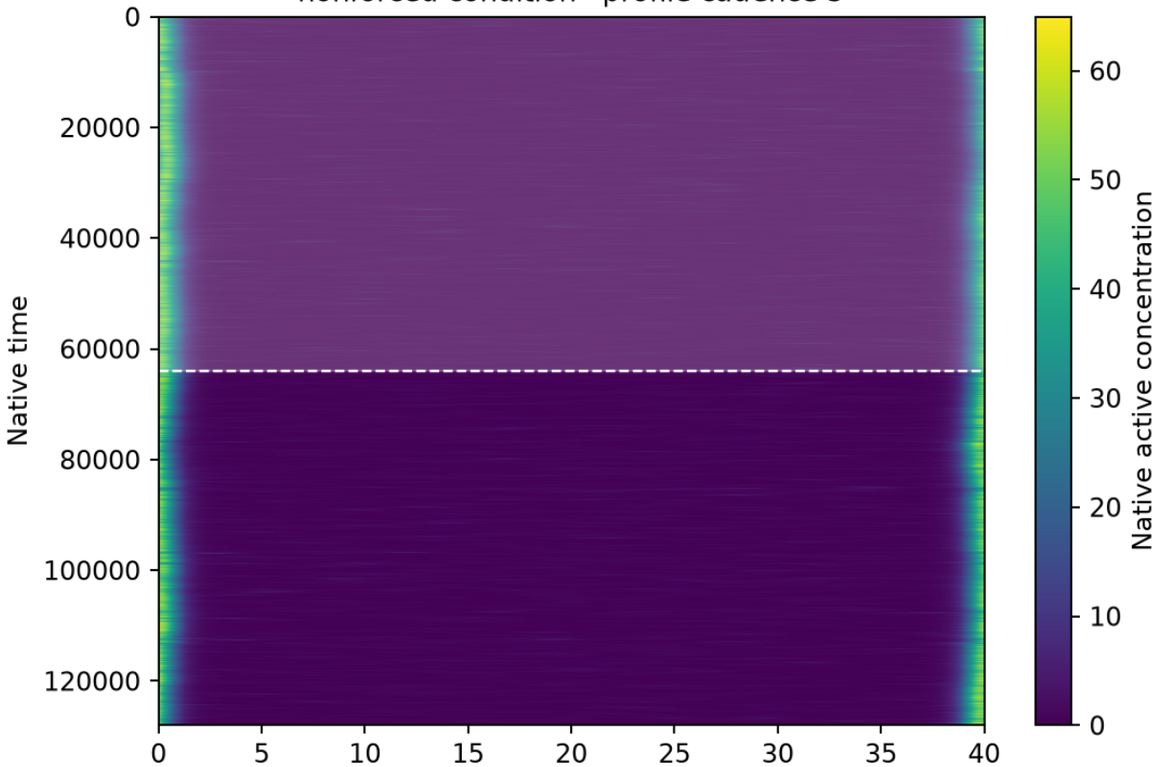


Deterministic distinct random · seed 202610180109
nonforced condition · profile cadence 5

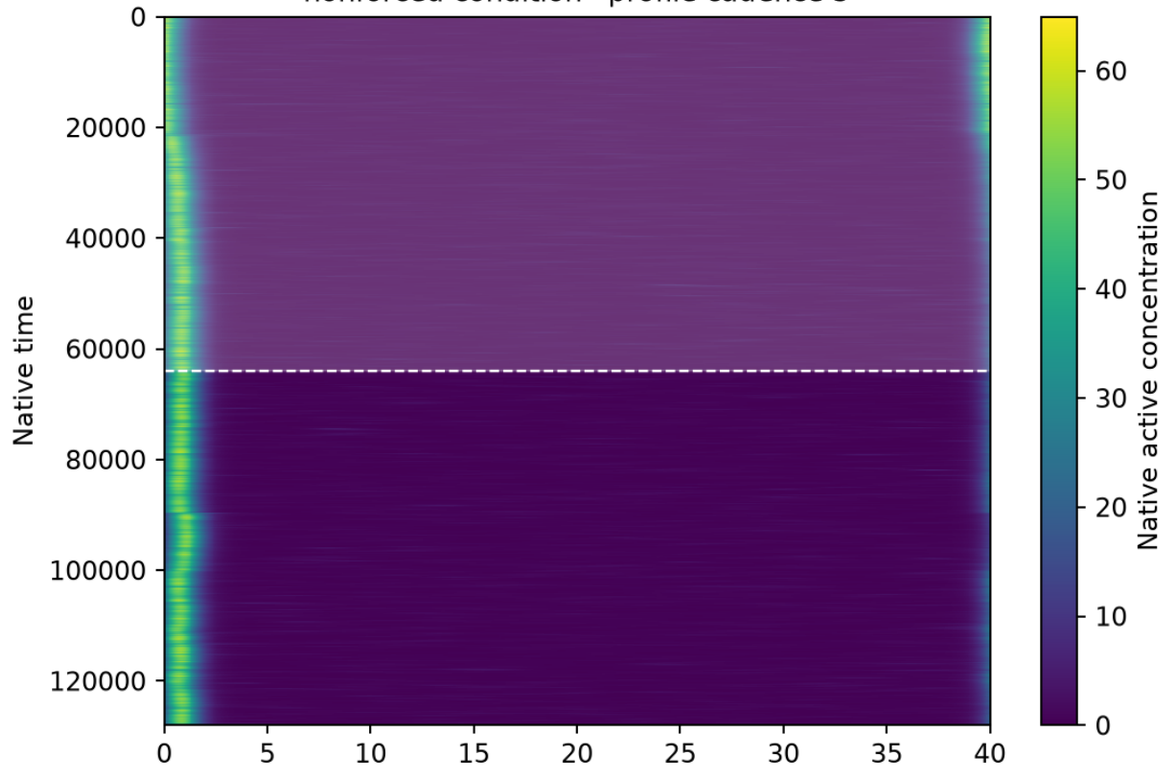



Physical arc from fixed material origin

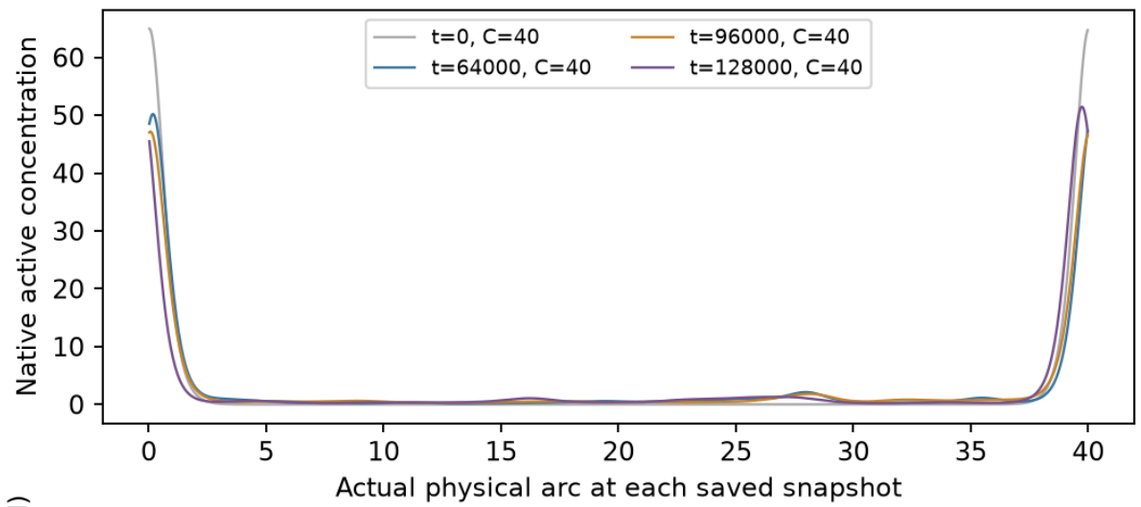

Physical arc from fixed material origin

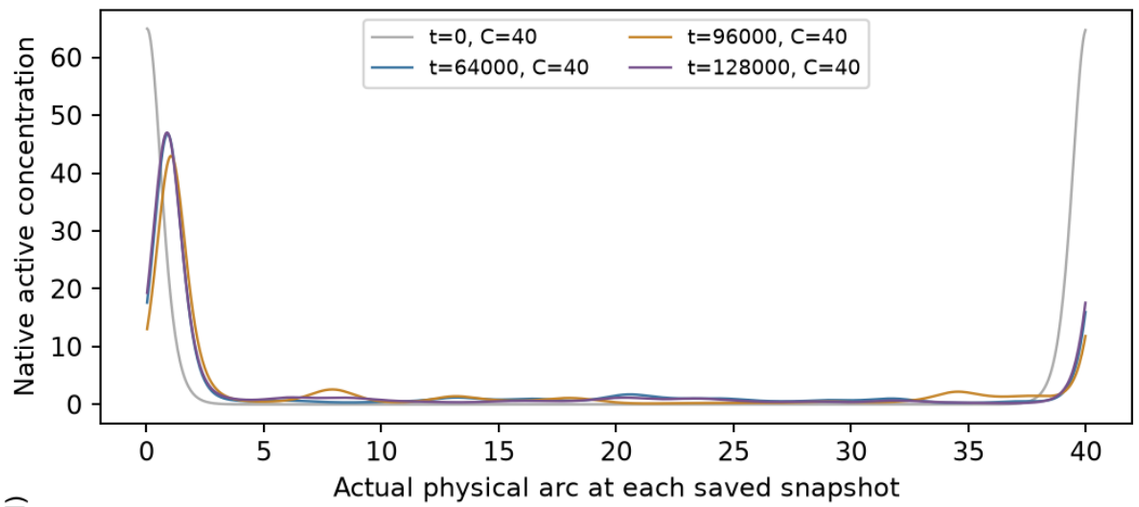


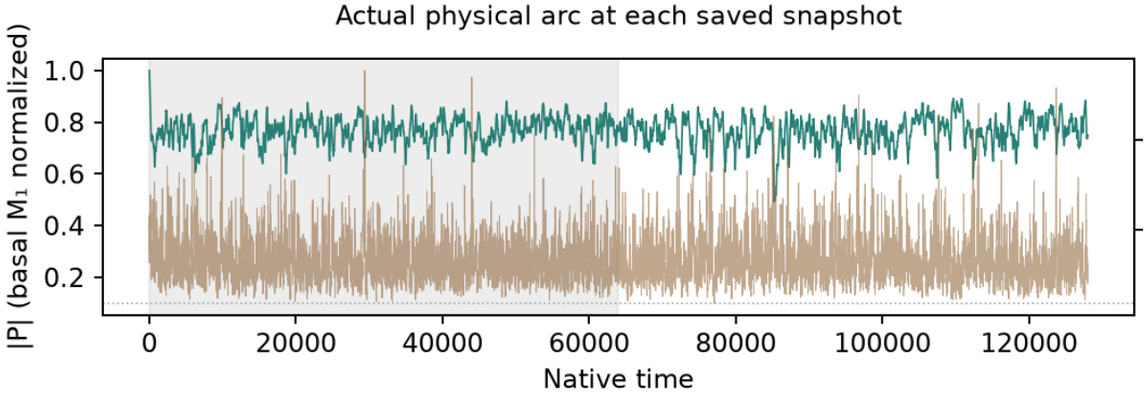


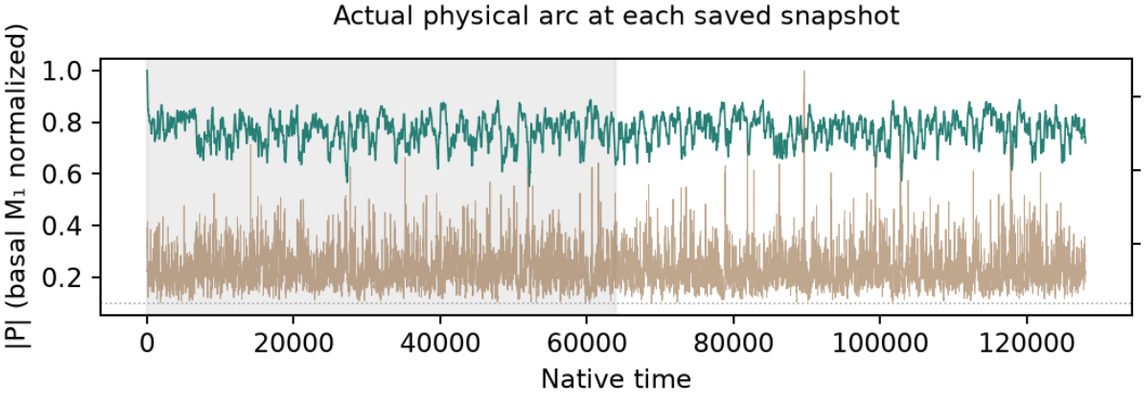


Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Goryachev · size label 40 · f=0.1 · mean
context E4_long · σ=0 · horizon=128000 · 1 deterministic control

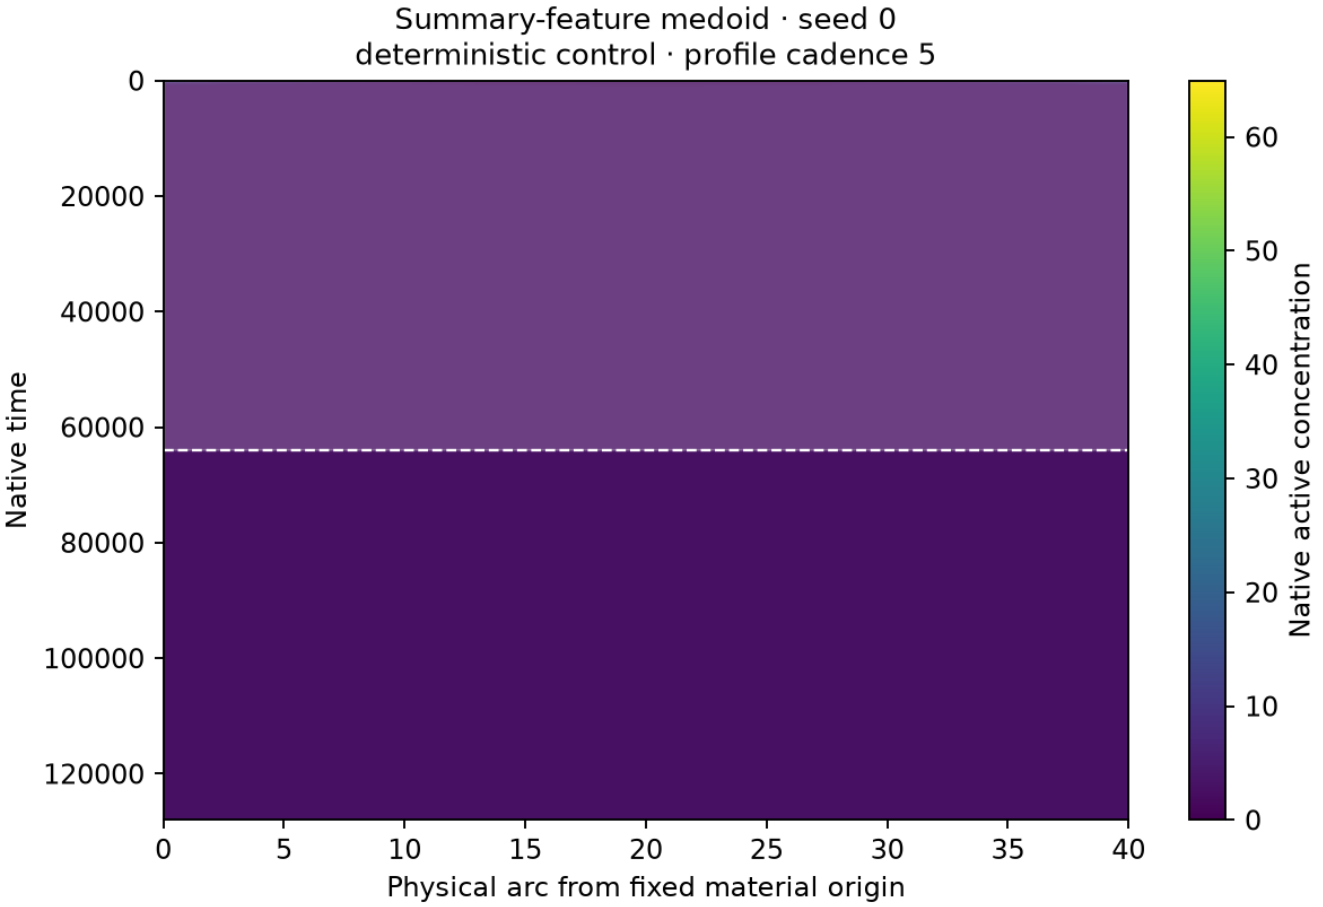


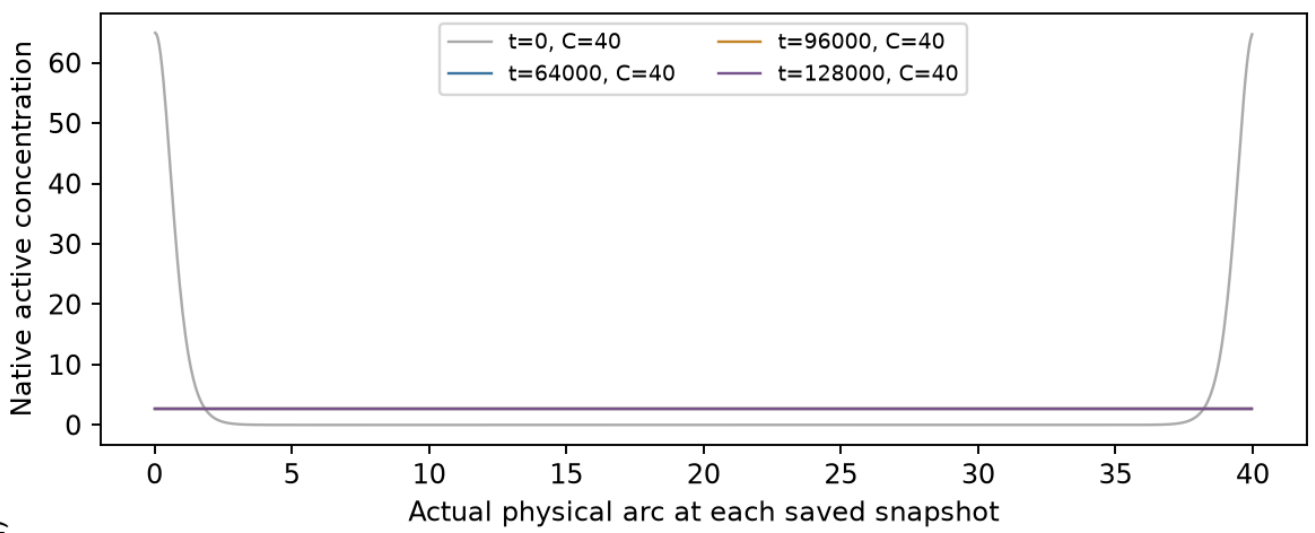


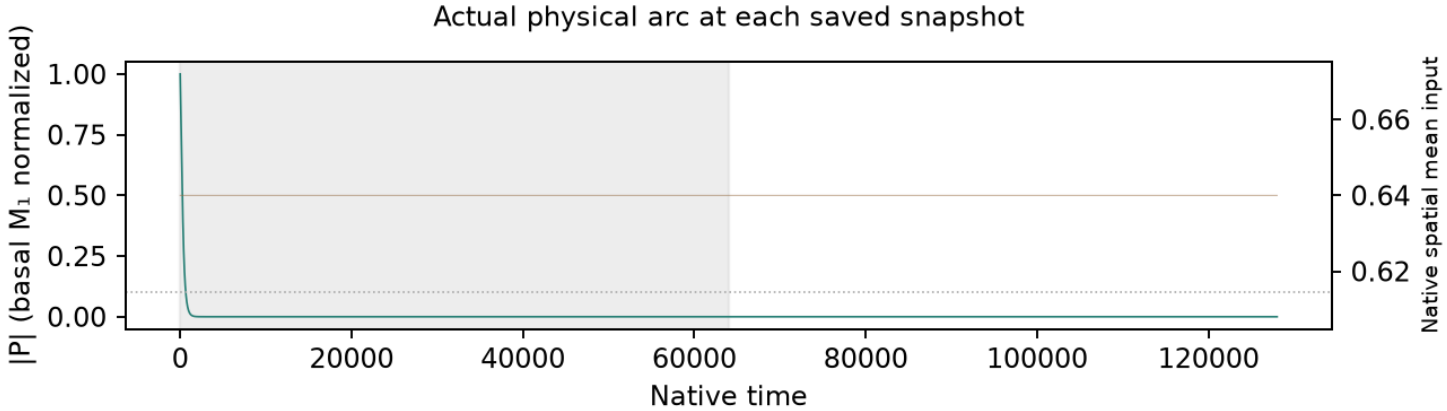

Native concentrations and every retained field frame are plotted without spatial resampling.
First half shaded: excluded from summary selection.
Spring mesh-face interpolation changes only boundary geometry; snapshots use actual saved C(t).
P uses basal M_1 normalization, distinct from instantaneous coherence.
Supplemental selection and controls; no main example is chosen.
Native NPZ/status links remain local/HPC data.


S11 · Goryachev · size label 40 · f=0.1 · noise
context E4_long · σ=1 · horizon=128000 · n=12 independent noisy realizations

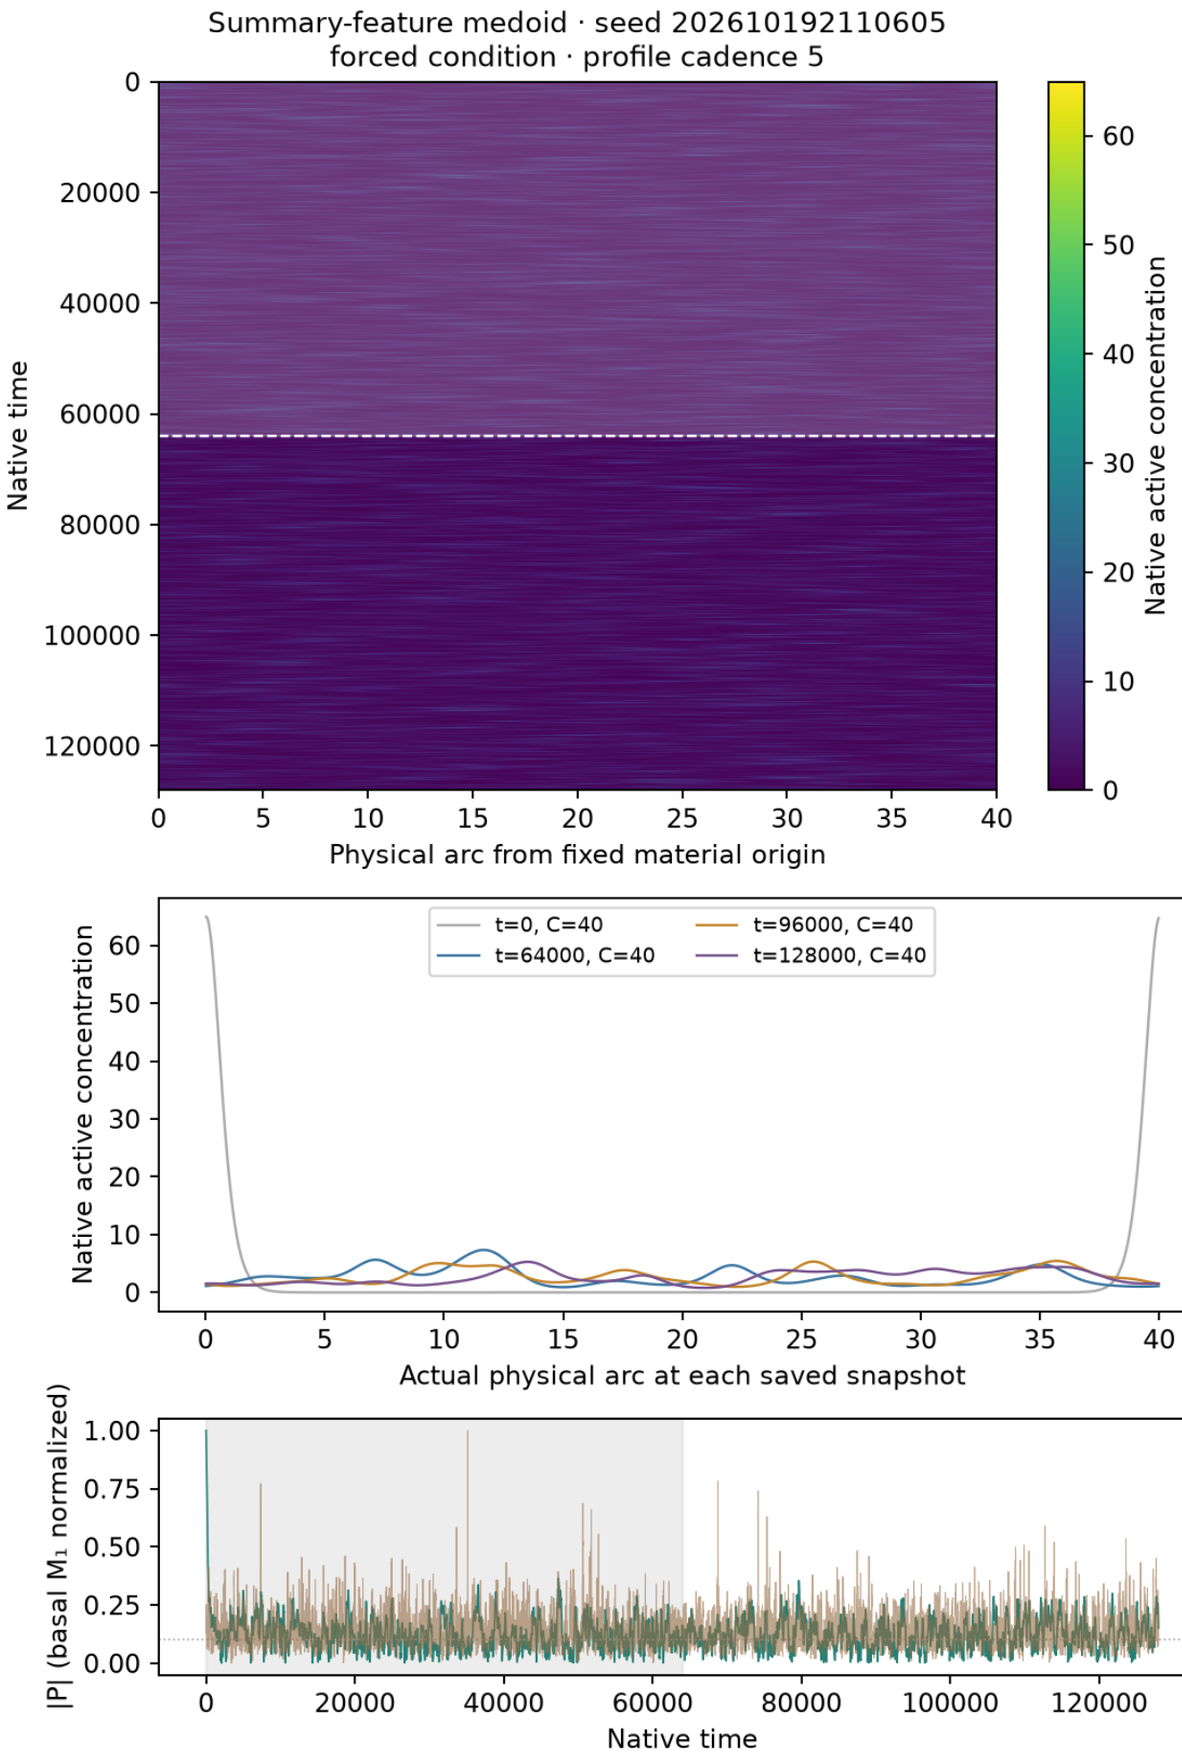


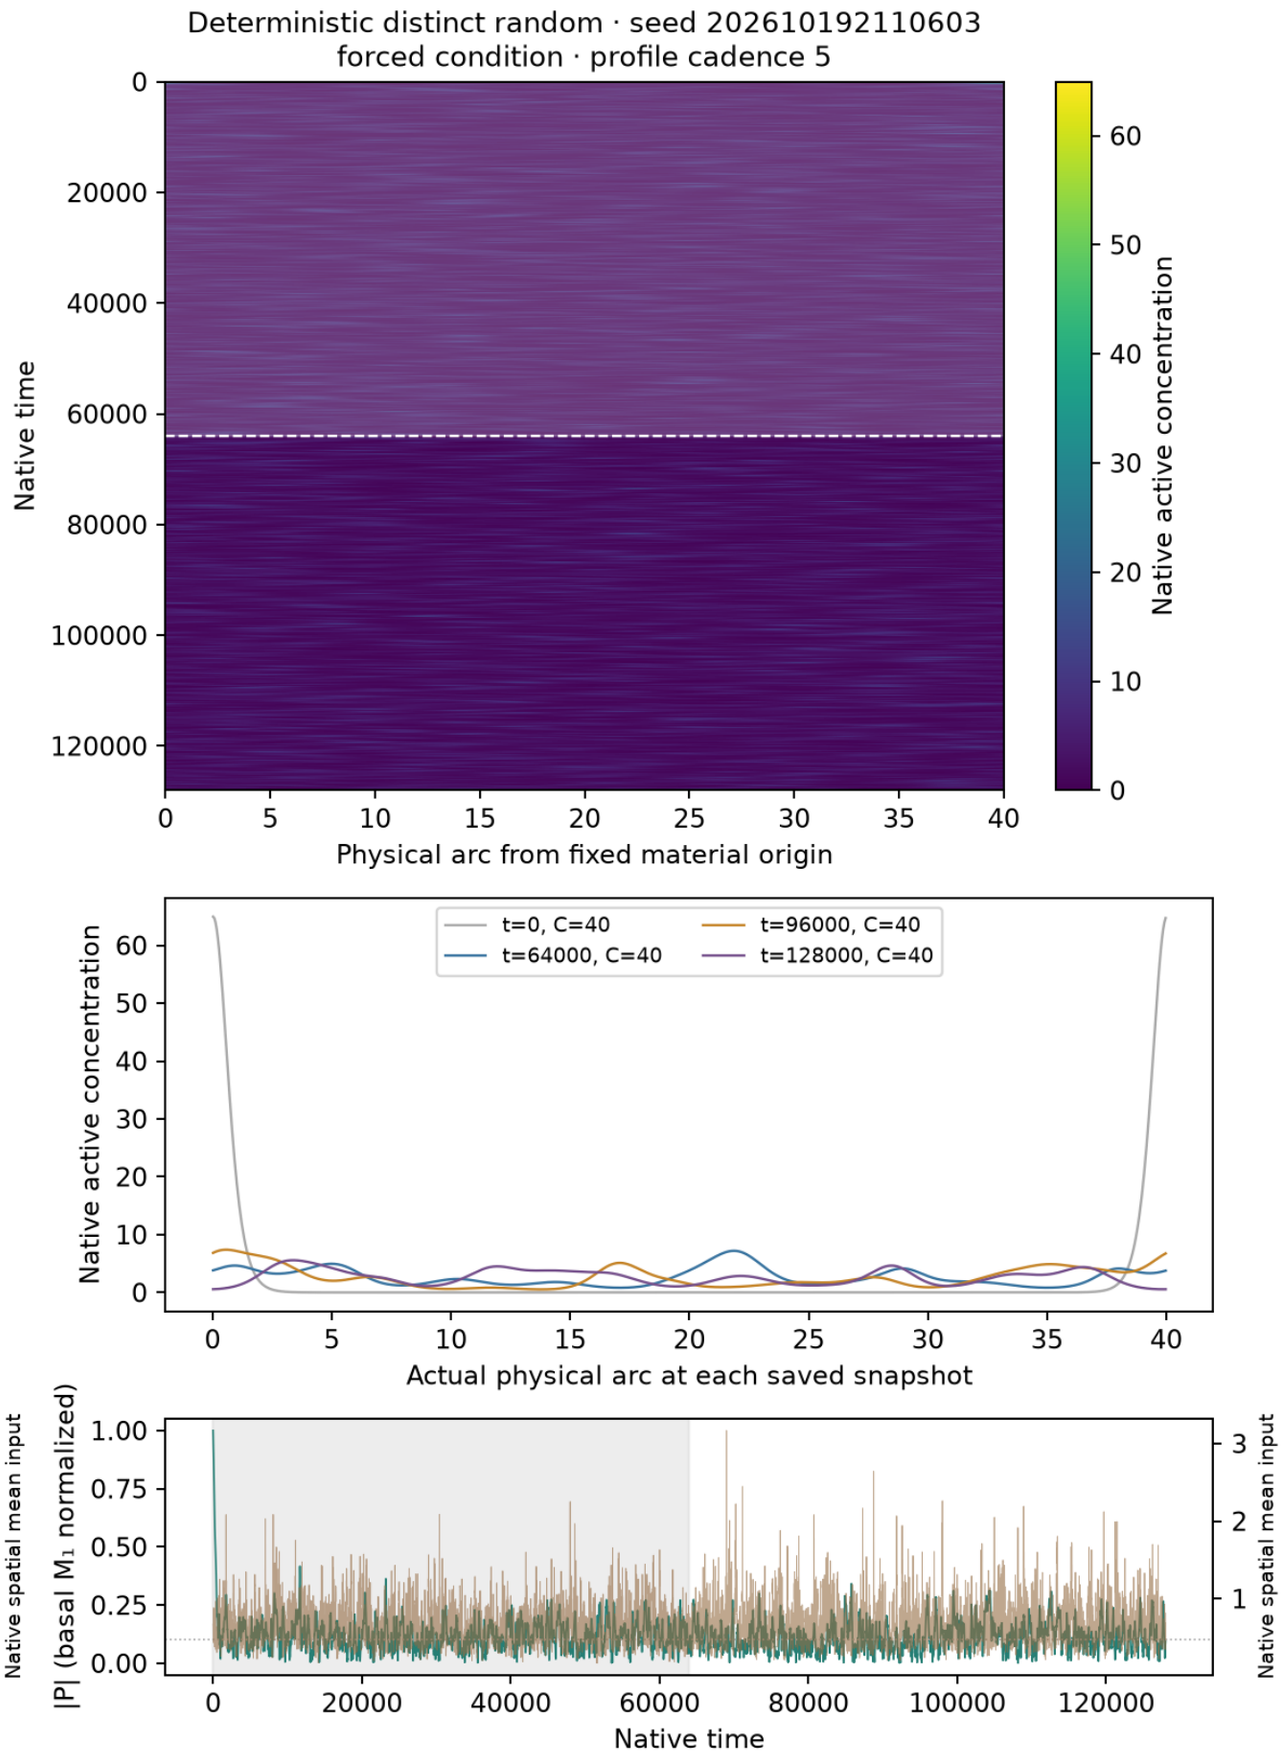


Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Goryachev · size label 60 · f=0 · zero
context E4_long · σ=0 · horizon=128000 · 1 deterministic control

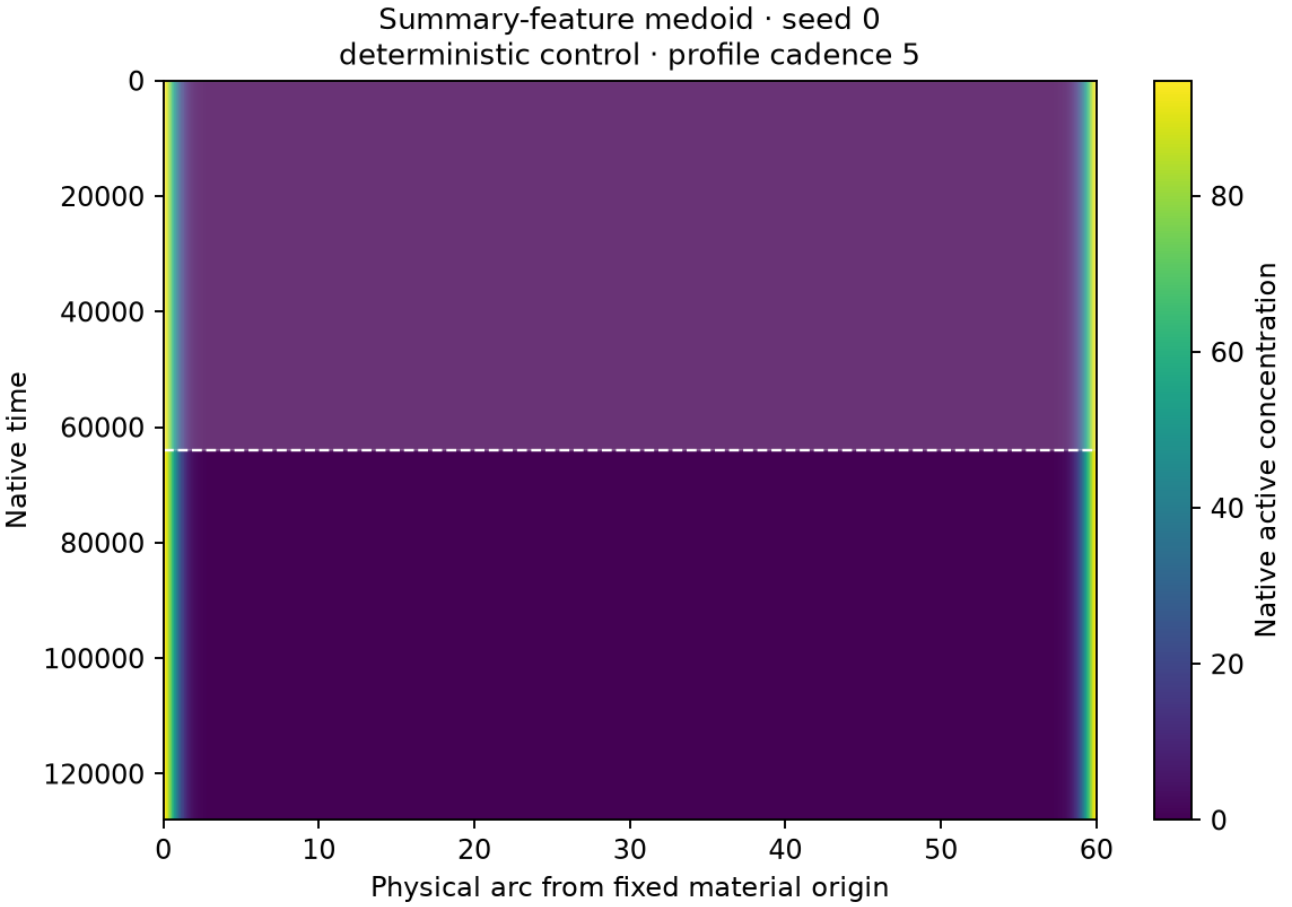


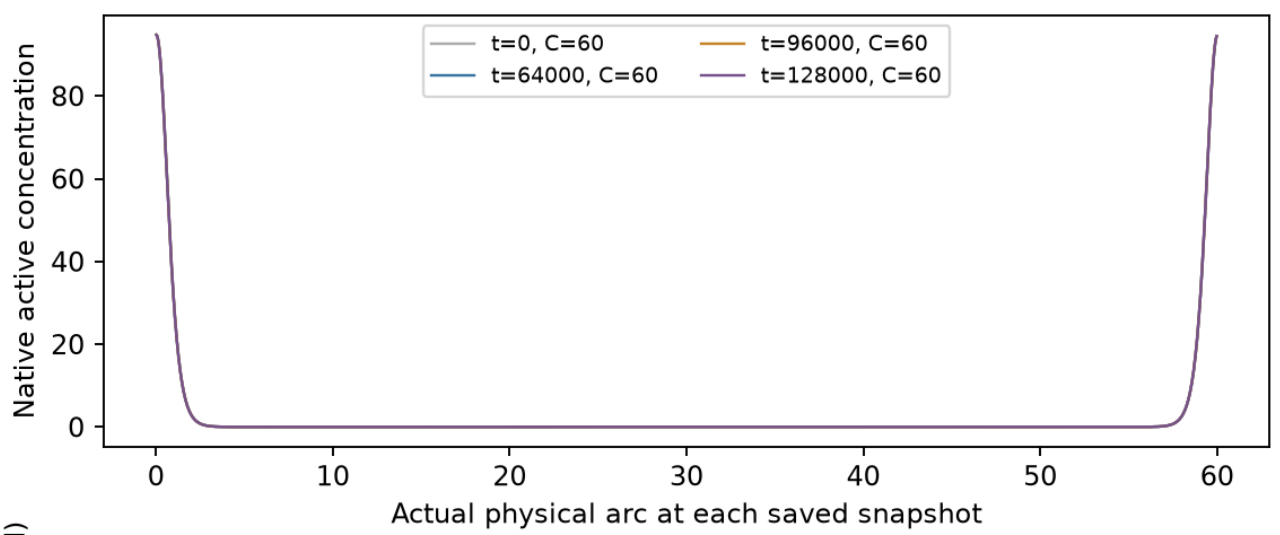


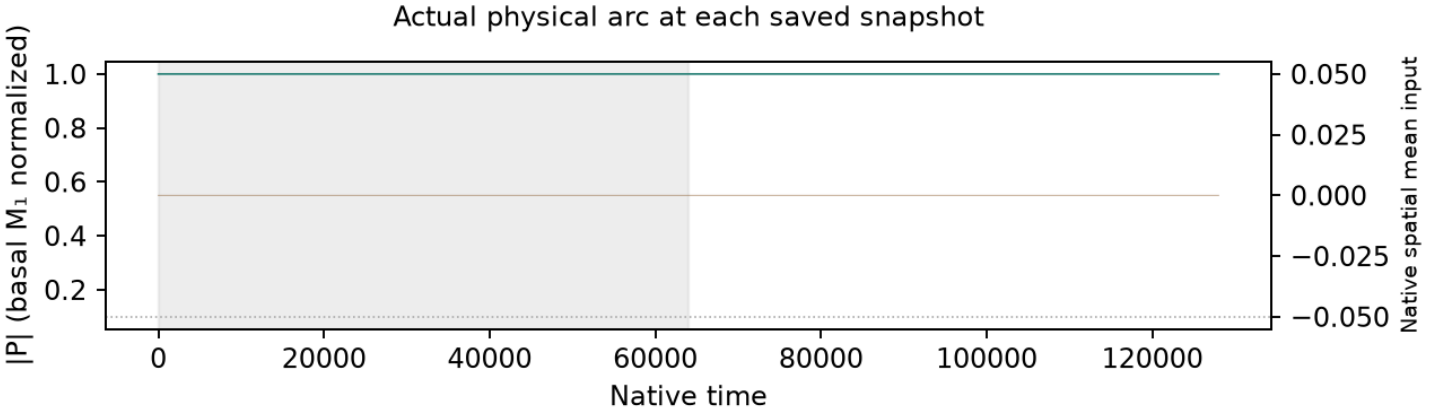


Native concentrations and every retained field frame are plotted without spatial resampling.
First half shaded: excluded from summary selection.
Spring mesh-face interpolation changes only boundary geometry; snapshots use actual saved C(t).
P uses basal M_1 normalization, distinct from instantaneous coherence.
Supplemental selection and controls; no main example is chosen.
Native NPZ/status links remain local/HPC data.

S11 · Goryachev · size label 60 · f=0.0001 · mean
context E4_long · σ=0 · horizon=128000 · 1 deterministic control

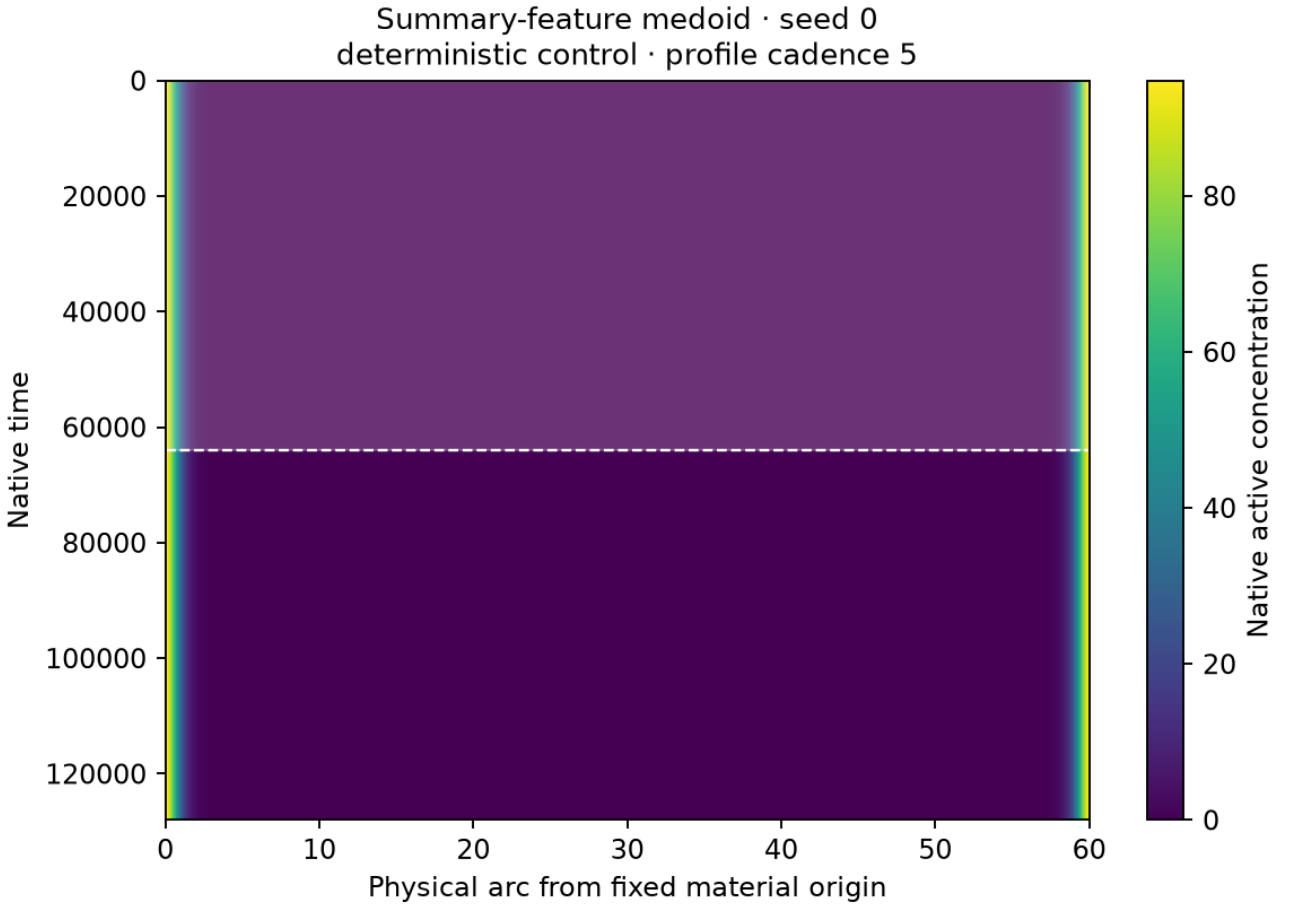


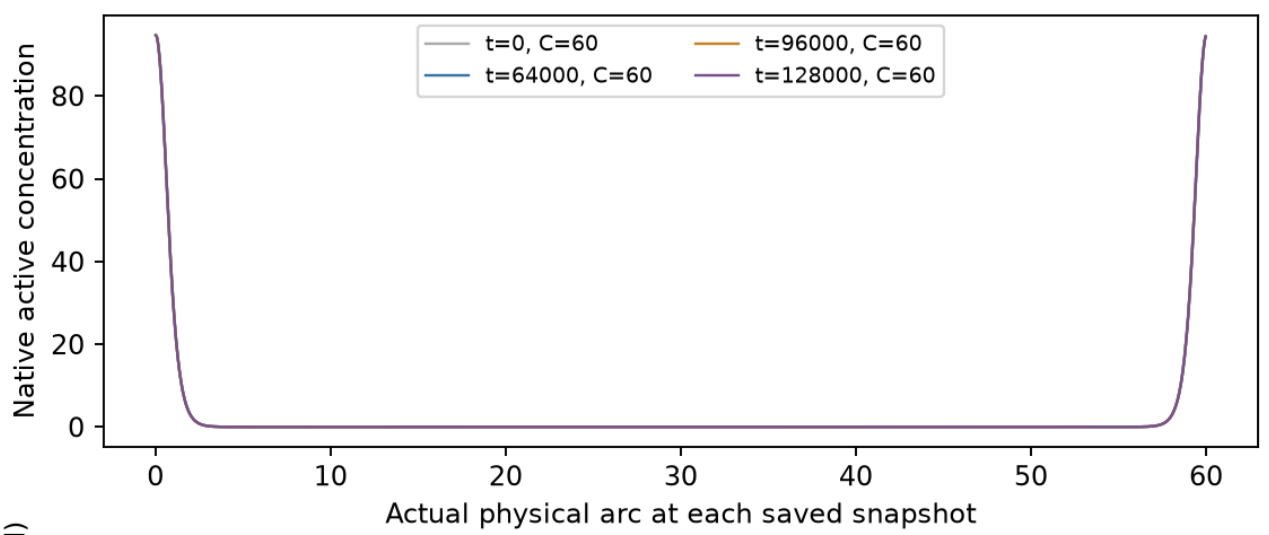

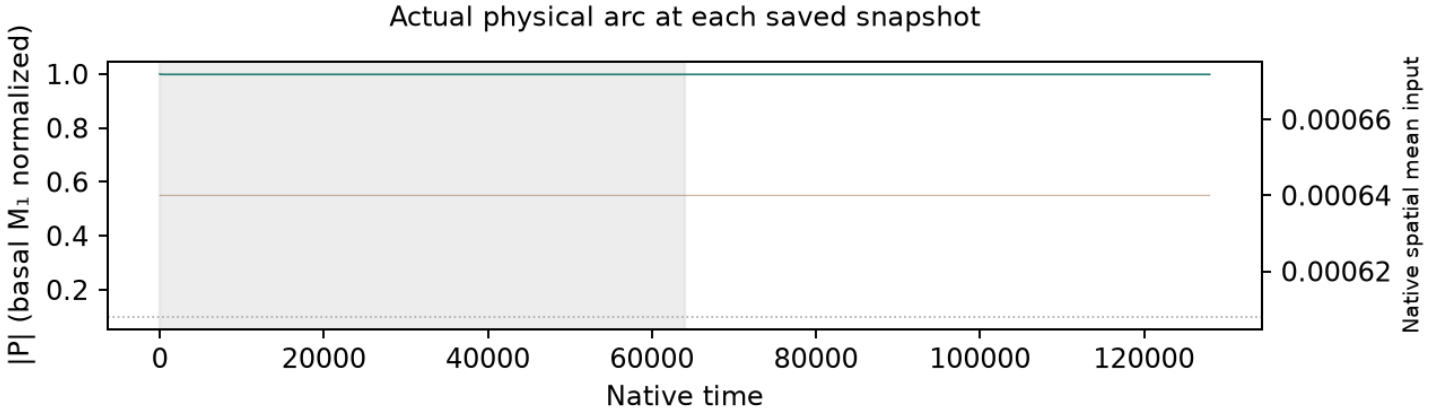


Native concentrations and every retained field frame are plotted without spatial resampling.
First half shaded: excluded from summary selection.
Spring mesh-face interpolation changes only boundary geometry; snapshots use actual saved C(t).
P uses basal M_1 normalization, distinct from instantaneous coherence.
Supplemental selection and controls; no main example is chosen.
Native NPZ/status links remain local/HPC data.


S11 · Goryachev · size label 60 · f=0.0001 · noise
context E4_long · σ=1 · horizon=128000 · n=12 independent noisy realizations

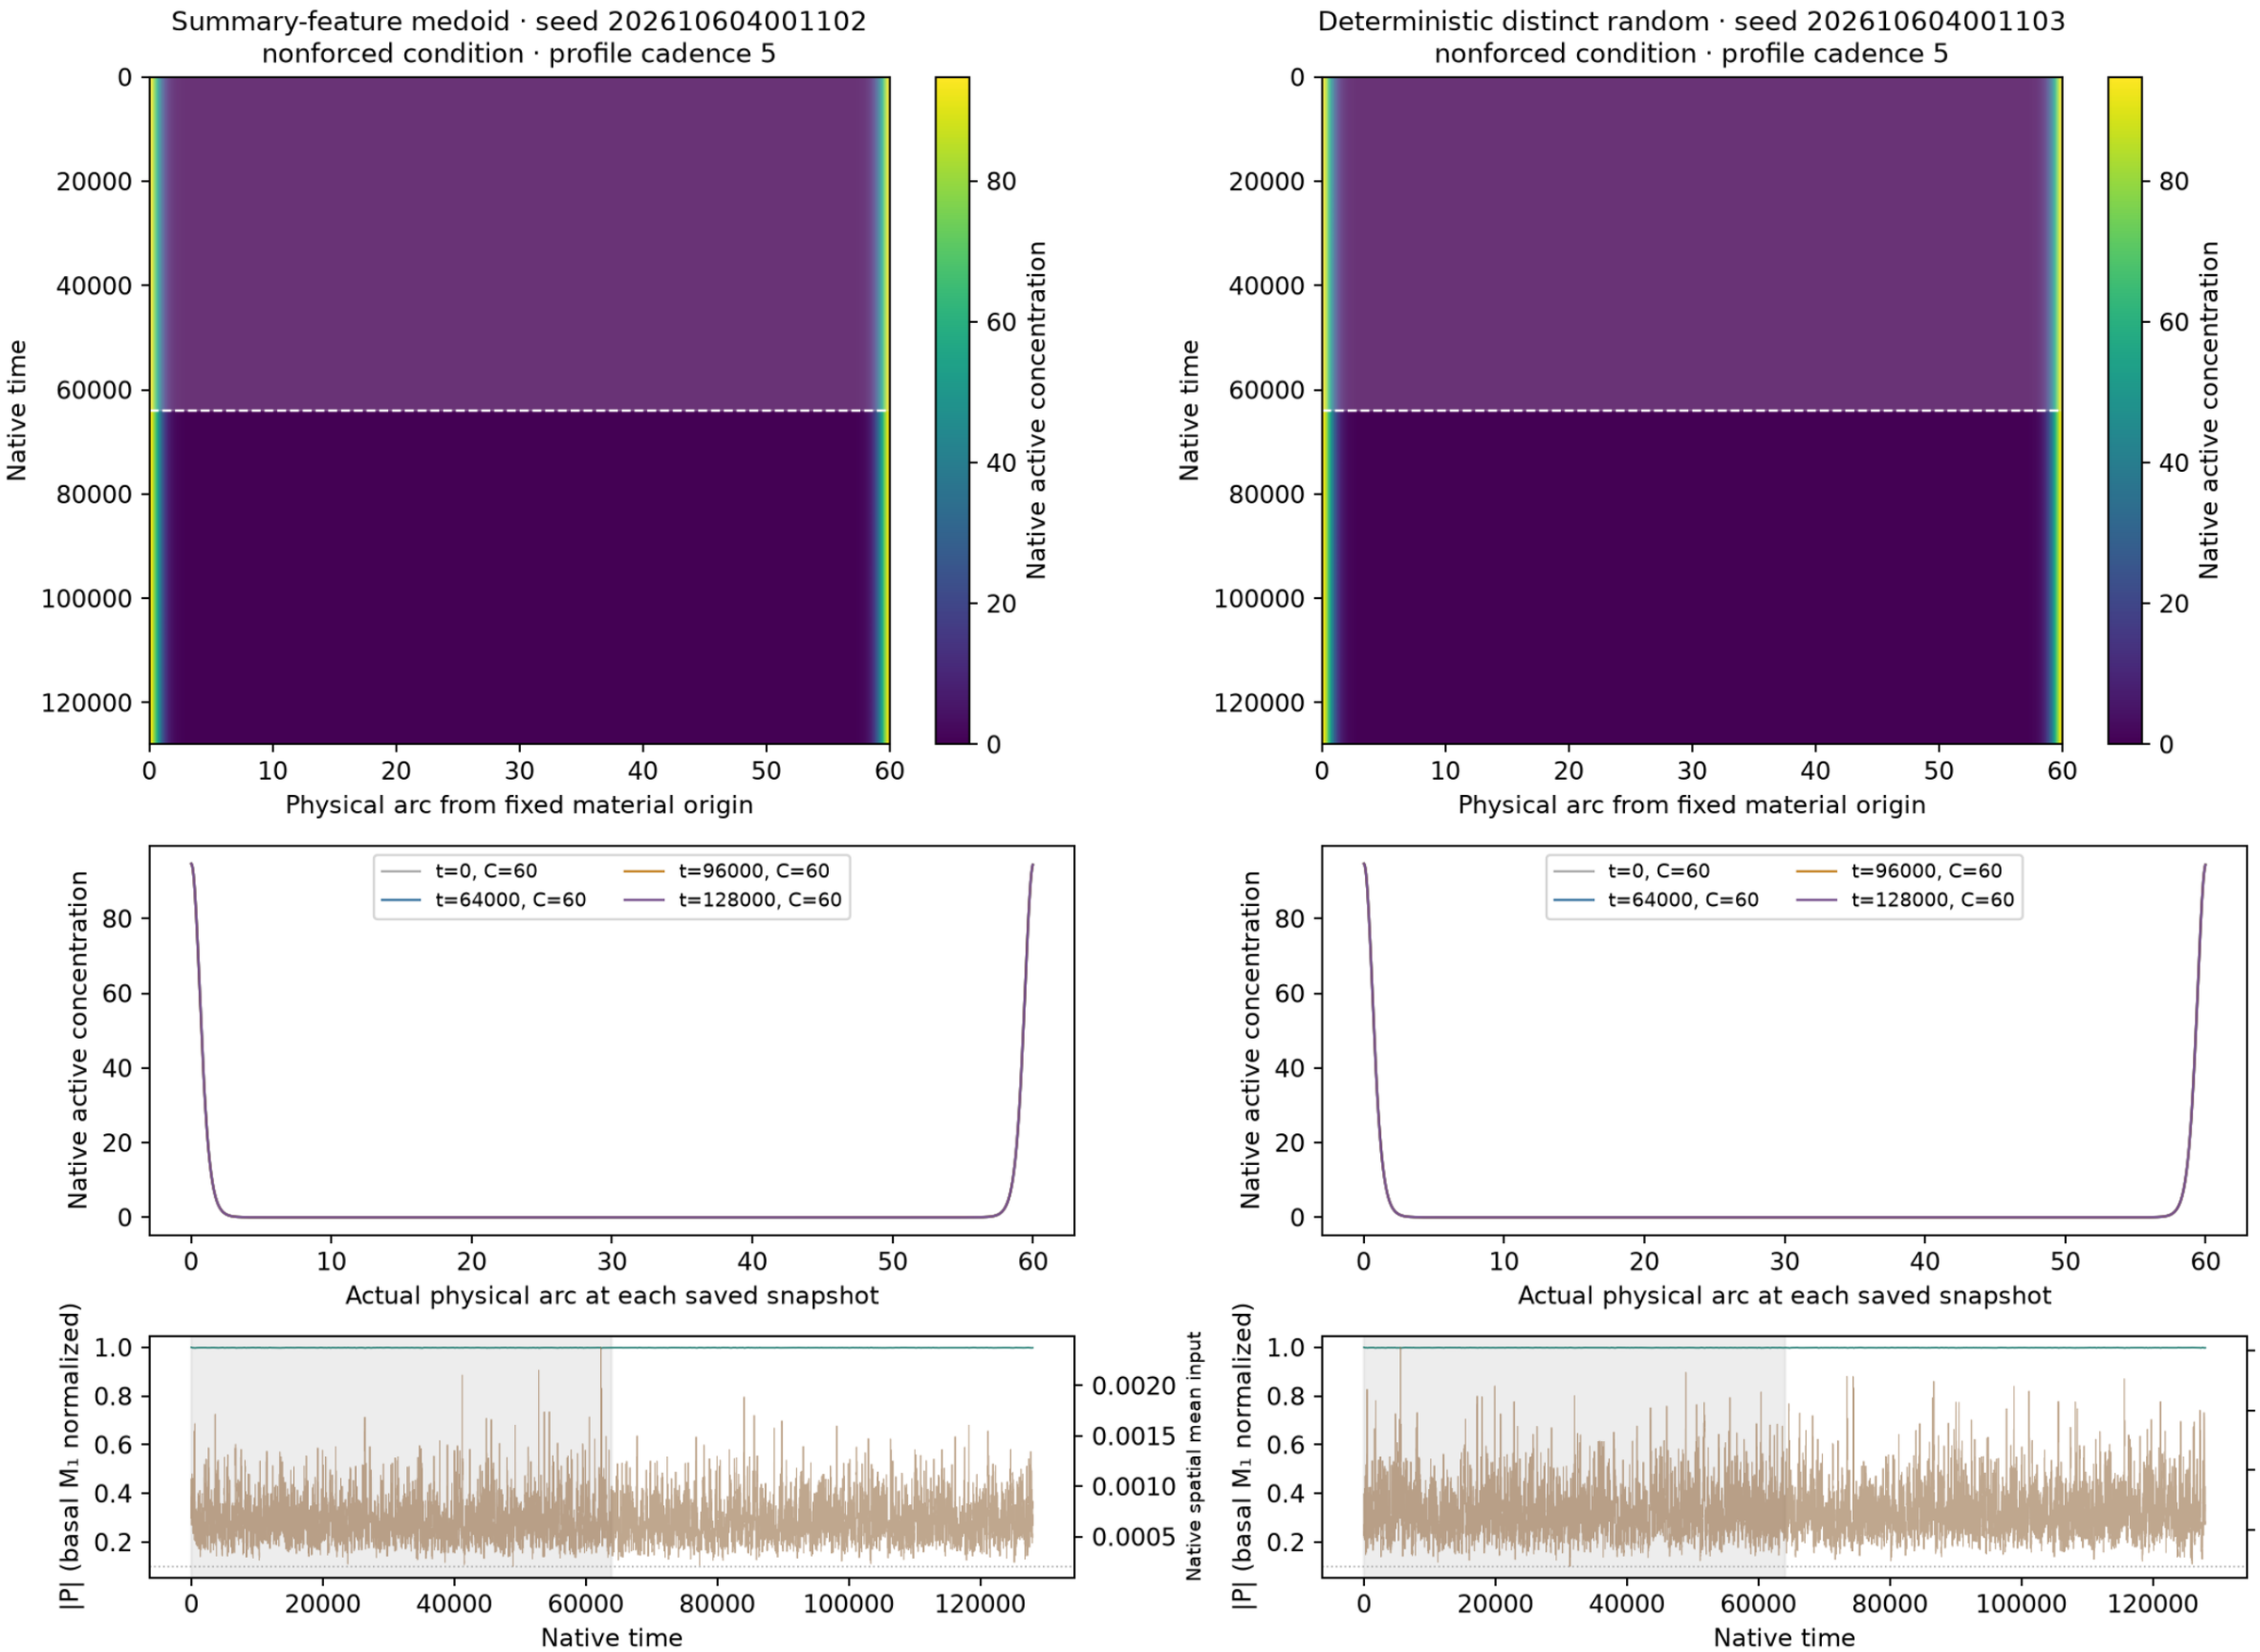


Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Goryachev · size label 60 · f=0.0003 · mean
context E4_long · σ=0 · horizon=128000 · 1 deterministic control

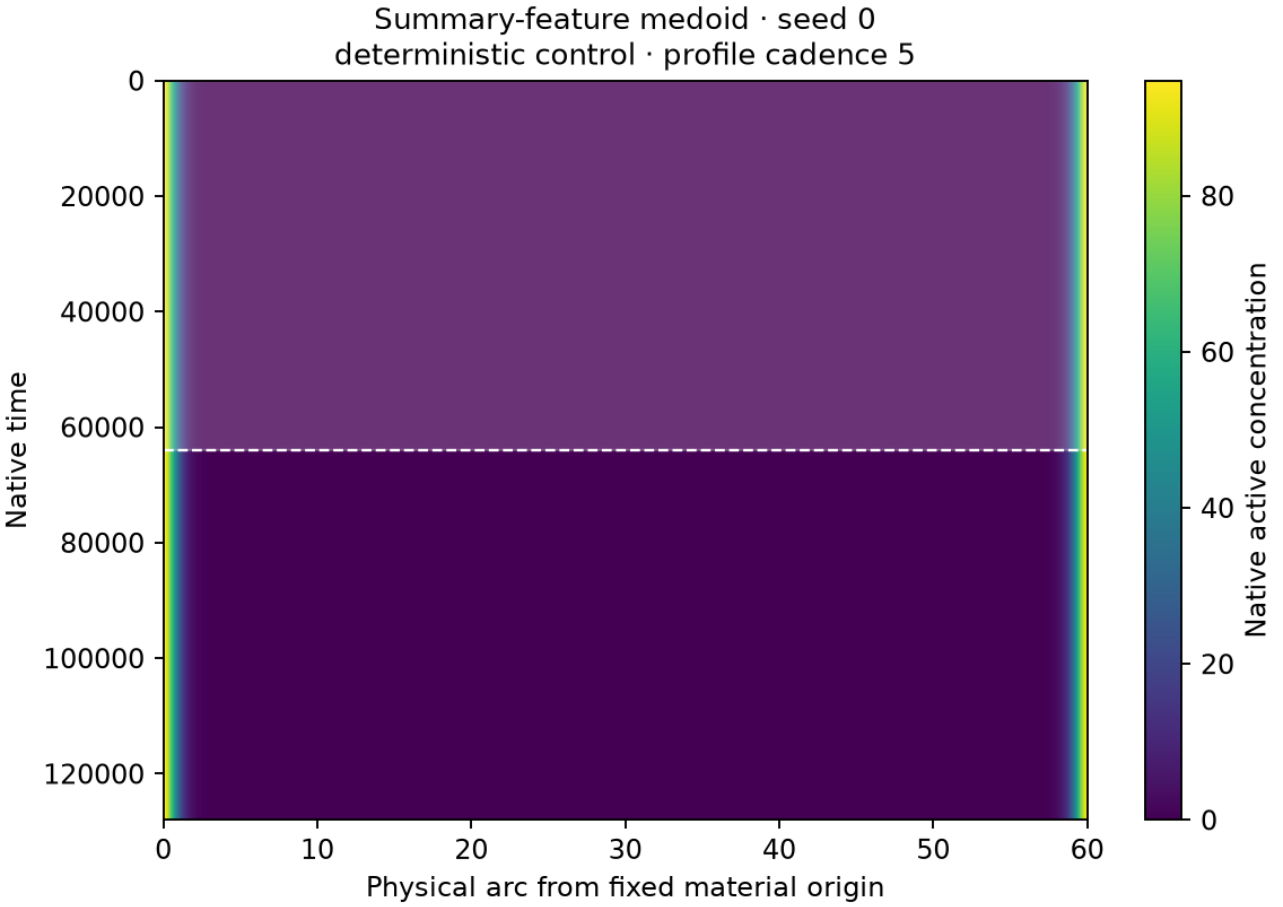


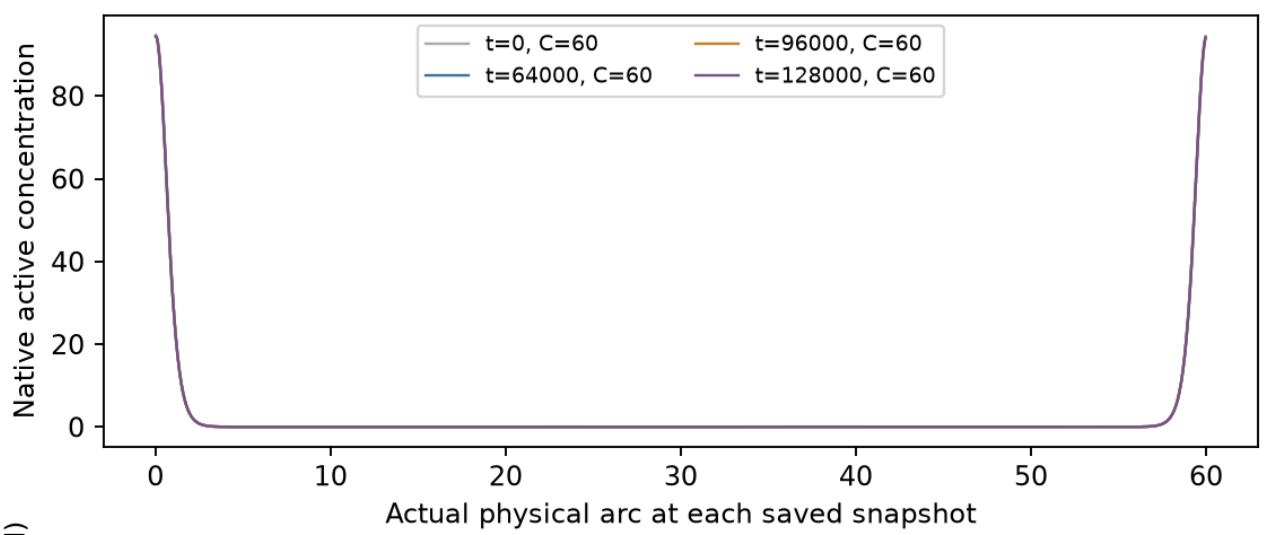


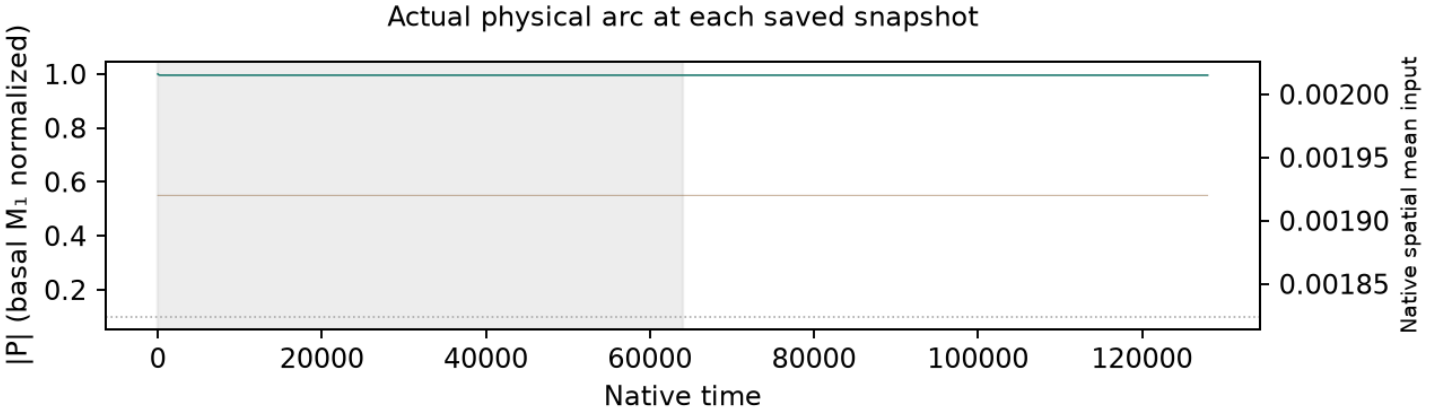

Native concentrations and every retained field frame are plotted without spatial resampling.
First half shaded: excluded from summary selection.
Spring mesh-face interpolation changes only boundary geometry; snapshots use actual saved C(t).
P uses basal M_1 normalization, distinct from instantaneous coherence.
Supplemental selection and controls; no main example is chosen.
Native NPZ/status links remain local/HPC data.


S11 · Goryachev · size label 60 · f=0.0003 · noise
context E4_long · σ=1 · horizon=128000 · n=12 independent noisy realizations

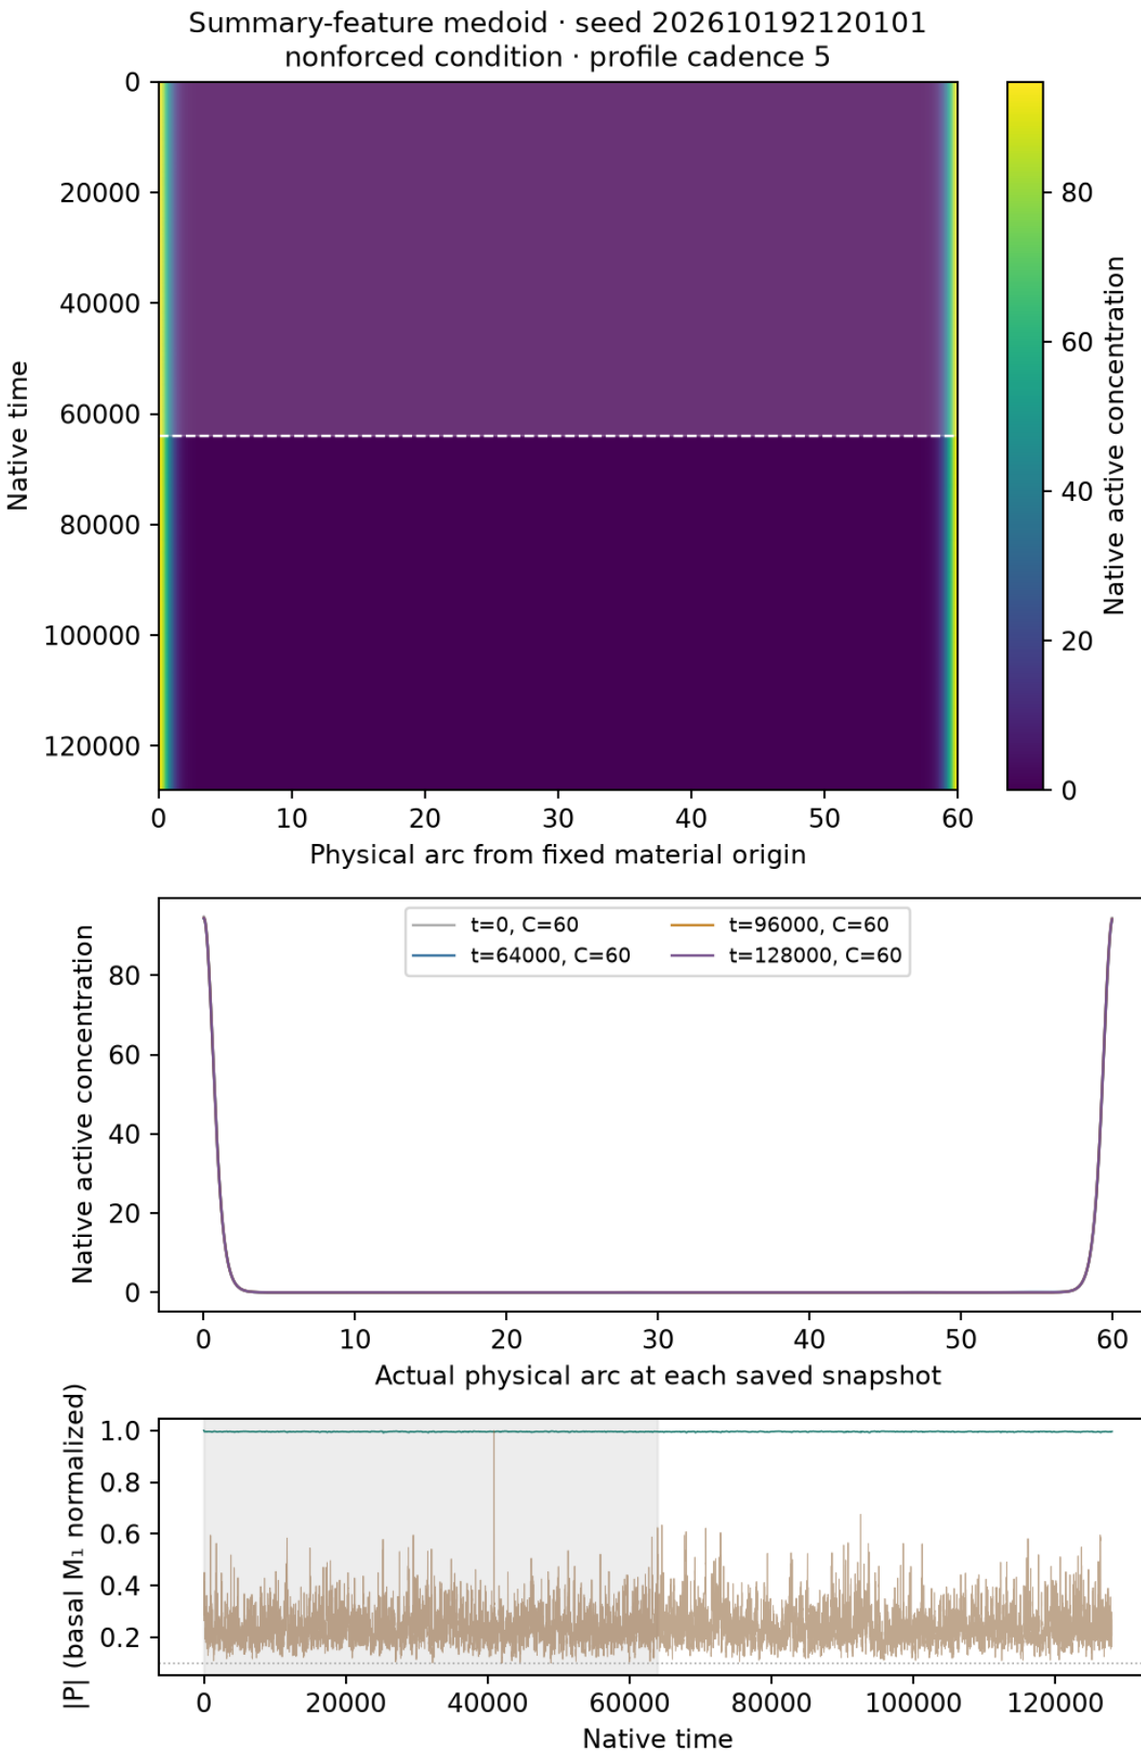


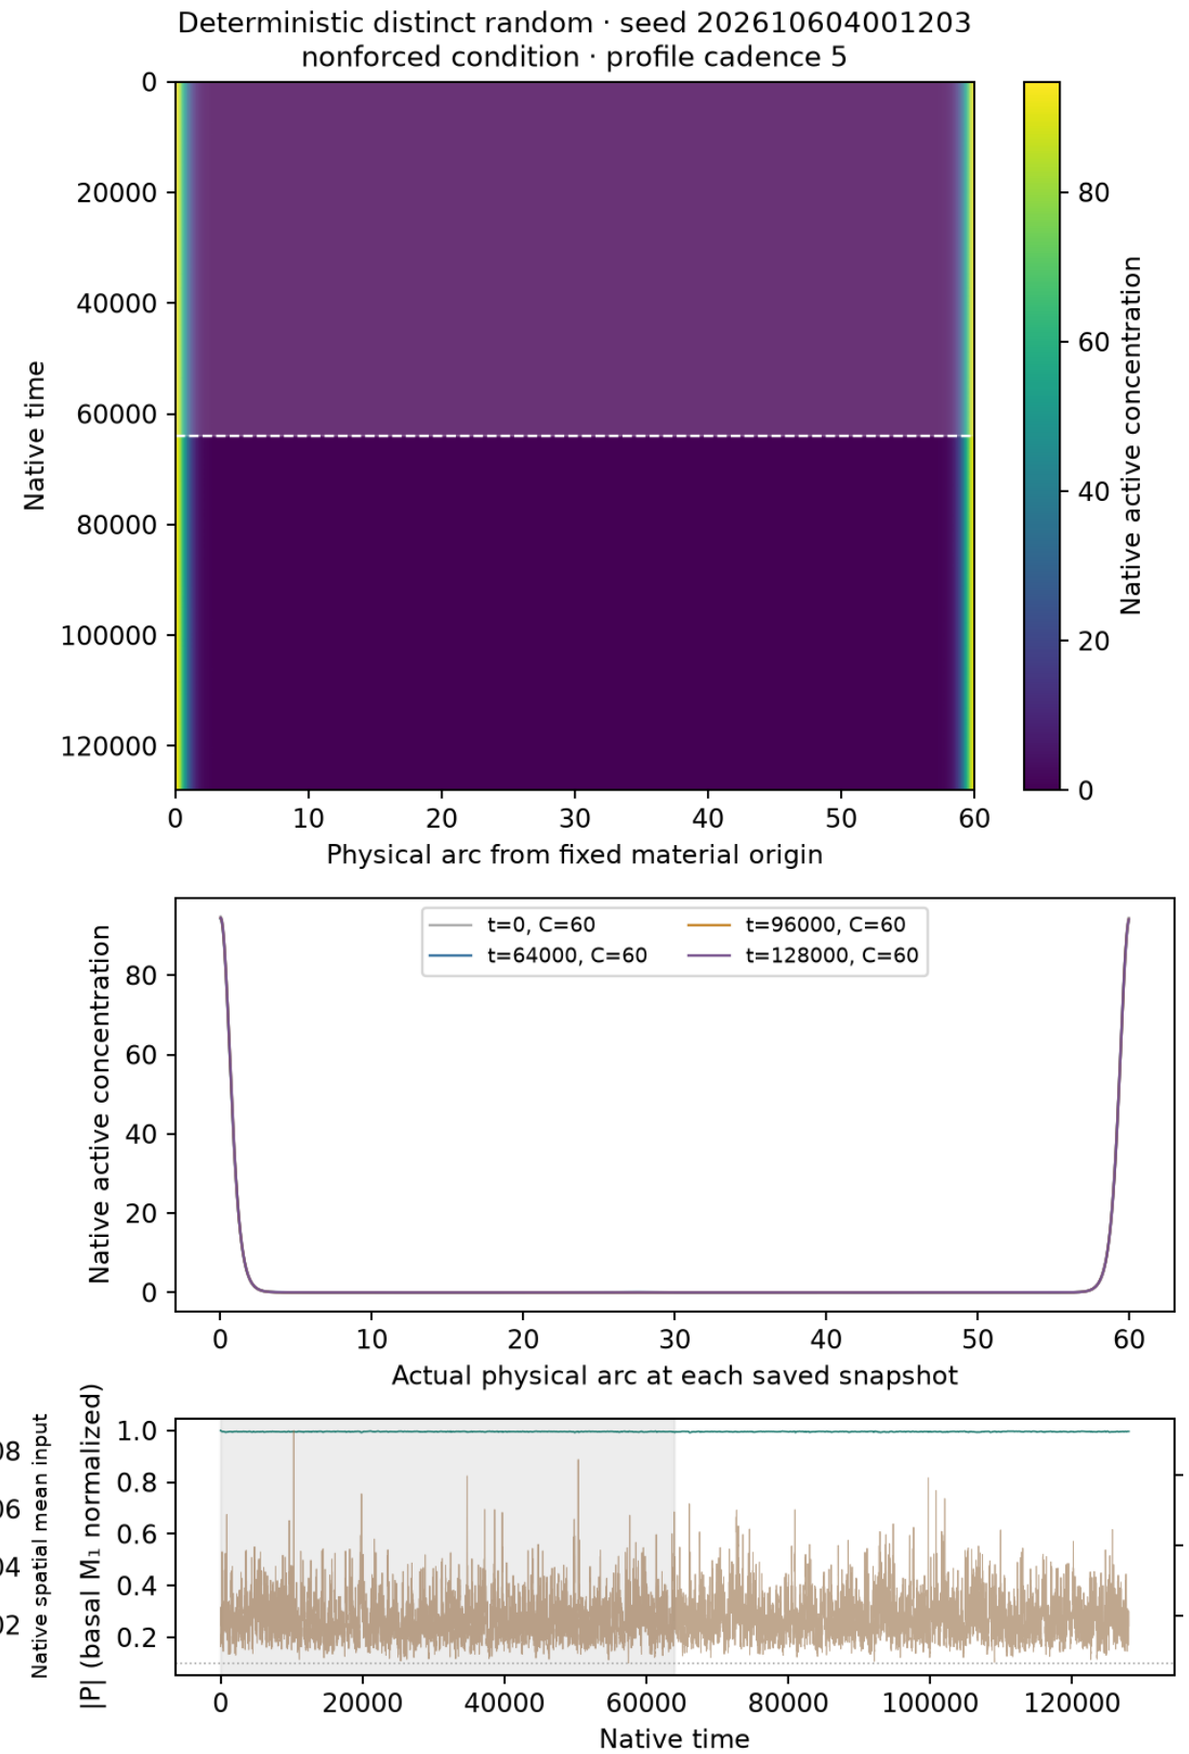


Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Goryachev · size label 60 · f=0.001 · mean
context E4_long · σ=0 · horizon=128000 · 1 deterministic control

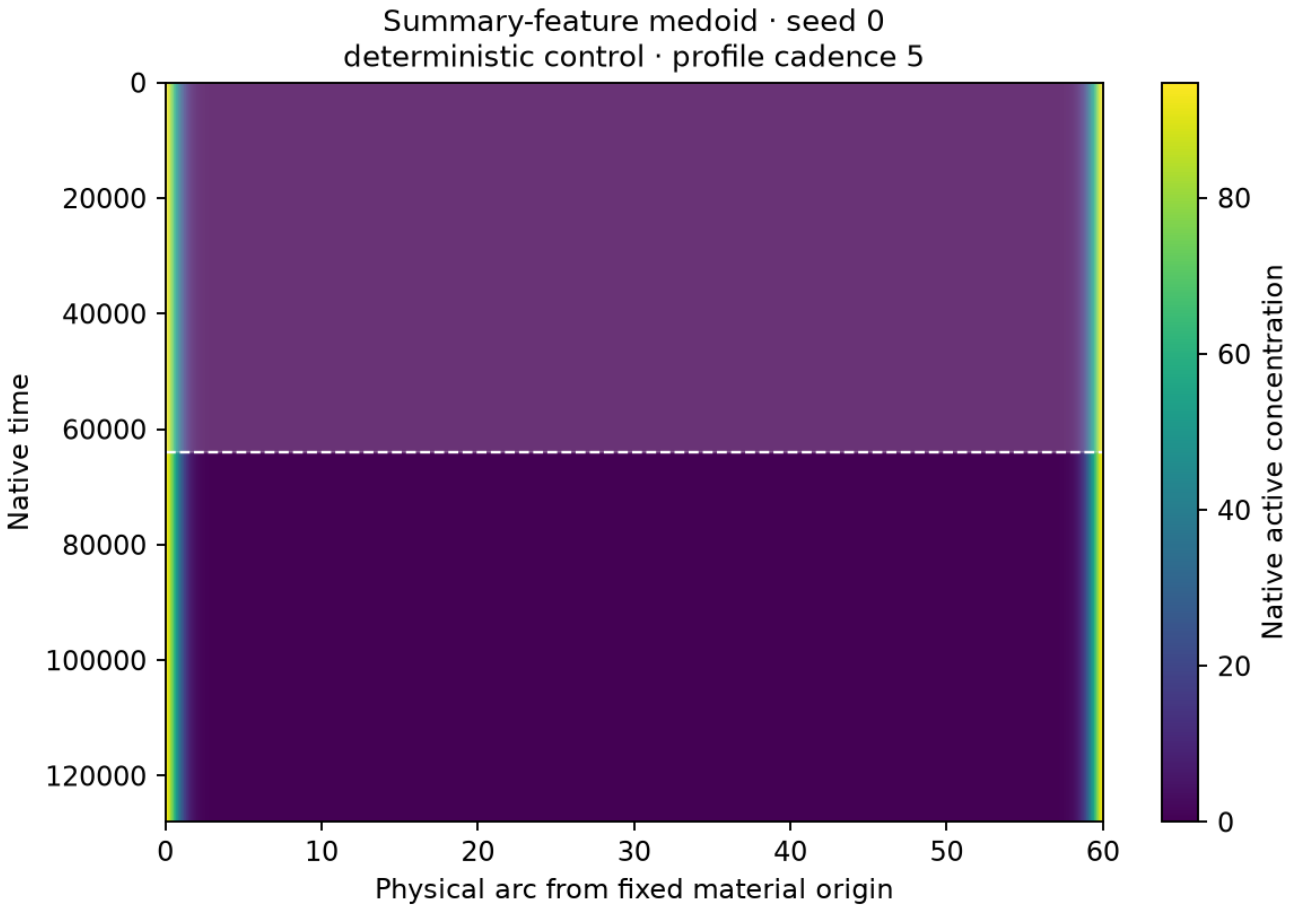


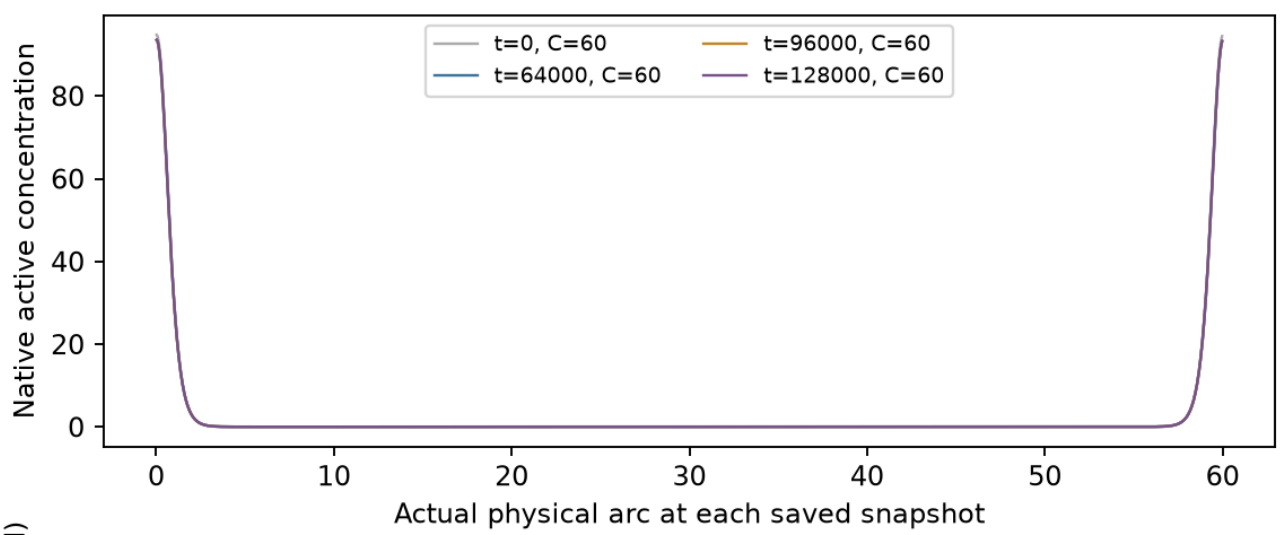


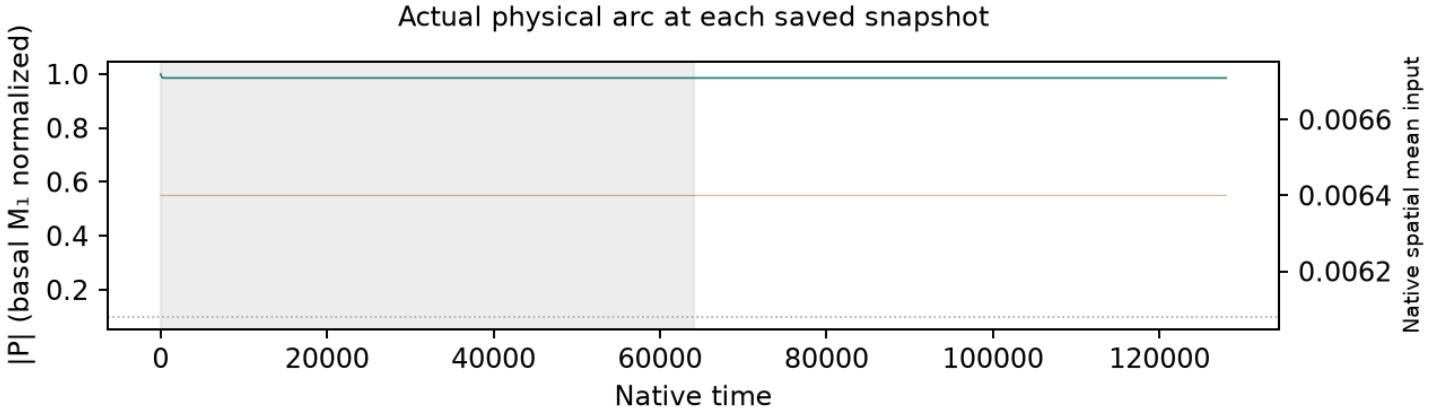

Native concentrations and every retained field frame are plotted without spatial resampling.
First half shaded: excluded from summary selection.
Spring mesh-face interpolation changes only boundary geometry; snapshots use actual saved C(t).
P uses basal M_1 normalization, distinct from instantaneous coherence.
Supplemental selection and controls; no main example is chosen.
Native NPZ/status links remain local/HPC data.


S11 · Goryachev · size label 60 · f=0.001 · noise
context E4_long · σ=1 · horizon=128000 · n=12 independent noisy realizations

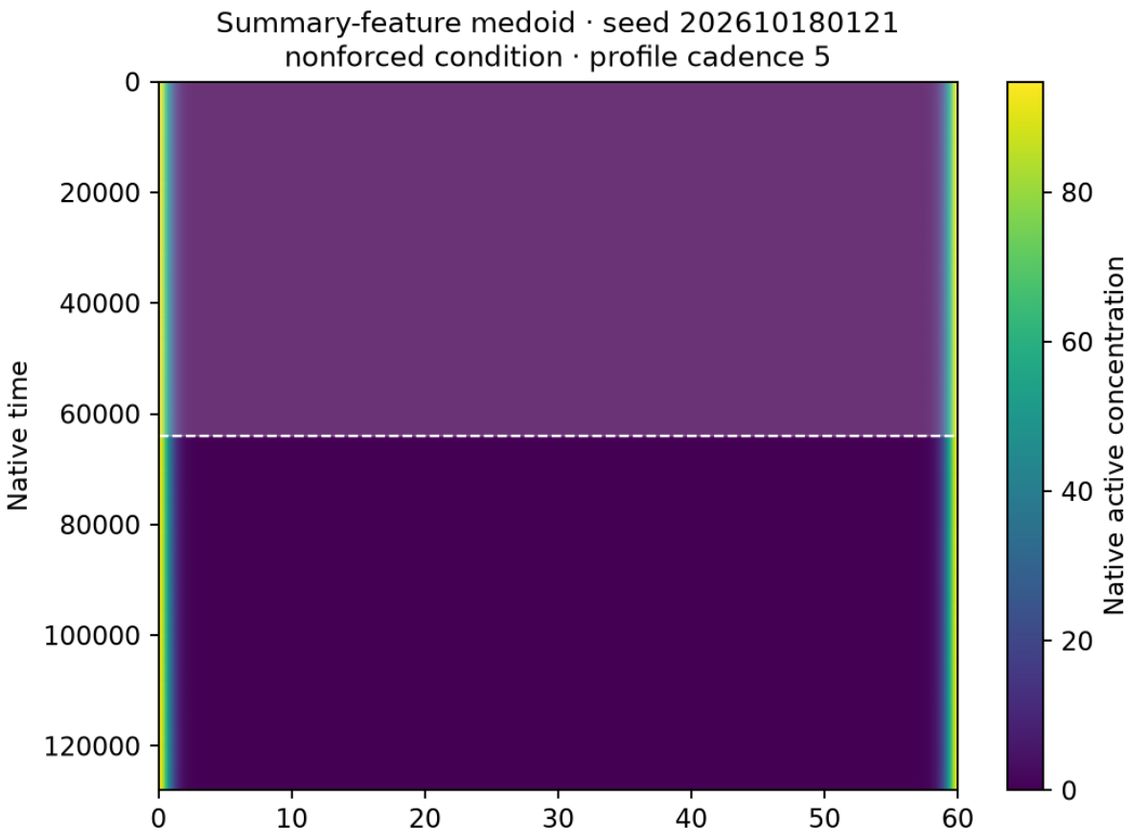


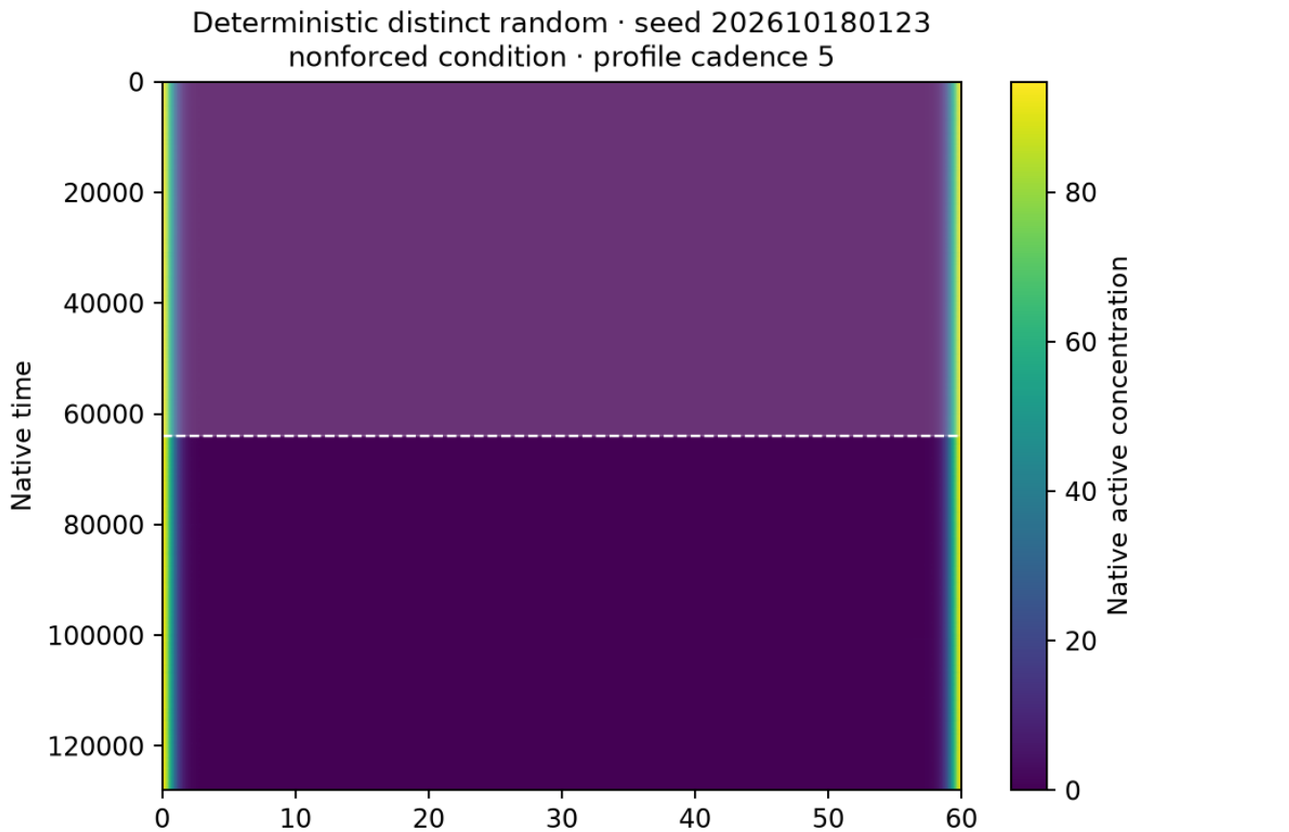


Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Goryachev · size label 60 · f=0.003 · mean
context E4_long · σ=0 · horizon=128000 · 1 deterministic control

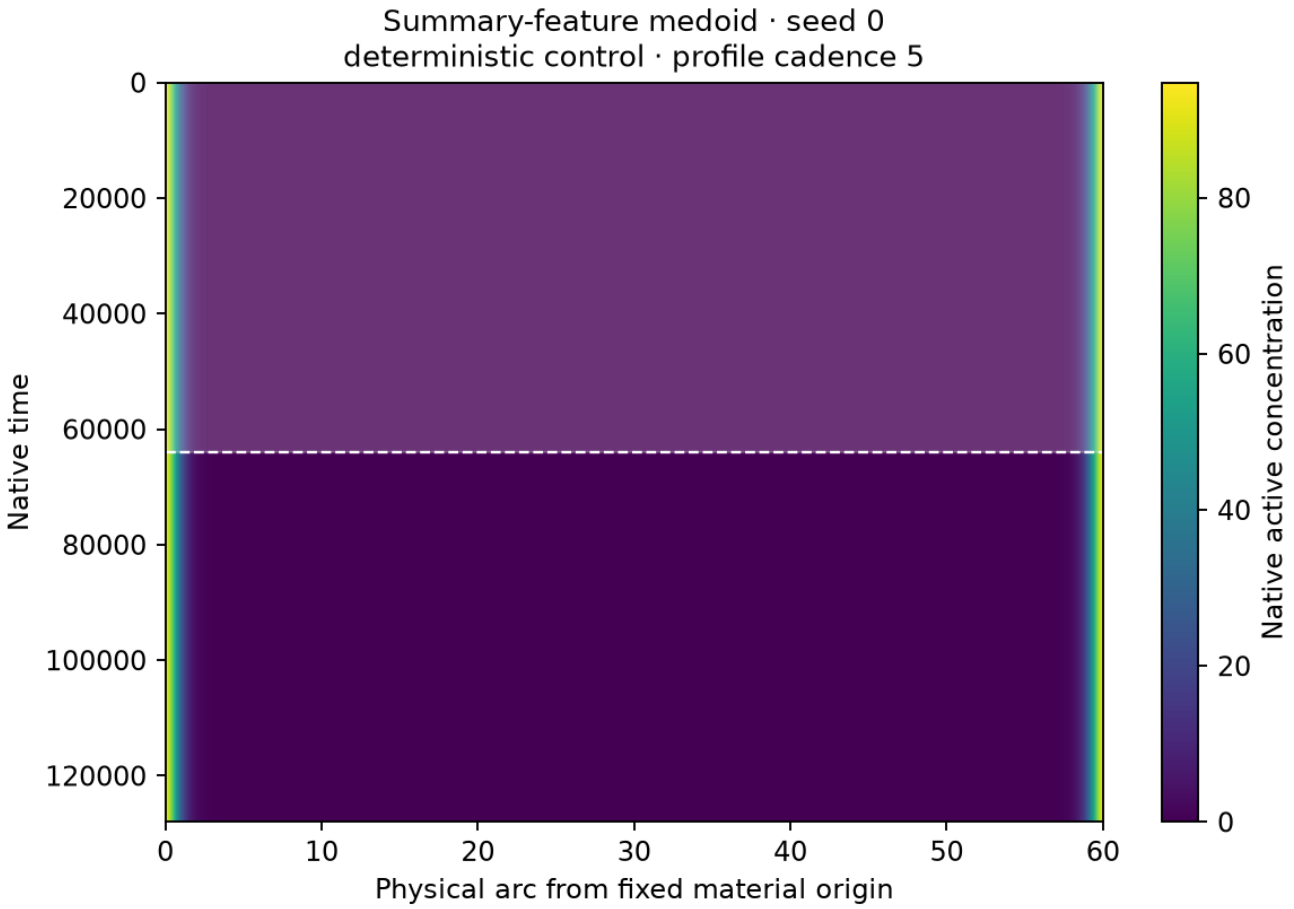


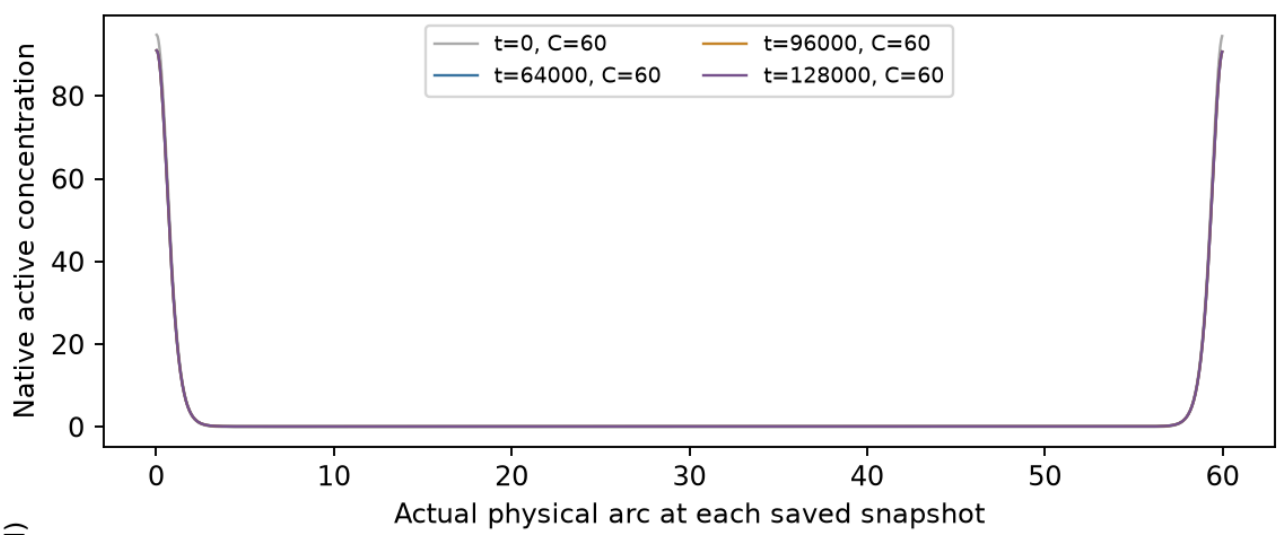

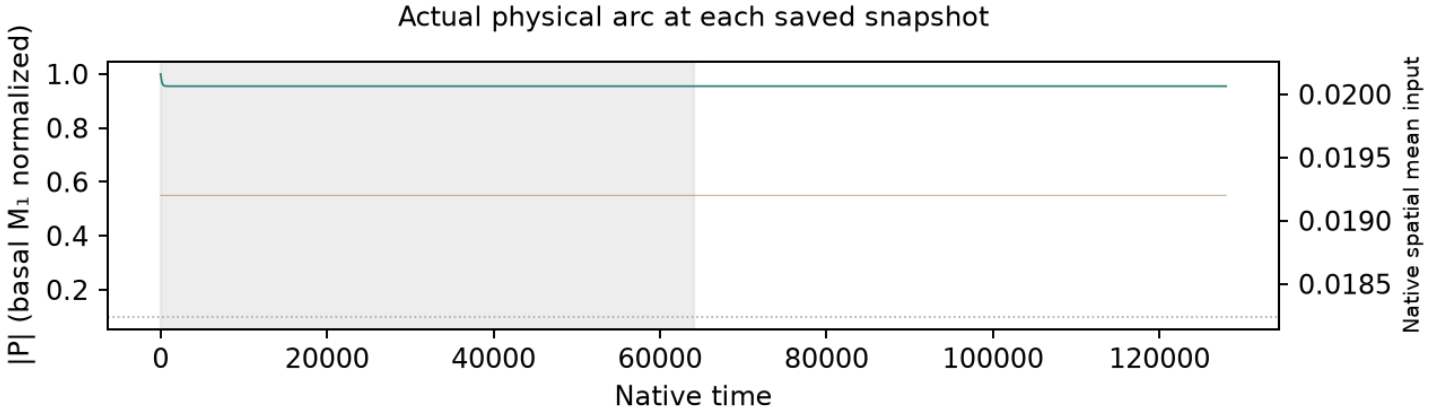


Native concentrations and every retained field frame are plotted without spatial resampling.
First half shaded: excluded from summary selection.
Spring mesh-face interpolation changes only boundary geometry; snapshots use actual saved C(t).
P uses basal M_1 normalization, distinct from instantaneous coherence.
Supplemental selection and controls; no main example is chosen.
Native NPZ/status links remain local/HPC data.


S11 · Goryachev · size label 60 · f=0.003 · noise
context E4_long · σ=1 · horizon=128000 · n=12 independent noisy realizations

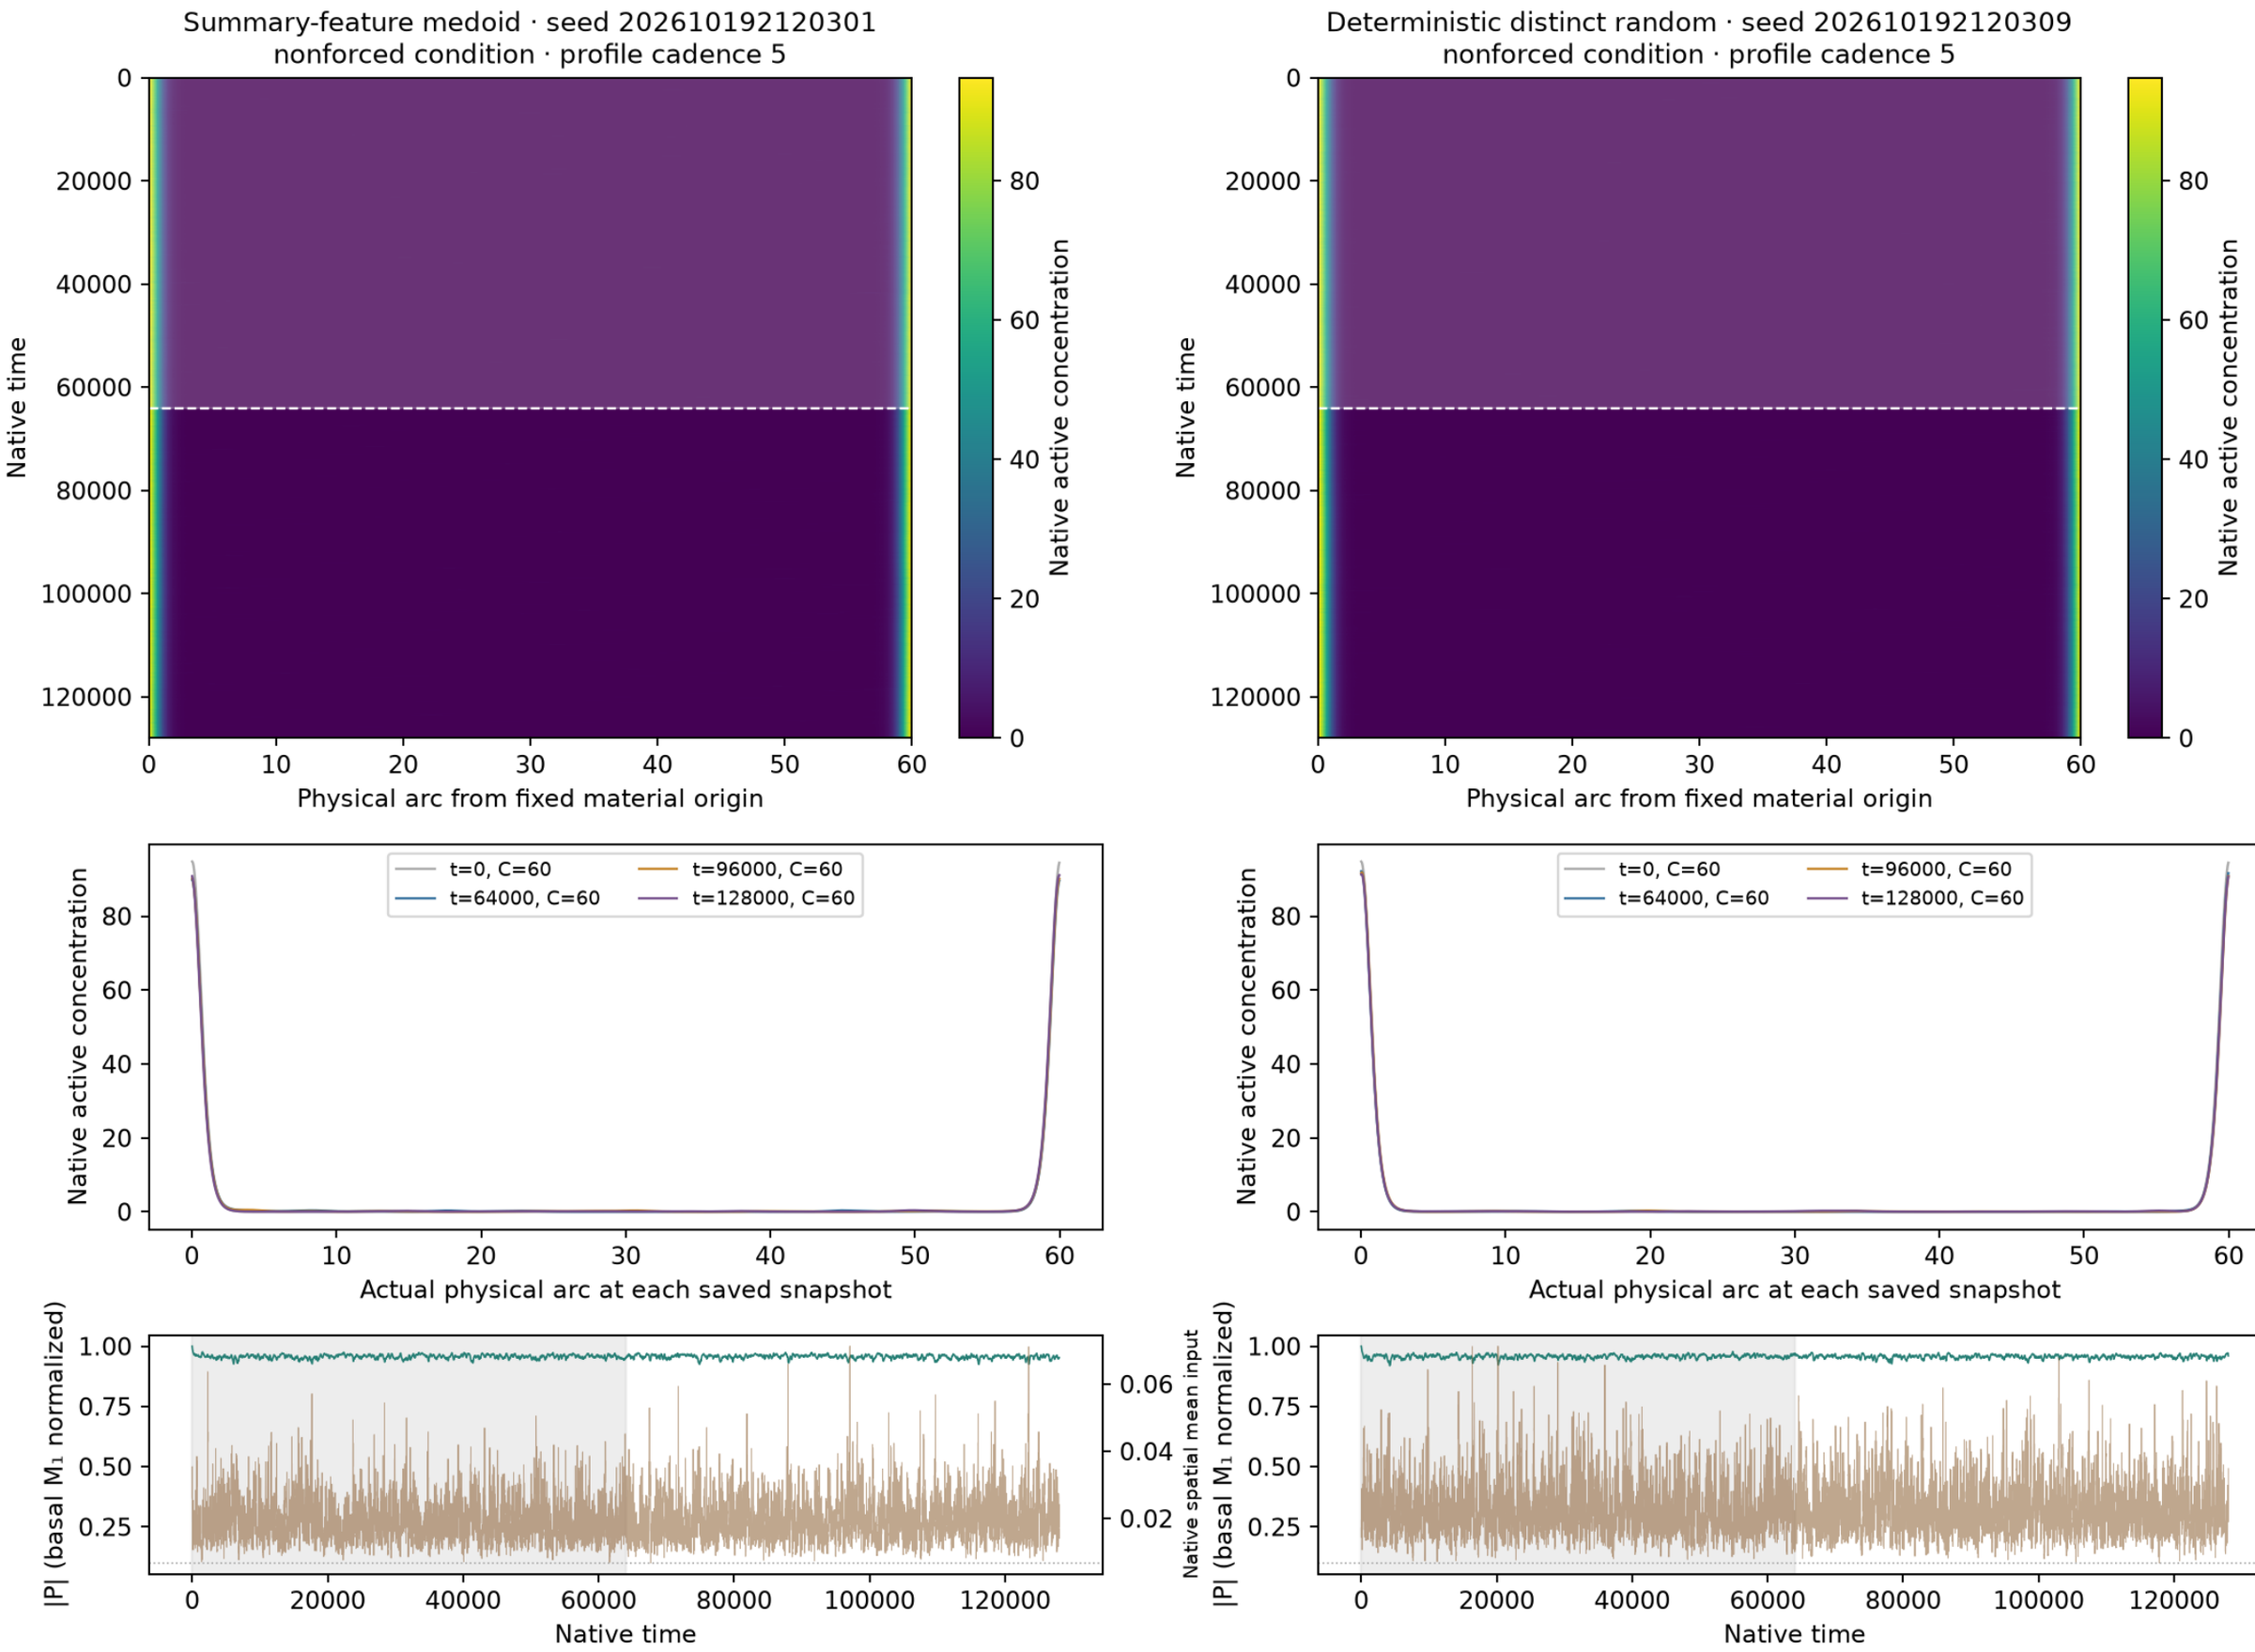


Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Goryachev · size label 60 · f=0.01 · mean
context E4_long · σ=0 · horizon=128000 · 1 deterministic control

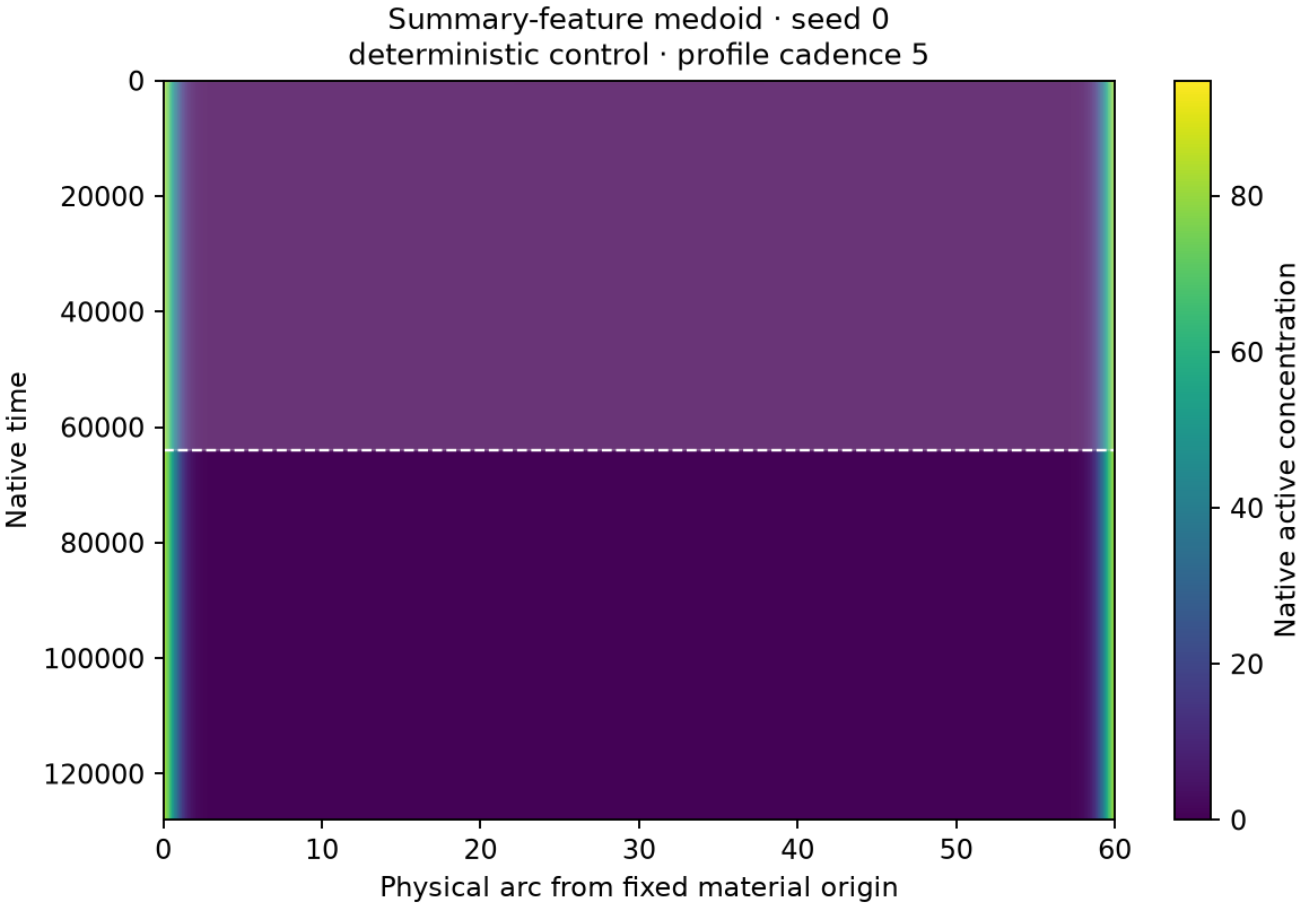

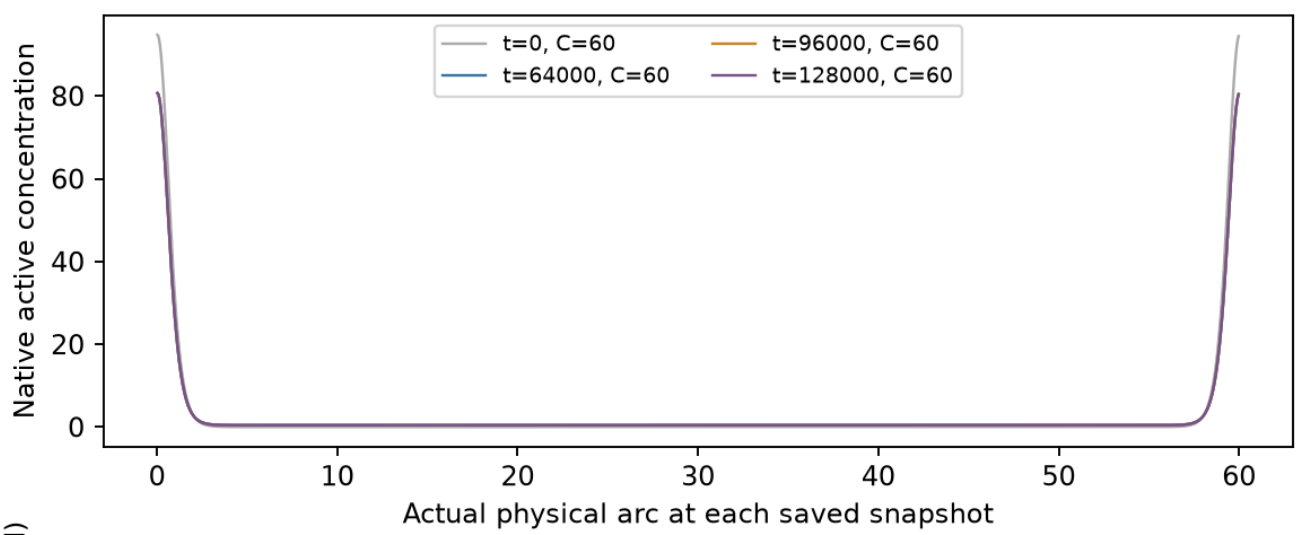


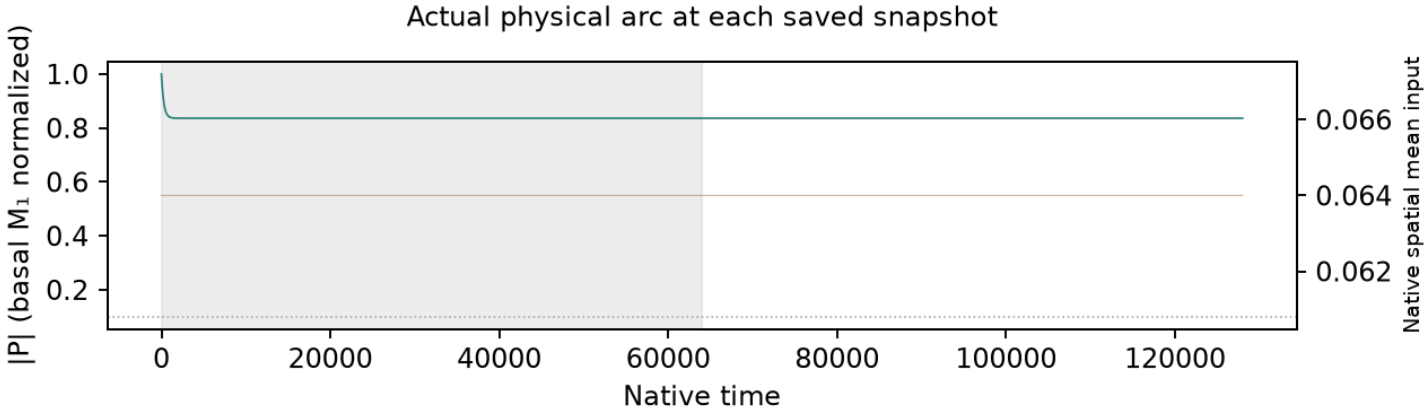


Native concentrations and every retained field frame are plotted without spatial resampling.
First half shaded: excluded from summary selection.
Spring mesh-face interpolation changes only boundary geometry; snapshots use actual saved C(t).
P uses basal M_1 normalization, distinct from instantaneous coherence.
Supplemental selection and controls; no main example is chosen.
Native NPZ/status links remain local/HPC data.

S11 · Goryachev · size label 60 · f=0.01 · noise
context E4_long · σ=1 · horizon=128000 · n=12 independent noisy realizations


Summary-feature medoid · seed 202610180138
nonforced condition · profile cadence 5

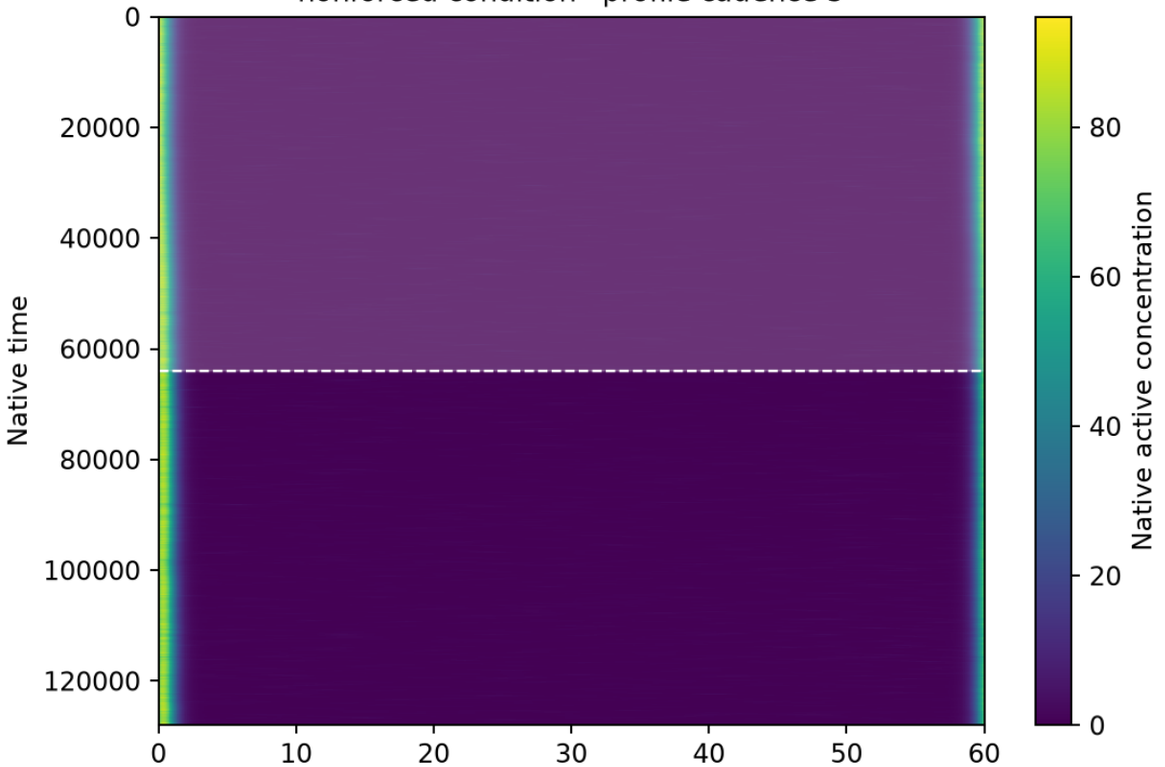


Deterministic distinct random · seed 202610180135
nonforced condition · profile cadence 5

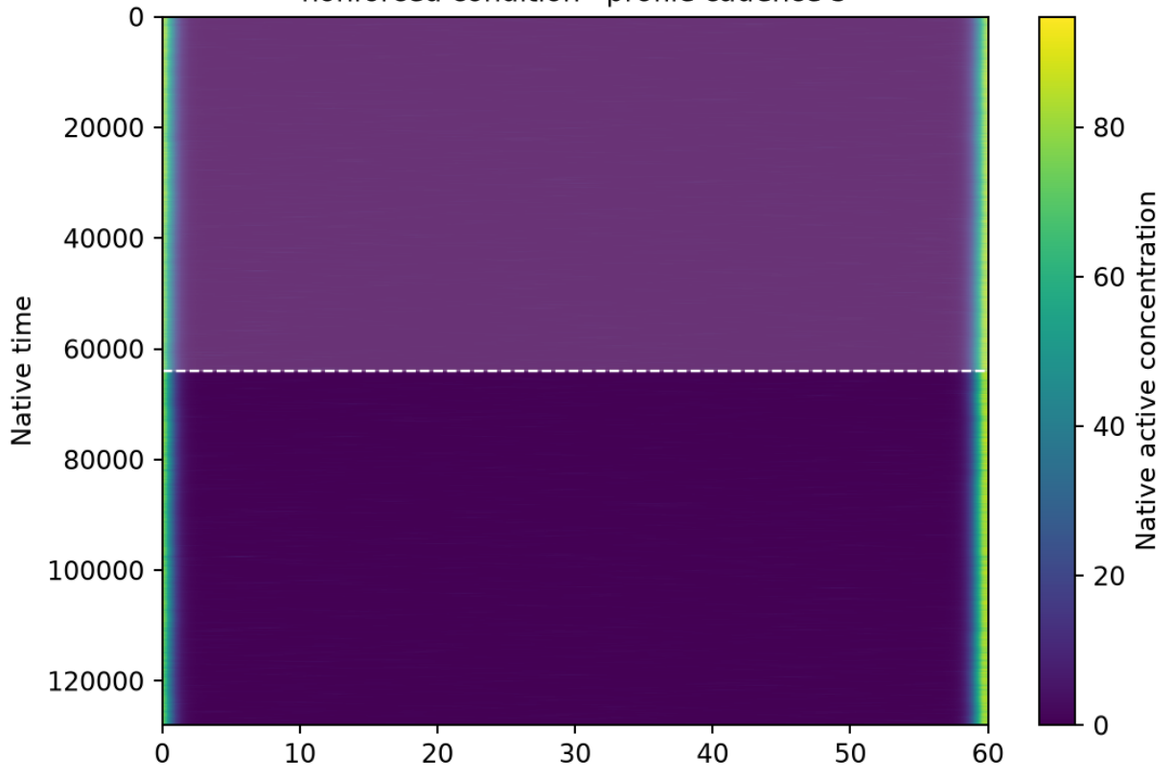



Physical arc from fixed material origin

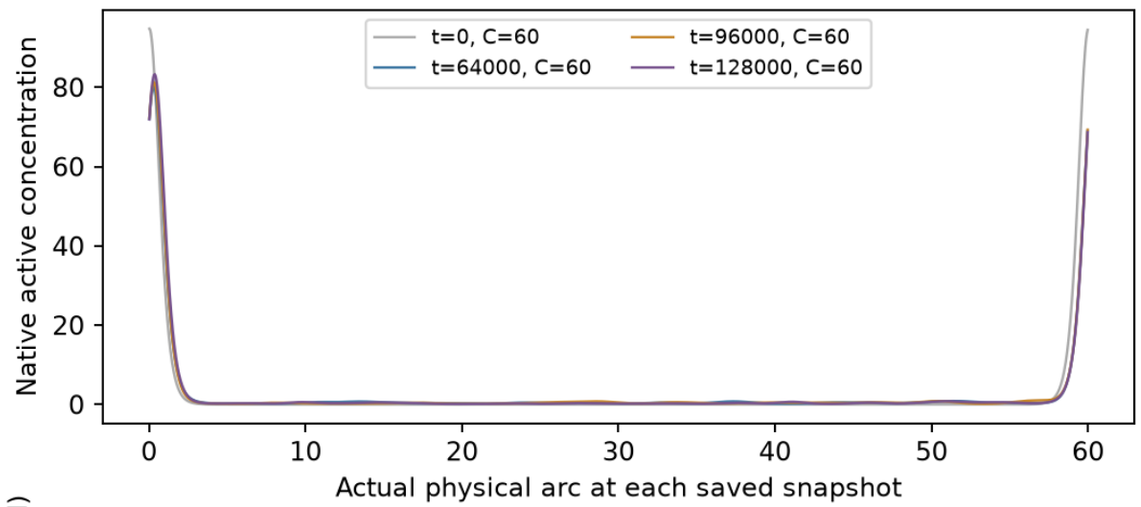

Physical arc from fixed material origin

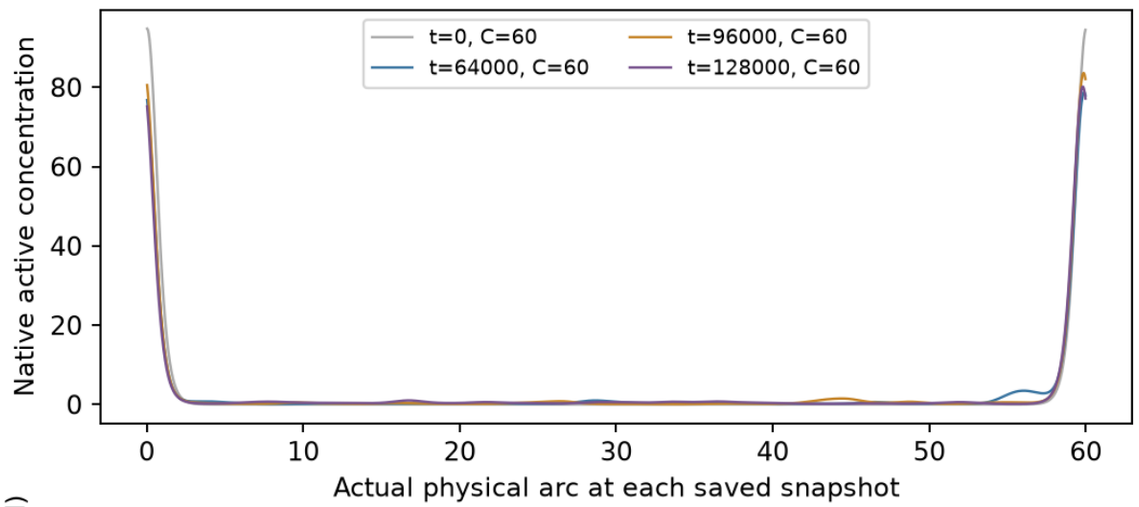


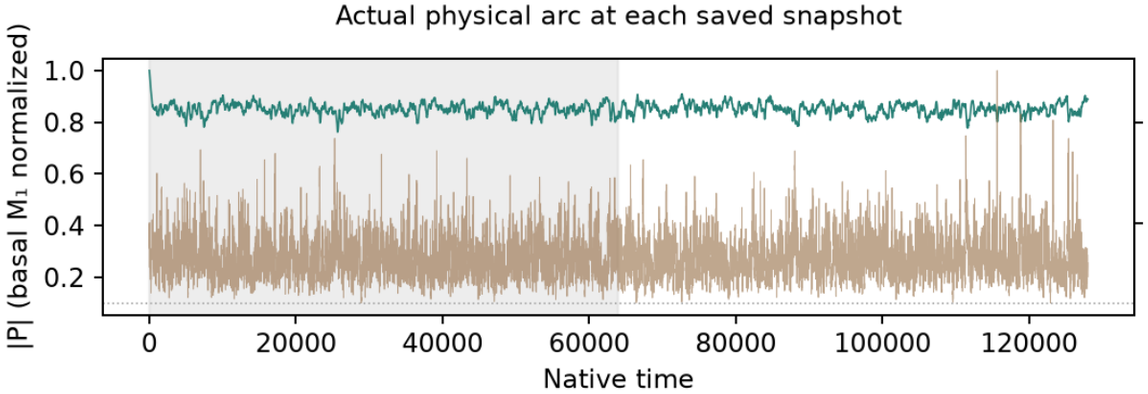


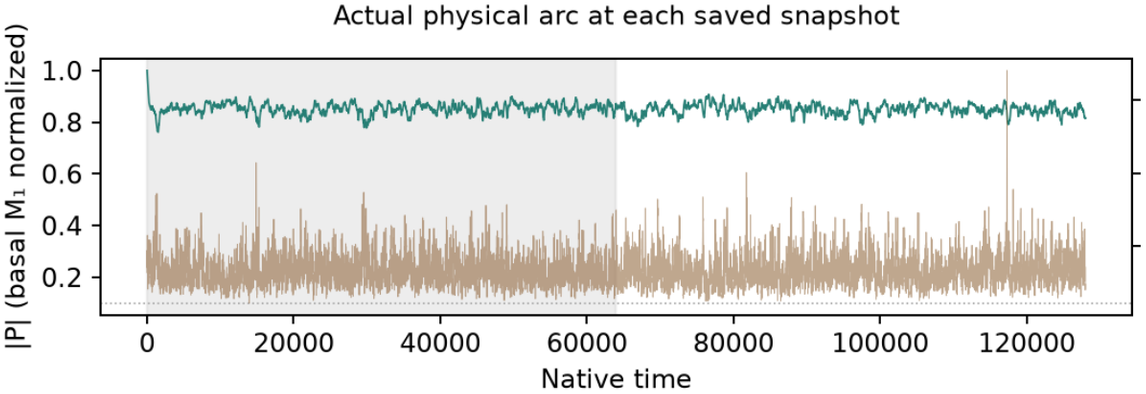


Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Goryachev · size label 60 · f=0.015 · mean
context E4_long · σ=0 · horizon=128000 · 1 deterministic control

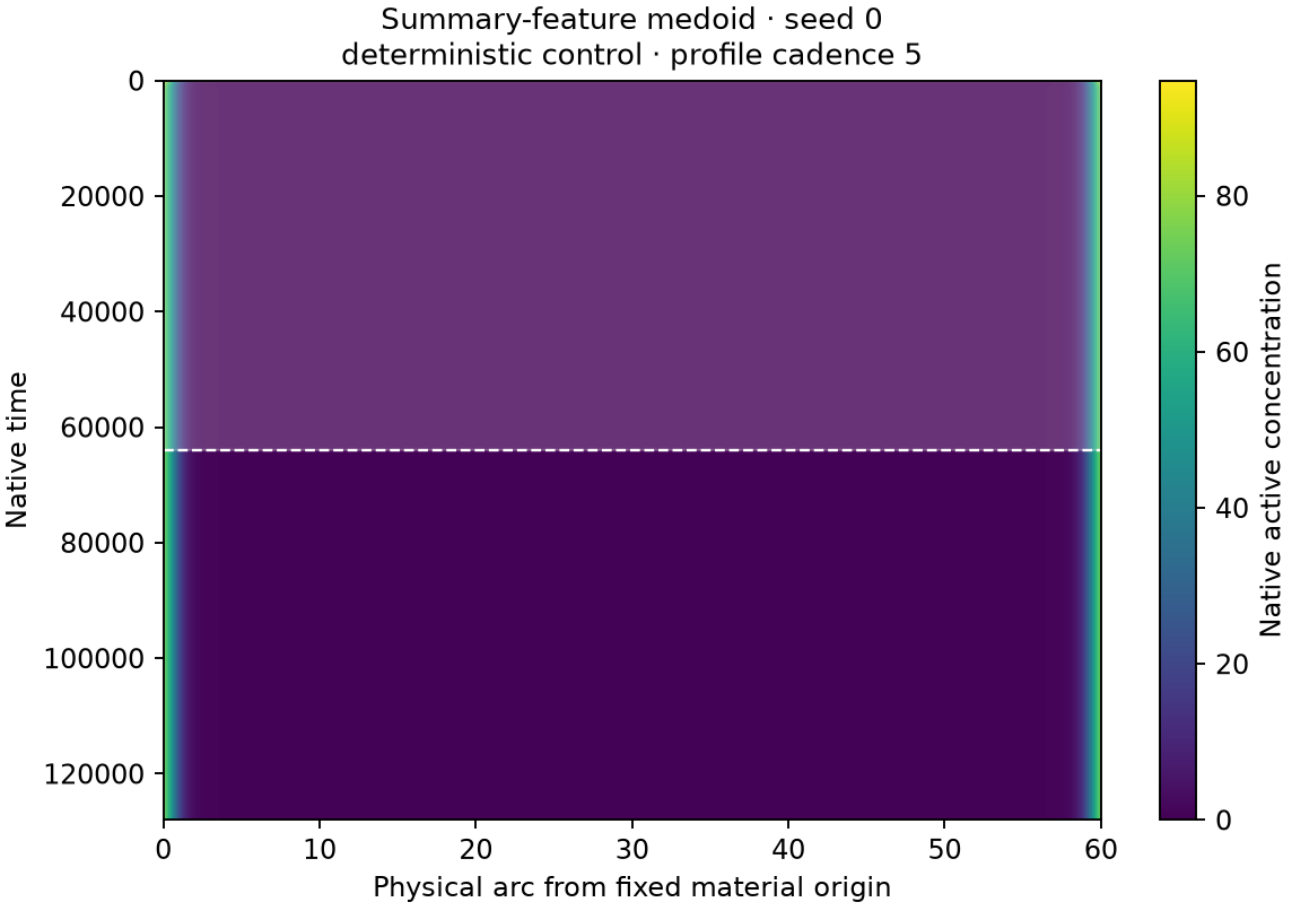


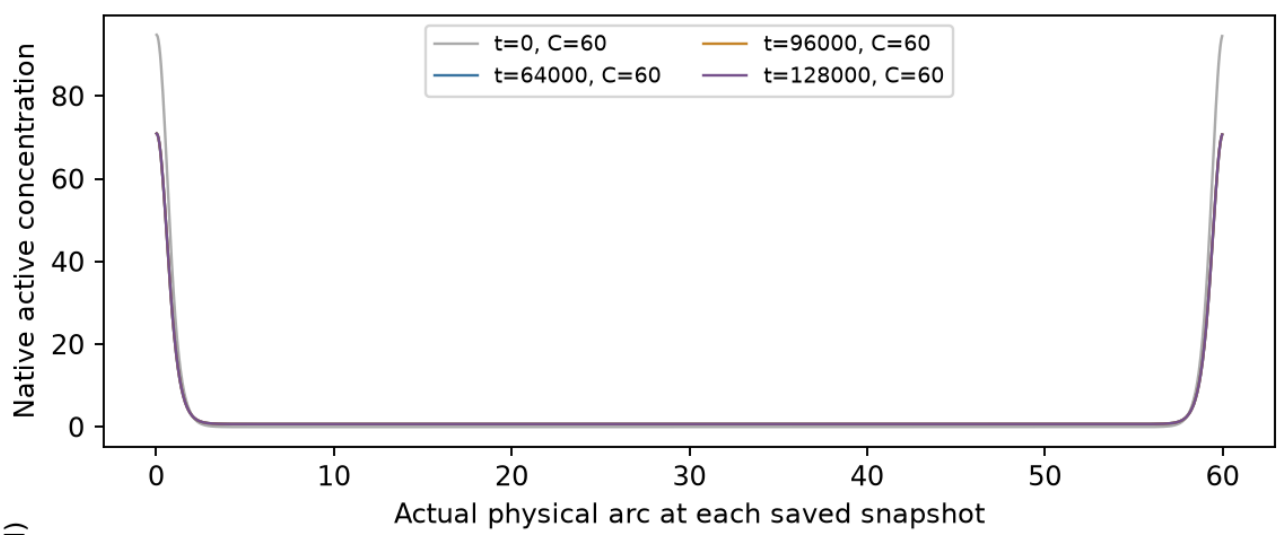


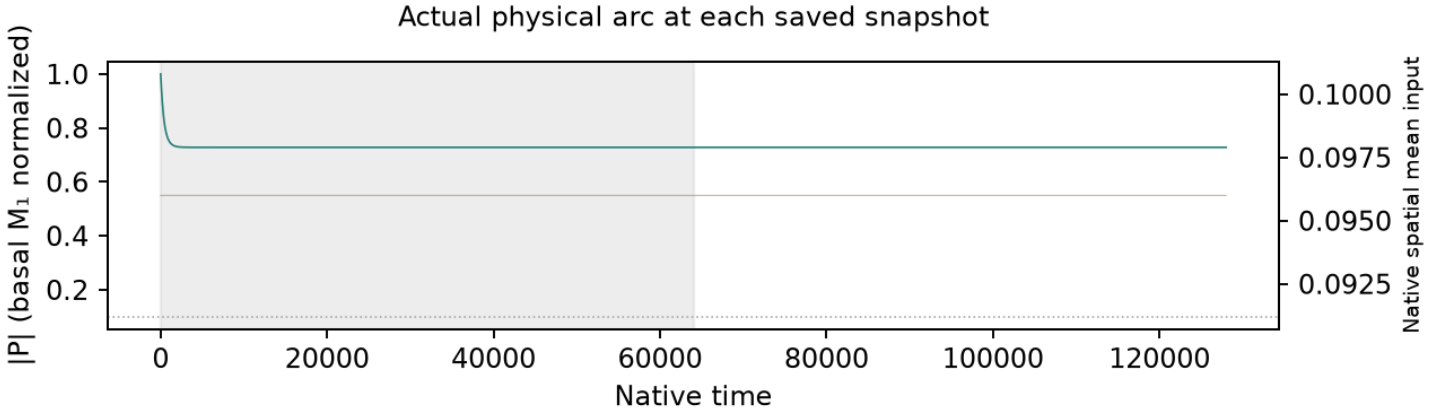

Native concentrations and every retained field frame are plotted without spatial resampling.
First half shaded: excluded from summary selection.
Spring mesh-face interpolation changes only boundary geometry; snapshots use actual saved C(t).
P uses basal M_1 normalization, distinct from instantaneous coherence.
Supplemental selection and controls; no main example is chosen.
Native NPZ/status links remain local/HPC data.


S11 · Goryachev · size label 60 · f=0.015 · noise
context E4_long · σ=1 · horizon=128000 · n=12 independent noisy realizations

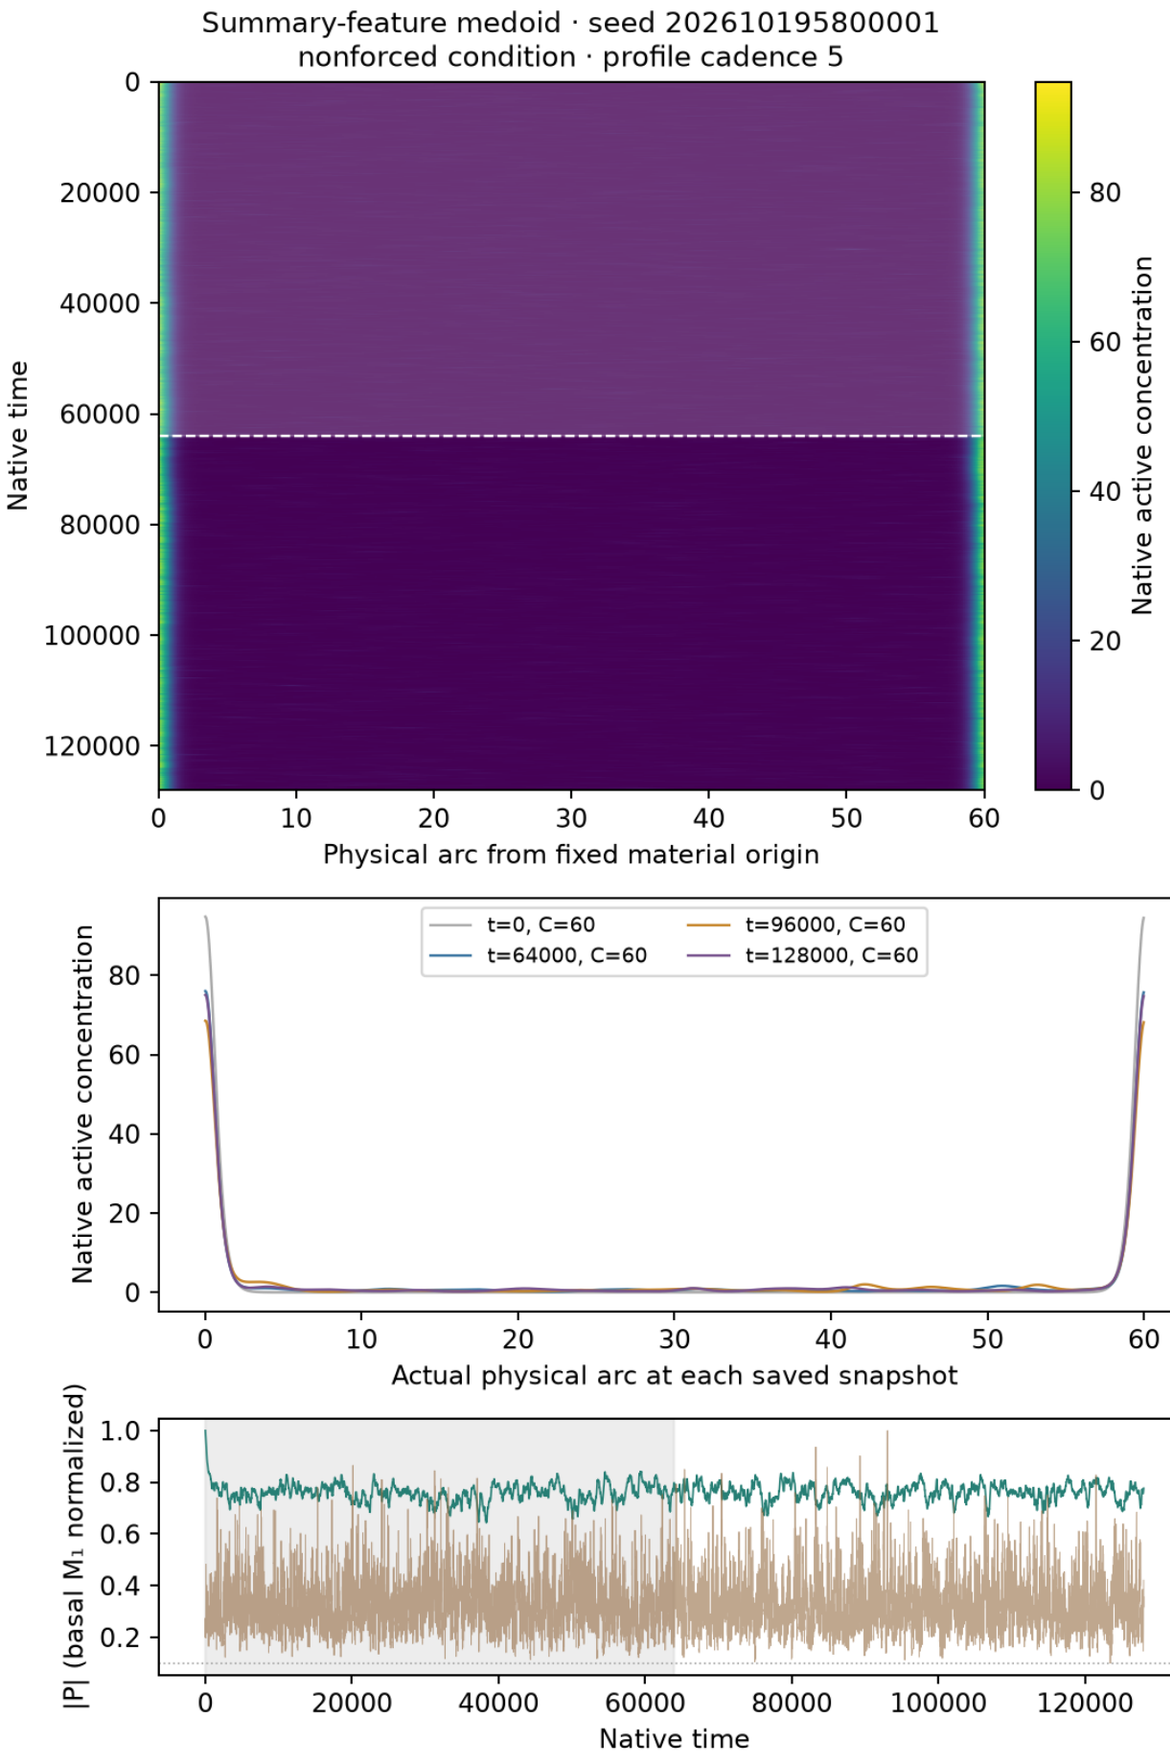


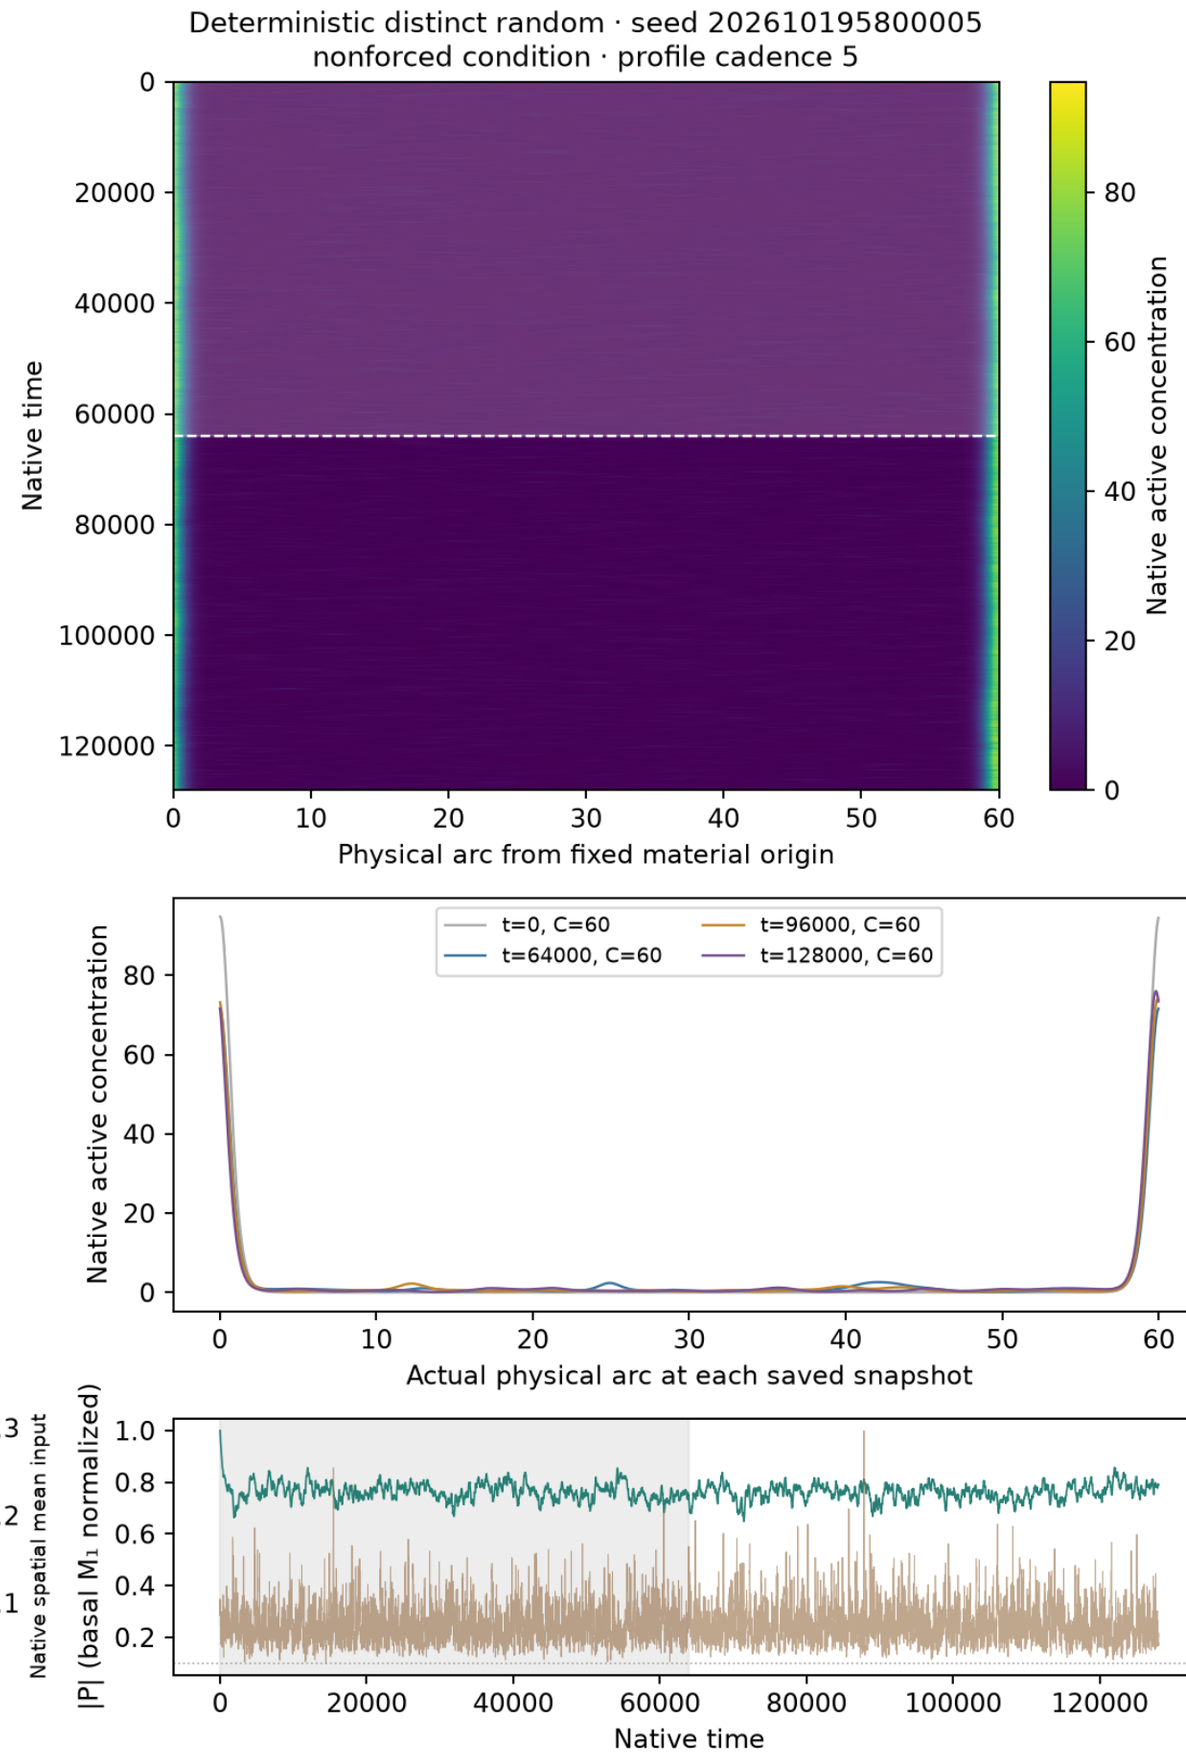


Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M_1 normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Goryachev · size label 60 · f=0.02 · mean
context E4_long · σ=0 · horizon=128000 · 1 deterministic control

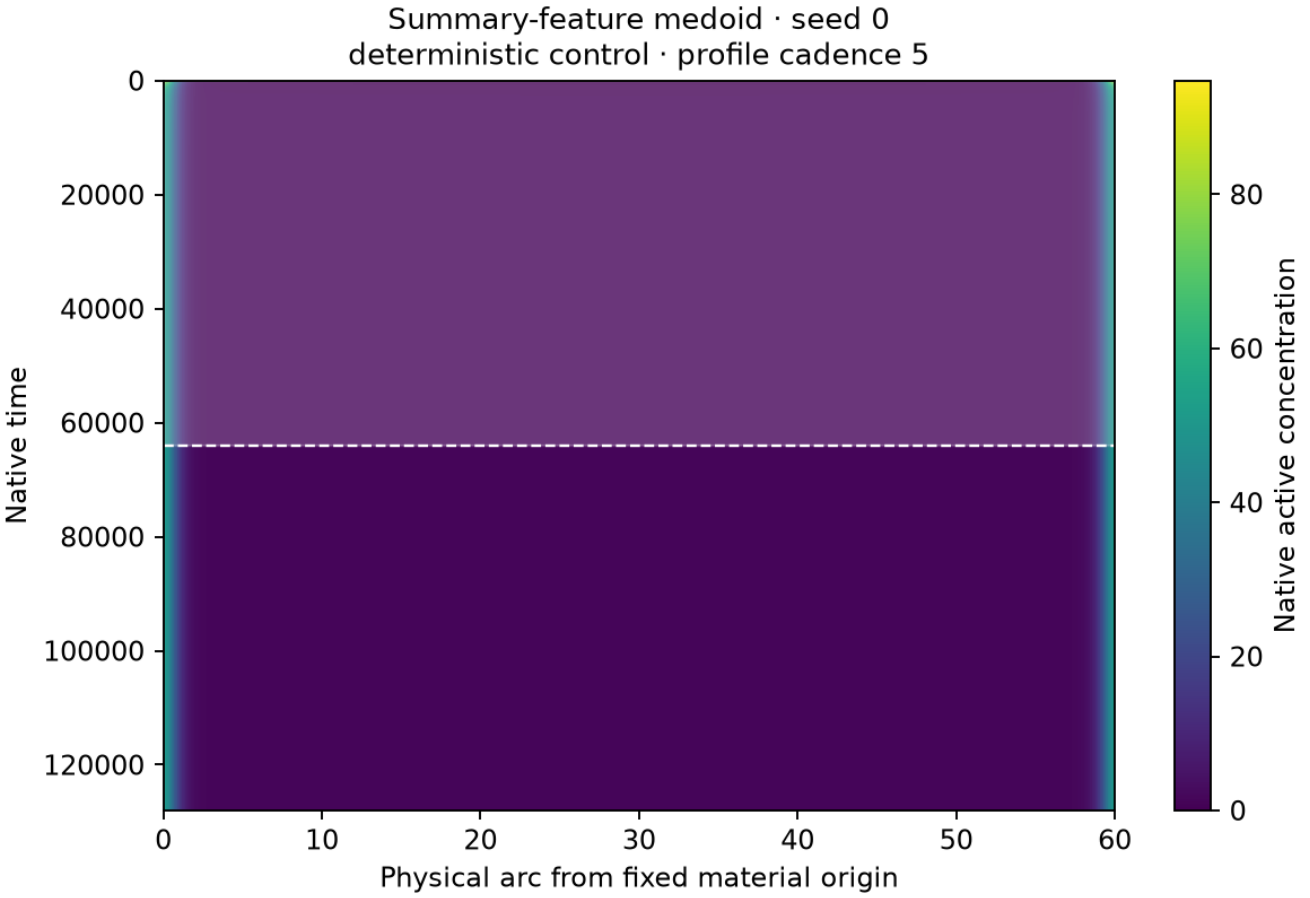

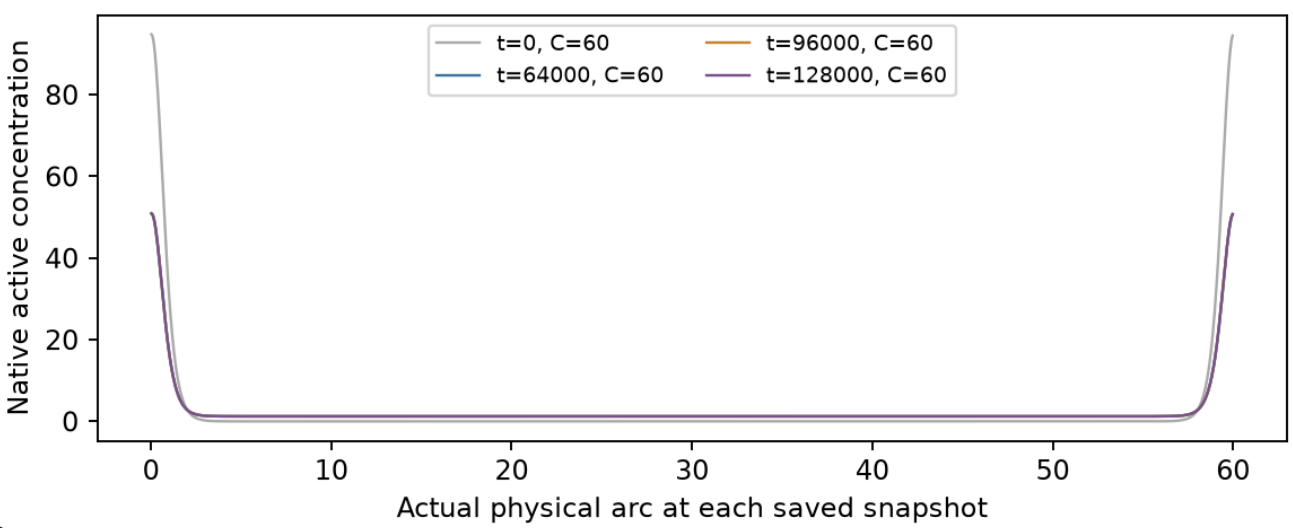


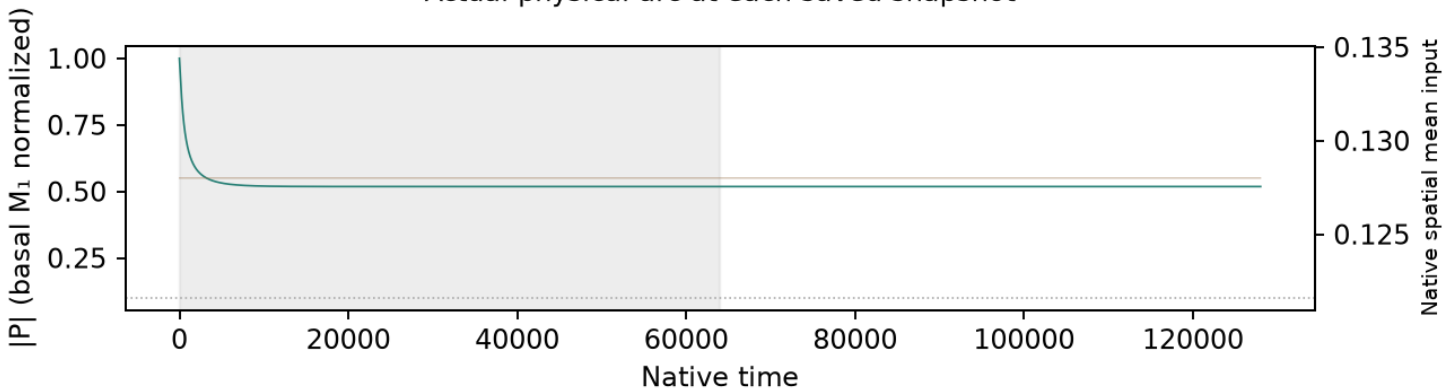


Native concentrations and every retained field frame are plotted without spatial resampling.
First half shaded: excluded from summary selection.
Spring mesh-face interpolation changes only boundary geometry; snapshots use actual saved C(t).
P uses basal M_1 normalization, distinct from instantaneous coherence.
Supplemental selection and controls; no main example is chosen.
Native NPZ/status links remain local/HPC data.

S11 · Goryachev · size label 60 · f=0.02 · noise
context E4_long · σ=1 · horizon=128000 · n=12 independent noisy realizations


Summary-feature medoid · seed 202610195800111
nonforced condition · profile cadence 5

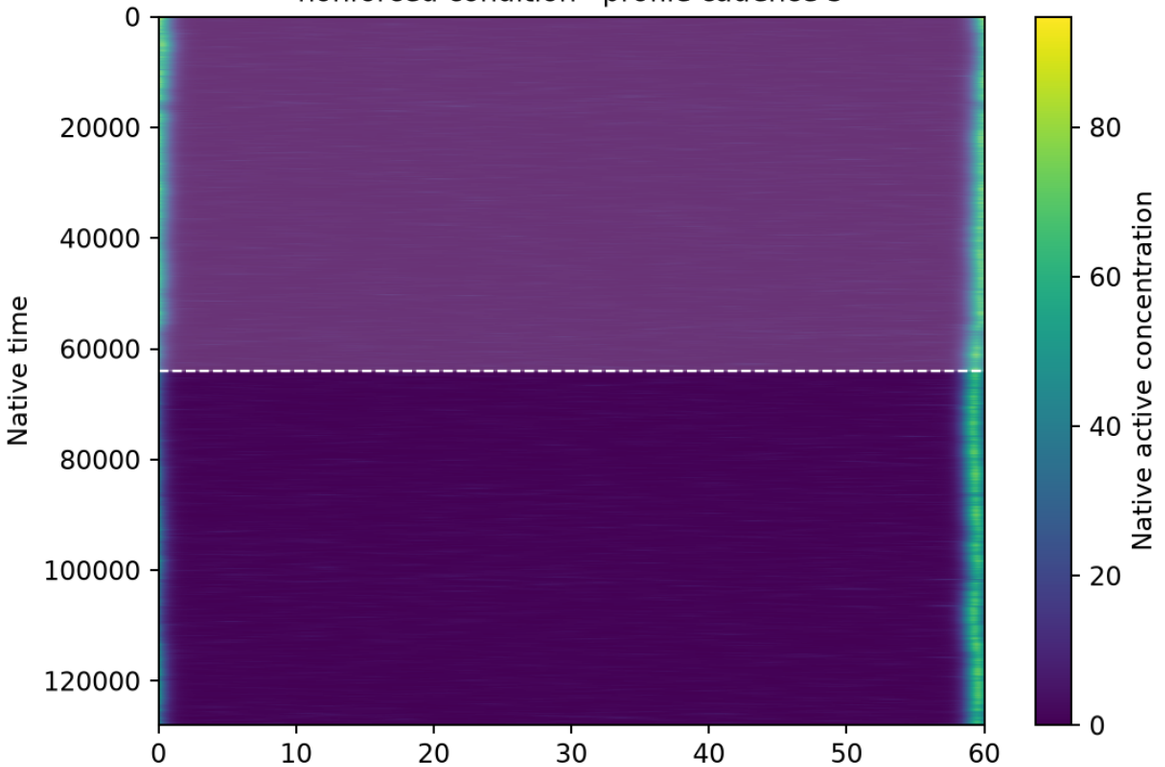


Deterministic distinct random · seed 202610195800101
nonforced condition · profile cadence 5

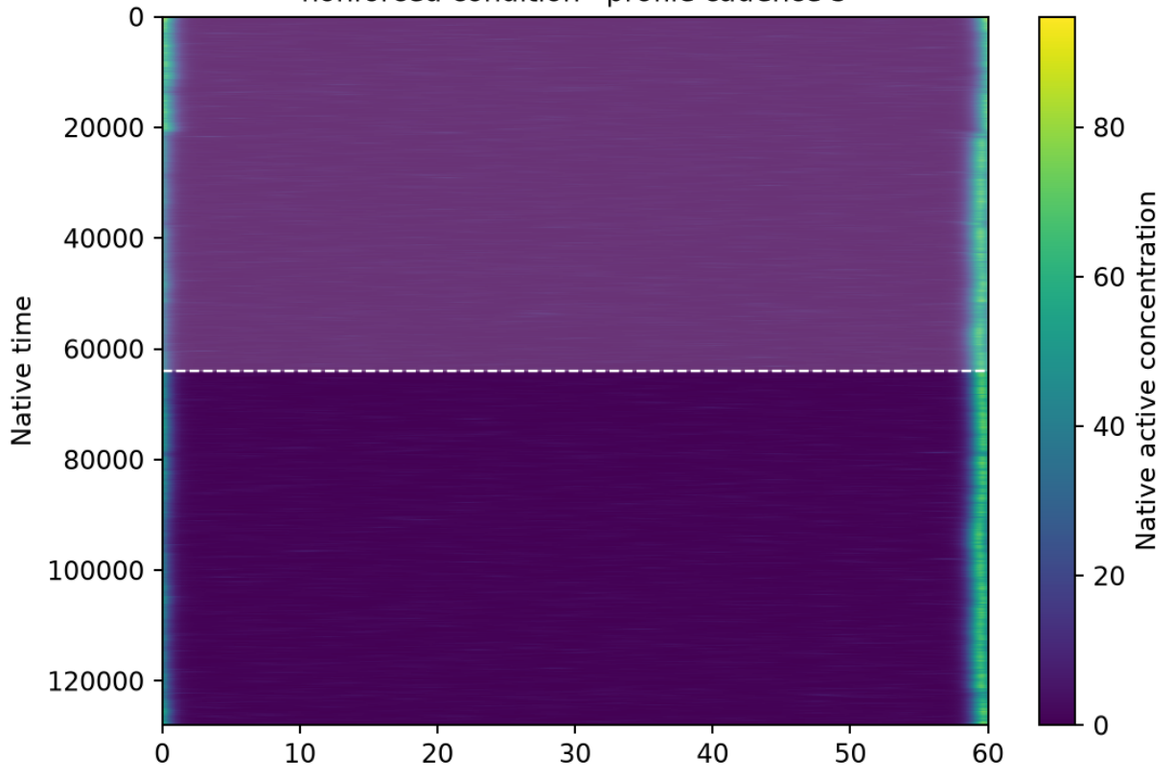



Physical arc from fixed material origin

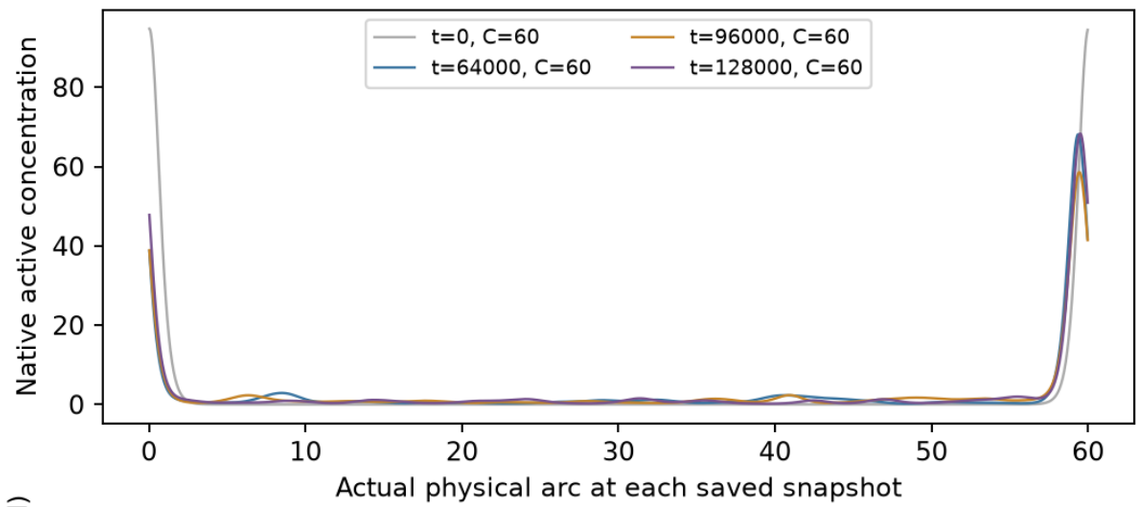

Physical arc from fixed material origin

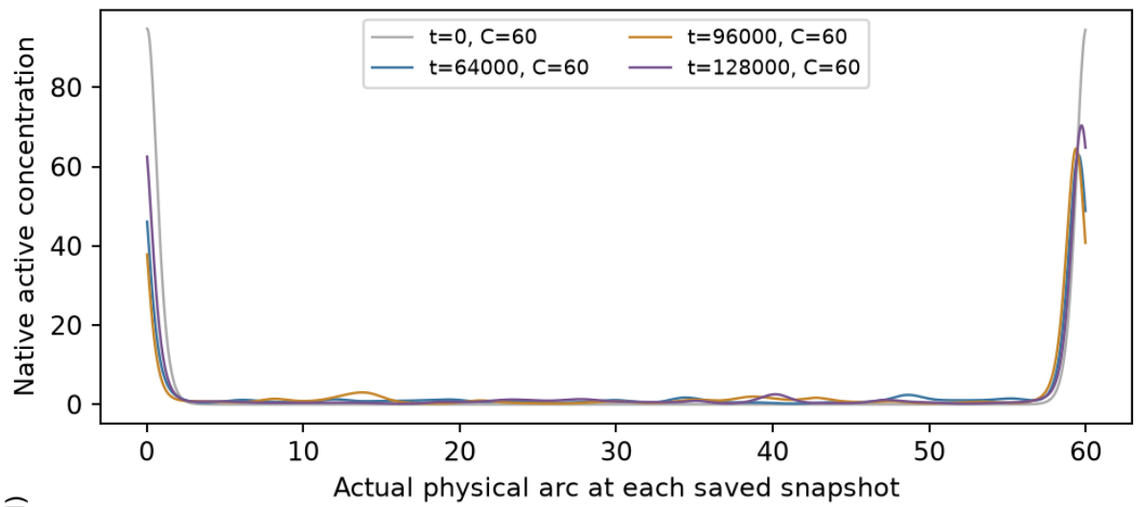


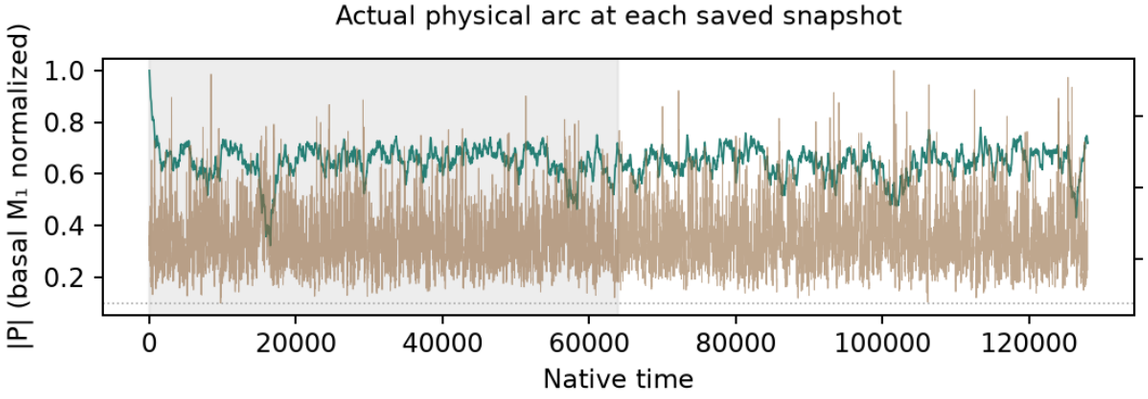


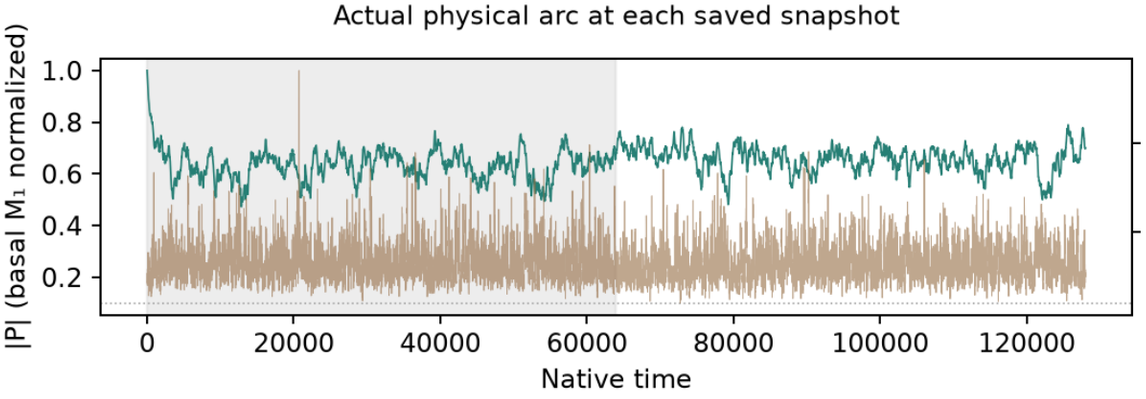


Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Holmes 3 · size label 20 · f=0 · zero
context E4_long · σ=0 · horizon=128000 · 1 deterministic control

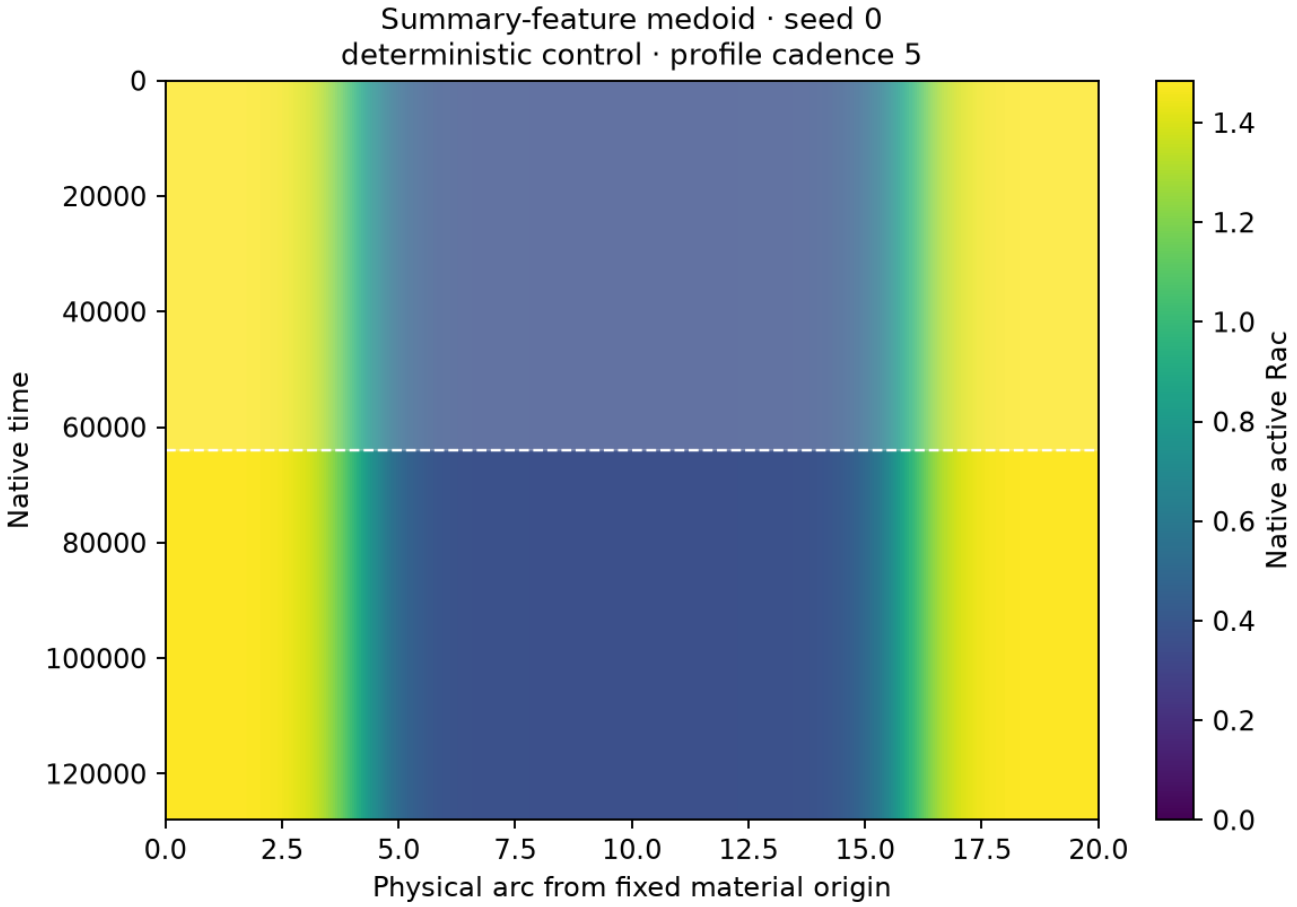


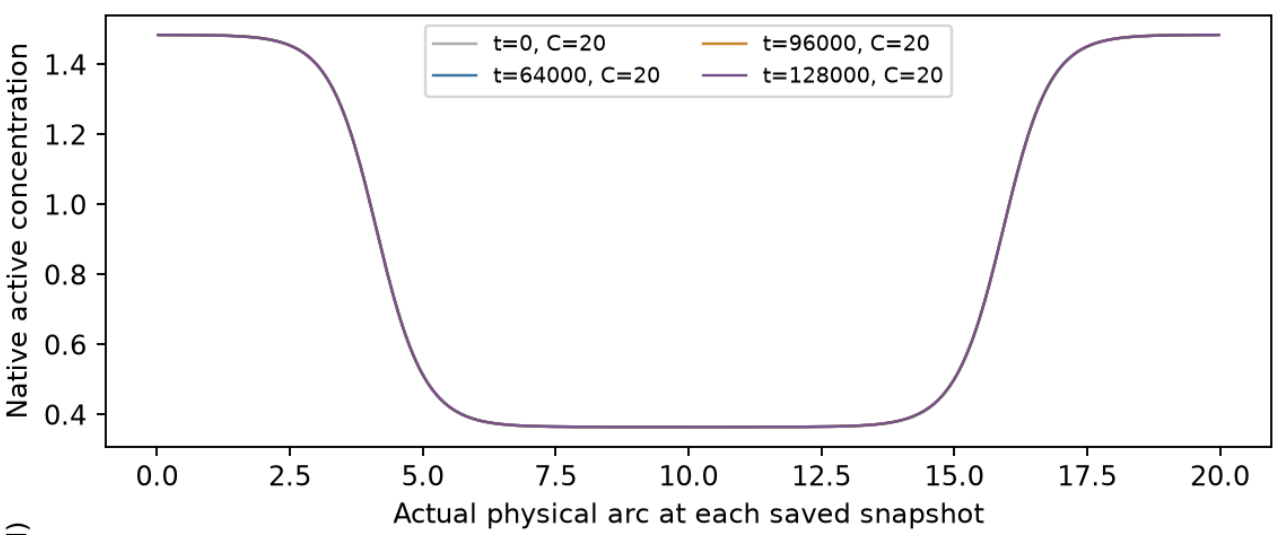


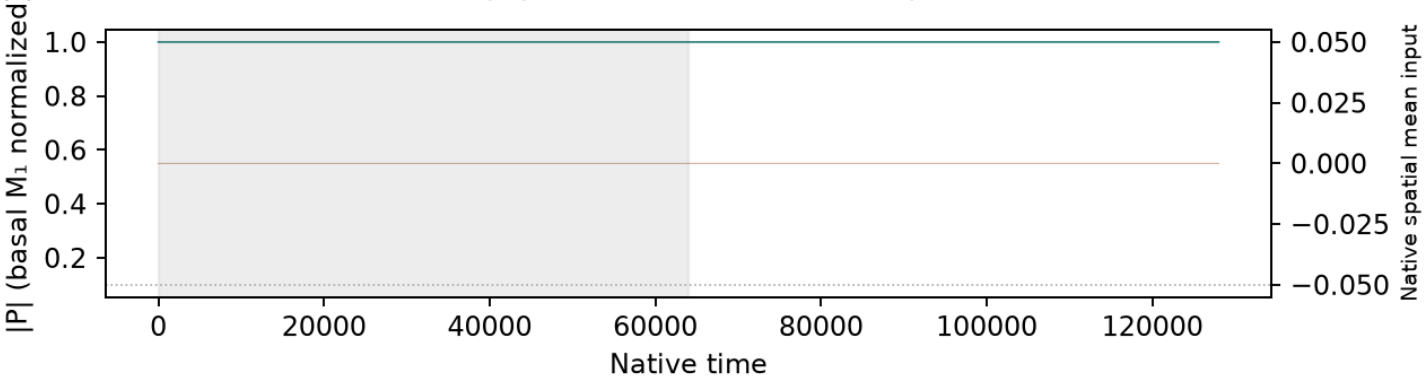


Native concentrations and every retained field frame are plotted without spatial resampling.
First half shaded: excluded from summary selection.
Spring mesh-face interpolation changes only boundary geometry; snapshots use actual saved C(t).
P uses basal M_1 normalization, distinct from instantaneous coherence.
Supplemental selection and controls; no main example is chosen.
Native NPZ/status links remain local/HPC data.

S11 · Holmes 3 · size label 20 · f=0.0001 · mean
context E4_long · σ=0 · horizon=128000 · 1 deterministic control

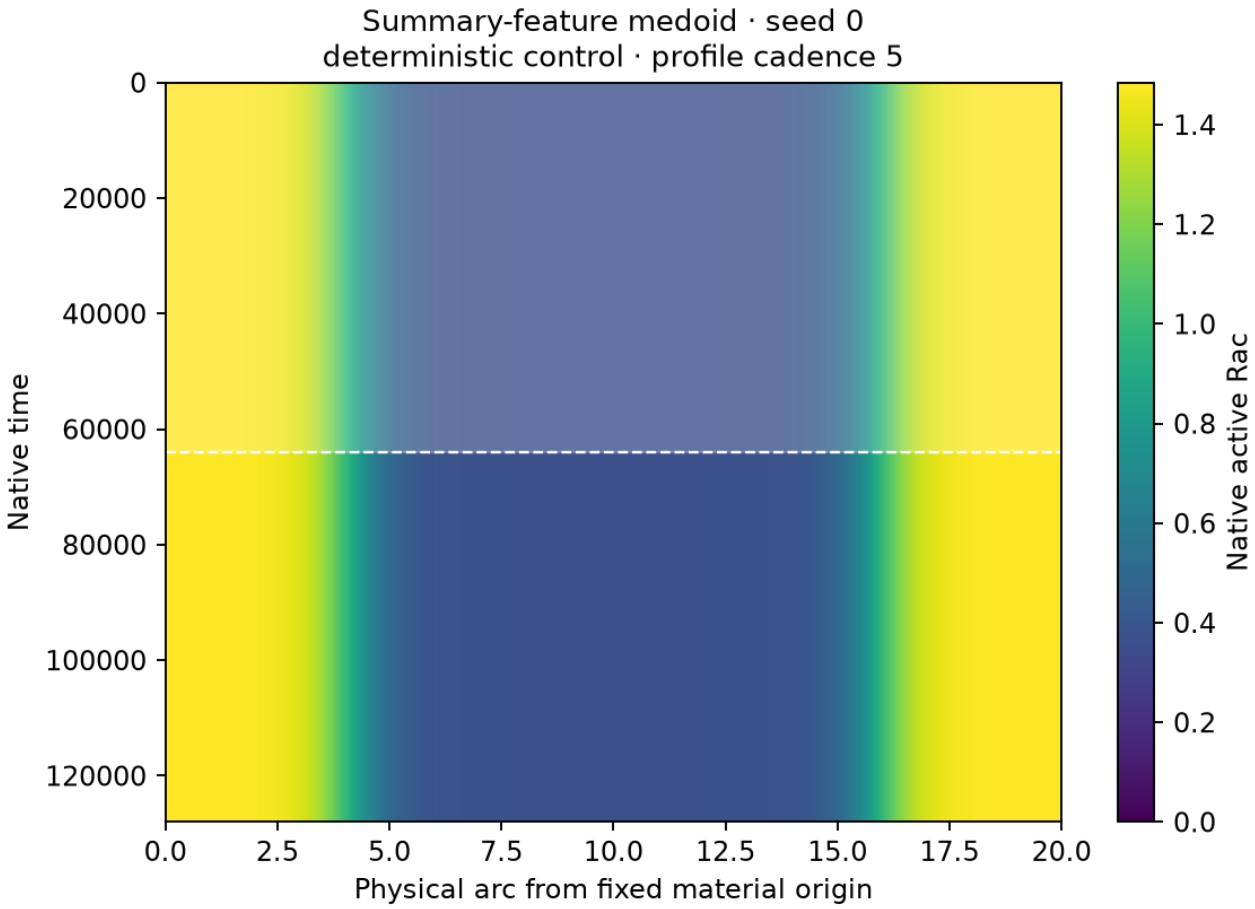


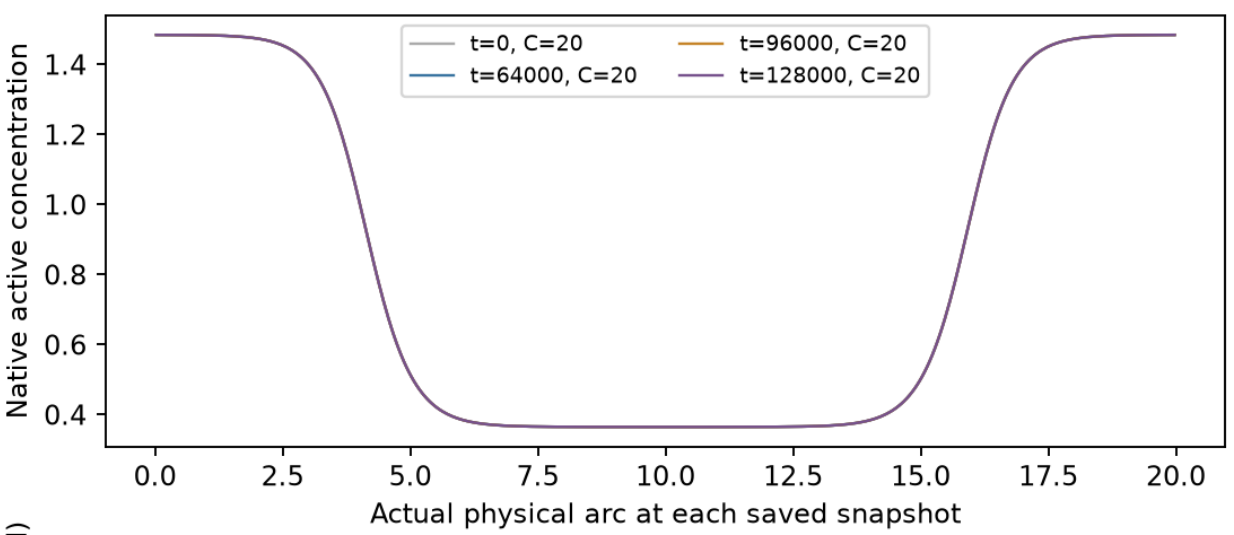

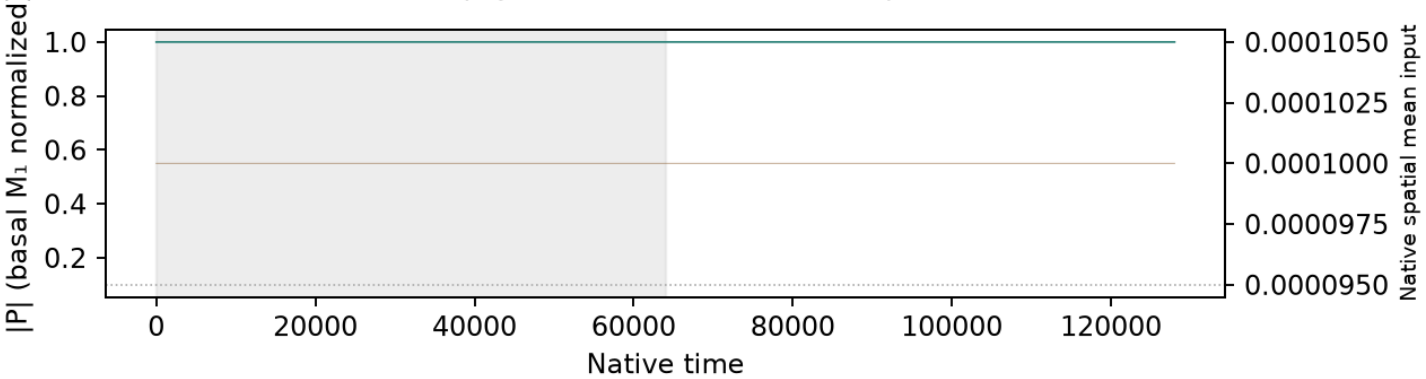


Native concentrations and every retained field frame are plotted without spatial resampling.
First half shaded: excluded from summary selection.
Spring mesh-face interpolation changes only boundary geometry; snapshots use actual saved C(t).
P uses basal M_1 normalization, distinct from instantaneous coherence.
Supplemental selection and controls; no main example is chosen.
Native NPZ/status links remain local/HPC data.


S11 · Holmes 3 · size label 20 · f=0.0001 · noise
context E4_long · σ=1 · horizon=128000 · n=12 independent noisy realizations

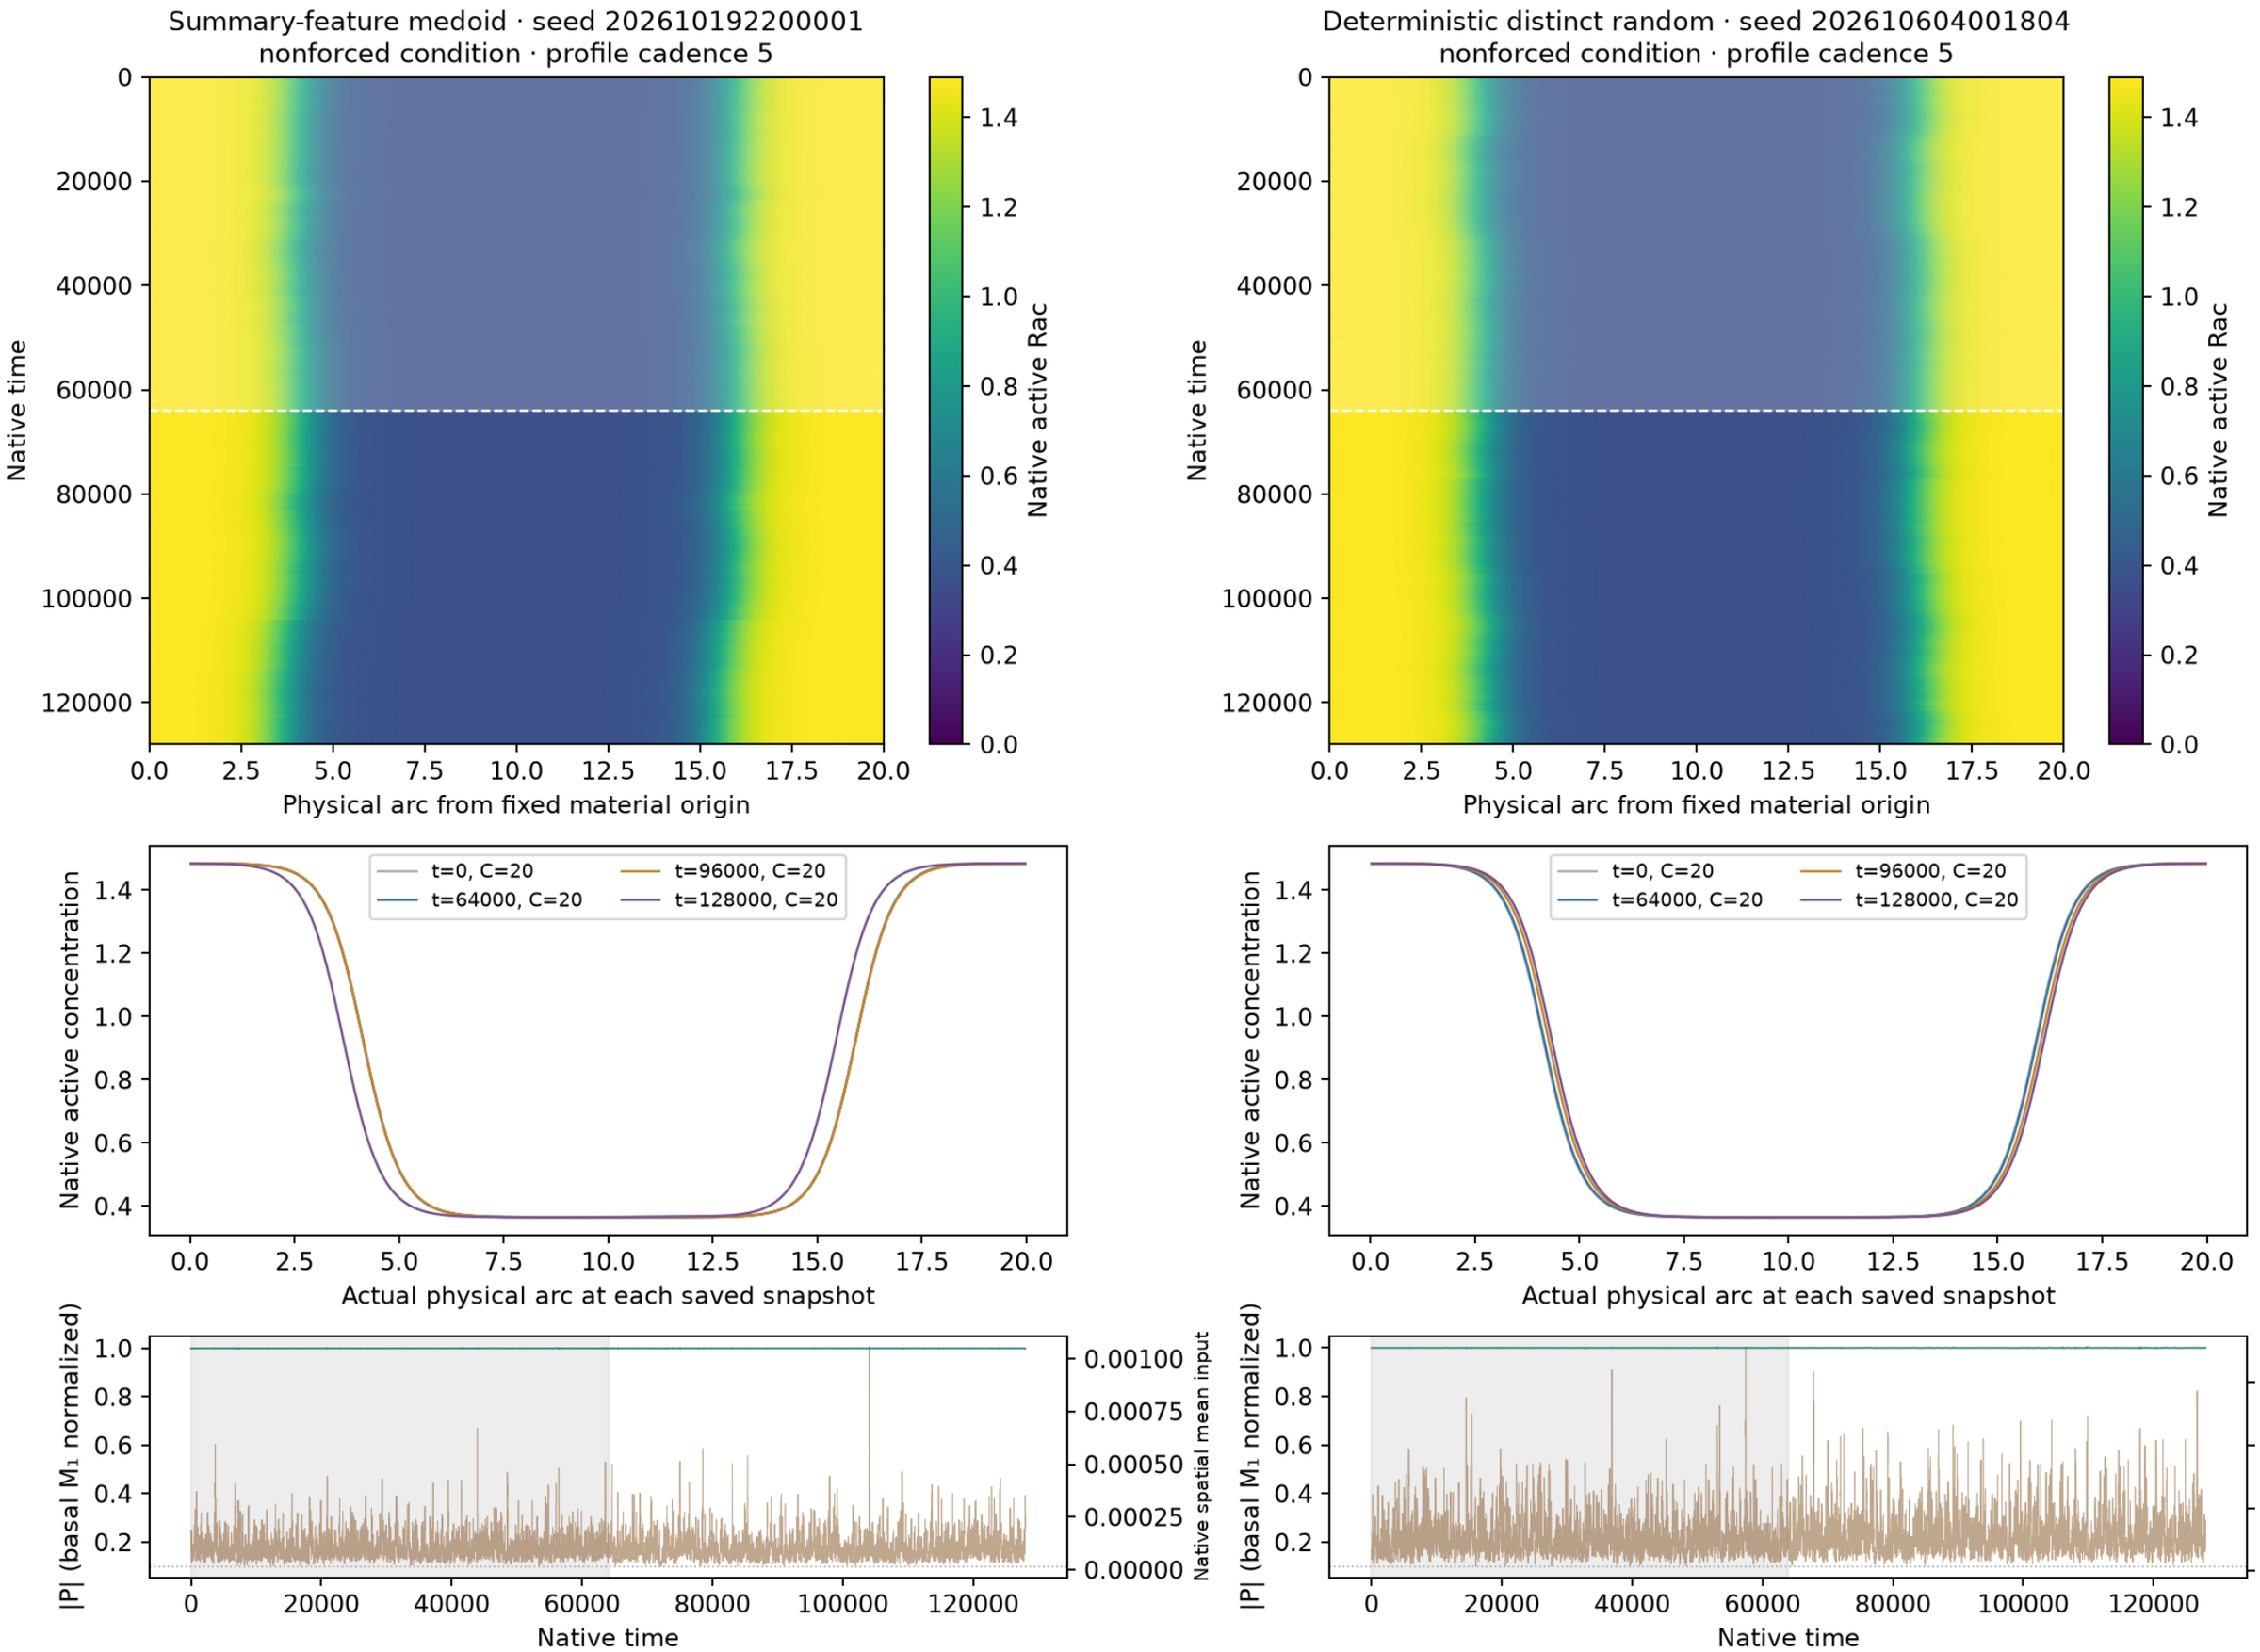


Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Holmes 3 · size label 20 · f=0.0003 · mean
context E4_long · σ=0 · horizon=128000 · 1 deterministic control

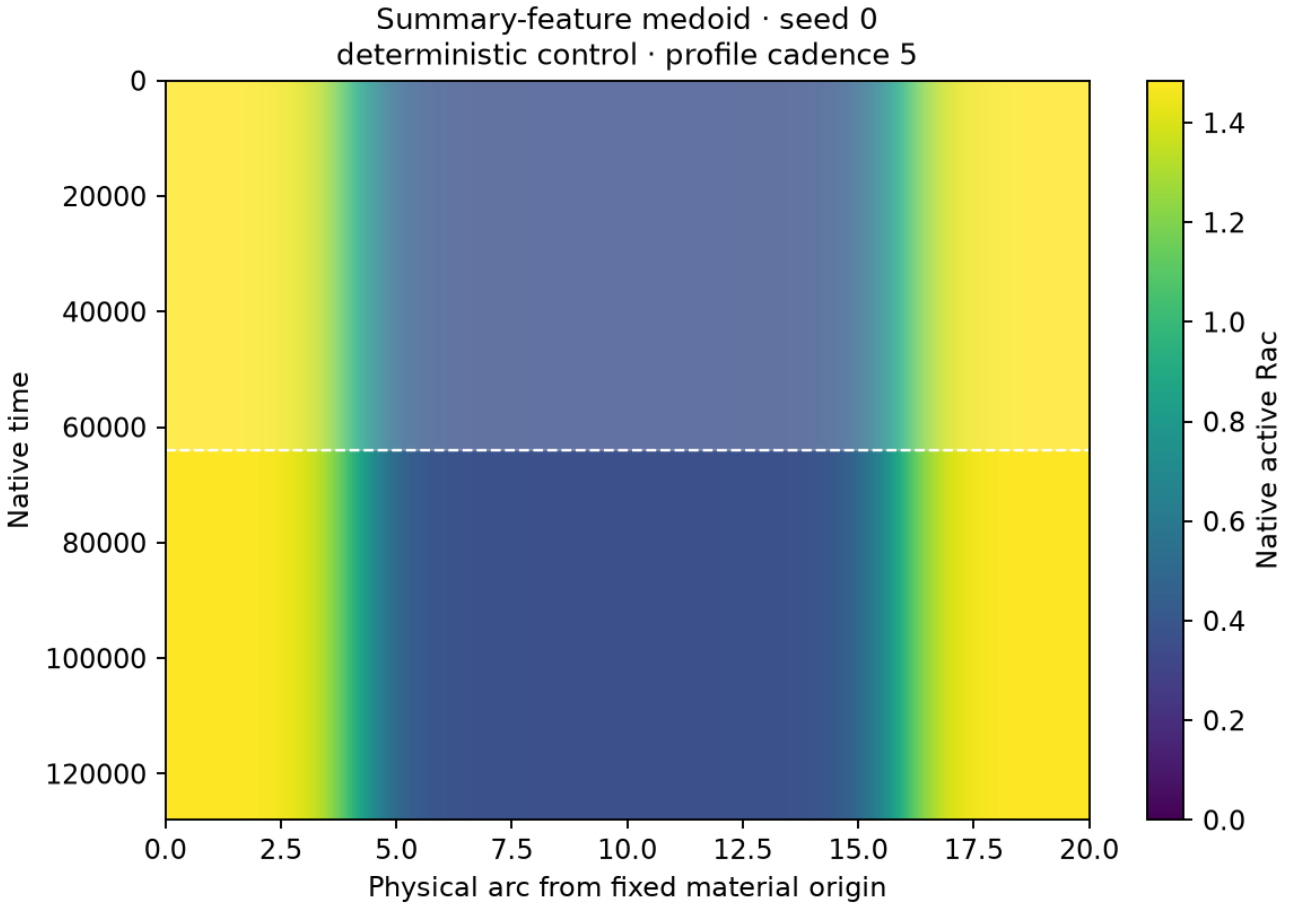


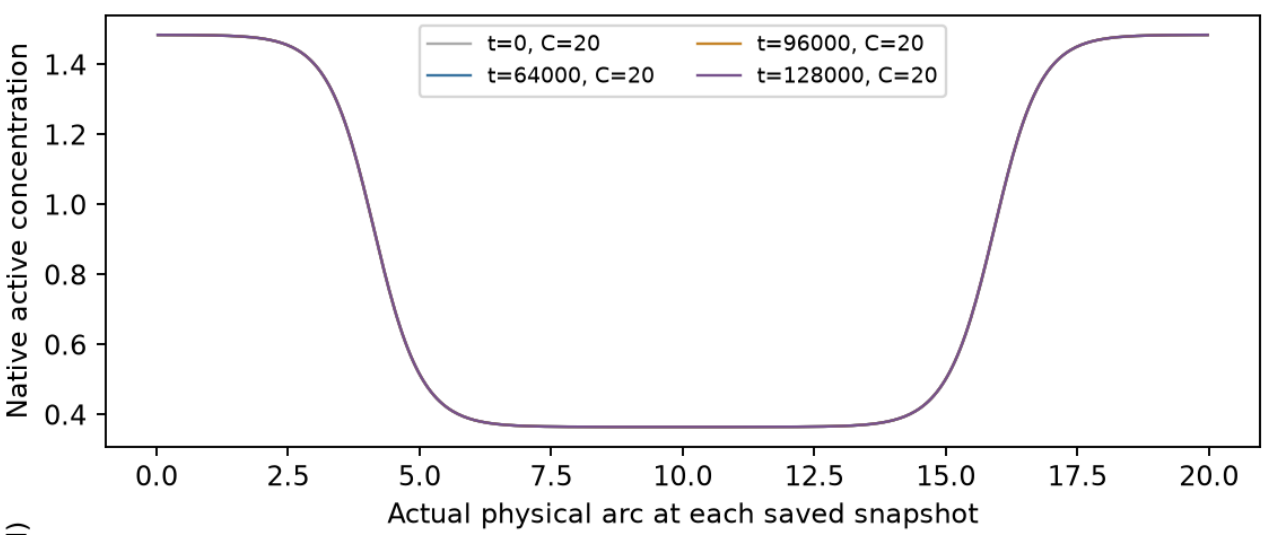

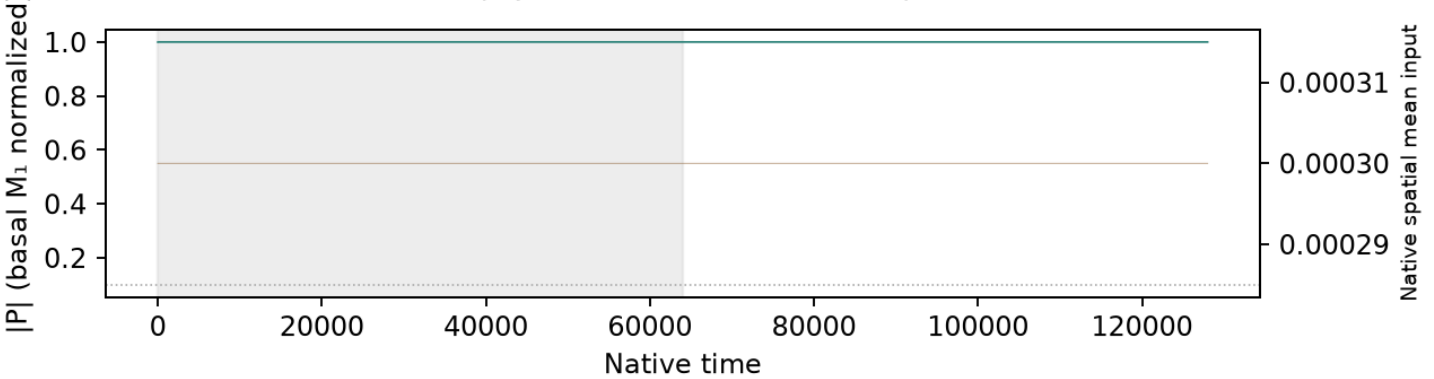


Native concentrations and every retained field frame are plotted without spatial resampling.
First half shaded: excluded from summary selection.
Spring mesh-face interpolation changes only boundary geometry; snapshots use actual saved C(t).
P uses basal M_1 normalization, distinct from instantaneous coherence.
Supplemental selection and controls; no main example is chosen.
Native NPZ/status links remain local/HPC data.


S11 · Holmes 3 · size label 20 · f=0.0003 · noise
context E4_long · σ=1 · horizon=128000 · n=12 independent noisy realizations

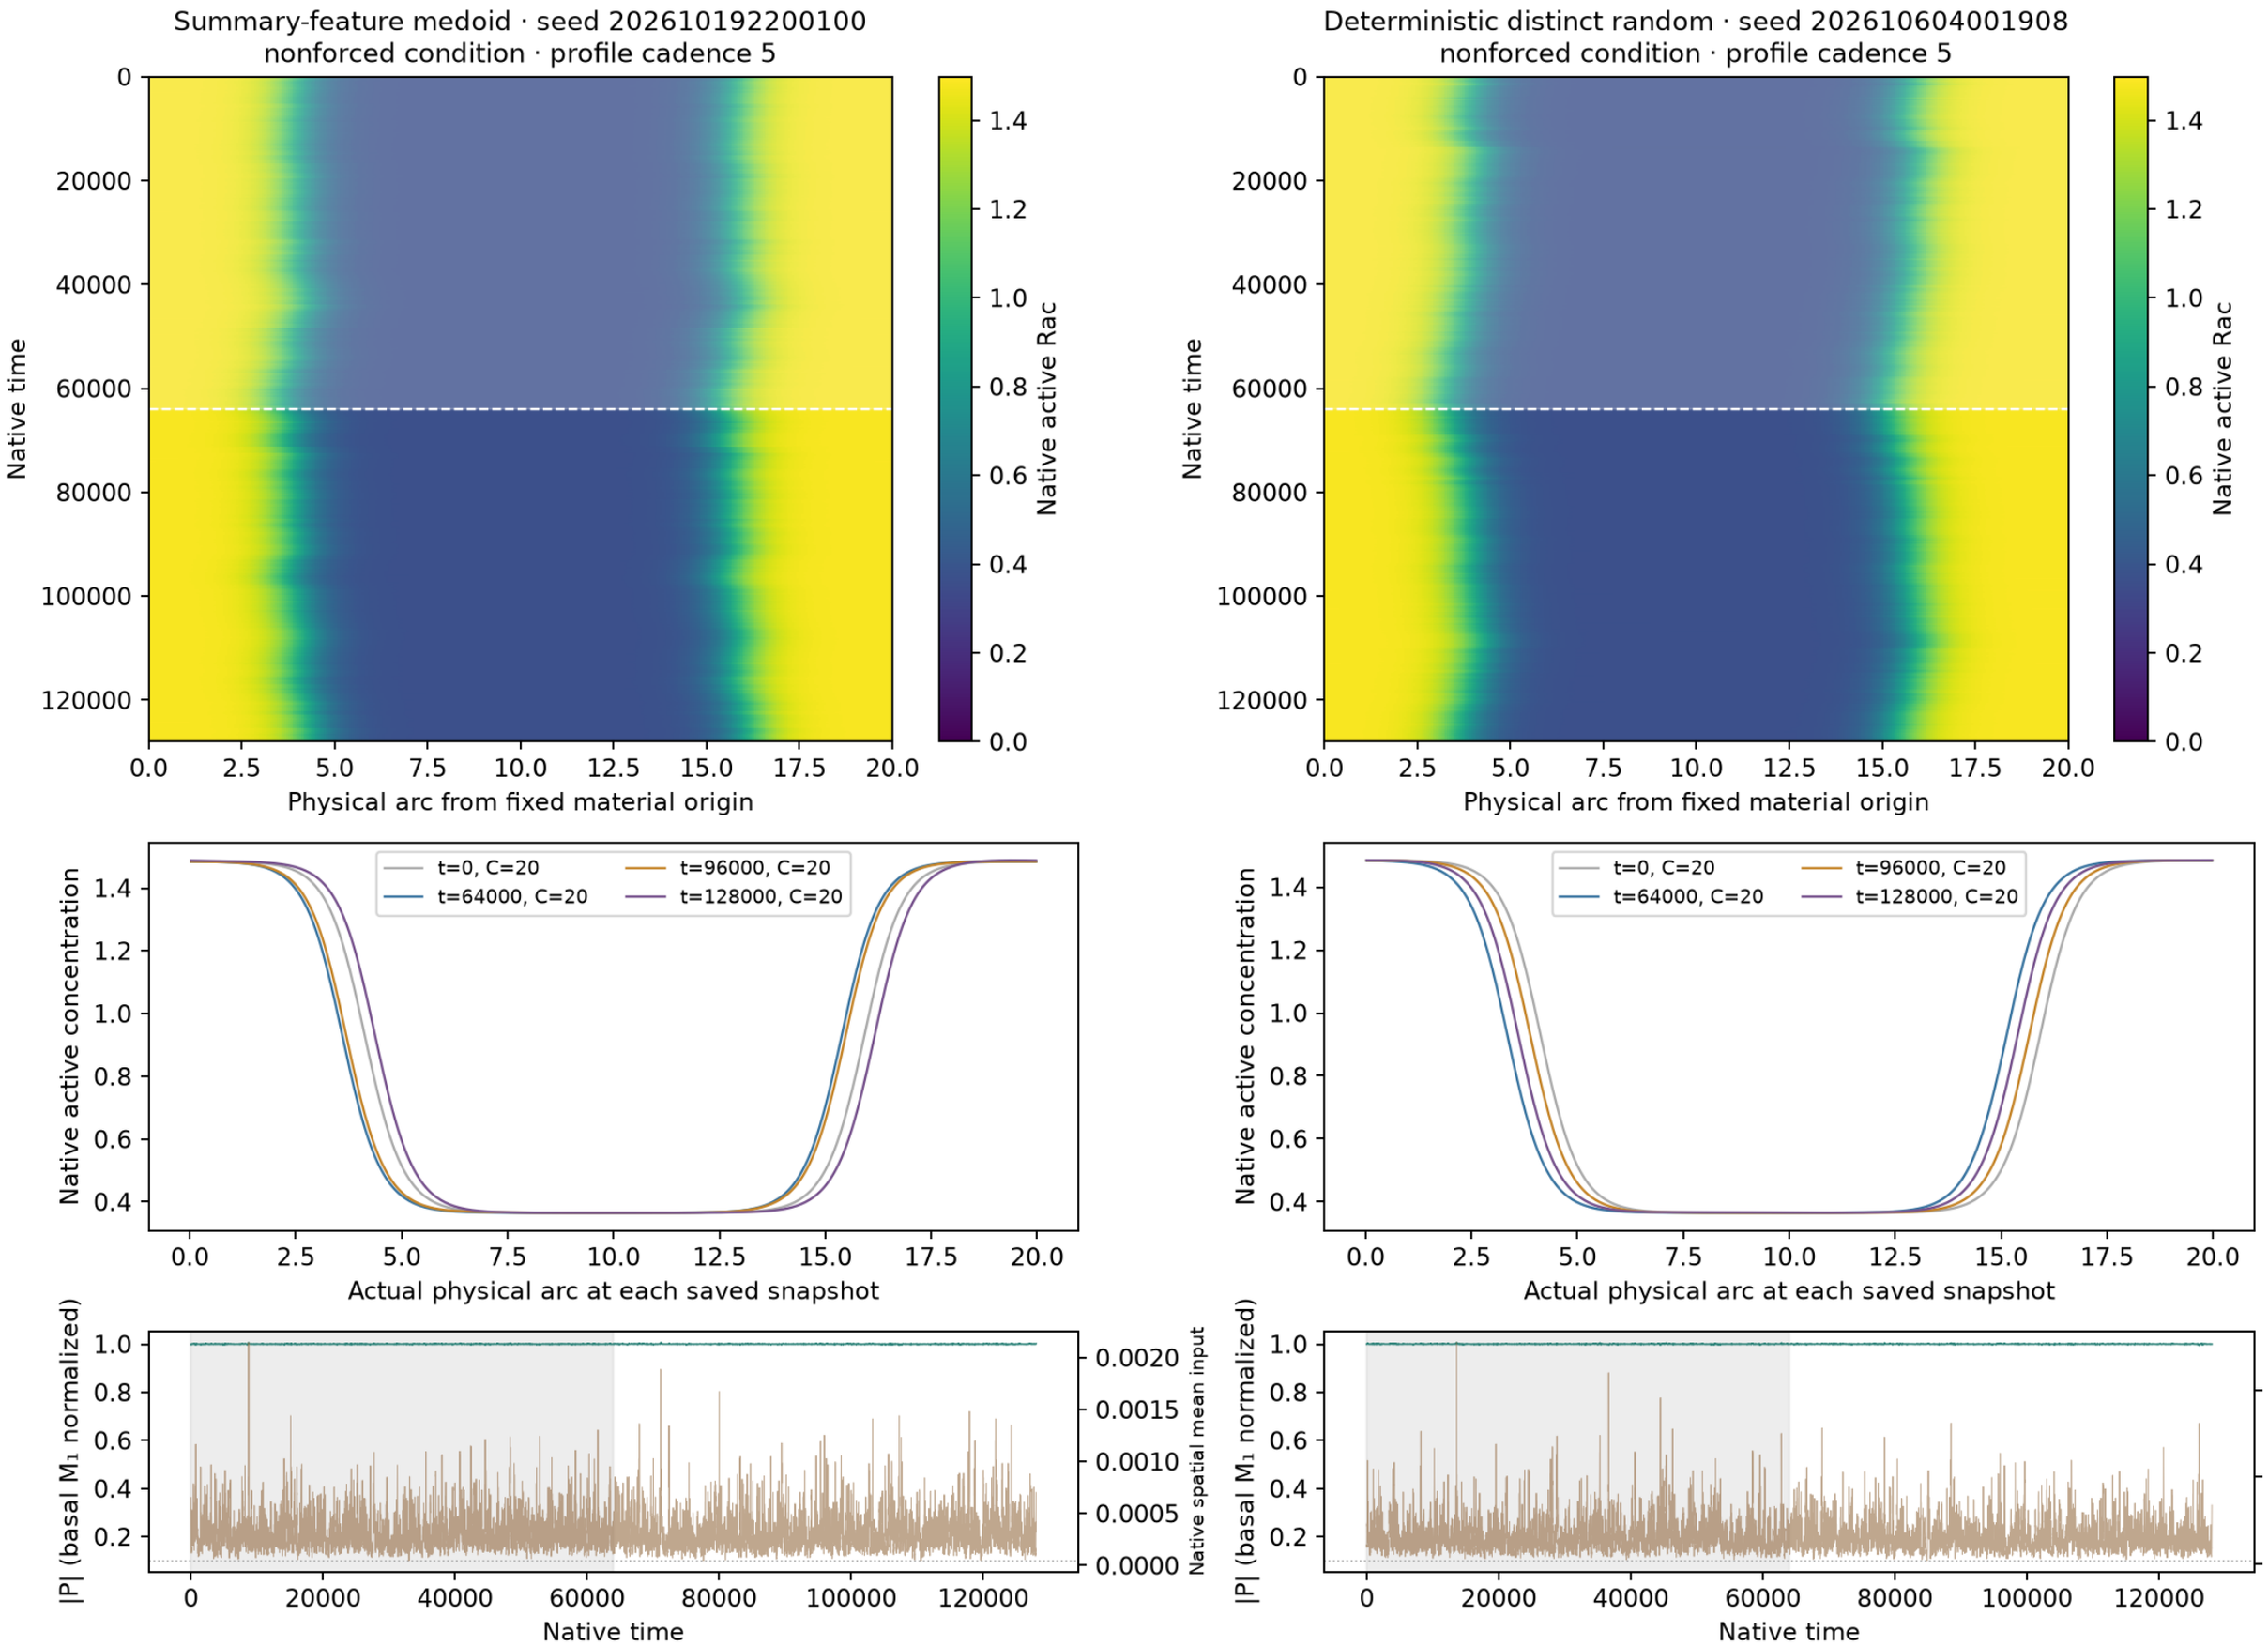


Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Holmes 3 · size label 20 · f=0.001 · mean
context E4_long · σ=0 · horizon=128000 · 1 deterministic control

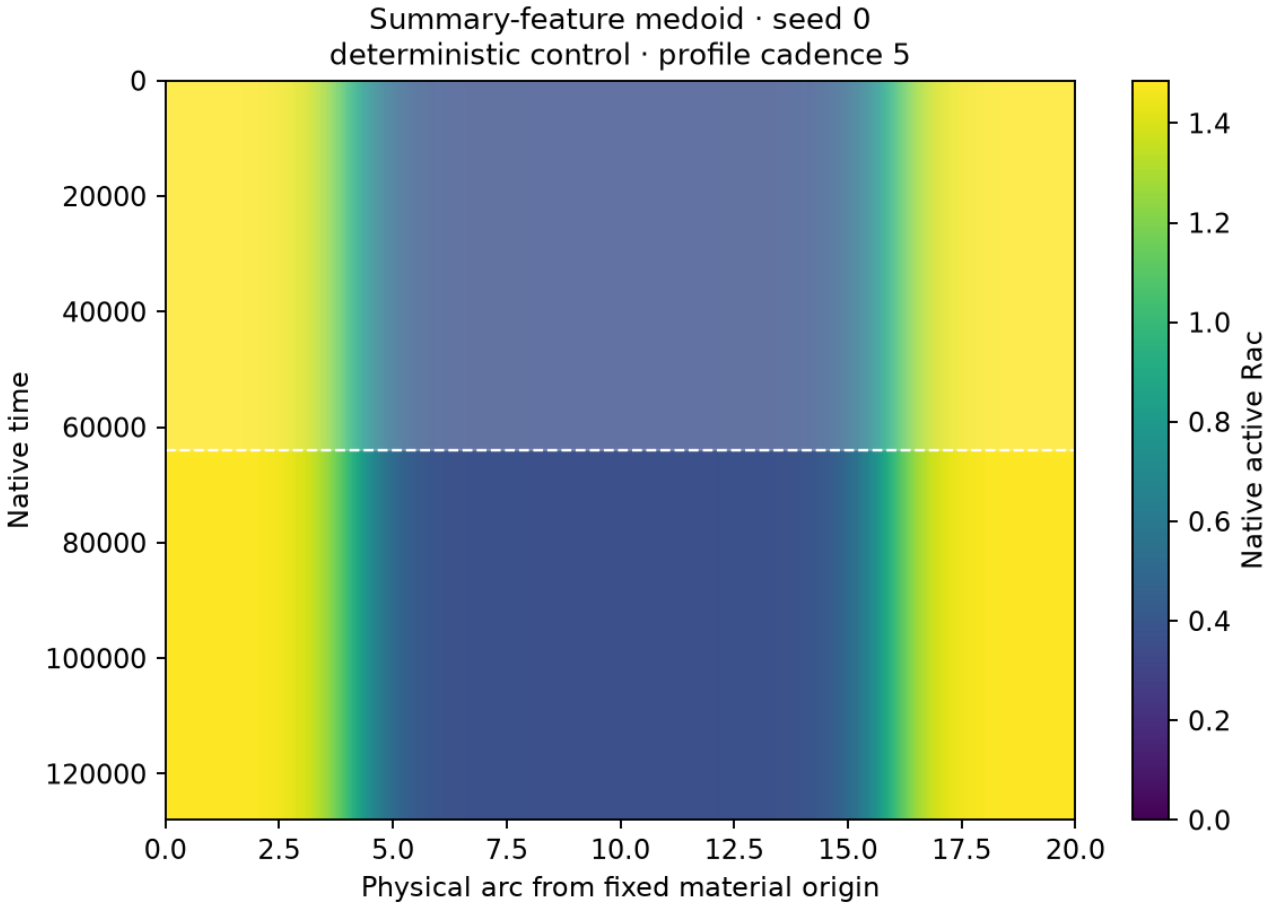


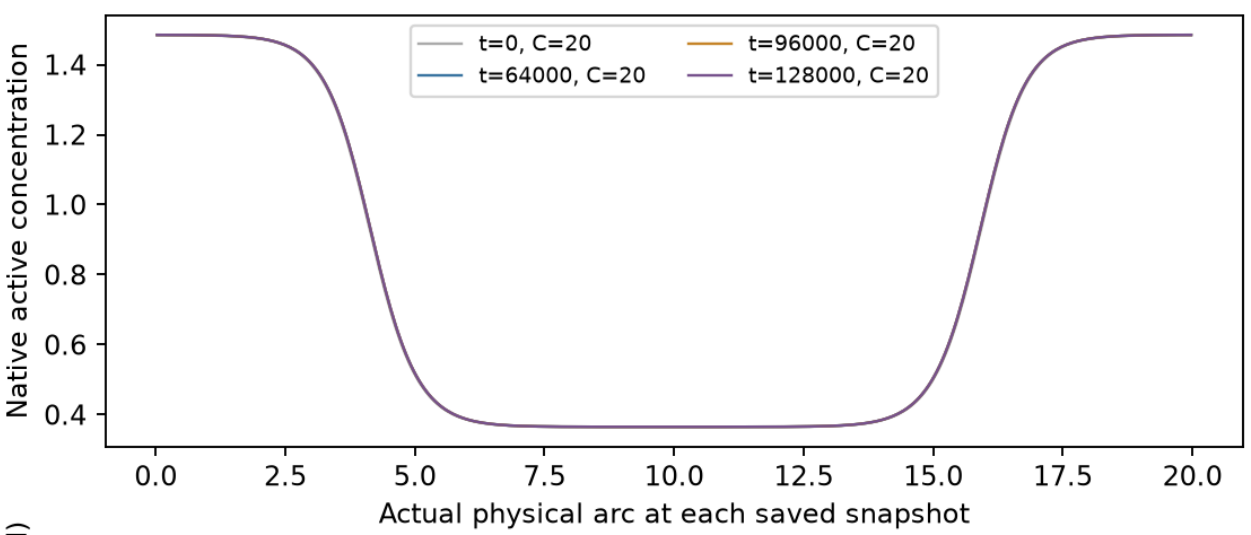

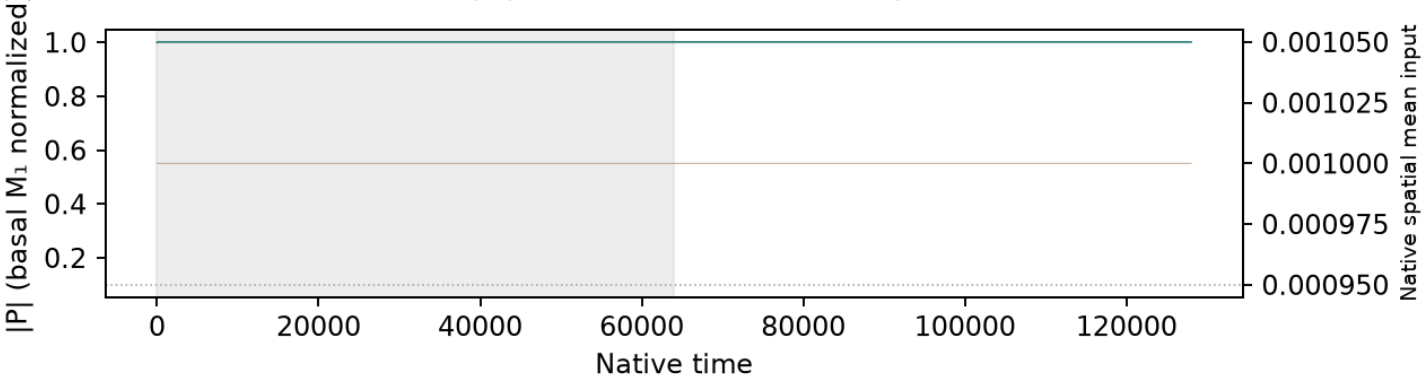


Native concentrations and every retained field frame are plotted without spatial resampling.
First half shaded: excluded from summary selection.
Spring mesh-face interpolation changes only boundary geometry; snapshots use actual saved C(t).
P uses basal M_1 normalization, distinct from instantaneous coherence.
Supplemental selection and controls; no main example is chosen.
Native NPZ/status links remain local/HPC data.

S11 · Holmes 3 · size label 20 · f=0.001 · noise
context E4_long · σ=1 · horizon=128000 · n=12 independent noisy realizations

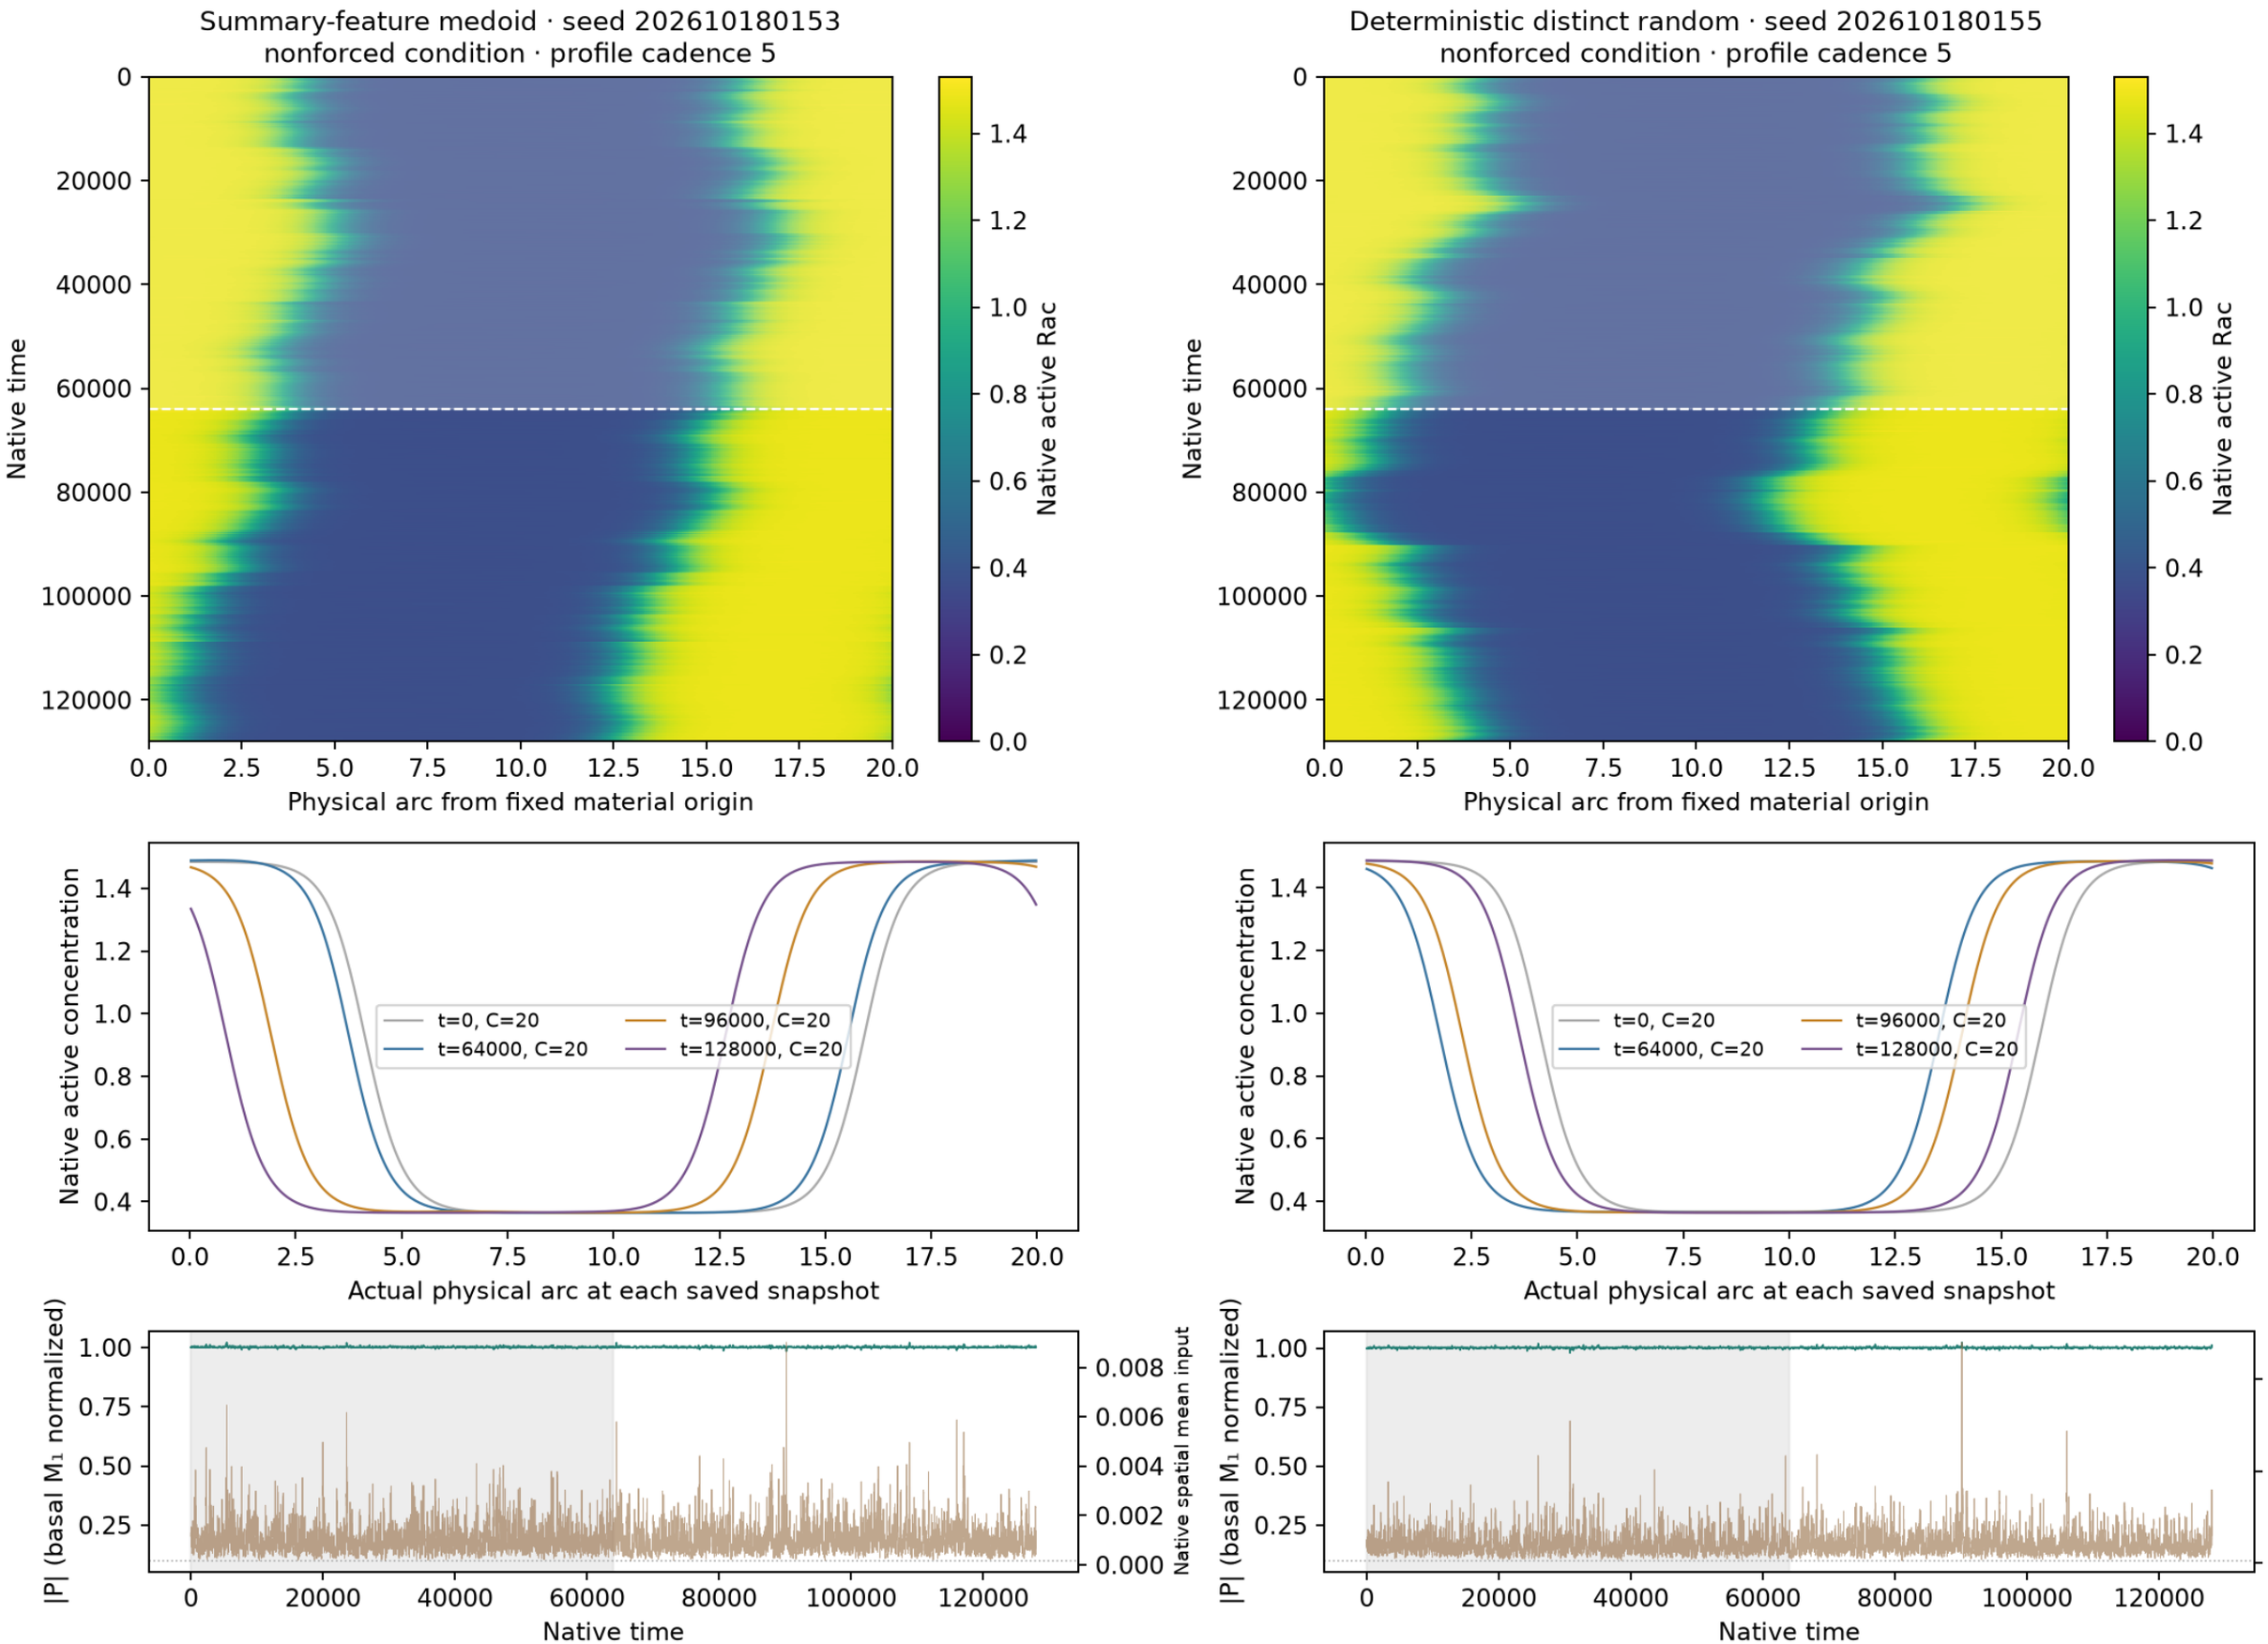


Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.


S11 · Holmes 3 · size label 20 · f=0.003 · mean
context E4_long · σ=0 · horizon=128000 · 1 deterministic control

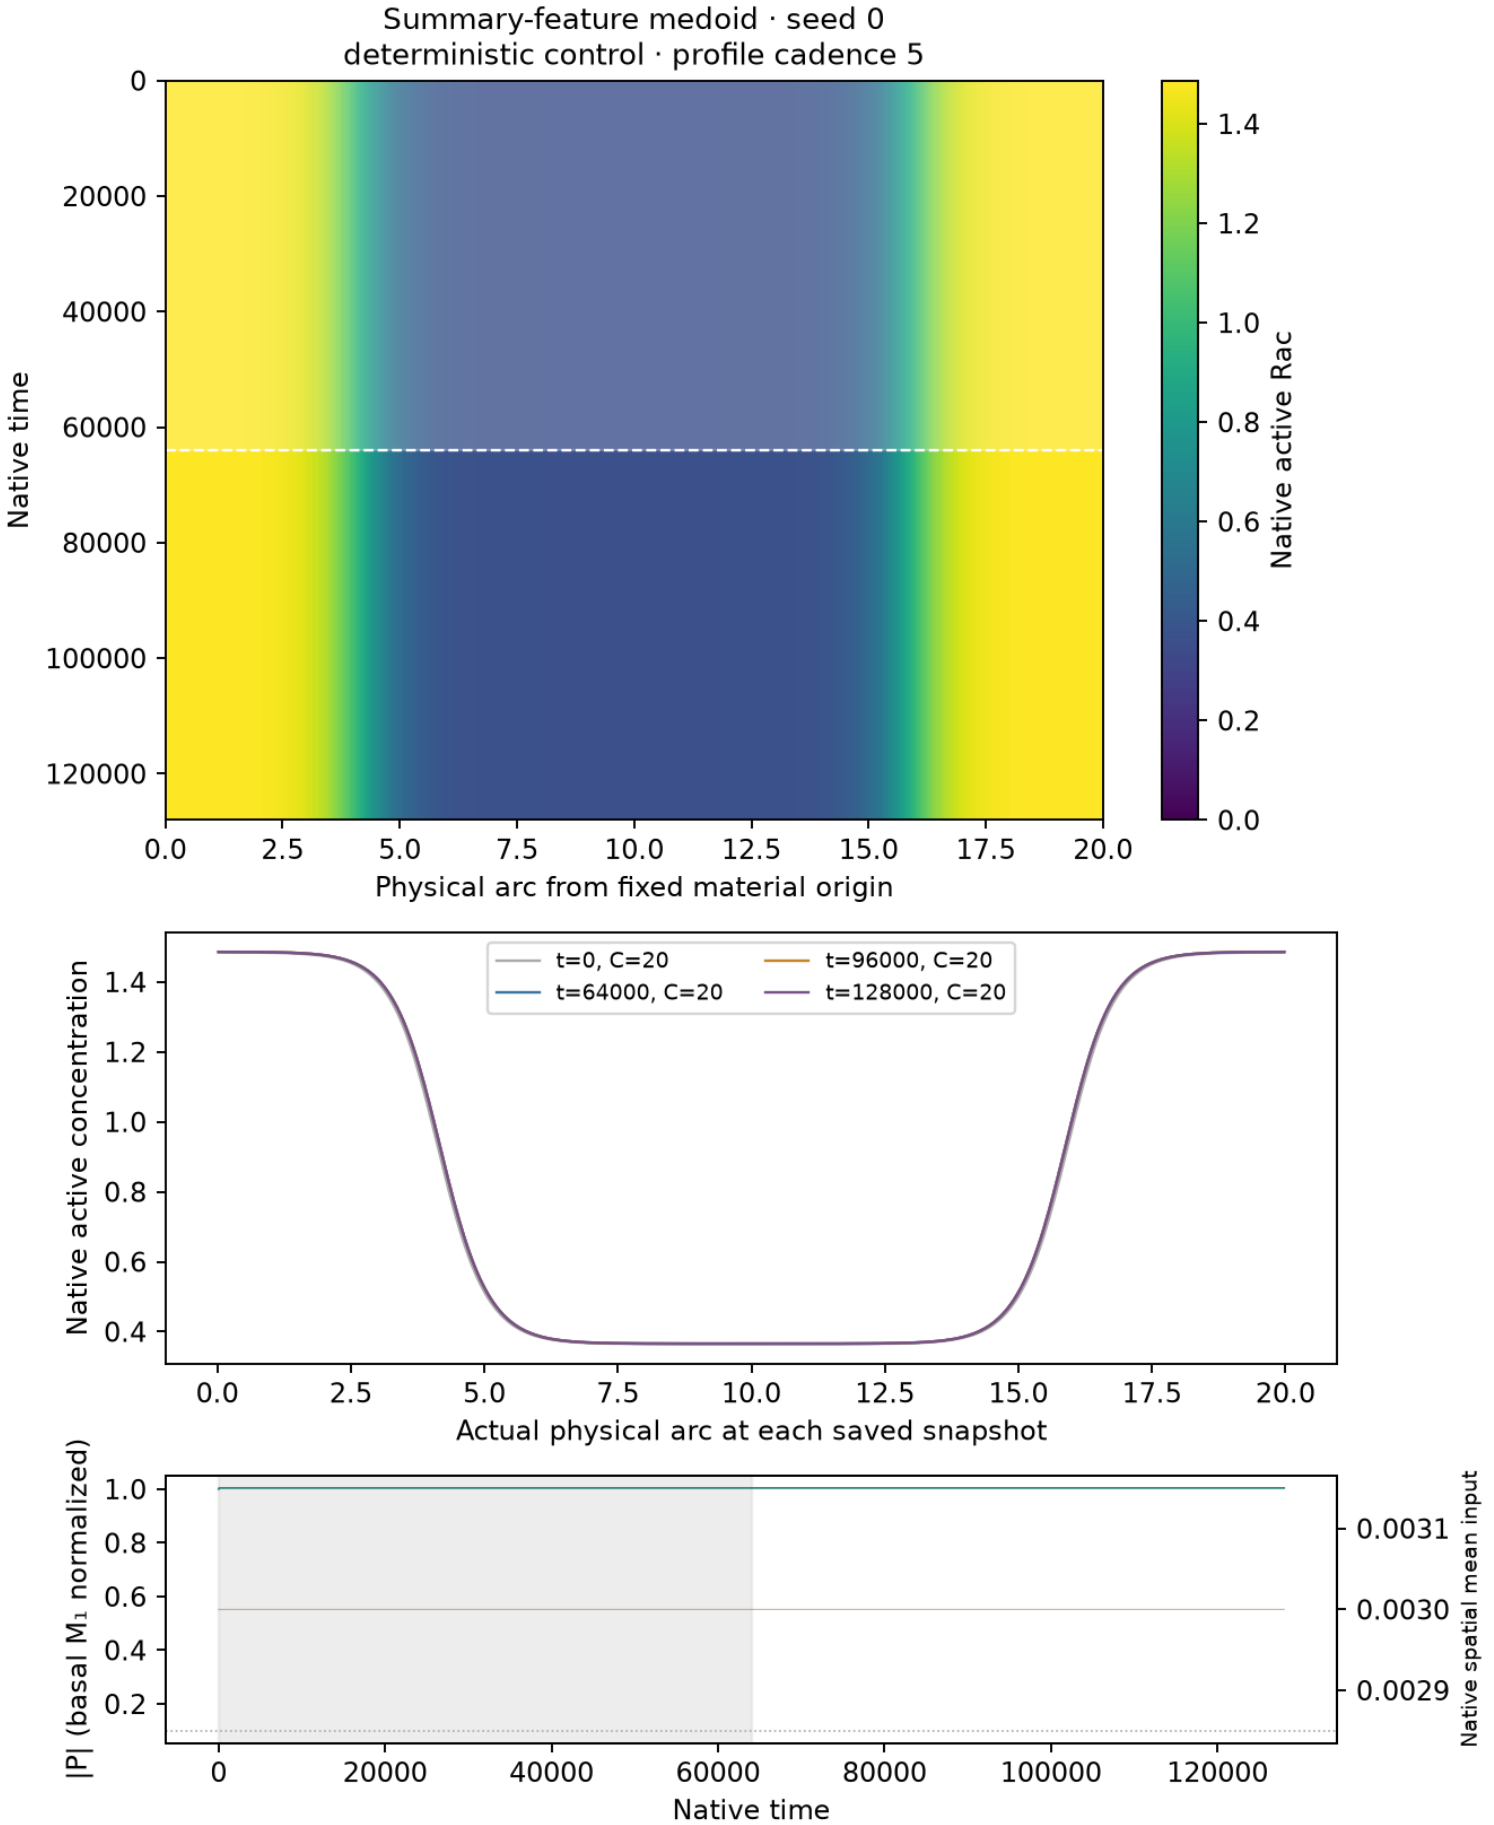

Native concentrations and every retained field frame are plotted without spatial resampling.
First half shaded: excluded from summary selection.
Spring mesh-face interpolation changes only boundary geometry; snapshots use actual saved C(t).
P uses basal M_1 normalization, distinct from instantaneous coherence.
Supplemental selection and controls; no main example is chosen.
Native NPZ/status links remain local/HPC data.


S11 · Holmes 3 · size label 20 · f=0.003 · noise
context E4_long · σ=1 · horizon=128000 · n=12 independent noisy realizations

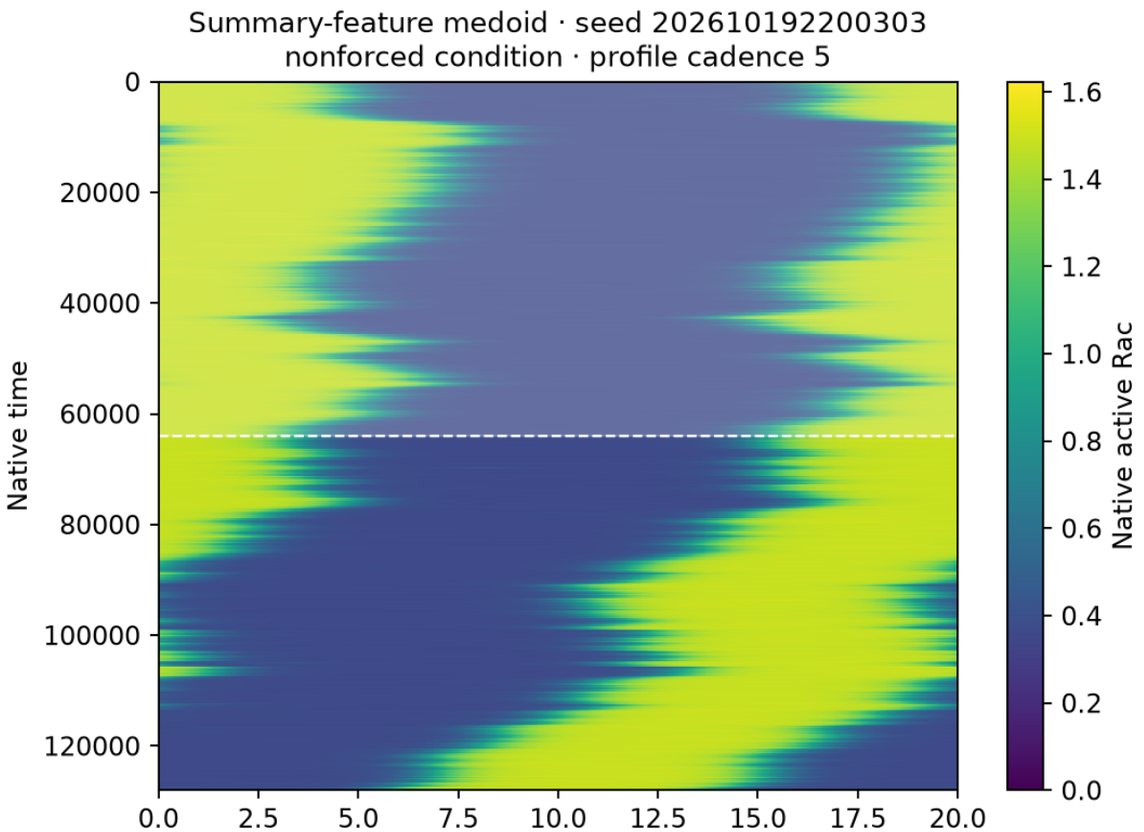


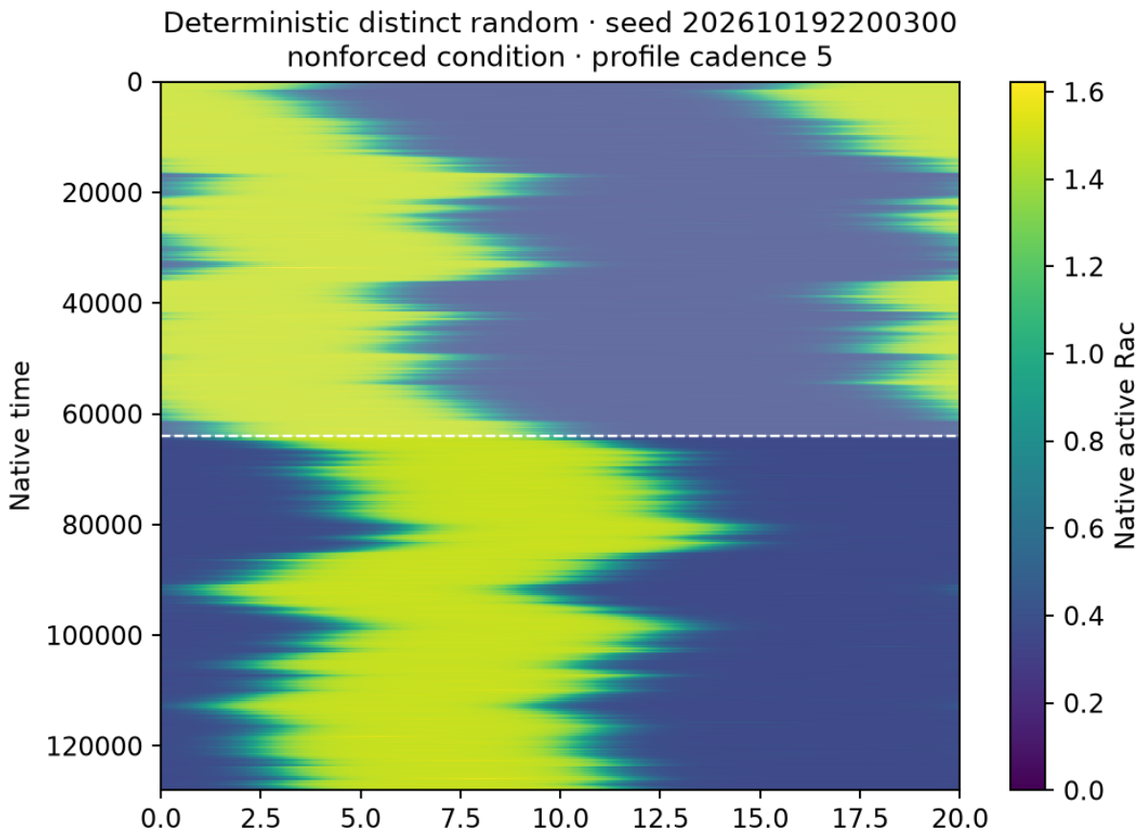


Native concentrations and every retained field frame are plotted without spatial resampling. First half shaded: excluded from summary selection.
Spring mesh-face interpolation applies only to boundary geometry; snapshots use their actual saved C(t). P uses basal M₁ normalization, not instantaneous coherence.
Selection and controls are supplemental; no main example is chosen. Native NPZ/status links remain local/HPC data.

S11 · Holmes 3 · size label 40 · f=0 · zero
context E4_long · σ=0 · horizon=128000 · 1 deterministic control

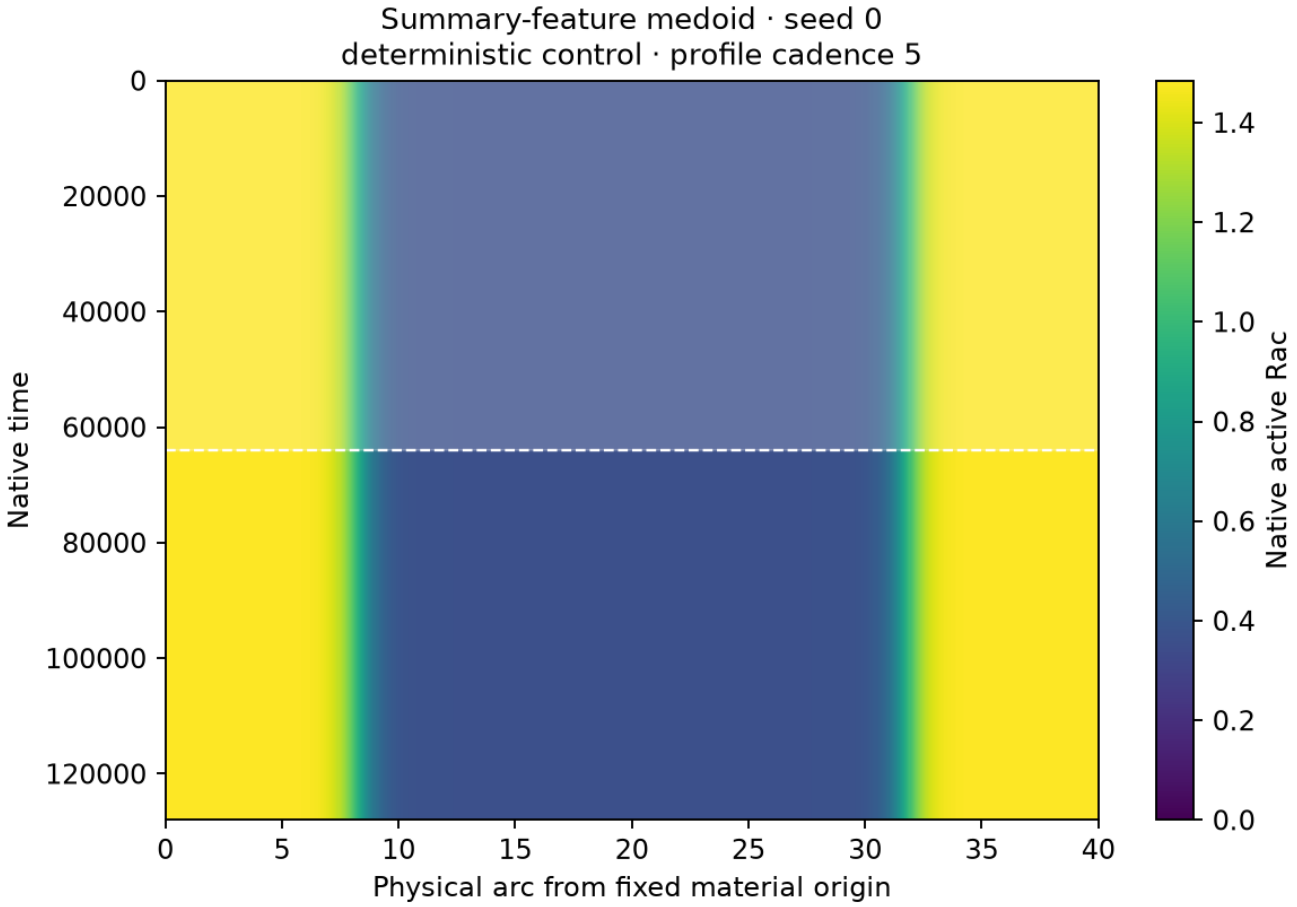


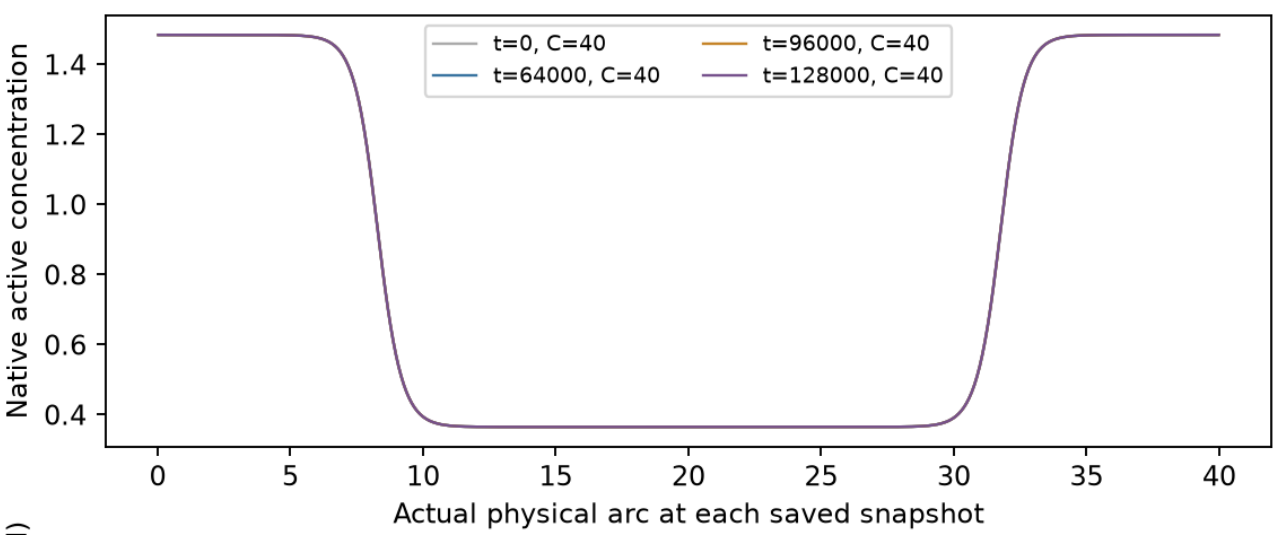

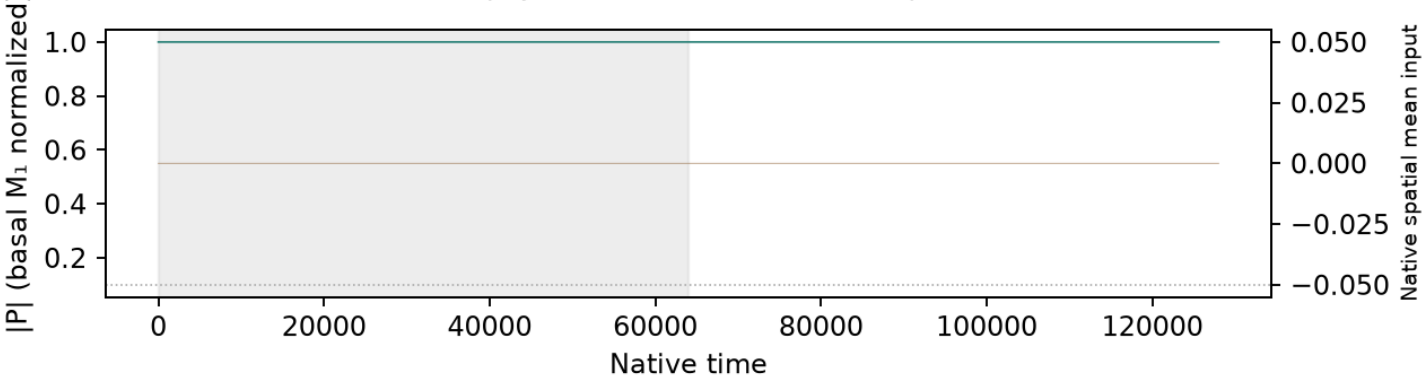

Native concentrations and every retained field frame are plotted without spatial resampling.
First half shaded: excluded from summary selection.
Spring mesh-face interpolation changes only boundary geometry; snapshots use actual saved C(t).
P uses basal M_1 normalization, distinct from instantaneous coherence.
Supplemental selection and controls; no main example is chosen.
Native NPZ/status links remain local/HPC data.

S11 · Holmes 3 · size label 40 · f=0.0001 · mean
context E4_long · σ=0 · horizon=128000 · 1 deterministic control

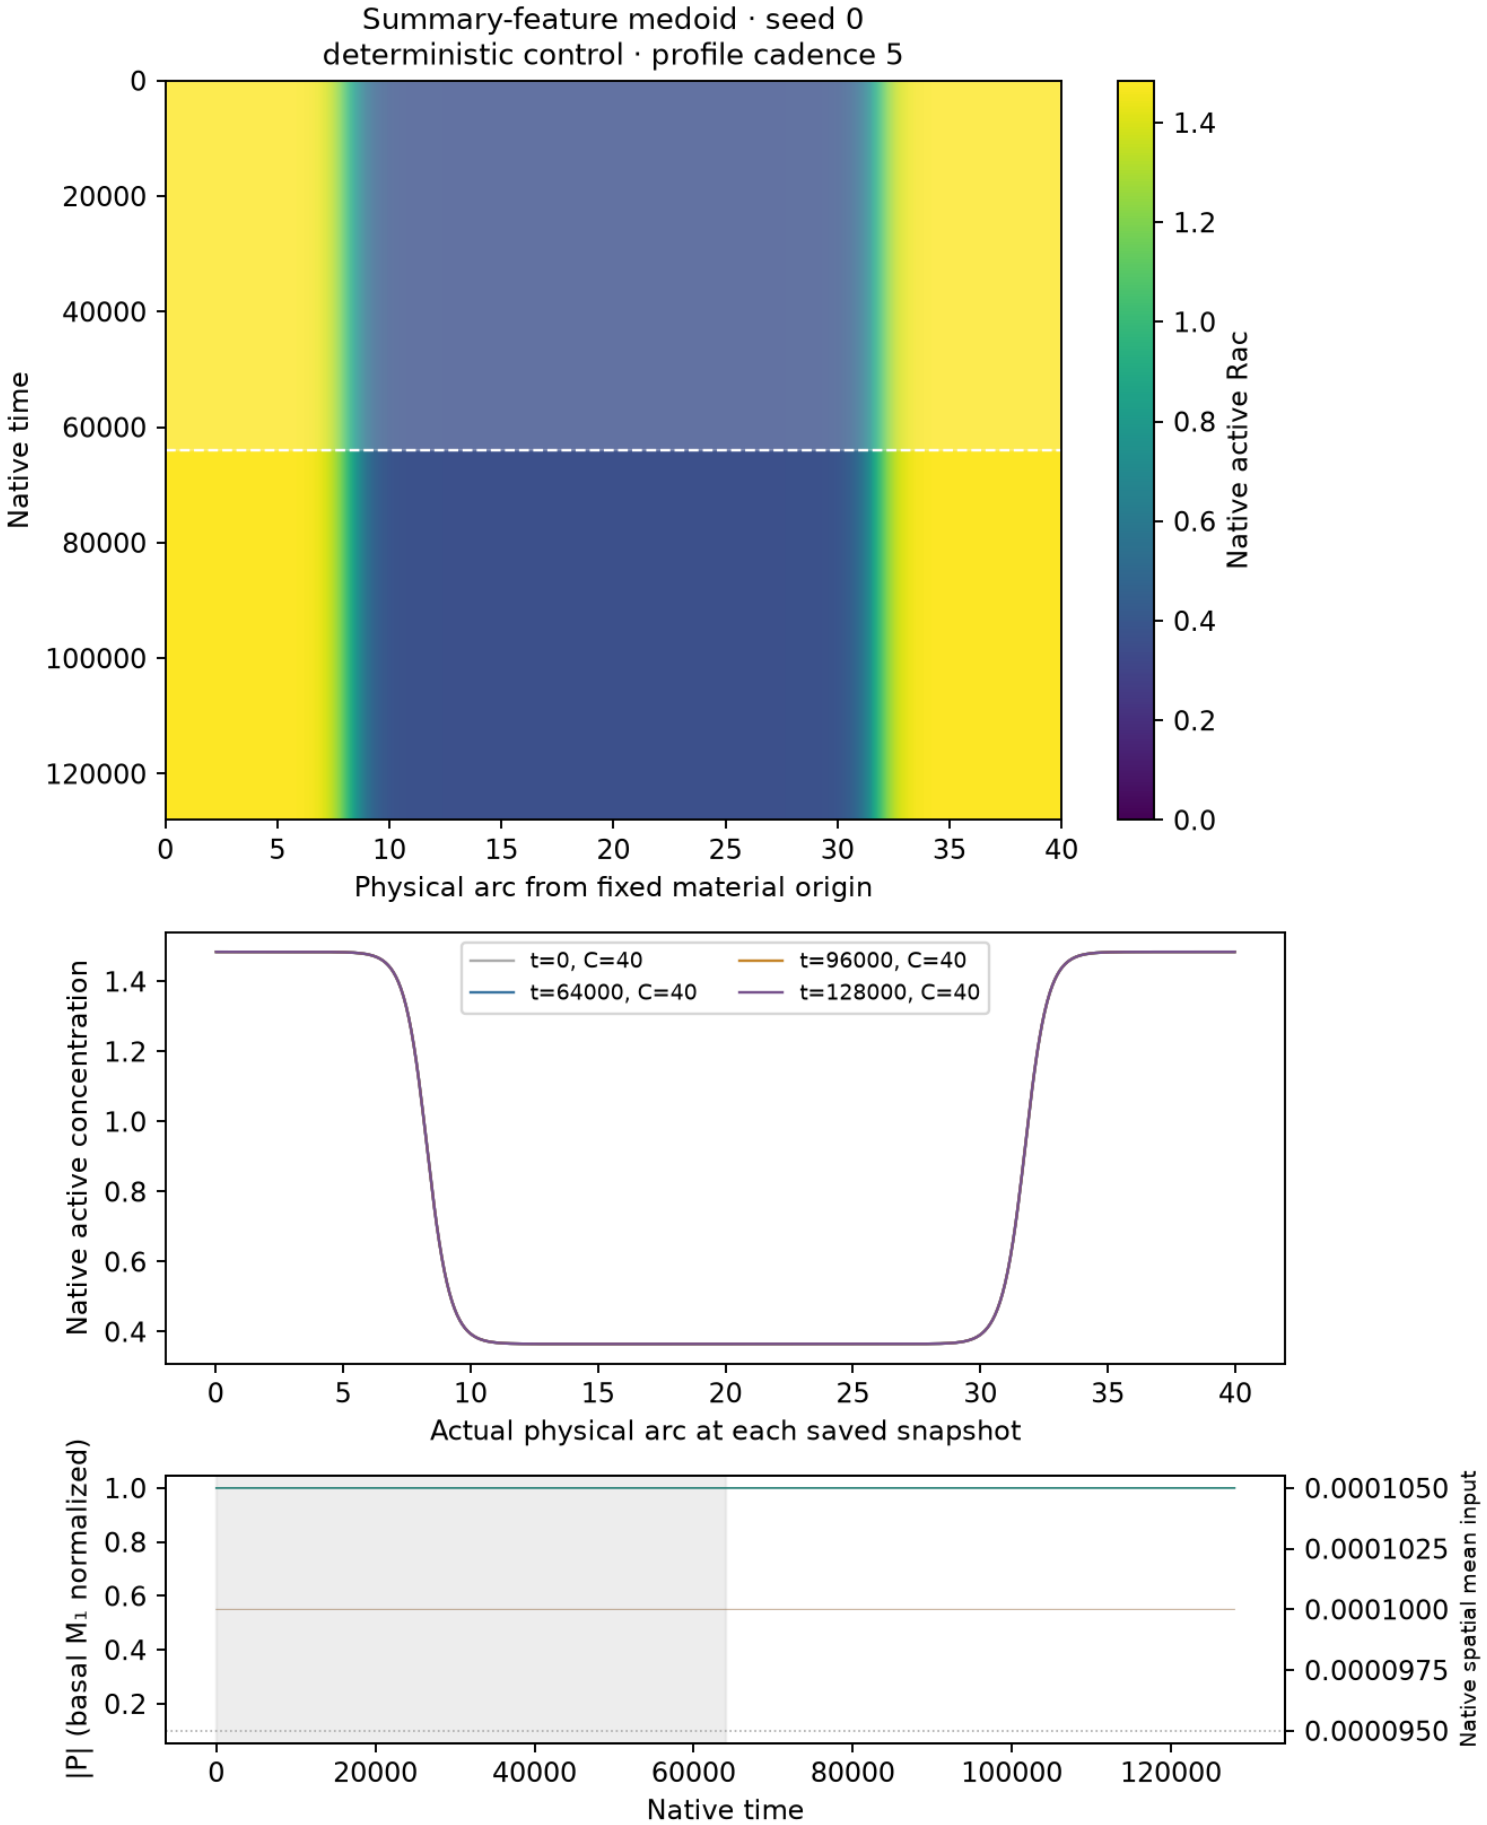

Native concentrations and every retained field frame are plotted without spatial resampling.
First half shaded: excluded from summary selection.
Spring mesh-face interpolation changes only boundary geometry; snapshots use actual saved C(t).
P uses basal M_1 normalization, distinct from instantaneous coherence.
Supplemental selection and controls; no main example is chosen.
Native NPZ/status links remain local/HPC data.