


FolderNotify

The FolderNotify tool watches specified file system locations for new build notification HTML files (*.uut.html) and notifies the user via the tray icon bubble text mechanism.

Use

Simply start the tool. If there are paths selected to watch they are stored to a local XML file along side of the executable and this is loaded at program start.

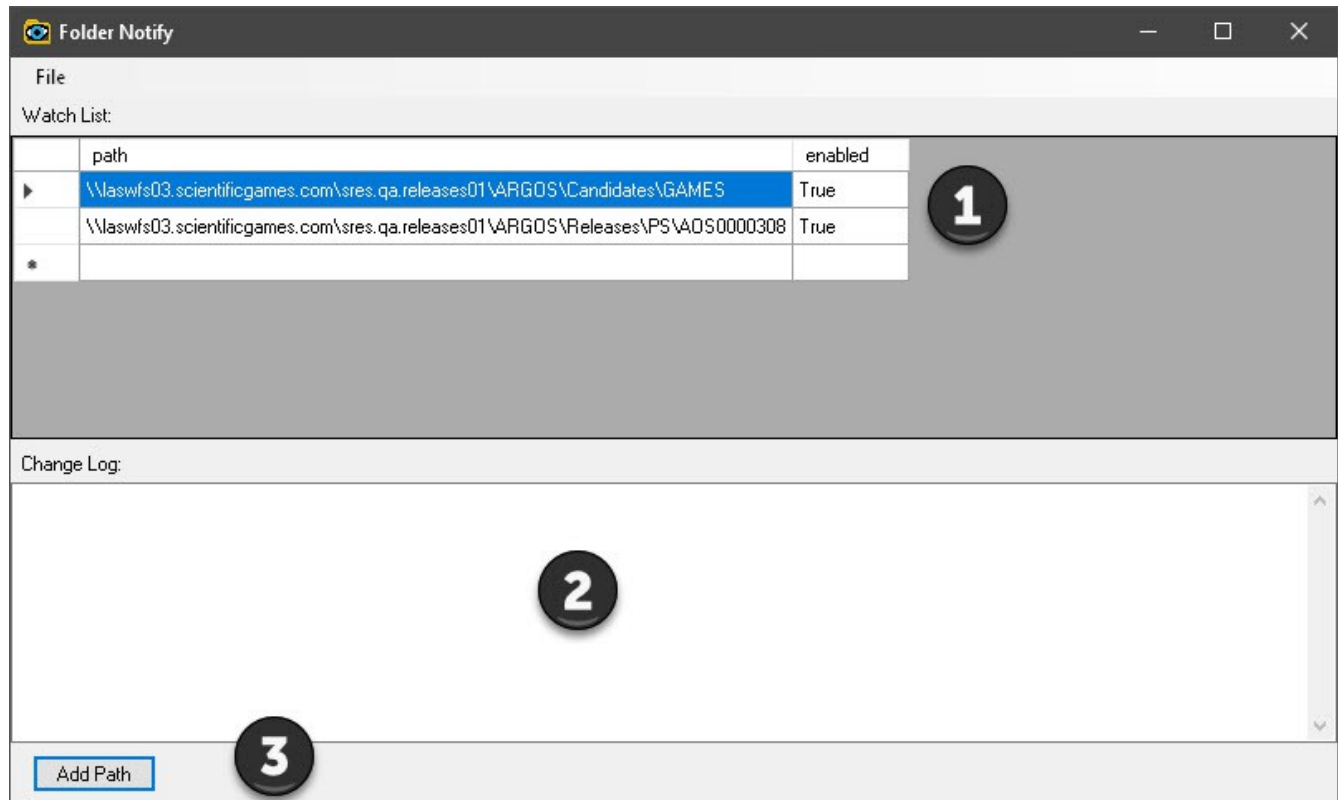

The menu only has a **File->Exit** option and it behaves as one would expect.

The Change Log (2)

While the program will notify the user via the tray bubble text pop-up, it also logs the events to this text box for later review.

Adding Watch Paths (3)


To add a watch path, click the **Add Path** button. A dialog will appear; add the path to the text box and click **OK**, or **Cancel** to cancel.



Your new path will be added and a watch will be created immediately.

Enable/Disable Watchers (1)


To enable or disable a path watcher, simply right-click on the corresponding row in the table and select **Toggle enabled** from the context menu.

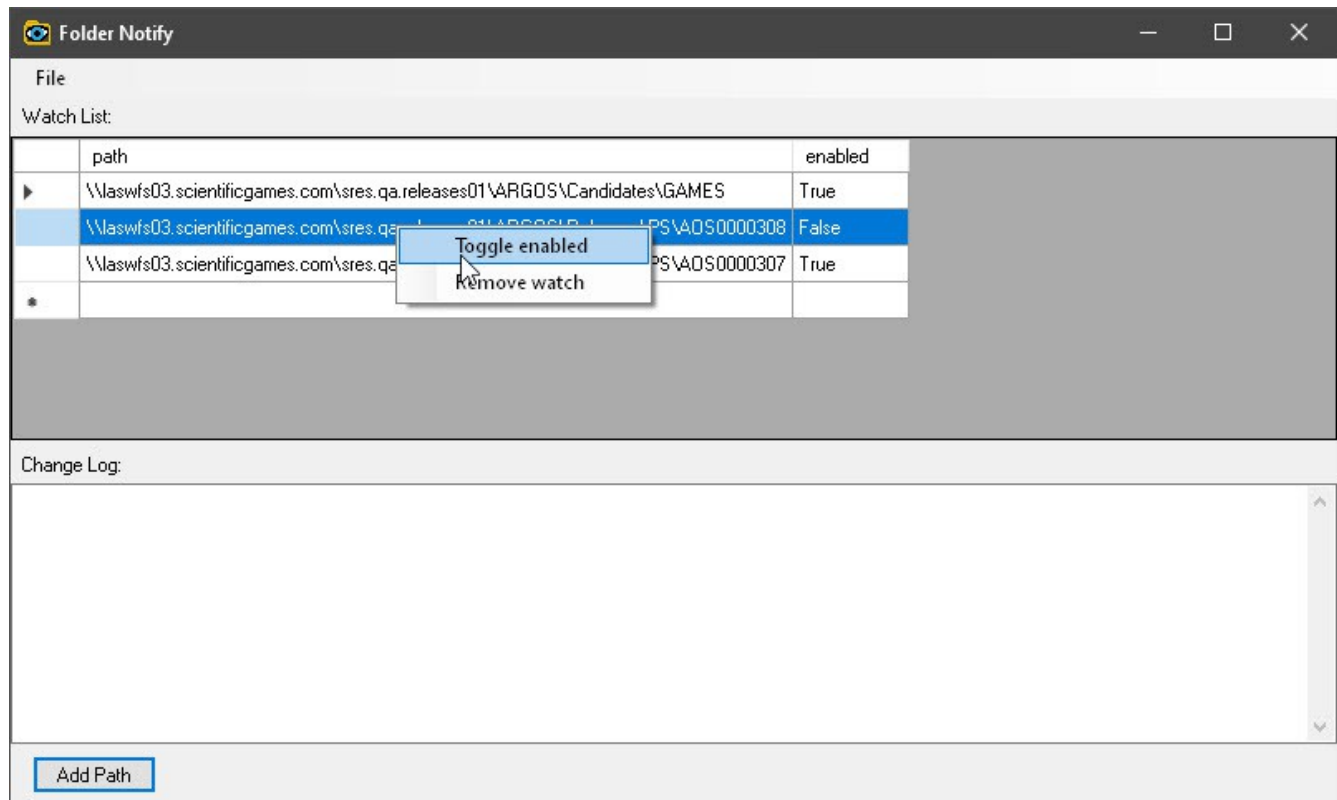

This will automatically update the data stored with the application and will be remembered on next load.

Remove Watchers (1)

To remove a watcher, right-click on the corresponding row and select **Remove Watch** from the context menu. A confirmation dialog will be displayed.

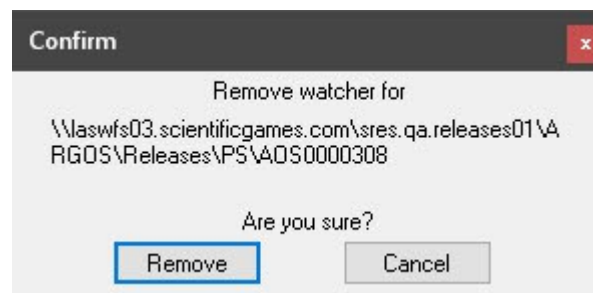

Click **Remove** to remove the watcher from the data, or **Cancel** to cancel. This automatically updates the data stored with the application and will be remembered on next load.

Notes

The tool minimizes to the tray. To restore it, simply double-click the tray icon.

The watch list and change log are in a split panel and can be adjusted.