



(a) *inference: one forward pass, no folded circuits*

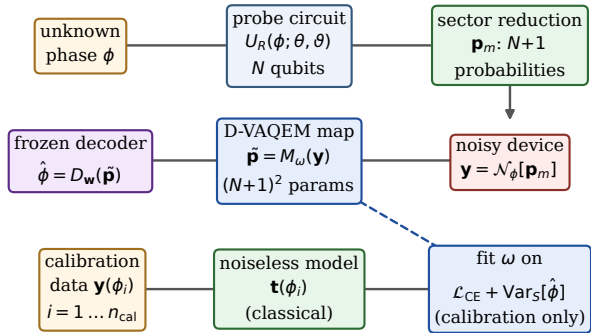

no noise-model knowledge; $N+1$ numbers per phase
instead of 2^N outcomes or 4^N tomography coefficients

(b) $\phi = 0.6$ rad, depol 0.01

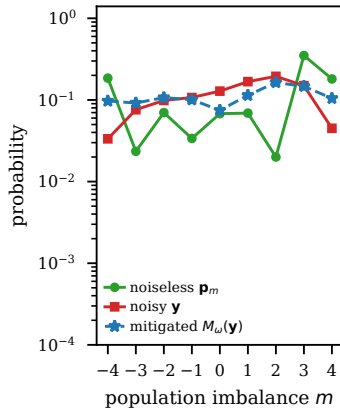

(c)

