

## Programming Assignment 2: Seam Carving

Seam-carving is a content-aware image resizing technique where the image is reduced in size by one pixel of height (or width) at a time. A *vertical seam* in an image is a path of pixels connected from the top to the bottom with one pixel in each row.

(A *horizontal seam* is a path of pixels connected from the left to the right with one pixel in each column.) Below left is the original 505-by-287 pixel image; below right is the result after removing 150 vertical seams, resulting in a 30% narrower image.

Unlike standard content-agnostic resizing techniques (e.g. cropping and scaling), the most interesting features (aspect ratio, set of objects present, etc.) of the image are preserved.

As you'll soon see, the underlying algorithm is quite simple and elegant. Despite this fact, this technique was not discovered until 2007 by Shai Avidan and Ariel Shamir. It is now a feature in Adobe Photoshop (thanks to a Princeton graduate student), as well as other popular computer graphics applications.



In this assignment, you will create a data type that resizes a  $W$ -by- $H$  image using the seam-carving technique.


Finding and removing a seam involves three parts and a tiny bit of notation:

1. *Notation.* In image processing, pixel  $(x, y)$  refers to the pixel in column  $x$  and row  $y$ , with pixel  $(0, 0)$  at the upper left corner and pixel  $(W - 1, H - 1)$  at the bottom right corner. This is consistent with the [Picture](#) data type in `stdlib.jar`. *Warning:* this is the opposite of the standard mathematical notation used in linear algebra where  $(i, j)$  refers to row  $i$  and column  $j$  and with Cartesian coordinates where  $(0, 0)$  is at the lower left corner.

<i>a 3-by-4 image</i>		
$(0, 0)$	$(1, 0)$	$(2, 0)$
$(0, 1)$	$(1, 1)$	$(2, 1)$
$(0, 2)$	$(1, 2)$	$(2, 2)$
$(0, 3)$	$(1, 3)$	$(2, 3)$

2. We also assume that the color of a pixel is represented in RGB space, using three integers between 0 and 255. This is consistent with the [java.awt.Color](#) data type.
3. *Energy calculation.* The first step is to calculate the *energy* of each pixel, which is a measure of the importance of each pixel—the higher the energy, the less likely that the pixel will be included as part of a seam (as we'll see in the next step). In this assignment, you will implement the *dual gradient* energy function, which is described below. Here is the dual gradient of the surfing image above:



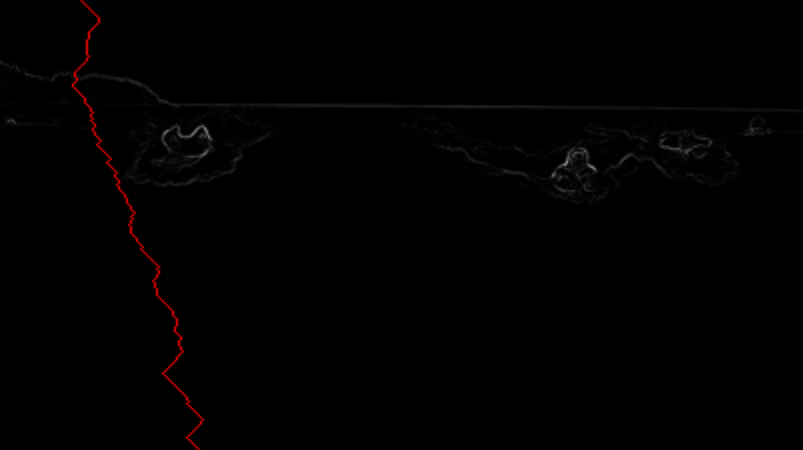

5. *Seam removal.* The final step is to remove from the image all of the pixels along the seam.

```
public class SeamCarver {
    public SeamCarver(Picture picture)           // create a seam
carver object based on the given picture
    public Picture picture()                     // current
picture
    public      int width()                     // width of
current picture
}
```

```

    public      int height()                // height of
current picture
    public  double energy(int x, int y)      // energy of pixel
at column x and row y
    public  int[] findHorizontalSeam()       // sequence of
indices for horizontal seam
    public  int[] findVerticalSeam()        // sequence of
indices for vertical seam
    public  void removeHorizontalSeam(int[] seam) // remove
horizontal seam from current picture
    public  void removeVerticalSeam(int[] seam) // remove
vertical seam from current picture
}

```

- **Corner cases.** Your code should throw an exception when called with invalid arguments.
  - By convention, the indices  $x$  and  $y$  are integers between 0 and  $W - 1$  and between 0 and  $H - 1$  respectively, where  $W$  is the width of the current image and  $H$  is the height. Throw a `java.lang.IndexOutOfBoundsException` if either  $x$  or  $y$  is outside its prescribed range.
  - Throw a `java.lang.NullPointerException` if either `removeVerticalSeam()` or `removeHorizontalSeam()` is called with a null argument.
  - Throw a `java.lang.IllegalArgumentException` if `removeVerticalSeam()` or `removeHorizontalSeam()` is called with an array of the wrong length or if the array is not a valid seam (i.e., either an entry is outside its prescribed range or two adjacent entries differ by more than 1).
  - Throw a `java.lang.IllegalArgumentException` if either `removeVerticalSeam()` or `removeHorizontalSeam()` is called when either the width or height is less than or equal to 1.
- **Constructor.** The data type may not mutate the `Picture` argument to the constructor.

- **Computing the energy of a pixel.** We will use the *dual gradient energy function*: The energy of pixel  $(x, y)$  is  $\Delta_x^2(x, y) + \Delta_y^2(x, y)$ , where the square of the  $x$ -gradient  $\Delta_x^2(x, y) = R_x(x, y)^2 + G_x(x, y)^2 + B_x(x, y)^2$ , and where the central differences  $R_x(x, y)$ ,  $G_x(x, y)$ , and  $B_x(x, y)$  are the absolute value in differences of red, green, and blue components between pixel  $(x + 1, y)$  and pixel  $(x - 1, y)$ . The square of the  $y$ -gradient  $\Delta_y^2(x, y)$  is defined in an analogous manner. We define the energy of pixels at the border of the image to be  $255^2 + 255^2 + 255^2 = 195075$ .

As an example, consider the 3-by-4 image with RGB values (each component is an integer between 0 and 255) as shown in the table below.

(255, 101, 51)	(255, 101, 153)	(255, 101, 255)
(255, 153, 51)	(255, 153, 153)	(255, 153, 255)
(255, 203, 51)	(255, 204, 153)	(255, 205, 255)
(255, 255, 51)	(255, 255, 153)	(255, 255, 255)

The ten border pixels have energy 195075. Only the pixels (1, 1) and (1, 2) are nontrivial. We calculate the energy of pixel (1, 2) in detail:

$$\begin{aligned}
 R_x(1, 2) &= 255 - 255 = 0, \\
 G_x(1, 2) &= 205 - 203 = 2, \\
 B_x(1, 2) &= 255 - 51 = 204, \\
 \text{yielding } \Delta_x^2(1, 2) &= 2^2 + 204^2 = 41620.
 \end{aligned}$$

$$\begin{aligned}
 R_y(1, 2) &= 255 - 255 = 0, \\
 G_y(1, 2) &= 255 - 153 = 102, \\
 B_y(1, 2) &= 153 - 153 = 0, \\
 \text{yielding } \Delta_y^2(1, 2) &= 102^2 = 10404.
 \end{aligned}$$

Thus, the energy of pixel (1, 2) is  $41620 + 10404 = 52024$ . Similarly, the energy of pixel (1, 1) is  $204^2 + 103^2 = 52225$ .

195075.0	195075.0	195075.0
195075.0	52225.0	195075.0
195075.0	52024.0	195075.0
195075.0	195075.0	195075.0

- **Finding a vertical seam.** The `findVerticalSeam()` method should return an array of length  $H$  such that entry  $x$  is the column number of the pixel to be removed from row  $x$  of the image. For example, consider the 6-by-5 image below (supplied as [6x5.png](#)).

( 97, 82, 107)	(220, 172, 141)	(243, 71, 205)	(129, 173, 222)	(225, 40, 209)	( 66, 109, 219)
(181, 78, 68)	( 15, 28, 216)	(245, 150, 150)	(177, 100, 167)	(205, 205, 177)	(147, 58, 99)
(196, 224, 21)	(166, 217, 190)	(128, 120, 162)	(104, 59, 110)	( 49, 148, 137)	(192, 101, 89)
( 83, 143, 103)	(110, 79, 247)	(106, 71, 174)	( 92, 240, 205)	(129, 56, 146)	(121, 111, 147)
( 82, 157, 137)	( 92, 110, 129)	(183, 107, 80)	( 89, 24, 217)	(207, 69, 32)	(156, 112, 31)

- The corresponding pixel energies are shown below, with a minimum energy vertical seam highlighted in red. In this case, the method `findVerticalSeam()` should return the array `{ 2, 3, 3, 3, 2 }`.

195075.0	195075.0	195075.0	195075.0	195075.0	195075.0
195075.0	23346.0	51304.0	31519.0	55112.0	195075.0
195075.0	47908.0	61346.0	35919.0	38887.0	195075.0
195075.0	31400.0	37927.0	14437.0	63076.0	195075.0
195075.0	195075.0	195075.0	195075.0	195075.0	195075.0

- When there are multiple vertical seams with minimal total energy (as in the example above), your method can return any such seam.
- **Finding a horizontal seam.** The behavior of `findHorizontalSeam()` is analogous to that of `findVerticalSeam()` except that it should return an array of length  $W$  such that entry  $y$  is the row number of the pixel to be removed from column  $y$  of the image.
- **Performance requirements.** The `width()`, `height()`, and `energy()` methods should take constant time in the worst case. All other methods should run in time at most proportional to  $WH$  in the

worst case. For faster performance, do not construct explicit `DirectedEdge` and `EdgeWeightedDigraph` objects.

**Analysis of running time (optional and not graded).**

- Give the worst-case running time to remove  $R$  rows and  $C$  columns from a  $W$ -by- $H$  image as a function of  $R$ ,  $C$ ,  $W$ , and  $H$ .
- Estimate empirically the running time (in seconds) to remove  $R$  rows and  $C$  columns from a  $W$ -by- $H$  image as a function of  $R$ ,  $C$ ,  $W$ , and  $H$ . Use tilde notation to simplify your answer.

**Submission.** Submit `SeamCarver.java`, and any other files needed by your program (excluding those in `stdlib.jar` and `algs4.jar`). You may not call any library functions other than those in `java.lang`, `java.util`, `java.awt.Color`, `stdlib.jar`, and `algs4.jar`.

*This assignment was developed by Josh Hug, Maia Ginsburg, and Kevin Wayne.*