
cas-src v3.73.0 RELEASE REPORT · PUBLISHED 22 OCTOBER 2026 · 3:39 PM CT

Cassy restores the screen, preserves settings and explains recovery.

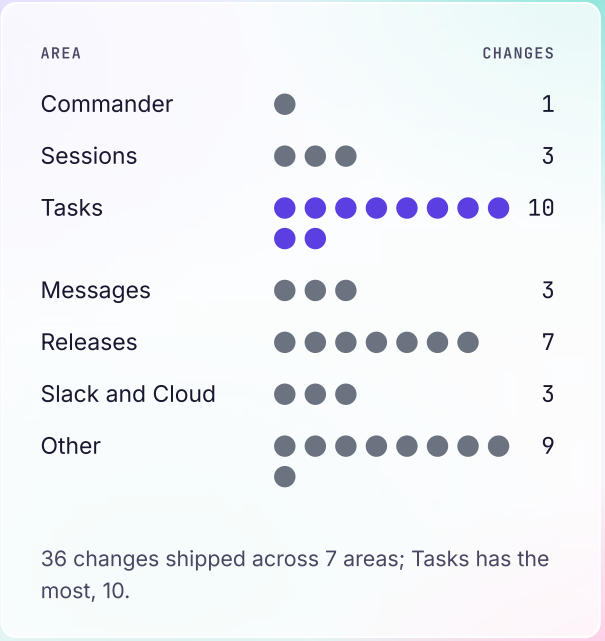

One dot, one shipped change. No GitHub issues are counted in this report's fixes ledger.

See every change ↓

01 / 06

Release at a glance

▼ What shipped, by area

One dot is one change listed in the v3.73.0 CHANGELOG. Dots count changes, not their size or importance.

AREA	CHANGES	WHAT CHANGED
Commander	1	Hub diagnostics
Sessions	3	Running-version visibility; Terminal ownership and shutdown; Managed-file repairs
Tasks	10	Notification delivery; Reassignment leases; Split ownership; Advisory-CI merges; Rebased parked deliveries; Delivery evidence; Candidate safety; Review-cache lifetime; Review-cache accounting; Bounded Rust proofs
Messages	3	Folded-message compatibility; Message addressing; Capacity diagnostics
Releases	7	Binding journal compatibility; Release publication records; Readable setup and updates; Update warnings; Follow-up release routing; Coverage and reference diagnostics; Release reports
Slack and Cloud	3	Recovery ordering; Direct Violet mentions; Cloud claim fencing
Other	9	Shared /finish command; Initialization recovery; Configuration editors; Safe launch remedies; Root-bound command access; Assignment freshness; Merge observations; Tooling help; Regression portability
Total	36	7 areas

Source: CHANGELOG `CHANGELOG.md`, release-notes draft `docs/release-notes/2026-10-22-v3.73.0-slack.md`, GitHub `Richards-LLC/cassy` release v3.73.0; retrieved 22 October 2026 · 3:47 PM CT.

36

Changes shipped

1 added, 5 changed, 30 fixed; tests and docs not counted

14m 7s

Green to published

Over budget (10m 0s budget); Merge-queue CI completion to publication

> Changes and GitHub issues are counted separately. A change is one titled entry in the v3.73.0 CHANGELOG section; tests and documentation entries are listed under the hood but not counted. A GitHub issue counts when release PR #1342 or the CHANGELOG section references it and it closed between the PR opening (1:47 PM CT) and 15 minutes after its merge (3:40 PM CT). Issues are closed by hand shortly after the merge, so a report run inside that window waits for referenced issues that are still open. No GitHub issues are counted in this report's fixes ledger. No release stage was blocked. No manual interventions. Not measured for this release: request to published, cut to published, lesson recurrence.

02 / 06

What you can do now

Everyday use

Finish anywhere

WAS

The finish command could be absent or duplicated across installations.

NOW

The command ships with Cassy and keeps a personal version when you already have one.

Clean terminal input

WAS

Mouse movement or leaving a session could leave raw escape codes on screen.

NOW

Terminal input and display settings are restored when a session ends.

Reattach at your size

WAS

Reopening a detached session could leave it stuck at a tiny screen size.

NOW

The display follows the size of the terminal you attach.

Clean exits

WAS

Background processes could survive after you left Cassy.

NOW

Owned processes are cleaned up on a real exit, and closing a frozen terminal stays bounded.

Recover setup

WAS
A failed setup could leave a folder that made a normal retry do nothing.

NOW
The error names the force-retry command and keeps your existing settings.

Keep connection settings

WAS
Setup could overwrite malformed connection settings or report success before connecting Claude.

NOW
Unreadable settings stay untouched, and a successful setup creates the connection first.

Readable setup

WAS
Setup text could disappear on a light screen or overflow a narrow terminal.

NOW
It uses your text colors, respects plain-color mode and wraps its guidance.

Readable updates

WAS
Warnings could run off screen, cut a path in half or join a step name directly to done.

NOW
Warnings fit the screen, preserve path words and separate progress from status.

Settings and recovery

Settings in the right place

WAS
Some host settings were read or reset in project settings instead.

NOW
Editors use the right settings location and save only the changes you made.

Usable settings menus

WAS
A refusal or help hint could be clipped on a small screen.

NOW
The cause and remedy stay visible in narrow and short terminals.

Keep unfinished repairs

WAS
An unreadable Git guard could abort an update and lose its staged repair.

NOW
The repair stays staged, with the warning needed to finish it.

Visible local repairs

WAS
A local repair commit could quietly become the starting point for later work.

NOW
Cassy points out changes that still need publishing and explains a missing upstream.

Safer copyable commands

WAS
A folder with spaces or an invisible branch character could produce an unsafe or confusing remedy.

NOW
Suggested commands quote folders correctly and refuse misleading branch names.

Reliable notifications

WAS
Notification settings could accept a bad address or inherit unexpected curl settings.

NOW
Bad addresses get an inline explanation and sends use bounded, isolated defaults.

Direct mentions

WAS
A direct @Violet mention could wait like an ordinary conversation update.

NOW
Recognized direct mentions wake Violet urgently.

Older conversations

WAS
Recovered messages could arrive in the order a batch was returned.

NOW
Cassy sorts each recovered batch by message time before showing it.

Shared work and reports

Work handovers

WAS
Reassigned work could remain locked to its previous owner.

NOW
Obsolete locks stop renewing and a new owner can start.

Clear busy checks

WAS
A busy-check refusal did not say which command was already running.

NOW
It names the command, its process and when it started.

Less review disk use

WAS

Repeated reviews could fill disk space with separate copies of the same build.

NOW

Matching copies are reused and finished copies are cleaned up while real edits are kept.

Recovery that stays safe

WAS

A failed repair could restart a connection too early or leave an abandoned pause behind.

NOW

Confirmed waiting periods stay in place, while an abandoned pause is released when a retry cannot submit.

Report links that open

WAS

A release report could link to a folder that existed only on one computer.

NOW

Its source and print links open from the published repository.

Split announcements

WAS

Replies or a report could attach to the last piece of a long announcement.

NOW

They attach to its first piece, and receipts retain every delivered part.

Hub status and retry

WAS

A custom hub could show the wrong service status, or a retry hint could wrap into confusion.

NOW

Status follows the chosen service and each retry option gets its own line.

03 / 06

Under the hood

Messages and ownership

Explicit mention urgency

WAS

Managed deliveries ignored event kind and idempotent enqueue discarded urgency.

NOW

Optional delivery.event_kind=app_mention selects urgent delivery atomically. Missing or ordinary kinds stay non-interrupting and replay cannot escalate.

Recovery batch order

WAS

Recovery walked returned admissions without sorting.

NOW

The client sorts each returned batch numerically by Slack timestamp then delivery ID, placing missing or invalid times last. Cross-page ordering remains a separate Cloud change.

Mention addressing

WAS

The push-wake contract omitted the mention alias.

NOW

mention is documented as addressed to Violet. Source-age calculation remains the existing behavior shipped earlier.

Fold boundary integrity

WAS

A message summary or guessed row boundary could imitate folded-message authority.

NOW

Labels and delimiters are escaped before folding, with absorbed action wakes retained.

Mixed-version fold readers

WAS

3.72 wrote the earlier fold marker format.

NOW

3.73 writes escaped fold boundaries. Keep communicating sessions on the same release when upgrading.

Journal pause origin

WAS

Every Paused journal row looked like a prior legacy-intake refusal.

NOW

Only a strict matching-attempt refusal marks a durable quiet hold. Pre-submit failures release unmarked pauses without releasing Submitting, Unknown or Managed evidence.

Journal upgrade

WAS

3.72 journals did not record why a pause existed.

NOW

An old quiet hold reads as unmarked after upgrade and its quiet window can end early once per host.

Journal downgrade

WAS

3.72 accepted only its older journal shape.

NOW

It rejects a journal containing the new origin field and admits nothing. Rerunning cas update after a downgrade may be needed.

Conditional claim release

WAS

A delayed rollback or release could erase a same-agent restart or re-claim.

NOW

Synchronous, rollback and background paths release against the observed claim snapshot and confirm renewals.

Lease ownership

WAS

An old assignee or missing task row could keep renewing a claim.

NOW

Only the current assignee of running work renews it, and self-held transfers are identified correctly.

Split release persistence

WAS

Retargeted tasks could retain split-owned Cloud claims or lose pending shares.

NOW

Obsolete claims are released with a durable release ledger, while unknown releases keep their pending share.

Fail-closed split fallback

WAS

Projection or release-read errors could erase a raw hold or resurrect a released child.

NOW

Raw fallback keeps unknown holds and applies explicit child releases before admission.

Release-bound follow-ups

WAS

New follow-ups could default outside the active release.

NOW

Live follow-ups inherit its release binding without rerouting unrelated work.

Audited freshness override

WAS

A stale-assignment refusal had no approved escape and the warning overstated the check.

NOW

The audited override works and its caveat matches actual start admission.

Runtime and command behavior

Version skew

WAS

Installed binaries could change while long-running MCP sessions kept an unnoticed older version.

NOW

Live epochs and process identity expose stale or unknown versions, including directly registered server PIDs and the newest daemon epochs.

Release notice

WAS

Stale sessions could keep running without a visible update notice.

NOW

One release notice spans the stale sessions. Restart long-running sessions after upgrading to activate the installed code.

Terminal restoration

WAS

Signals, disconnects and unwind could leave input modes active or orphan children.

NOW

The active client restores terminal state, daemon process sessions are isolated, and owned children are cleaned up on real exits.

Signal semantics

WAS

A frozen terminal could trap termination, or parents saw an ordinary 128+signal exit.

NOW

Cleanup is bounded and the client preserves death-by-signal semantics.

Attached geometry

WAS

A detached 80×24 size could remain authoritative after attaching.

NOW

The active input owner supplies the local TUI dimensions.

Initialization state

WAS

A partial init could hide the retry path or replace existing settings.

NOW

Force-retry advice is explicit, existing configuration is preserved and JSON init saves its full configuration before provisioning.

MCP initialization

WAS

JSON init could succeed without Claude MCP, and malformed settings could be overwritten.

NOW

Provisioning precedes success and malformed or non-object settings are refused unchanged.

Terminal presentation

WAS

Fixed foregrounds, repeated init causes and wide hints broke light or narrow terminals.

NOW

Setup and pickers inherit text color, NO_COLOR and locale precedence. Init causes print once, with bounded hanging continuations.

Update diagnostics

WAS

Warnings split paths or lost complete values, and a full-width label touched its status.

NOW

Warnings retain path tokens and complete JSON or verbose values, abbreviate home paths, and keep a separating gap before status.

Config editor writes

WAS

Host-scoped edits used project configuration and batch saves could race.

NOW

Host settings stay host-scoped, saves use the configuration lock, and only visible edits are persisted.

Config refusal layout

WAS

Short or narrow terminals clipped the operator-only remedy or help.

NOW

Wrapped row counts determine footer height and refusal text remains visible.

Managed repair guards

WAS

A configuration-read failure aborted a staged managed-file repair.

NOW

The repair remains staged and the diagnostic retains its recovery context, including detached HEADs.

Reconcile publication

WAS

Local repair commits silently became a base and rebased history or deleted upstreams confused diagnostics.

NOW

Unpublished repairs are surfaced, published-parent comparisons survive rebase, and deleted upstreams get the correct explanation.

Command boundaries

WAS

A workdir override could widen an unbound turn root, and unsafe branch text leaked into remedies.

NOW

Write and artifact fallbacks remain turn-bound. Trust commands are quoted, invisible refs refused, and Git causes retained.

Webhook isolation

WAS

curl could read user defaults and legacy unsafe destinations could still be sent.

NOW

Normalized URL checks, curl -q and a bounded runtime apply at send time, with inline configuration refusals.

Merge evidence and QA

Merge observation recovery

WAS

A committed merge could lose its completion observation or keep an obsolete wake intent.

NOW

Observation writes retry within a bounded lock hold and record skipped close, ineligible close and later merge failure outcomes.

Advisory CI continuation

WAS

A published no-check-runs merge stopped before normal close and verification dispatch.

NOW

It continues through the ordinary proof gate with a persisted CI-unconfirmed note. Explicit failed-CI overrides remain separate.

Rebased delivery anchors

WAS

A merge request could advertise a new tip while its parked anchor remained old.

NOW

Ownership and the persisted anchor are validated before the rebased request is emitted.

Content attribution

WAS

Empty checkpoints and merged builtin-history unions could look like dropped delivery content.

NOW

Earlier non-empty effects and per-key history additions establish the delivered content.

QA range ownership

WAS

Close could compare against a creation-time range or resolve a managed merge in the wrong repository.

NOW

Recorded delivery boundaries and the task target repository govern QA evidence.

Proof diagnostics

WAS

Declared sibling test modules could appear uncovered, complete pairs got waiver notes, and shortened references lost a measured commit.

NOW

Declaration-aware scope matching, conditional waiver notes and preserved commit suffixes make the evidence specific.

Candidate isolation

WAS

A scratch candidate could migrate the live store or its receipt could describe an earlier binary.

NOW

Implicit scratch stores stay isolated and the copied binary is verified against the published candidate receipt, with a short task locator.

Resource and publication contracts

Review target reuse

WAS

Each dispatch built and retained another large target.

NOW

Matching targets are reused and resolved ones enter bounded lifecycle cleanup.

Safe background reclaim

WAS

A verdict waited on target deletion and interrupted trash could become unreclaimable.

NOW

Targets are staged before asynchronous collection. Dirty edits are rechecked, ownership is atomic and private stale owner markers can be reclaimed.

Cleanup accounting

WAS

Retained bytes looked reclaimable and report paths repeated expensive walks.

NOW

Only eligible bytes count as reclaimable, pending bytes stay visible, JSON exposes deferral and staging errors are logged from one measurement per trash row.

Bounded test processes

WAS

macOS discovery could hang on output and termination missed subprocess groups.

NOW

The capped runner drains discovery, forwards wrapper signals, waits for slow cleanup and bounds escalation without signaling a reaped group.

Portable test control

WAS

Discovery cleanup assumed Python waitid and macOS fixtures assumed proc or timed-out ports.

NOW

Supported fallbacks, portable liveness checks, short-lived port reservations and unwind-safe schema restoration keep the regressions deterministic.

Capacity bookkeeping

WAS

A busy check hid its holder and bookkeeping errors could stop admitted work.

NOW

The holder process, command and age are shown, while episode or missing-row failures do not derail an admitted check.

Hub and tooling checks

WAS

Custom launchd labels, narrow required-mode retries and stale GC help misled callers.

NOW

Status follows the selected label, retry alternatives are separated and help names reachable options.

Journey diagnostics

WAS

Corrupt or unknown-version history could remain unusable and progress exemptions hid real truncation.

NOW

Bad debt history is reset explicitly and only complete known progress text receives an ellipsis exemption.

MCP future size

WAS

Only one dispatcher had a future-size guard.

NOW

Every public MCP tool dispatcher is checked against the 32 KiB limit.

Release artifact identity

WAS

Report links named local files and split receipts retained only one message identity.

NOW

Repository links, ordered part IDs, distinct PDF file/upload-message IDs and first-root thread selection retain the full publication evidence.

Shared command distribution

WAS

The finish command depended on local copies and account refresh could fail silently.

NOW

One builtin reaches all supported command catalogs, personal entrypoints take precedence and refresh failures are visible.

Portable documentation

WAS

Design records could embed machine-specific paths.

NOW

Documentation checks reject those paths, and the previous release report and receipts remain in the release history.

04 / 06

Fixes ledger

GitHub issues closed with this release · 0

ISSUE	TITLE	CLOSED	AREA

No GitHub issues are counted in this report's fixes ledger. The count covers issues referenced by release PR #1342 or the CHANGELOG section that closed between the PR opening (1:47 PM CT) and 15 minutes after its merge (3:40 PM CT); none did.

05 / 06

Install

```
cas update --yes --version 3.73.0
```

Release assets

ASSET	DIGEST	SIZE
cas-aarch64-apple-darwin.tar.gz	sha256:4abd2c1756289fbf9d9659d46f5ba2e55042970ca289bba73f75615602479722	35402869
cas-x86_64-unknown-linux-gnu.tar.gz	sha256:dd188456ddbb49307cd9d87f4caf3e810b1ba1dc941194a0a6c1c3c6e87ba711	39901144

06 / 06

Evidence and scope

Retrieved: 22 October 2026 · 3:47 PM CT.

Source: CHANGELOG `CHANGELOG.md`, release-notes draft `docs/release-notes/2026-10-22-v3.73.0-slack.md`, GitHub `Richards-LLC/cassy` release v3.73.0; retrieved 22 October 2026 · 3:47 PM CT.

Each change is placed in a product area by the words in its title, then its text; a change that matches no area is listed under Other. Correct an area in the Change map table before rendering.

Release PR: https://github.com/Richards-LLC/cassy/pull/1342 `(https://github.com/Richards-LLC/cassy/pull/1342)` (merged 22 October 2026 · 3:25 PM CT).

Release-notes draft: `docs/release-notes/2026-10-22-v3.73.0-slack.md`.

CHANGELOG source: `CHANGELOG.md`.

GitHub release: https://github.com/Richards-LLC/cassy/releases/tag/v3.73.0 `(https://github.com/Richards-LLC/cassy/releases/tag/v3.73.0)` (published 22 October 2026 · 3:39 PM CT).

Release receipt: `release-latency.receipt`, measured after publication with `scripts/release-latency-receipt.sh v3.73.0`. Merge-queue CI went green at 3:25:19 PM CT, `main` landed at 3:25:32 PM CT and the release was published at 3:39:26 PM CT: 847 seconds from green to published against a 600-second budget, so the release ran over budget. Zero manual interventions and no blocked stages were recorded.

Pipeline latency

Stage timings are unavailable: the latency receipt records no STAGE_SECS.

No source warnings.