
A normal project setting you set in one line.

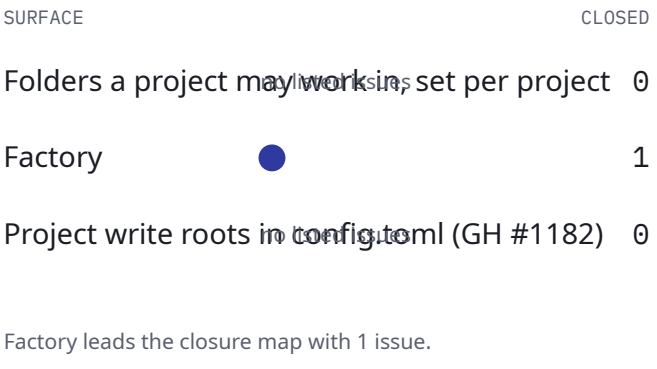

One dot, one closed issue. 1 issue-bearing surfaces.

Read the map data ↓

Release at a glance

01 / 06

1
Issues closed
Named, verified closed issues in this report

0
Features added
Top-level Added entries in the CHANGELOG section

0
Changed entries
Top-level Changed entries in the CHANGELOG section

0
Fix entries
Top-level Fixed entries in the CHANGELOG section

70m 38s
Green to published
gate.green.epoch to the published receipt, when available

33m 3s — over budget (10m 0s budget)
Tag to published
First tag workflow to publication; measured budget result

4
Manual interventions
Distinct rescued stages plus recorded hand fixes; receipt INTERVENTIONS

▼ Change map · data and reading guide

One filled dot represents one closed issue. Dots have equal weight: this is a count of closures, not a measured impact score.

Change map data · closed issues by surface

SURFACE	ISSUES CLOSED	ISSUE NUMBERS
Folders a project may work in, set per project	0	No listed issues
Factory	1	#1182

SURFACE	ISSUES CLOSED	ISSUE NUMBERS
Project write roots in config.toml (GH #1182)	0	No listed issues
Total	1	1 issue-bearing themes

Source: CHANGELOG `/home/pippenz/Petrastella/cassy/.cas/release-v3.50.1b/CHANGELOG.md`, release-notes `/home/pippenz/Petrastella/cassy/.cas/release-v3.50.1b/docs/release-notes/2026-10-13-v3.50.1-slack.md`, GitHub `Richards-LLC/cassy` release v3.50.1; retrieved 2026-10-13T19:50:53Z.

What you can do now

Folders a project may work in, set per project

A normal project setting

WAS the folders a project could write to outside its own directory lived in a separate hidden file. →

NOW they are part of the project's settings and show up in `cas config list`.

Set it from where you work

WAS setting them asked you to retype a confirmation at a terminal, and running it with `!` inside a Cassy window was refused. →

NOW `cas config set factory.write_roots "~/Downloads,/mnt/models"` just works, including with `!` in a Cassy window.

Per project, as intended

WAS it was unclear which projects an outside folder applied to. →

NOW each project has its own list, so adding `~/Downloads` to one project leaves every other project unchanged.

Simpler and safer

WAS each folder needed separate create, edit and delete choices. →

NOW a listed folder allows all three, and Cassy refuses risky choices like your whole home folder or the project's own settings.

Only you can change it

WAS the old confirmation step was the main safeguard. →

NOW Cassy's assistants can't add folders or edit the project settings file themselves, and `cas config set factory.write_roots ""` clears the list.

Nothing to redo

WAS folders you added in v3.50.0 were stored in the old file. →

NOW they keep working and move into the project settings the next time you set the list. One-off folder grants for a single task work as before.

Under the hood

03 / 06

Project write roots in config.toml (GH #1182)

Config key

WAS 3.50.0 stored project roots in `.cas/operator/write-policy.toml`, invisible to `cas config list`. →

NOW `[factory] write_roots = [...]` in the project's `.cas/config.toml`, registered and shown by `config get/list`, read by PreToolUse from the owning project's cas root (also for isolated worktrees).

Operator set path

WAS `cas config set factory.write_roots` required no agent env markers, no agent ancestor, a TTY and a typed `ALLOW`, so the operator's `! cas …` from a pane was refused. →

NOW it refuses only a `cas-worker-*` or `cas-server-*` cgroup and writes config.toml directly.

Set-time validation

WAS entries were `path[:modes]`, canonicalized, refusing `/`, `$HOME` and `.cas/operator`. →

NOW plain paths, each allowing create, edit and delete. Paths are canonicalized; `..` components, `/`, `$HOME` and its ancestors, the project root, and anything containing or inside `.cas/` are refused. The hook re-checks each entry and skips unsafe ones.

Hook is the agent gate

WAS agents were kept out by the separate policy file. →

NOW PreToolUse refuses agent `cas config set factory.write_roots`, and agent writes, in-place edits, renames and deletes of `.cas/config.toml`, `.cas/config.yaml` and `.cas/operator/` (file tools, NotebookEdit, apply_patch, redirections, tee, cp, mv, `sed -i`, `perl -i`, rm). No root admits any project's `.cas/config.*` or `.cas/operator/`.

Other write paths

WAS `Config::set` refused the key because roots were not in config.toml. →

NOW it still refuses it, so MCP, the config TUI and reset cannot widen roots, and `cas config import` keeps the current value.

Compatibility

WAS roots and grants shared write-policy.toml. →

NOW legacy roots are unioned in the hook and migrated on the next set (an empty value clears both). Per-task grants (`cas config grant-write`, Commander) stay in the operator file, unchanged. With no roots configured, the workspace contract is unchanged except for the config-file refusal.

CLI output

WAS `cas config set --help` printed 337- and 486-column lines. →

NOW help, set/get output and refusals wrap at 78 columns in ASCII.

Fixes ledger

04 / 06

Issue register · 1 verified closures

ISSUE	STATE	CLOSED	THEME

ISSUE	STATE	CLOSED	THEME
#1182 (https://github.com/Richards-LLC/cassy/issues/1182)	CLOSED	2026-10-13T17:52:56Z	Factory

Install

05 / 06

```
cas update  # install v3.50.1 through the proje
ct's normal release channel
```

Change map data · closed issues by surface

ASSET	DIGEST	SIZE
cas-aarch64-apple-darwin.tar.gz	sha256:b4fec4c3c179e9fd073691b7413858017307e1d033682527441cc62f6de3fe60	31612309
cas-x86_64-unknown-linux-gnu.tar.gz	sha256:8c30d63da5cef10c50f68e34e7e1fc3fc6ba52442beb5619f22640b900871f34	36275399

Evidence and scope

06 / 06

Retrieved: 2026-10-13T19:50:53Z.

Source: CHANGELOG `/home/pippenz/Petrastella/cassy/.cas/release-v3.50.1b/CHANGELOG.md`, release-notes `/home/pippenz/Petrastella/cassy/.cas/release-v3.50.1b/docs/release-notes/2026-10-13-v3.50.1-slack.md`, GitHub `Richards-LLC/cassy` release v3.50.1; retrieved 2026-10-13T19:50:53Z.

GitHub issue theme assignment uses labels first, then the keyword table in the CLI. Any issue classified as `Unclassified` is shown in the map so a human can correct the Markdown before rendering.

Release-notes draft: `docs/release-notes/2026-10-13-v3.50.1-slack.md`.

CHANGELOG source: `CHANGELOG.md`.

GitHub release: <https://github.com/Richards-LLC/cassy/releases/tag/v3.50.1> (published or unknown).

Release receipt: `/home/pippenz/.cas/artifacts/release/v3.50.1-release-v3.50.1b/release-published.receipt`.

Source warnings:

- GitHub issues: referenced closures unavailable or not closed: #1169