
cas-src v3.83.0

RELEASE REPORT · PUBLISHED 27 OCTOBER 2026 · 5:36 AM ET

Commander messages reach idle conversations without being refused or lost.

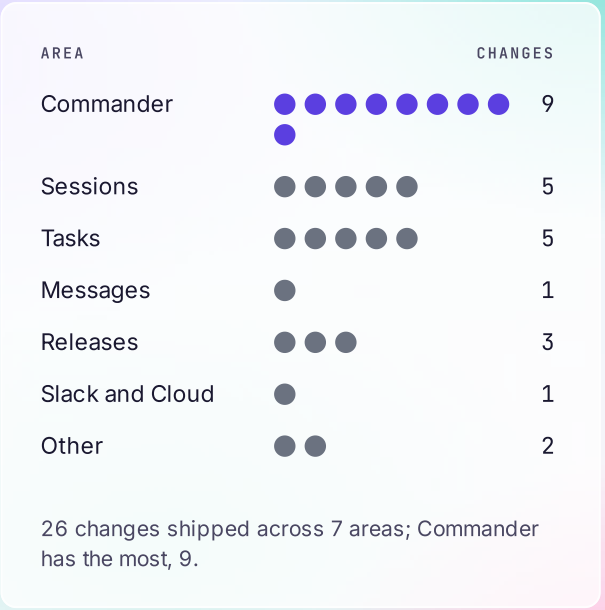

One dot, one shipped change. No GitHub issues are counted in this report's fixes ledger.

See every change ↓

01 / 06

Release at a glance

▼ What shipped, by area

One dot is one change listed in the v3.83.0 CHANGELOG. Dots count changes, not their size or importance.

AREA	CHANGES	WHAT CHANGED
Commander	9	Commander phone messages wake an idle supervisor, including short approvals, instead of waiting f...; Commander sends get their own bounded two-second store wait, so brief write contention or an exha...; An unread, verified phone message addressed to an ended supervisor moves once to its successor. M...; Two people can send through one hub without taking terminal input control. Leaving releases contr...; After a supervisor replacement or hub restart, Commander retires the old connection, retries subs...; Supervisor answers are saved to the operator thread while Commander is reconnecting. A temporaril...; Ask choices survive live replies and conversation history, so the phone keeps the offered one-tap...; Refused Commander sends leave a daemon log and a correlated hub outcome. History reads do not cre...; Pairing codes can be sent through the phone's share sheet, with a clipboard fallback and the appr...
Sessions	5	The working indicator requires current unanswered activity. An idle supervisor no longer appears ...; Recovered connections clear their outage attention item. A fleet change still refreshes the catal...; New session includes projects with a live session even if they are not in the project registry. F...; Invalid daemon socket paths or store ownership are refused before startup registers a session, pr...; Downloads is writable by default (the configured Linux downloads folder, or `~/Downloads`), and u...
Tasks	5	Delivery receipts distinguish a durable queue entry from delivery to the supervisor. Replayed rec...; No-code completion stays tied to its reviewed revision when the checkout is reused for another ch...; Visual QA waits for visible images to decode before resting and journey screenshots. Broken or ti...; Journey evidence bundles keep the originating task identity in nested output, preserve a moved tr...; Review-wait alerts recognize the full recorded hold, unchanged not-ready deliveries wait for the ...

AREA	CHANGES	WHAT CHANGED
Messages	1	Newly paired devices load unread replies and their conversation-list previews before the conversa…
Releases	3	Release reports use and name the configured artifacts root instead of assuming the default locati…; Branded deliverables can capture immutable revisions through the journey or catalog path, includi…; Release notes select verified before/after JPGs from the released commit range and attach them to…
Slack and Cloud	1	Committed installation pairings write their pairing audit row. Reconnection audit rows include th…
Other	2	Styled terminal bullets fall back to ASCII in C locales, keeping diagnostics readable without a v…; Configured visual capture requires declared, complete before/after pairs. Capture diagnostics exp…
Total	26	7 areas

Source: CHANGELOG `CHANGELOG.md`, release-notes draft `docs/release-notes/2026-10-27-v3.83.0-slack.md`, GitHub `Richards-LLC/cassy` release v3.83.0; retrieved 27 October 2026 · 5:42 AM ET.

26

Changes shipped

21 fixed, 2 changed, 3 added; tests and docs not counted

12m 2s

Green to published

Over budget (10m 0s budget); Merge-queue CI completion to publication

> Changes and GitHub issues are counted separately. A change is one titled entry in the v3.83.0 CHANGELOG section; tests and documentation entries are listed under the hood but not counted. A GitHub issue counts when release PR #1379 or the CHANGELOG section references it and it closed between the PR opening (4:13 AM ET) and 15 minutes after its merge (5:39 AM ET). Issues are closed by hand shortly after the merge, so a report run inside that window waits for referenced issues that are still open. No GitHub issues are counted in this report's fixes ledger. The merge queue turned the release back once: combining the two branches of work exposed nine failing checks that neither branch ran on its own. One repair round fixed all nine and the second queue run passed. No rescue repeated a lesson already learned. Not measured for this release: request to published, cut to published.

02 / 06

What you can do now

Commander

Phone sends

WAS

A phone message could sit unseen in an idle conversation.

NOW

Commander wakes the conversation, including for a short approval.

Brief busy spells

WAS

A short busy spell could immediately show “Not sent”.

NOW

Sending allows a two-second wait for the message to be saved.

Conversation handover

WAS
An unread phone message could remain with a conversation that had ended.

NOW
It moves once to the replacement conversation. Messages already seen stay in the original.

Two people, one hub

WAS
Sending could be blocked by someone else's input control, and names could disappear.

NOW
Both people can send, leaving releases their control, and names stay with each message. Read-only access explains how to get permission.

Reconnect without reloading

WAS
Replacing the running session or restarting the hub could leave a phone looking live but unable to receive.

NOW
Commander reconnects and counts the open phone again without a page reload.

Replies kept safe

WAS
An answer written during reconnect could be refused before it was saved.

NOW
The answer is saved, held and shown when the conversation reconnects.

Unread on a new device

WAS
A newly paired device could hide unread replies until you opened the conversation.

NOW
Its list shows the unread count and latest reply preview straight away.

Honest delivery status

WAS
A saved message could look delivered too early, or a replay could move its status backwards.

NOW
Saved, delivered and replied stay distinct, and progress never rolls back.

Truthful activity

WAS
An idle conversation could keep showing "working".

NOW
Working appears only while current activity is still awaiting an answer.

One-tap answers

WAS
Offered answer buttons could disappear from a live reply or its history.

NOW
The choices remain available in both.

Recovery notices

WAS
A recovered connection could leave an outage warning, or a change could leave the list stale.

NOW
The warning clears and the list refreshes even after an overlapping connection check fails.

Find a running project

WAS
New session could omit a project that was already running.

NOW
It includes those projects, respects folder-view permissions and checks names consistently.

Access and diagnostics

Traceable connections

WAS
A pairing or reconnection could leave an incomplete connection record.

NOW
Successful pairing is recorded and reconnect records identify the machine.

Clearer send failures

WAS
A refused send could leave little evidence of what happened.

NOW
Its refusal is recorded at both ends for diagnosis.

Documentation completion

WAS
A documentation change could fail its final check after its folder was reused.

NOW
Its check stays tied to the reviewed version, and recovery can save the correction.

Report storage

WAS
A custom evidence folder could be ignored when creating a release report.

NOW
Reports use that folder and keep their evidence references portable.

Images ready to capture

WAS
An image could still be blank when its screenshot passed.

NOW
Visible images must finish decoding, and broken or timed-out images fail the check.

Evidence that stays connected

WAS
Moving a capture or revising its notes could detach the recording or mislabel its origin.

NOW
The recording stays linked to the original run and version.

Readable terminal lists

WAS
Some terminal settings could display broken bullet symbols.

NOW
Those terminals use readable plain-text bullets.

Downloads access

WAS
Saving into Downloads could need extra setup in each project.

NOW
Downloads is writable by default, and your saved extra folders apply across projects.

Branded reports and captures

Complete comparisons

WAS
A comparison could be missing one side or leave an unclear capture error.

NOW
Configured captures require complete before-and-after pairs and explain what needs fixing.

Share a pairing code

WAS
The person holding the phone had to relay its pairing instructions by hand.

NOW
Send the code through the phone's share sheet, or copy it, with approval steps and expiry included.

Branded comparisons

WAS
Making a branded report comparison required separate capture steps.

NOW
Capture fixed versions, check matching images and use the available branded report and customer-note commands.

Before and after in releases

WAS
Release notes and reports could leave out an available comparison.

NOW
They can include complete, checked before-and-after images with the change they explain.

Session safeguards

Clean startup

WAS
An invalid local connection path could leave a half-started session.

NOW
Startup checks the path and stored ownership before creating the session.

Quieter review waits

WAS
An existing review wait or unchanged result could trigger repeated alerts.

NOW
The wait is recognized and unchanged results follow the normal retry interval.

03 / 06

Under the hood

Commander

Operator wake

WAS
Verified phone input could be classified as quiet inbox traffic.

NOW
Paired-device messages use operator wake priority, including approvals.

Store contention

WAS
A send inherited an exhausted loop budget and failed immediately.

NOW
Each send gets its own bounded two-second store wait.

Successor delivery

WAS
Pending phone input could be stranded with an ended session.

NOW
Verified unread operator rows move once to its successor, while seen rows remain.

Shared hub

WAS
Message send depended on terminal input ownership and attribution could disappear.

NOW
Send is independent of the input lease, departure releases owned control, sender names persist, and read-only Send explains its permission.

Replacement recovery

WAS

Retired viewers and a refused subscription could strand an apparently live phone.

NOW

Replacement retires old viewers, retries the catalog gap and restores the attached-device count after daemon or hub restart.

Durable replies

WAS

A zero device count could reject an answer before persistence.

NOW

The operator thread stores it first and reports held delivery until reattachment.

Unopened previews

WAS

A fresh device did not hydrate unopened conversation tails.

NOW

Initial history supplies unread state and previews before opening the thread.

Monotonic receipts

WAS

Queue acceptance could imply execution, and history or receipt replay could regress progress.

NOW

Durable acceptance is distinct from supervisor delivery, and delivered or replied states remain monotonic.

Working state

WAS

An open connection could leave an idle supervisor marked as working.

NOW

The indicator requires live unanswered activity.

Ask choices

WAS

Answer choices were lost between CLI, live reply and history.

NOW

The same options survive each path.

Recovery and catalog

WAS

Recovered outages stayed in attention and a failed overlapping heartbeat could swallow a refresh.

NOW

Recovery retires its attention item, and the fleet change still reads a fresh catalog.

Project discovery

WAS

Live but unregistered projects were omitted and folder visibility was too broad.

NOW

Live projects are included only with session-read access, and session names use shared CLI validation.

Access and diagnostics

Connection audit

WAS

Committed installation pairing lacked an audit row and reconnect rows lacked machine identity.

NOW

Pairing writes its audit row and recovery records carry the hub machine ID.

Send telemetry

WAS

Refused sends lacked correlated outcomes and history reads could look like sends.

NOW

Daemon logs and hub outcomes record real sends, with bounded client references and no history-read send audit.

No-code proofs

WAS

A reused checkout or unsupported store update could invalidate documentation completion or branch recovery.

NOW

No-code proofs pin the reviewed revision and branch recovery uses the guarded store update.

Report artifacts

WAS

Release reports assumed the default artifacts root.

NOW

They read and name the configured artifacts root and use portable receipt references.

Decoded-image QA

WAS

Capture could pass before visible images decoded, even with an exception configured.

NOW

Decode precedes resting and journey screenshots, and failed images remain findings.

Journey bundles

WAS

Nested output could inherit the wrong task identity and a documentation rebundle could lose a moved trace.

NOW

Bundles retain their originating identity, executed revision and trace location.

C-locale output

WAS

Styled bullets needed a visual exception in C locales.

NOW

ASCII fallback keeps diagnostic output readable without the exception.

Write roots

WAS

Downloads and user-wide folder grants were not applied consistently.

NOW

The platform Downloads folder and user-level `factory.write_roots` join project roots through existing safety checks.

Branded reports and captures

Capture requirements

WAS

Configured capture could omit declared pairs and diagnostics were hard to read.

NOW

Complete pairs are required, selector/mask/budget findings fit 80 columns, and reused dependencies remain clean.

Pairing share

WAS

Pairing assumed the phone owner could use the machine's terminal.

NOW

Native sharing or clipboard fallback carries the code, approval command and expiry.

Immutable captures

WAS

Report capture helpers were duplicated and comparisons lacked a shared integrity check.

NOW

Journey and catalog capture use immutable revisions, optional masks and goal receipts, with validated image framing and integrity.

Release image pairs

WAS

Notes and reports did not share verified comparison selection.

NOW

Notes select JPG pairs from the released range and reports resolve Pair references. Missing or incomplete evidence adds no image.

Session safeguards

Startup admission

WAS

Invalid socket paths or store ownership could leave a partially registered daemon.

NOW

Read-only admission refuses them before startup changes session state.

Wait and anchor checks

WAS

A hold could be misclassified, settled results could re-alert, and anchor checks could miss the delivery branch.

NOW

Full hold notes are classified, settled retries are respected and origin checks try the delivery branch first.

04 / 06

Fixes ledger

GitHub issues closed with this release · 0

ISSUE	TITLE	CLOSED	AREA

No GitHub issues are counted in this report's fixes ledger.

05 / 06

Install

```
cas update --yes --version 3.83.0
```

Release assets

ASSET	DIGEST	SIZE
cas-aarch64-apple-darwin.tar.gz	sha256:7b4acf9922f6022ed850b5e791d40f7515edbff22521b9371098e0c2c9815fed	36262121
cas-x86_64-unknown-linux-gnu.tar.gz	sha256:a52a3e9d08550ce493809e9e59bc934670a1a2f2c4a84f68ae0f7d3b5c7ebab8	41266396

06 / 06

Evidence and scope

Retrieved: 27 October 2026 · 5:42 AM ET.

Source: CHANGELOG `CHANGELOG.md`, release-notes draft `docs/release-notes/2026-10-27-v3.83.0-slack.md`, GitHub `Richards-LLC/cassy` release v3.83.0; retrieved 27 October 2026 · 5:42 AM ET.

Each change is placed in a product area by the words in its title, then its text; a change that matches no area is listed under Other. Correct an area in the Change map table before rendering.

Release PR: https://github.com/Richards-LLC/cassy/pull/1379 (https://github.com/Richards-LLC/cassy/pull/1379) (merged 27 October 2026 · 5:24 AM ET).

Release-notes draft: `docs/release-notes/2026-10-27-v3.83.0-slack.md`.

CHANGELOG source: `CHANGELOG.md`.

GitHub release: https://github.com/Richards-LLC/cassy/releases/tag/v3.83.0 (`https://github.com/Richards-LLC/cassy/releases/tag/v3.83.0`) (published or unknown).

Release receipt (relative to `~/.cas/artifacts`): `cassy-bbb8e75581403d3edc2689512df64eaf37780d70a032cb0d79850218dfada14a/release-v3.83.0/release-latency.receipt`.

Pipeline latency

Release commit to main: 1h 11m 47s, over the 30m budget, because of the one merge-queue return and its repair round (release commit 27 October 2026 · 4:13 AM ET; landed on main 5:24 AM ET). Main to published: 12m 0s, inside the 20m budget (published 5:36 AM ET). Installed on the release host within a minute of publication. Per-stage timings are not recorded in the latency receipt.

No source warnings.
