Nama : Frederico Steven Kwok

NPM : 242310037

Kelas : TI-24-PA1

Mata Kuliah : Lab. Pemrograman Web

Tugas : Pertemuan 5 – Tugas dan Latihan

Github : https://github.com/RicoSteven120206/PW-MERN-STACK-242310037.git

Dokumentasi Lengkap Source Code Berada di Repository Github

1. Buatlah dokumentasi dalam mengerjakan soal Latihan Pembelajaran, dengan memberikanScreenshot baik dari sisi aplikasi ataupun code yang sudah dimodifikasi dengan penjelasandan alur yang baik dan benar. Dokumentasi disimpan dalam bentuk PDF dan ditaruhdalamproject web yang telah anda kerjakan.
   - ⇨ Buatlah directory untuk membuat components { Hero Section, Category Section, Feature Section, Testimonial Section, Footer, dan Choose Us } dan page sebagai landing page nya

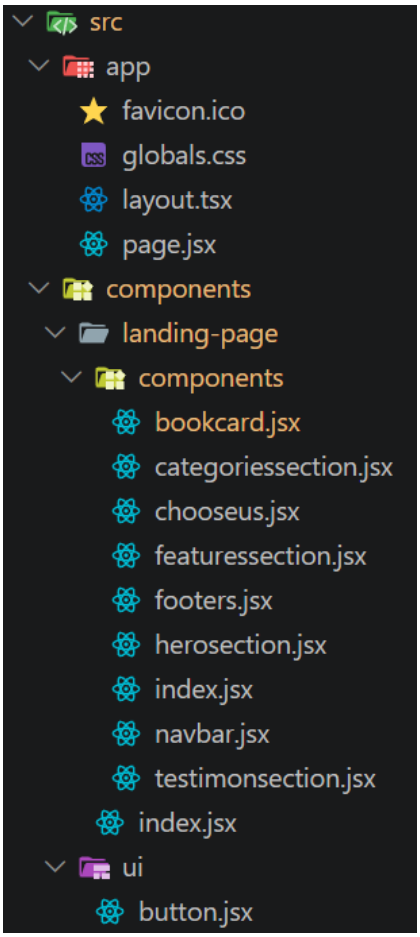

Lalu Instalasi bootstrap sebagai css framework nya dengan mengetik “npm install bootstrap boostrap-icons reract-bootstrap”.

```
PS D:\Tugas Kuliah Semester 4\Lab. Pemrograman Web\MERN-STACK\MERN-STACK\app-react> npm install bootstrap bootstrap-icons
  react-bootstrap

 up to date, audited 401 packages in 14s

 146 packages are looking for funding
   run `npm fund` for details

 2 moderate severity vulnerabilities

 To address all issues (including breaking changes), run:
   npm audit fix --force

 Run `npm audit` for details.
```

Setelah selesai instlasi, lakukan import bootstrap pada di layout.tsx

```
import type { Metadata } from "next";
import { Geist, Geist_Mono } from "next/font/google";
import "./globals.css";
import "bootstrap/dist/css/bootstrap.min.css";
import "bootstrap-icons/font/bootstrap-icons.css";
```

Dan buat layout untuk Root default seperti font dari layout pada file layout.tsx

```
7   const geistSans = Geist({
8     variable: "--font-geist-sans",
9     subsets: ["latin"],
10  });
11
12  const geistMono = Geist_Mono({
13    variable: "--font-geist-mono",
14    subsets: ["latin"],
15  });
16
17  export const metadata: Metadata = {
18    title: "Create Next App",
19    description: "Generated by Create Next App",
20  };
21
22  export default function RootLayout({
23    children,
24  }: Readonly<{
25    children: React.ReactNode;
26  }>) {
27    return (
28      <html lang="en" className={`${geistSans.variable} ${geistMono.variable}`}>
29        <body>
30          {children}
31        </body>
32      </html>
33    )
34  }
```

Buatlah sekumpulan component menjadi sebuah layout yang bernama Landing Page pada directory components/landing_page/index.jsx

```
app-react > src > components > landing-page > index.jsx > LandingPage
1   import React from "react";
2   import Navbar from "./components/navbar";
3   import HeroSection from "./components/herosection";
4   import FeaturedBookSection from "./components/featuressection";
5   import CategoriesSection from "./components/categoriessection";
6   import ChooseUs from './components/chooseus';
7   import TestimonialSection from "./components/testimonsection";
8   import Footer from "./components/footers";
9
10  export default function LandingPage() {
11      return (
12          <div>
13              <Navbar />
14              <HeroSection />
15              <FeaturedBookSection />
16              <CategoriesSection />
17              <ChooseUs />
18              <TestimonialSection />
19              <Footer />
20          </div>
21      )
22  }
```

Lalu ketik source code buat components untuk button pada file components/ui/button.jsx

```
app-react > src > components > ui > button.jsx > Button
1   import React from "react";
2
3   const Button = ({
4       children,
5       variant = "primary",
6       size = "md",
7       outline = false,
8       icon,
9       iconPosition = "left",
10      disabled = false,
11      loading = false,
12      fullWidth = false,
13      className = "",
14      onClick,
15      type = "button",
16      ...props
17  }) => {
18      const variantClass = outline ? `btn-outline-${variant}` : `btn-${variant}`;
19      const sizeClass = size !== "md" ? `btn-${size}` : "";
20      const widthClass = fullWidth ? "w-100" : "";
21      const disabledClass = disabled || loading? "disabled" : "";
22      const buttonClasses = `btn ${variantClass} ${sizeClass} ${widthClass} ${disabledClass} ${className}`.trim();
```

```
    return (
        <button
        type={type}
        className={buttonClasses}
        onClick={onClick}
        disabled={disabled || loading}
        {...props}
        >
            {loading ? (
                <>
                    <span
                        className="spinner-border spinner-border-sm me-2"
                        role="status"
                        aria-hidden="true"
                    ></span>
                    Loading...
                </>
            ) : (
                <>
                    {icon && iconPosition === "left" && (
                        <i className={`bi bi-${icon} me-2`}></i>
                    )}
                    {children}
                    {icon && iconPosition === "right" && (
                        <i className={`bi bi-${icon} ms-2`}></i>
                    )}
                </>
            )}
        </button>
    );
}
```

Lalu ketik source code components/landing_page/components/navbar.jsx

```
import React from "react";
import { Button } from "../../ui/button";

export default function Navbar() {
  const menu_nav = [
    { id: 1, name: "Home", link: "#home" },
    { id: 2, name: "Books", link: "#books" },
    { id: 3, name: "Categories", link: "#categories" },
    { id: 4, name: "About", link: "#about" },
    { id: 5, name: "Contact", link: "#contact" },
  ];
  return (
    <nav
      className={`navbar navbar-expand-lg fixed-top transition-navbar`}
      style={styles.navigationBar}
    >
      <div className="container">
        <a className="navbar-brand" href="#">
          <i className="bi bi-book me-2"></i>
          Readly <sup>+</sup>
        </a>
        <button
          className="navbar-toggler"
          type="button"
          data-bs-toggle="collapse"
          data-bs-target="#navbarNav"
        >
          <span className="navbar-toggler-icon"></span>
        </button>
        <div className="collapse navbar-collapse" id="navbarNav">
          <ul className="navbar-nav mx-auto">
```

```
32                {menu_nav.map((menu, index) => (
33                  <li className="nav-item" key={index}>
34                    <a className="nav-link" href={menu.link}>
35                      {menu.name}
36                    </a>
37                  </li>
38                ))}
39              </ul>
40              <div className="d-flex gap-2">
41                <Button className="btn btn-light text-dark">
42                  <i className="bi bi-box-arrow-in-right me-2"></i>
43                  Sign In
44                </Button>
45                <Button className="btn btn-warning">
46                  <i className="bi bi-person-plus me-2"></i>
47                  Sign Up
48                </Button>
49              </div>
50            </div>
51          </div>
52        </nav>
53      );
54    }
55    const styles = {
56      navigationBar: {
57        backgroundColor: "rgba(247, 248, 226, 0.8)",
58        transition: "all 0.3s ease-in-out",
59      },
60    };
```

Lalu ketik source code components/landing_page/components/herosection.jsx

```
1   import React from "react";
2   import { Button } from "../../ui/button";
3
4   export default function HeroSection() {
5     return (
6       <section
7         id="home"
8         className="relative min-h-screen flex items-center overflow-hidden bg-primary text-white"
9         style={styles.section}
10      >
11        <div className="container">
12          <div className="row align-items-center">
13            <div className="col-lg-6">
14              <h1 className="display-4 fw-bold mb-4">
15                Discover Your Next Great Read
16              </h1>
17              <p className="lead mb-4">
18                Explore thousands of books across all genres. From bestsellers to
19                hidden gems, find your perfect book today.{" "}
20              </p>
21              <div className="d-flex gap-3">
22                <Button className="btn btn-light btn-lg">
23                  <i className="bi bi-search me-2"></i>
24                  Browse Books
25                </Button>
26                <Button className="btn btn-outline-light btn-lg">
27                  <i className="bi bi-play-circle me-2"></i>
28                  Learn More
29                </Button>
30              </div>
31            </div>
32            <div className="col-lg-6 text-center mt-4 mt-lg-0">
```

```
33                <i
34                  className="bi bi-book"
35                  style={{ fontSize: "15rem", opacity: 0.8 }}
36                ></i>
37              </div>
38            </div>
39          </div>
40        </section>
41      );
42    }
43    const styles = {
44      section: {
45        minHeight: "100vh",
46        marginTop: "-70px",
47        paddingTop: "70px",
48        display: "flex",
49        alignItems: "center",
50      },
51    };
```

Lalu ketik source code components/landing_page/components/featuresection.jsx

app-react > src > components > landing-page > components > featuressection.jsx > FeaturesSection > ListBook.map() callback

```
1   import React from 'react'
2   import ListBook from "../../../constants/list_books";
3   import BookCard from "./bookcard";
4
5   export default function FeaturesSection() {
6     return (
7       <section id="books" className="py-5">
8           <div className="container">
9               <div className="row mb-5">
10                  <div className="col">
11                      <h2 className="fw-bold text-center">Featured Books</h2>
12                      <p className="text-center text-muted">Handpicked selections just for you</p>
13                  </div>
14              </div>
15              <div className="row g-4">
16                  {ListBook.map((book) => (
17                      <div key={book.id} className="col-md-6 col-lg-3">
18                          <BookCard book={book} />
19                      </div>
20                  ))}
21              </div>
22          </div>
23      </section>
24    )
25  }
```

Lalu ketik source code components/landing_page/components/categorysection.jsx

```
app-react > src > components > landing-page > components > categoriessection.jsx > CategoriesSection
import React from 'react'
import GenreData from "../../../constants/list_genre";

export default function CategoriesSection() {
  return (
    <section id="categories" className="py-5 bg-light">
      <div className="container">
        <div className="row mb-5">
          <div className="col">
            <h2 className="fw-bold text-center">Browse by Category</h2>
            <p className="text-center text-muted">
              Find books in your favorite genres
            </p>
          </div>
        </div>
        <div class="row g-3">
          {GenreData.map((category, index) => (
            <div key={index} className="col-md-4 col-lg-2">
              <div className={`card text-center border-${category.color} h-100`}>
                <div class="card-body">
                  <i
                    className={`bi ${category.icon} text-${category.color}`}
                    style={{ fontSize: "2.5rem" }}
                  ></i>
                  <h6 class="mt-3 mb-0">{category.name}</h6>
                </div>
              </div>
            </div>
          ))}
        </div>
      </div>
    </section>
  )
}
```

Lalu ketik source code components/landing_page/components/footer.jsx

```
import React from 'react'

export default function ChooseUs() {
  return (
    <section id='chooseus' class='py-5  bg-light'>
        <div class='container'>
            <div class='mb-5'>
                <div>
                    <h2 class='fw-bold text-center'>Why Choose Us?</h2>
                    <p  class='text-center text-muted'>Your onestop destination for all things book</p>
                </div>
            </div>
            <div class='row g-4'>
                {listChoose.map((item) => (
                    <div key={item.id} class='col-md-6 col-lg-4'>
                        <Choose item={item} />
                    </div>
                ))}
            </div>
        </div>
    </section>
  );
}
```

```
25  const listChoose = [
28          title: "Vast Collection",
29          description: "Acces thousands of books across all genres, from best sellers to hidden gems.",
30          icon: "bi bi-collection"
31      },
32      {
33          id: 2,
34          title: "Fast Delivery",
35          description: "Get your books delivered quickly and securely to your doorstep.",
36          icon: "bi bi-truck"
37      },
38      {
39          id: 3,
40          title: "Best Prices",
41          description: "Get the best seller deals on your favorite books without breaking the bank.",
42          icon: "bi bi-percent"
43      }
44  ];
45
46  const Choose = ({item}) => {
47      const {title, description, icon} = item;
48
49      return (
50          <div className='card h-100'>
51              <div className='card-body text-center'>
52                  <div className='p-4 mb-3'>
53                      <i className={`${icon} fs-1 text-primary`}></i>
54                  </div>
55                  <h5 className='fw-bold'>{title}</h5>
56                  <p className='text-muted'>{description}</p>
57              </div>
58          </div>
59      )
60  }
```

Lalu ketik source code components/landing_page/components/testimonsection.jsx

```
app-react > src > components > landing-page > components > testimonsection.jsx > TestimonSection
1   import React from "react";
2   import UserTestimonials from "../../../constants/list_testimon";
3
4   export default function TestimonSection() {
5     return (
6       <section className="py-5">
7         <div className="container">
8           <div className="row mb-5">
9             <div className="col">
10              <h2 className="fw-bold text-center">What Our Readers Say</h2>
11              <p className="text-center text-muted">
12                Join thousands of satisfied book lovers
13              </p>
14            </div>
15          </div>
16          <div className="row g-4">
17            {UserTestimonials.map((testimonial, index) => (
18              <div key={index} className="col-md-4">
19                <div className="card h-100 shadow-sm">
20                  <div className="card-body">
21                    <div className="mb-3">
22                      {[...Array(5)].map((_, i) => (
23                        <i
24                          key={i}
25                          className={`bi bi-star${i < testimonial.rating ? "-fill" : ""} text-warning`}
26                        ></i>
27                      ))
28                    </d (property) HTMLAttributes<T>.className?: string | undefined
29                    <p className="card-text mb-3">{testimonial.review}</p>
30                    <div className="d-flex align-items-center">
31                      <div
32                        className="bg-primary rounded-circle d-flex align-itemscenter justify-content-center"
33                        style={{ width: "50px", height: "50px" }}
```

```
                    style={{ width: "50px", height: "50px" }}
                  >
                    <i
                      className="bi bi-person-fill text-white"
                      style={{ fontSize: "1.5rem" }}
                    ></i>
                  </div>
                  <div className="ms-3">
                    <h6 className="mb-0">{testimonial.name}</h6>
                    <small className="text-muted">Verified Buyer</small>
                  </div>
                </div>
              </div>
            </div>
          ))}
        </div>
      </div>
    </section>
  );
}
```

Lalu ketik source code components/landing_page/components/footer.jsx

```
import React from "react";

export default function Footers() {
  const socialLinks = [
    { icon: "facebook", url: "#", label: "Facebook" },
    { icon: "twitter", url: "#", label: "Twitter" },
    { icon: "instagram", url: "#", label: "Instagram" },
    { icon: "linkedin", url: "#", label: "LinkedIn" },
  ];
  const quickLinks = [
    { text: "About Us", url: "#" },
    { text: "Contact", url: "#" },
    { text: "Privacy Policy", url: "#" },
    { text: "Terms of Service", url: "#" },
  ];
  const contactItems = [
    { icon: "geo-alt", text: "123 Book Street, Reading City" },
    { icon: "telephone", text: "+1 234 567 8900" },
    { icon: "envelope", text: "info@bookstore.com" },
  ];

  return (
    <footer id="contact" className="bg-light py-4">
      <div className="container">
        <div className="row">
          <div className="col-md-4 mb-3">
            <h5 className="fw-bold">
              <i className="bi bi-book-fill me-2"></i>
              Readly<sup>+</sup>
            </h5>
            <p className="text-muted">
              Your trusted online bookstore since 2024
            </p>
```

```
34                <SocialMediaLinks links={socialLinks} />
35              </div>
36              <FooterSection title="Quick Links">
37                <LinkList links={quickLinks} />
38              </FooterSection>
39              <FooterSection title="Contact Info">
40                <ContactInfo items={contactItems} />
41              </FooterSection>
42            </div>
43            <hr />
44            <div className="text-center text-muted">
45              <p className="mb-0">
46                &copy; 2024 Febry D Fairuz. All rights reserved.
47              </p>
48            </div>
49          </div>
50        </footer>
51      );
52    }
```

```
54    const SocialMediaLinks = ({ links, iconSize = "1.5rem", className = "" }) => {
55      return (
56        <div className={`d-flex gap-3 ${className}`}>
57          {links.map((link, index) => (
58            <a
59              key={index}
60              href={link.url}
61              className="text-dark"
62              arialabel={link.label}
63            >
64              <i
65                className={`bi bi-${link.icon}`}
66                style={{ fontSize: iconSize }}
67              ></i>
68            </a>
69          ))}
70        </div>
71      );
72    };
```

```
74    const FooterSection = ({ title, children, className = "" }) => {
75      return (
76        <div className={`col-md-4 mb-3 ${className}`}>
77          <h6 className="fw-bold">{title}</h6>
78          {children}
79        </div>
80      );
81    };
```

```
const ContactInfo = ({ items, className = "" }) => {
  return (
    <ul className={`list-unstyled text-muted ${className}`}>
      {items.map((item, index) => (
        <li key={index}>
          <i className={`bi bi-${item.icon} me-2`}></i>
          {item.text}
        </li>
      ))}
    </ul>
  );
};
```

```
const LinkList = ({ links, className = "" }) => {
  return (
    <ul className={`list-unstyled ${className}`}>
      {links.map((link, index) => (
        <li key={index}>
          <a href={link.url} className="text-muted text-decoration-none">
            {link.text}
          </a>
        </li>
      ))}
    </ul>
  );
};
```

Pada file app/page.jsx mengetik source code dibawah agar untuk menampilkan output untuk route

```
export { default } from "../components/landing-page/index";
```

Untuk Output nya pada screenshot dibawah

Readly +

Home Books Categories About Contact

Sign In Sign Up

Discover Your Next Great Read

Explore thousands of books across all genres. From bestsellers to hidden gems, find your perfect book today.

Browse Books Learn More

Featured Books

Handpicked selections just for you



Animal Farm
by George Orwell
(4.8)



The Metamorphosis
by Franz Kafka
(4.5)



Meditations
by Marcus Aurelius
(4.9)



Technical Analysis of the Financial Markets
by John J. Murphy
(4.7)

Readly +

Home Books Categories About Contact

Sign In Sign Up



1984
by George Orwell
(4.9)



The Republic
by Plato
(4.6)

Japanese Candlestick Charting Techniques
by Steve Nison
(4.8)

Beyond Good and Evil
by Friedrich Nietzsche
(4.4)

The Intelligent Investor
by Benjamin Graham
(4.8)



Sapiens: Riwayat Singkat Umat Manusia
by Yuval Noah Harari

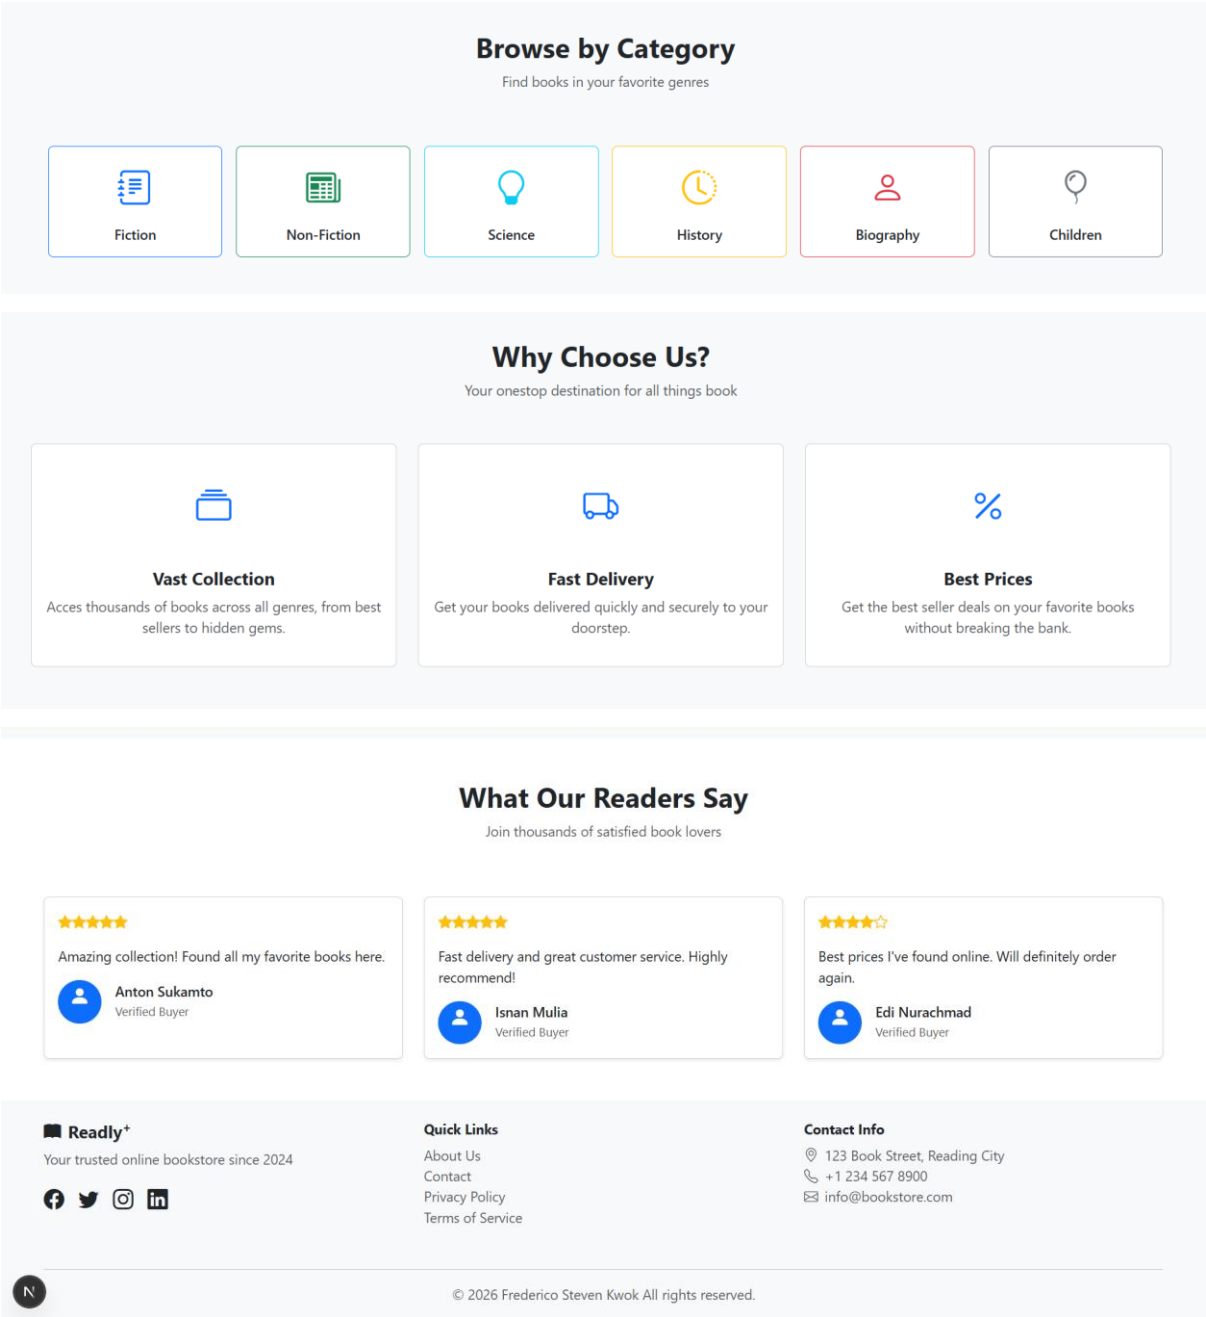

2. Upload project tersebut pada GITHUB dengan menggunakan repository bernama "**PW-MERN-STACK-NPM**" dengan nama commit "**Praktikum 5**".
   Link GITHUB PW-MERN-STACK-242310037
   https://github.com/RicoSteven120206/PW-MERN-STACK-242310037.git