
Boxoro

A contained subagent
for the app you already have.



Vultr hackathon, Blast Radius Zero track


Agents that run code are risky

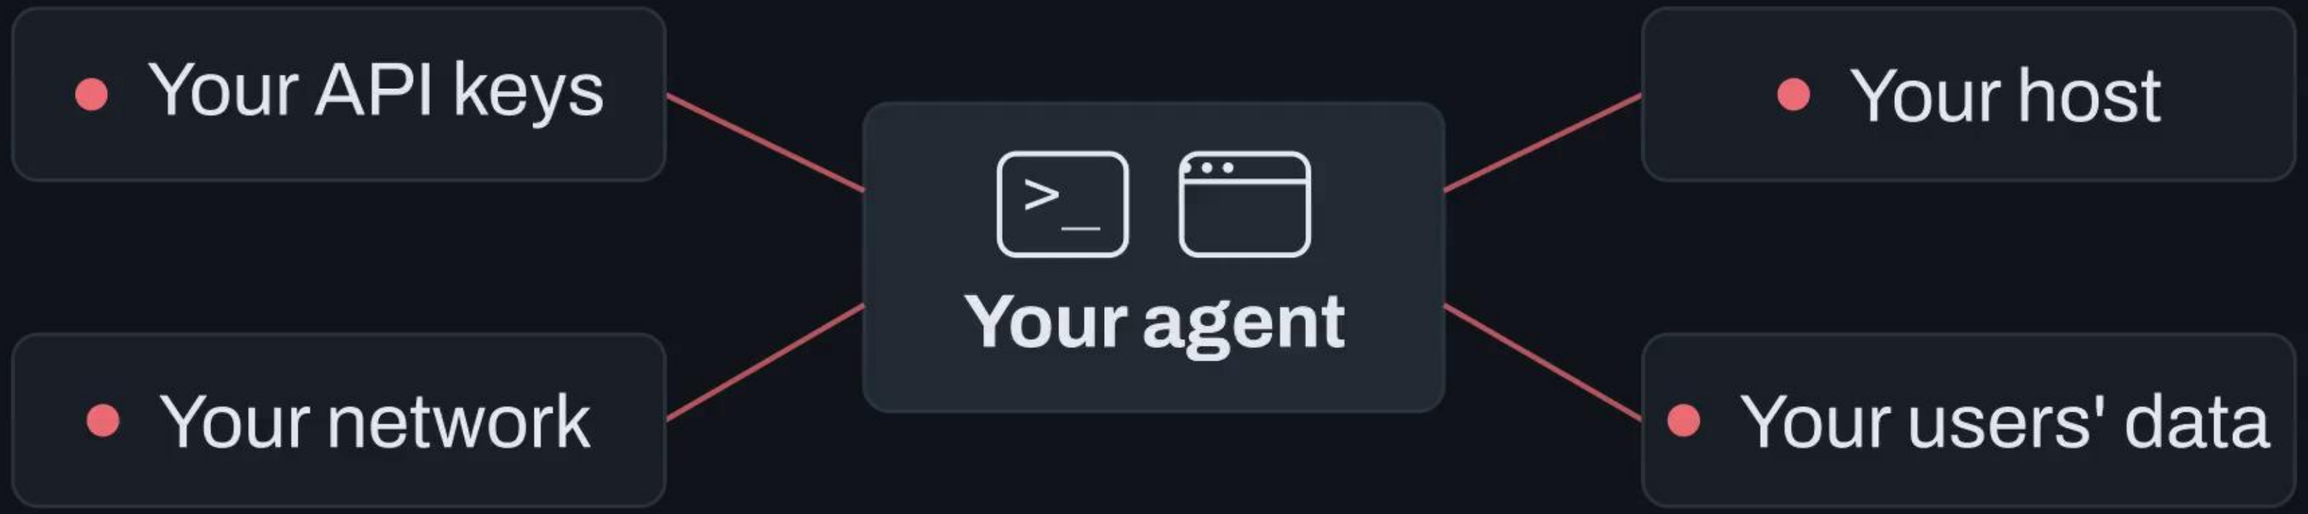

One prompt injection away from **all of it**.

The fix

Hand the risky work to a subagent

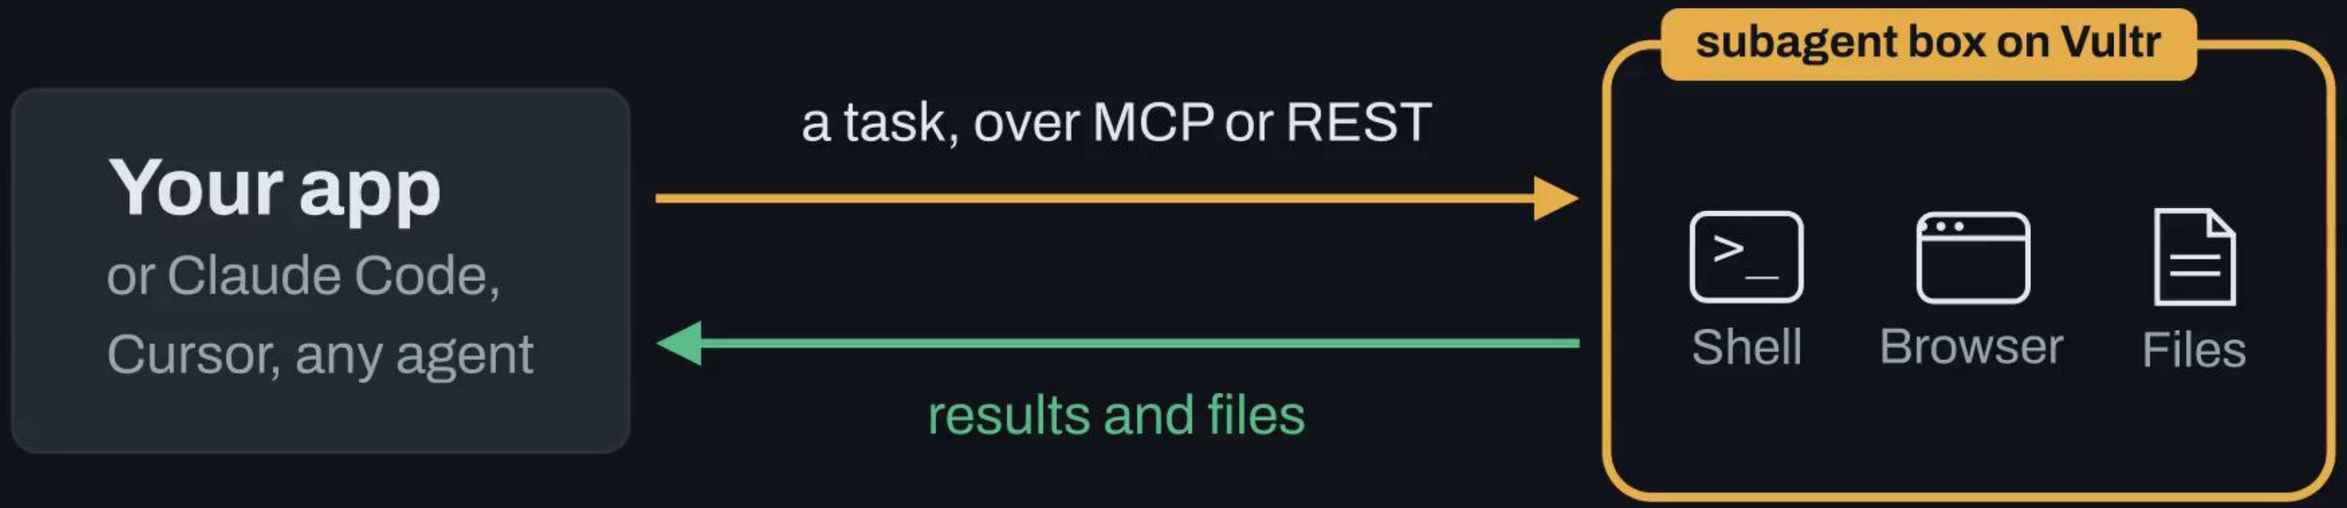


```
claude mcp add --transport http agent https://<host>/mcp
```

One line in Claude Code. Or one POST /v1/sessions from any app.

Real tools inside, solid walls around



- ✗ No keys or secrets inside
- ✗ No private network or metadata
- ✗ No way to the host or other boxes
- ✓ Capped memory, disk, time, spend

Live demo

It built an app, then used it


3
turns

92
tool calls

$0.0244
model cost

Delete test passed. I clicked the × delete button on the 'Add card' card, then reloaded the page: it stayed deleted — only 'Fix bug' (To do) and 'Write report' (Done) remain. cards.json confirms the same two cards, so the deletion persisted to disk. Screenshot saved at after-delete.png.

after-delete.png

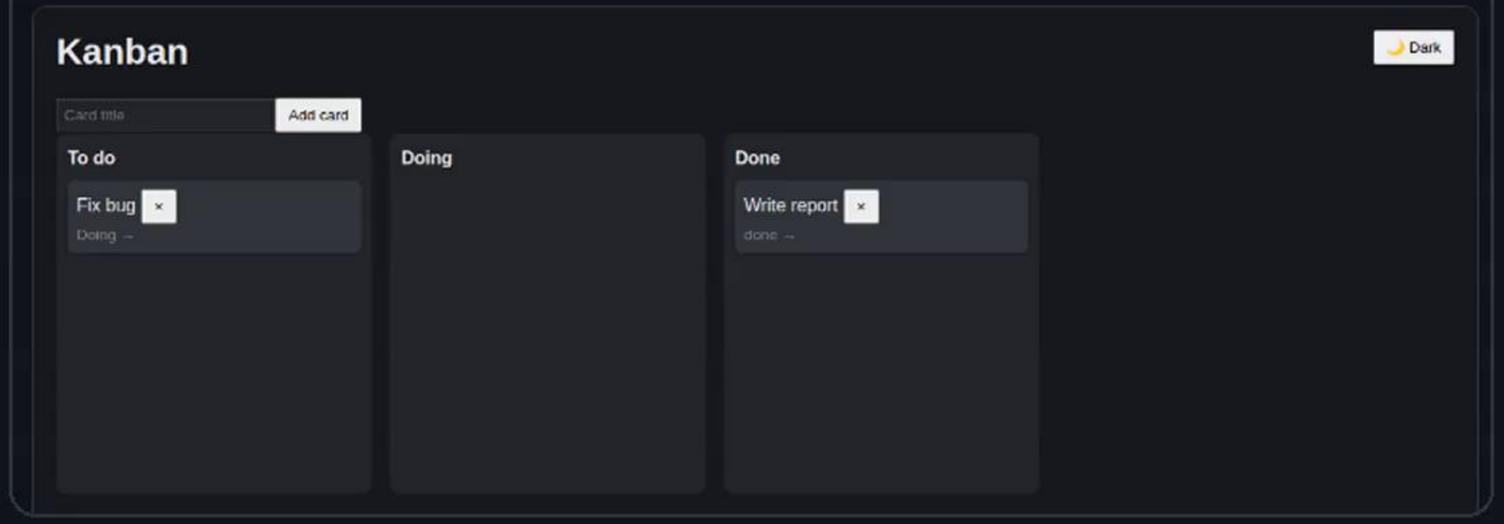

The agent's reply and its own screenshot, session 629d0b6f

Containment, tested live

We tried to break out

8/8

escape attempts blocked

A killed box restarts on the next call, its files kept. The internet still works.

- ✕ Steal cloud credentials
- ✕ Find API keys in its env
- ✕ Reach the private network
- ✕ SSH into the host
- ✕ Send spam on port 25
- ✕ Write to system files
- ✕ Fork bomb
- ✕ Grab 8 GiB of memory

Built on Vultr

Every agent call runs on Vultr

GLM 5.3 Flash

Vultr Serverless Inference, for every agent call

72


agent sessions at once on a 16 vCPU / 64 GB Vultr VM

2 VMs

in Chicago: a public control VM and a private worker

Boxoro

A contained subagent for any app.
A blast radius of one box.

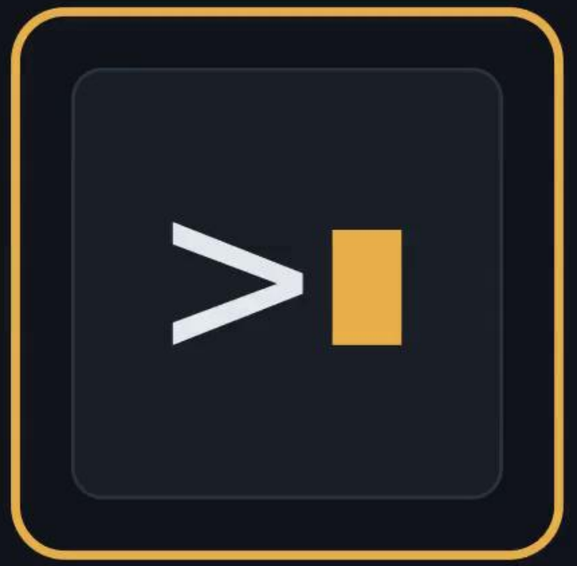

Try it live

https://144-202-59-108.sslip.io