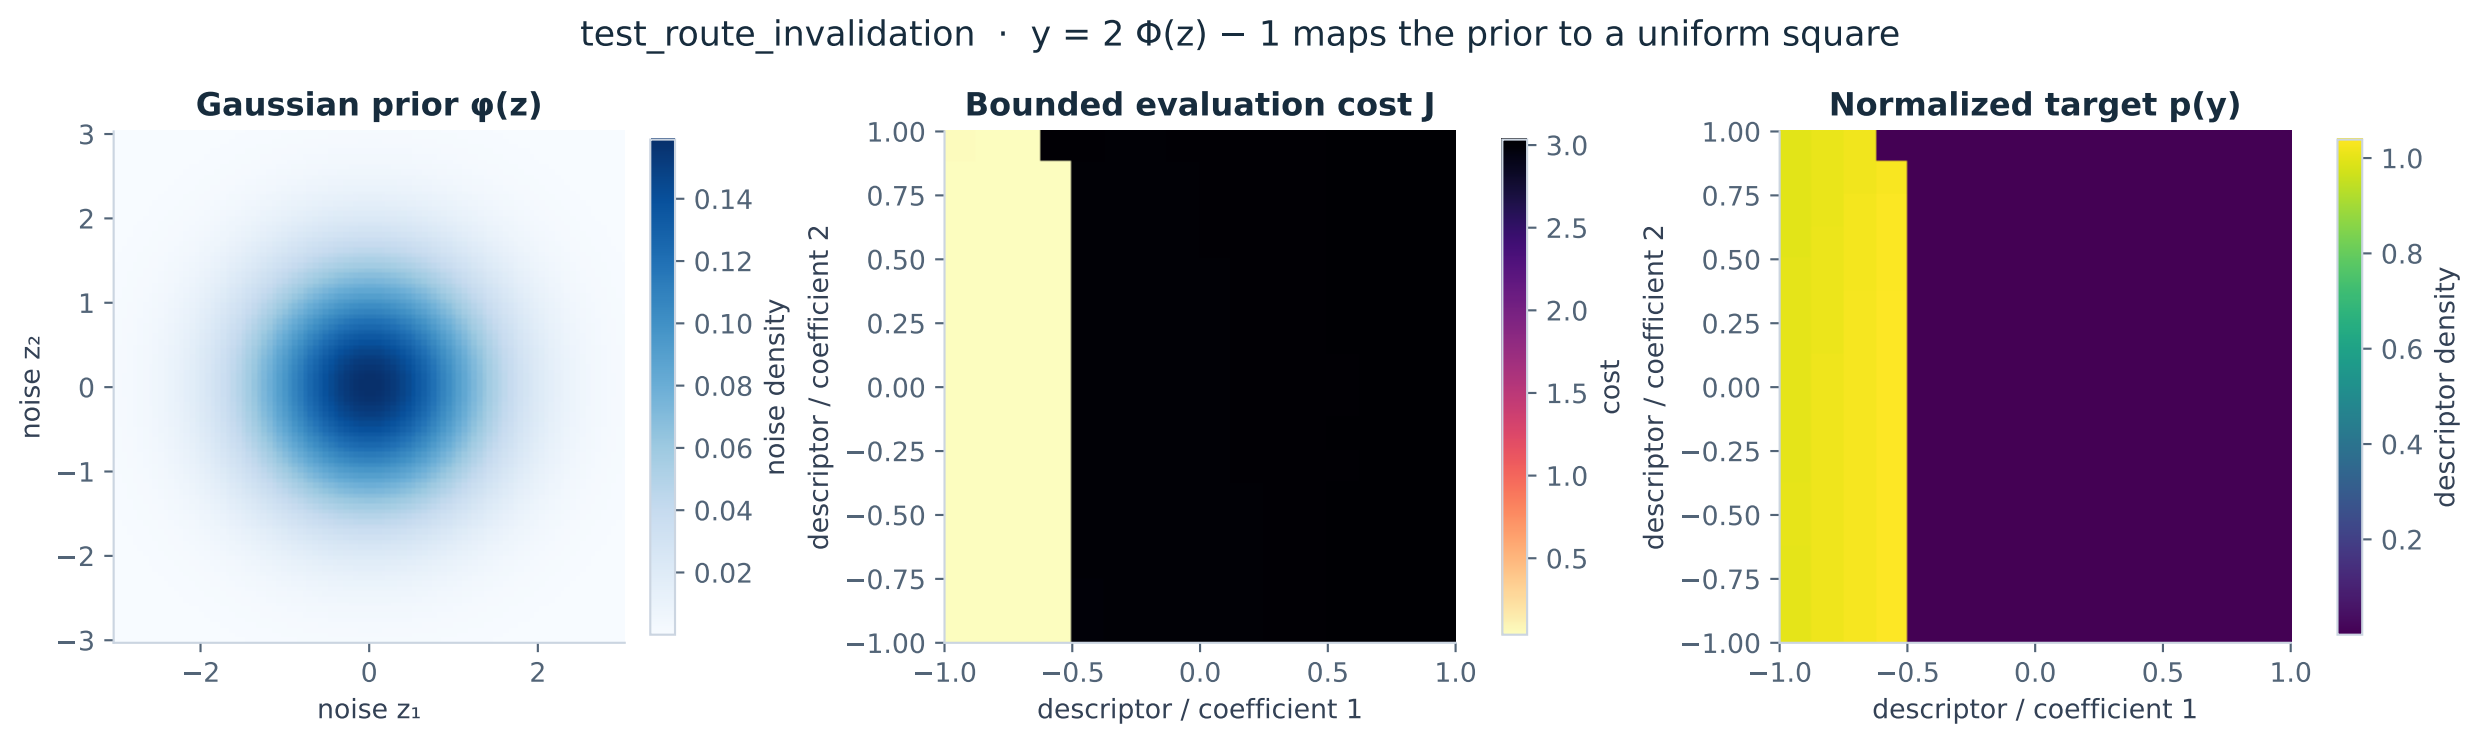
test_route_invalidation · y = 2 Φ(z) − 1 maps the prior to a uniform square
Gaussian prior φ(z)
noise z₂
noise z₁
noise density
Bounded evaluation cost J
descriptor / coefficient 2
descriptor / coefficient 1
cost
Normalized target p(y)
descriptor / coefficient 2
descriptor / coefficient 1
descriptor density