BAB 2. TCP/IP Model

2.1 Tujuan

- Mahasiswa mampu melakukan identifikasi transmisi data menggunakan model TCP/IP
- Mahasiswa mampu melakukan identifikasi layer dari model TCP/IP
- Mahasiswa mampu menggunakan aplikasi untuk mengidentifikasi data dari model TCP/IP

2.2 Dasar Teori

2.2.1 OSI Layer

OSI adalah referensi komunikasi dari Open System Interconnection. OSI model digunakan sebagai referensi untuk membahas spesifikasi protokol. OSI model terdiri dari 7 layer seperti pada tabel 1.

Layer #	Nama	Unit Enkapsulasi	Deskripsi/Fungsi
7	Application	Data	Mendefinisikan pelayanan (services) komunikasi pada suatu aplikasi
6	Presentation	Data	Mendefinisikan format data
5	Session	Data	Mendefinisikan memulai, pengontrolan dan mengakhiri komunikasi
4	Transport	Segment	Mendefinisikan jenis pengiriman
3	Network	Paket	Mendefinisikan pengiriman dari titik ke titik.
2	Data Link	Frame	Mendefinisikan cara pengaturan pengiriman data
1	Physical	bit	Mendifinisikan bentuk interface dari sebuah media transmisi


Tabel 1. OSI Layer

Dimana setiap layer memiliki fungsi dan contoh masing-masing.

2.2.2 TCP/IP Model

TCP/IP (singkatan dari Transmission Control Protocol/Internet Protocol), adalah gabungan dari protokol TCP dan IP sebagai sekelompok protokol yang mengatur komunikasi data dalam proses tukar-menukar data dari satu komputer ke komputer lain di dalam jaringan Internet yang akan memastikan pengiriman data sampai ke alamat yang dituju. Protokol ini tidaklah dapat berdiri sendiri, karena memang protokol ini berupa kumpulan protokol (Protocol Suite).

Arsitektur TCP/IP tidaklah berbasis OSI Layer, tetapi menggunakan model referensi DARPA. Seperti pada gambar 11., TCP/IP mengimplementasikan arsitektur berlapis yang terdiri atas empat lapis. Empat lapis ini, dapat dipetakan terhadap model OSI layer. Empat lapis ini, disebut juga DARPA Model atau DOD Model.

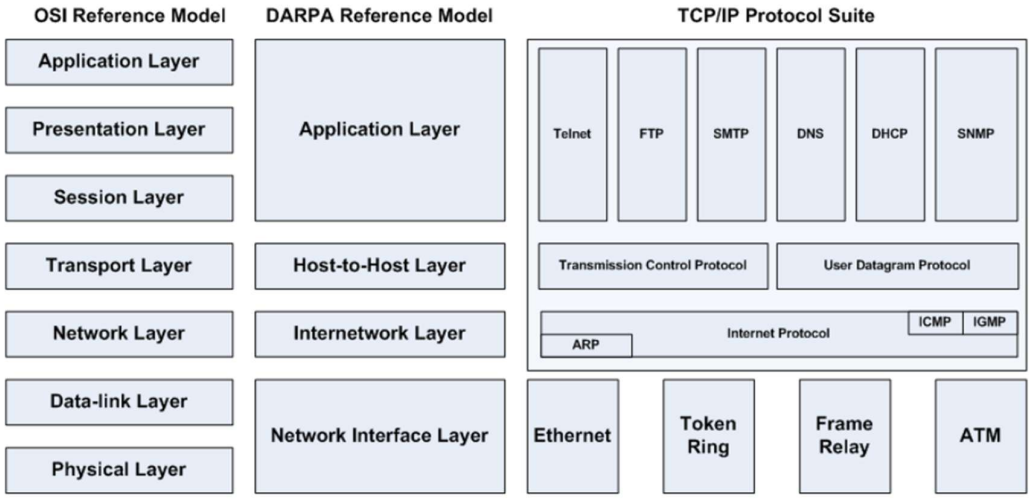

Gambar 11. OSI Layer vs TCP/IP Protocol Suite.

2.3 Pengenalan Aplikasi

2.3.1 Wireshark

Wireshark adalah aplikasi penganalisa paket jaringan (Network Packet Analyzer). Sebuah software penganalisa paket jaringan yang bekerja dengan cara menangkap paket jaringan dan mencoba untuk menampilkan data paket yang tertangkap dengan detail.

Wireshark bersifat open source.

Contoh penggunaan wireshark:
- Administrator jaringan menggunakan untuk melakukan penangan masalah jaringan
- Network security engineer menggunakan untuk memeriksa keamanan jaringan
- Developer menggunakan untuk melakukan debug pada implementasi protokol
- Umum digunakan untuk mempelajari internal protokol jaringan

Wireshark memiliki fitur:
- Tersedia untuk UNIX dan Windows.
- Menangkap paket data langsung dari network interface.
- Tampilan paket dengan informasi protokol yang sangat rinci.
- Open dan Save data paket yang dicapture.
- Import dan Eksport paket data dari dank e banyak program capture lainnya.
- Menyaring paket data dengan berbagai macam kriteria.
- Warnai layar paket berdasarkan filter.

2.3.2 Cara penggunaan Wireshark

Langkah-langkah menggunakan wireshark


1. Klik ikon…




2. Kemudian akan tampil aplikasi wireshark dengan diawali spash screen.




3. Tampilan awal program Wireshark.

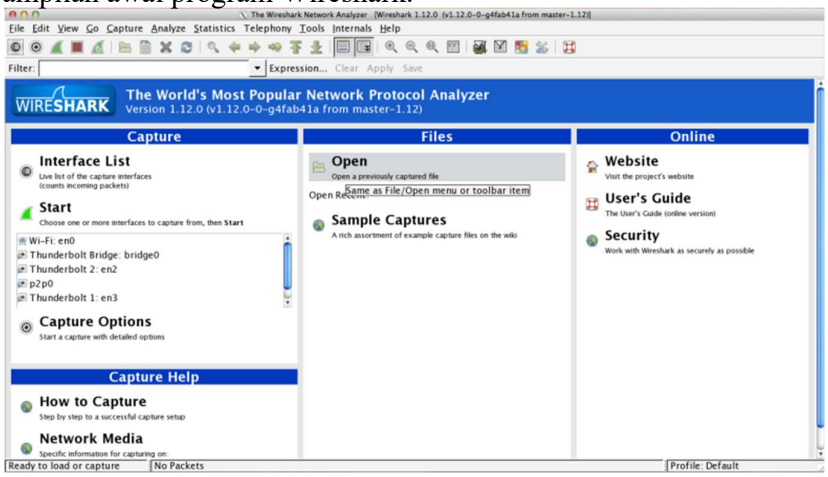


4. Keterangan menu wireshark.

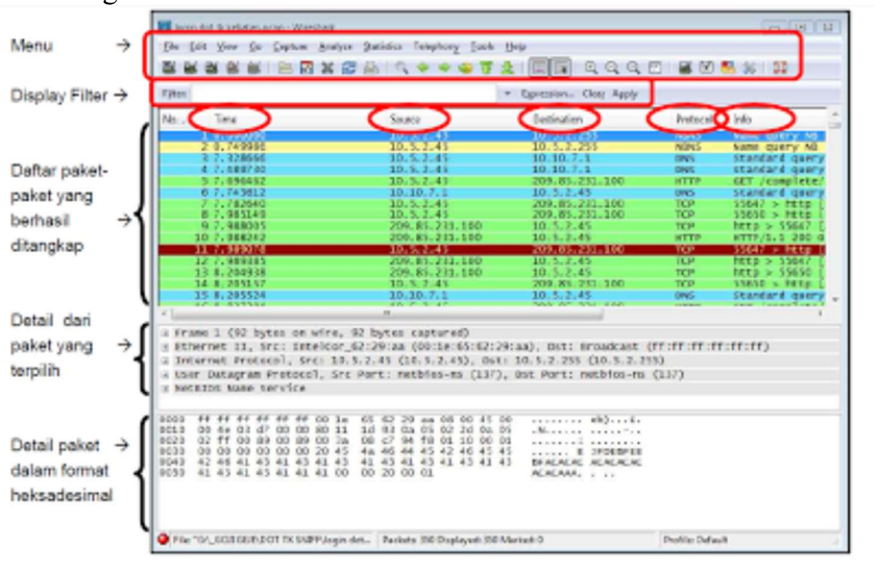


5. Melakukan CAPTURE data menggunakan wireshark. Pilih menu INTERFACE.

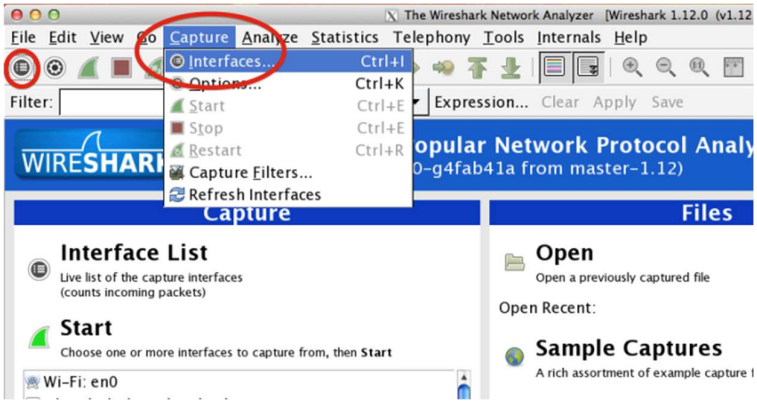

6. Pilih interface yang kita gunakan, kemudian klik start.

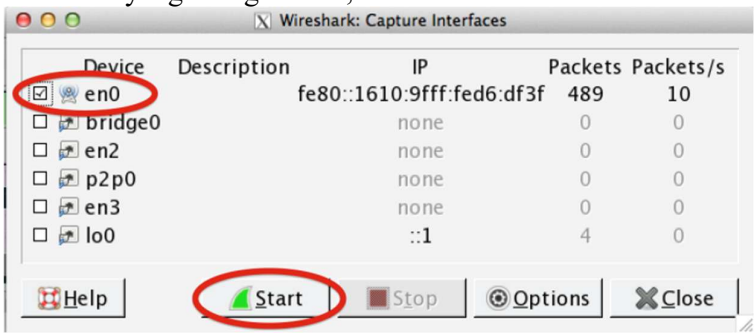

7. Setelah mengaktifkan interfaces, Wireshark akan beraksi membaca semua data yang berada di jaringan.

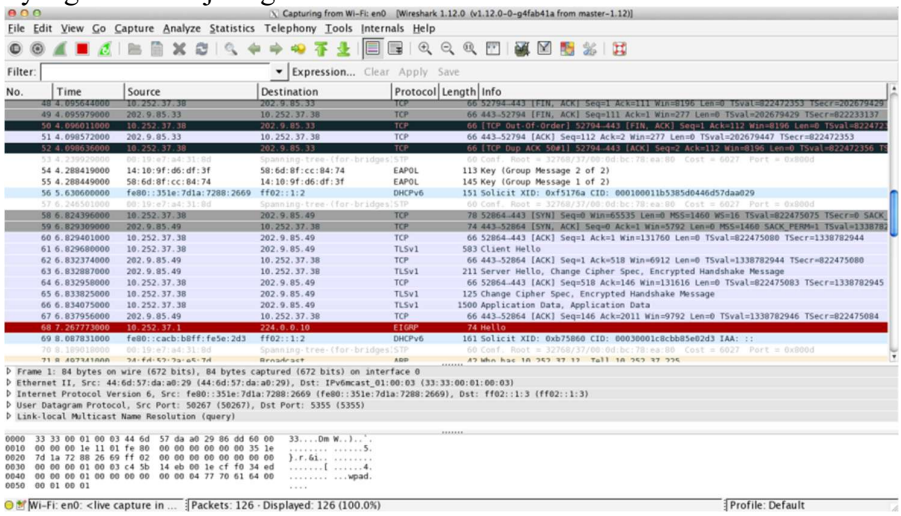


Terlihat banyak data yang dapat dicapture.


Keterangan:

Source	Alamat IP pengirim
Destination	Alamat IP tujuan
Protocol	Jenis protokol yang digunakan, seperti TCP, DHCP, dll
Length	Panjang data yang dikirimkan
Info	Informasi isi data yang dikirimkan

8. Ketikkan ICMP pada filter box untuk melakukan penyaringan data yang akan ditampilkan sehingga hanya data PING yang akan ditampilkan.

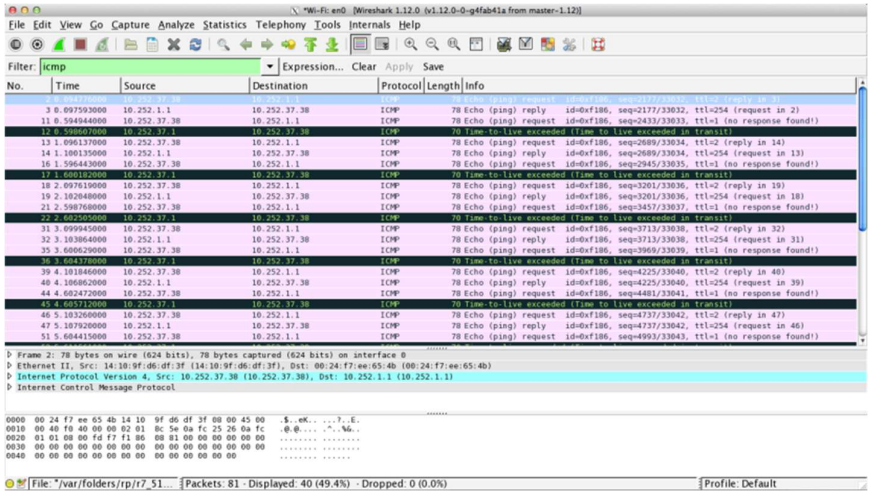

9. Penjelasan data

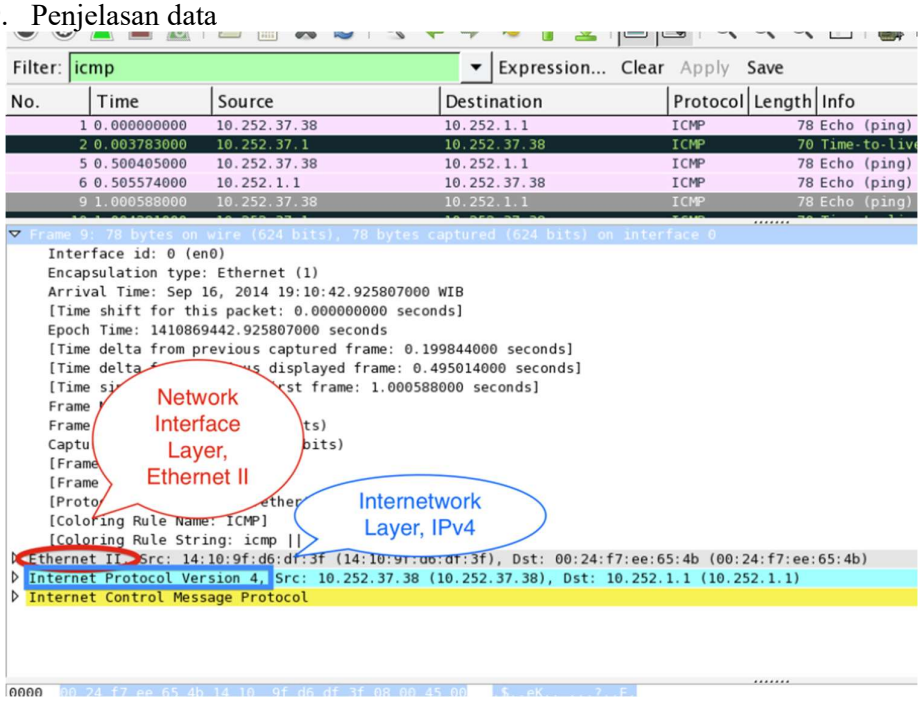

2.4 Persiapan Praktikum

1. Modul praktikum
2. PC yang dilengkapi dengan aplikasi Wireshark
3. Jaringan aktif
4. Lembar Laporan Praktikum (Lampiran)
5. Koneksi LAN dan Internet

2.5 Langkah-langkah Praktikum

2.5.1 Menjalankan aplikasi wireshark

1. Mahasiswa melakukan pengecekan apakah pada PC yang dipakai sudah terinstall aplikasi wireshark ?!!

2. Apabila belum terinstall, mahasiswa harus melakukan installasi di PC yang digunakan !!!

   Untuk OS Linux Debian/Ubuntu:
   dhoto@mypc $ su
   root@mypc # apt-get install wireshark

   Untuk OSX:
   - Download wireshark dan XQuartz
   - Lakukan konfigurasi XQuartz pada wireshark

   Untuk Windows:
   - Download wireshark
   - Klik 2x pada installer wireshark

3. Klik ikon Wireshark !!!
4. Klik pada menu CAPTURE dan memilih INTERFACES.
5. Pilih interface yang akan digunakan untuk mengrekam data.
6. Klik Start.
7. Pada OS linux, jalankan aplikasi TERMINAL dan ketik perintah PING yang digunakan untuk melakukan pengecekan jaringan (tanpa tanda $):
   $ ping 10.252.1.1
8. Kembali ke aplikasi wireshark, hentikan rekam data dengan cara klik tombol merah pada wireshark. Ambil data untuk jenis tipe: icmp dengan cara memfilter di aplikasi wireshark dan lakukan screen shot pada tampilan wireshark yang kalian gunakan.

2.5.2 Melakukan rekam data untuk jenis protokol tertentu

1. Lakukan praktikum seperti kegiatan 2.5.1 dari nomer 4 s/d 8.
2. Ganti kegiatan pada no 7, dengan kegiatan berikut:
   a. Jalankan aplikasi terminal dan ketik perintah NSLOOKUP yang digunakan untuk mengetahui IP dari suatu tujuan (tanpa tanda $):
      $ nslookup www.pens.ac.id
      Ambil data untuk jenis tipe: dns
   b. Jalankan aplikasi web browser dan arahkan ke alamat:
      ftp://newfs.pens.ac.id
      Download salah satu data yang ada di alamat tersebut !!!
      Ambil data untuk jenis tipe: ftp
   c. Jalankan aplikasi web browser dan arahkan ke alamat:
      http://www.pens.ac.id
      Ambil data untuk jenis tipe: http
3. Untuk masing-masing kegiatan diatas, laporkan data yang telah direkam sesuai dengan layer pada TCP/IP model. Gunakan lembar **Laporan praktikum 2. TCP/IP Model**. (Lampiran)

2.6 Lampiran

Laporan praktikum 2. TCP/IP Model


Kegiatan : Mengambil data untuk jenis tipe: dns
Nama : Rifky Qur'an Nanda
NRP : 5325600014

```
C:\Users\a516j>nslookup www.pens.ac.id
Server:  iac3.pens.ac.id
Address:  10.252.128.2

Non-authoritative answer:
Name:    www.pens.ac.id
Address:  202.9.85.176
```

Data layer

Application Layer

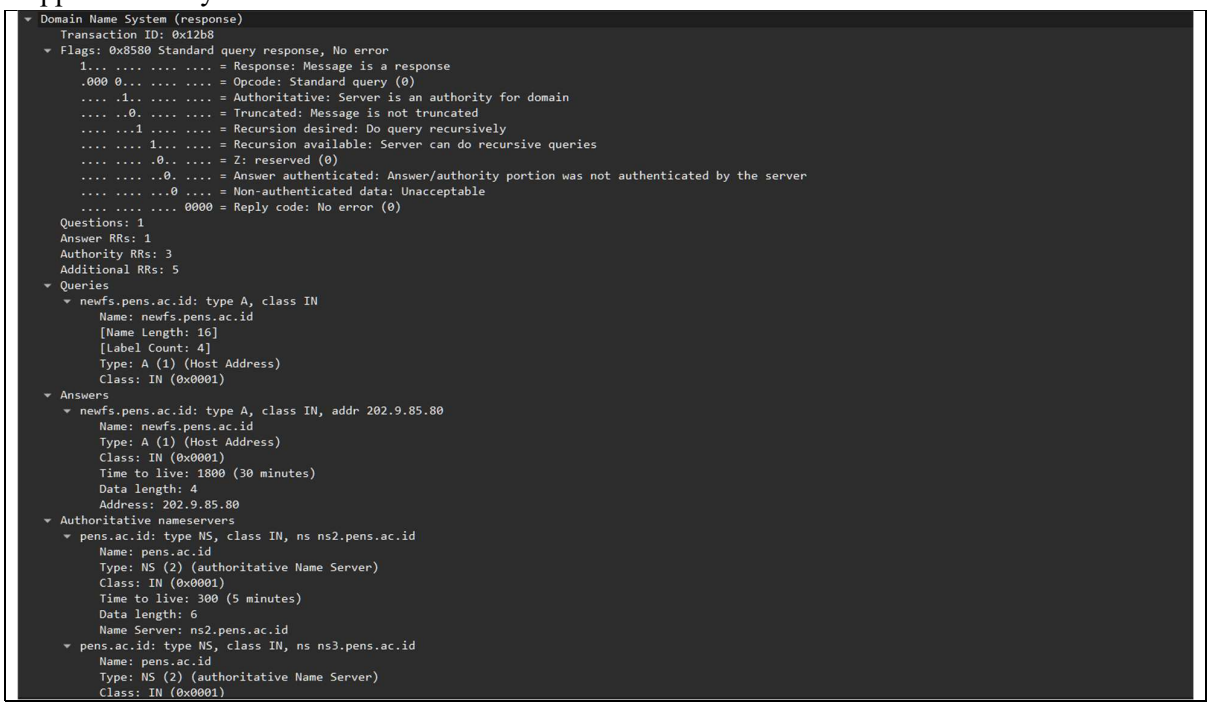

```
Domain Name System (response)
    Transaction ID: 0x12b8
  Flags: 0x8580 Standard query response, No error
      1... .... .... .... = Response: Message is a response
      .000 0... .... .... = Opcode: Standard query (0)
      .... .1.. .... .... = Authoritative: Server is an authority for domain
      .... ..0. .... .... = Truncated: Message is not truncated
      .... ...1 .... .... = Recursion desired: Do query recursively
      .... .... 1... .... = Recursion available: Server can do recursive queries
      .... .... .0.. .... = Z: reserved (0)
      .... .... ..0. .... = Answer authenticated: Answer/authority portion was not authenticated by the server
      .... .... ...0 .... = Non-authenticated data: Unacceptable
      .... .... .... 0000 = Reply code: No error (0)
    Questions: 1
    Answer RRs: 1
    Authority RRs: 3
    Additional RRs: 5
  Queries
    newfs.pens.ac.id: type A, class IN
        Name: newfs.pens.ac.id
        [Name Length: 16]
        [Label Count: 4]
        Type: A (1) (Host Address)
        Class: IN (0x0001)
  Answers
    newfs.pens.ac.id: type A, class IN, addr 202.9.85.80
        Name: newfs.pens.ac.id
        Type: A (1) (Host Address)
        Class: IN (0x0001)
        Time to live: 1800 (30 minutes)
        Data length: 4
        Address: 202.9.85.80
  Authoritative nameservers
    pens.ac.id: type NS, class IN, ns ns2.pens.ac.id
        Name: pens.ac.id
        Type: NS (2) (authoritative Name Server)
        Class: IN (0x0001)
        Time to live: 300 (5 minutes)
        Data length: 6
        Name Server: ns2.pens.ac.id
    pens.ac.id: type NS, class IN, ns ns3.pens.ac.id
        Name: pens.ac.id
        Type: NS (2) (authoritative Name Server)
        Class: IN (0x0001)
```

```
        Time to live: 300 (5 minutes)
        Data length: 6
        Name Server: ns3.pens.ac.id
    pens.ac.id: type NS, class IN, ns ns1.pens.ac.id
        Name: pens.ac.id
        Type: NS (2) (authoritative Name Server)
        Class: IN (0x0001)
        Time to live: 300 (5 minutes)
        Data length: 6
        Name Server: ns1.pens.ac.id
  Additional records
    ns1.pens.ac.id: type A, class IN, addr 202.9.85.3
        Name: ns1.pens.ac.id
        Type: A (1) (Host Address)
        Class: IN (0x0001)
        Time to live: 1800 (30 minutes)
        Data length: 4
        Address: 202.9.85.3
    ns1.pens.ac.id: type AAAA, class IN, addr 2001:df0:a8:85::3
        Name: ns1.pens.ac.id
        Type: AAAA (28) (IP6 Address)
        Class: IN (0x0001)
        Time to live: 1800 (30 minutes)
        Data length: 16
        AAAA Address: 2001:df0:a8:85::3
    ns2.pens.ac.id: type A, class IN, addr 202.9.85.4
        Name: ns2.pens.ac.id
        Type: A (1) (Host Address)
        Class: IN (0x0001)
        Time to live: 1800 (30 minutes)
        Data length: 4
        Address: 202.9.85.4
    ns2.pens.ac.id: type AAAA, class IN, addr 2001:df0:a8:85::4
        Name: ns2.pens.ac.id
        Type: AAAA (28) (IP6 Address)
        Class: IN (0x0001)
        Time to live: 1800 (30 minutes)
        Data length: 16
        AAAA Address: 2001:df0:a8:85::4
    ns3.pens.ac.id: type A, class IN, addr 103.109.210.10
        Name: ns3.pens.ac.id
        Type: A (1) (Host Address)
        Class: IN (0x0001)
        Time to live: 1800 (30 minutes)
        Data length: 4
        Address: 103.109.210.10
  [Request In: 155353]
  [Time: 21.030900 milliseconds]
```

Host-to-Host Layer

```
User Datagram Protocol, Src Port: 53, Dst Port: 64615
  Source Port: 53
  Destination Port: 64615
  Length: 216
  Checksum: 0x5329 [unverified]
  [Checksum Status: Unverified]
  [Stream index: 2877]
  [Stream Packet Number: 20]
  [Timestamps]
    [Time since first frame: 23.087661200 seconds]
    [Time since previous frame: 21.030900 milliseconds]
  UDP payload (208 bytes)
```

Internetnetwork Layer

```
Internet Protocol Version 4, Src: 10.252.128.2, Dst: 10.252.128.206
  0100 .... = Version: 4
  .... 0101 = Header Length: 20 bytes (5)
  Differentiated Services Field: 0x00 (DSCP: CS0, ECN: Not-ECT)
    0000 00.. = Differentiated Services Codepoint: Default (0)
    .... ..00 = Explicit Congestion Notification: Not ECN-Capable Transport (0)
  Total Length: 236
  Identification: 0x5141 (20801)
  000. .... = Flags: 0x0
    0... .... = Reserved bit: Not set
    .0.. .... = Don't fragment: Not set
    ..0. .... = More fragments: Not set
  ...0 0000 0000 0000 = Fragment Offset: 0
  Time to Live: 64
  Protocol: UDP (17)
  Header Checksum: 0x11f8 [validation disabled]
  [Header checksum status: Unverified]
  Source Address: 10.252.128.2
  Destination Address: 10.252.128.206
  [Stream index: 242]
```

Network Interface Layer

```
Ethernet II, Src: VMware_9f:5a:c2 (00:50:56:9f:5a:c2), Dst: Intel_64:91:96 (ec:63:d7:64:91:96)
  Destination: Intel_64:91:96 (ec:63:d7:64:91:96)
      .... ..0. .... .... .... .... = LG bit: Globally unique address (factory default)
      .... ...0 .... .... .... .... = IG bit: Individual address (unicast)
  Source: VMware_9f:5a:c2 (00:50:56:9f:5a:c2)
      .... ..0. .... .... .... .... = LG bit: Globally unique address (factory default)
      .... ...0 .... .... .... .... = IG bit: Individual address (unicast)
  Type: IPv4 (0x0800)
```

== http://lecturer.pens.ac.id/~dhoto ==

Laporan praktikum 2. TCP/IP Model

Kegiatan : Mengambil data untuk jenis tipe: ftp

Nama : Rifky Qur'an Nanda

NRP : 5325600014

```
C:\Users\a516j>ftp newfs.pens.ac.id
Connected to newfs.pens.ac.id.
220 ProFTPD 1.3.5b Server (newfs.eepis-its.edu) [::ffff:202.9.85.80]
200 UTF8 set to on
User (newfs.pens.ac.id:(none)): anonymous
331 Anonymous login ok, send your complete email address as your password
Password:

230-Selamat datang NEWFS PENS, user: anonymous@202.9.85.32 !
230-
230-Waktu saat ini: Tue Oct 13 04:33:42 2026
230-
230 Anonymous access granted, restrictions apply
ftp> ls
200 PORT command successful
150 Opening ASCII mode data connection for file list
ebook
temp
software
picture
audio
226 Transfer complete
ftp: 42 bytes received in 0.00Seconds 14.00Kbytes/sec.
```

Data layer


Application Layer

```
▾ File Transfer Protocol (FTP)
  ▾ 220 ProFTPD 1.3.5b Server (newfs.eepis-its.edu) [::ffff:202.9.85.80]\r\n
      Response code: Service ready for new user (220)
      Response arg: ProFTPD 1.3.5b Server (newfs.eepis-its.edu) [::ffff:202.9.85.80]
  [Current working directory: ]
```


Host-to-Host Layer

```
▾ Transmission Control Protocol, Src Port: 21, Dst Port: 62539, Seq: 1, Ack: 1, Len: 70
    Source Port: 21
    Destination Port: 62539
    [Stream index: 1939]
    [Stream Packet Number: 7]
  ▾ [Conversation completeness: Complete, WITH_DATA (31)]
      ..0. .... = RST: Absent
      ...1 .... = FIN: Present
      .... 1... = Data: Present
      .... .1.. = ACK: Present
      .... ..1. = SYN-ACK: Present
      .... ...1 = SYN: Present
      [Completeness Flags: ·FDASS]
    [TCP Segment Len: 70]
    Sequence Number: 1    (relative sequence number)
    Sequence Number (raw): 1712149884
    [Next Sequence Number: 71    (relative sequence number)]
    Acknowledgment Number: 1    (relative ack number)
    Acknowledgment number (raw): 3798292324
    0101 .... = Header Length: 20 bytes (5)
  ▾ Flags: 0x018 (PSH, ACK)
      000. .... .... = Reserved: Not set
      ...0 .... .... = Accurate ECN: Not set
      .... 0... .... = Congestion Window Reduced: Not set
      .... .0.. .... = ECN-Echo: Not set
      .... ..0. .... = Urgent: Not set
      .... ...1 .... = Acknowledgment: Set
      .... .... 1... = Push: Set
      .... .... .0.. = Reset: Not set
      .... .... ..0. = Syn: Not set
      .... .... ...0 = Fin: Not set
      [TCP Flags: ·····AP···]
    Window: 229
    [Calculated window size: 29312]
    [Window size scaling factor: 128]
    Checksum: 0x6427 [unverified]
    [Checksum Status: Unverified]
    Urgent Pointer: 0
  ▾ [Timestamps]
      [Time since first frame in this TCP stream: 4.611596000 seconds]
      [Time since previous frame in this TCP stream: 9.272000 milliseconds]
  ▾ [SEQ/ACK analysis]
      [iRTT: 1.588450900 seconds]
      [Bytes in flight: 69]
      [Bytes sent since last PSH flag: 70]
    [Client Contiguous Streams: 1]
    [Server Contiguous Streams: 1]
    TCP payload (70 bytes)
```

Internetnetwork Layer

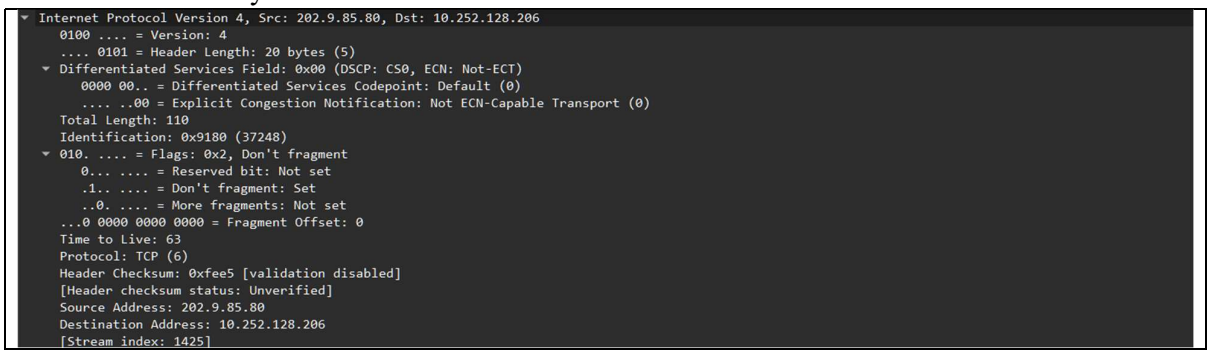

Network Interface Layer

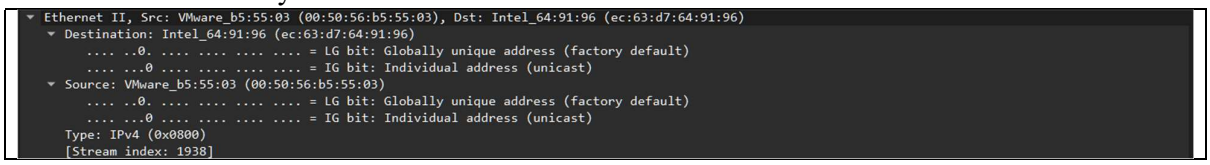


== http://lecturer.pens.ac.id/~dhoto ==

Laporan praktikum 2. TCP/IP Model

Kegiatan : Mengambil data untuk jenis tipe: http

Nama : Rifky Qur'an Nanda

NRP : 5325600014

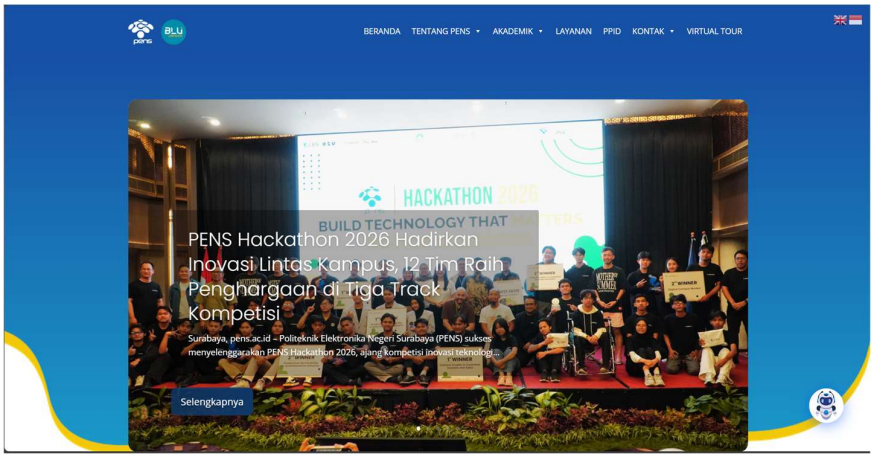


Data layer


Application Layer

```
Hypertext Transfer Protocol
  GET / HTTP/1.1\r\n
     Request Method: GET
     Request URI: /
     Request Version: HTTP/1.1
  Host: www.pens.ac.id\r\n
  Connection: keep-alive\r\n
  DNT: 1\r\n
  Upgrade-Insecure-Requests: 1\r\n
  User-Agent: Mozilla/5.0 (Windows NT 10.0; Win64; x64) AppleWebKit/537.36 (KHTML, like Gecko) Chrome/
  Accept: text/html,application/xhtml+xml,application/xml;q=0.9,image/jxl,image/avif,image/webp,image/
  Accept-Encoding: gzip, deflate\r\n
  Accept-Language: id-ID,id;q=0.9,en-US;q=0.8,en;q=0.7,sq;q=0.6,ms;q=0.5\r\n
  \r\n
  [Response in frame: 88119]
  [Full request URI: http://www.pens.ac.id/]
```


Host-to-Host Layer

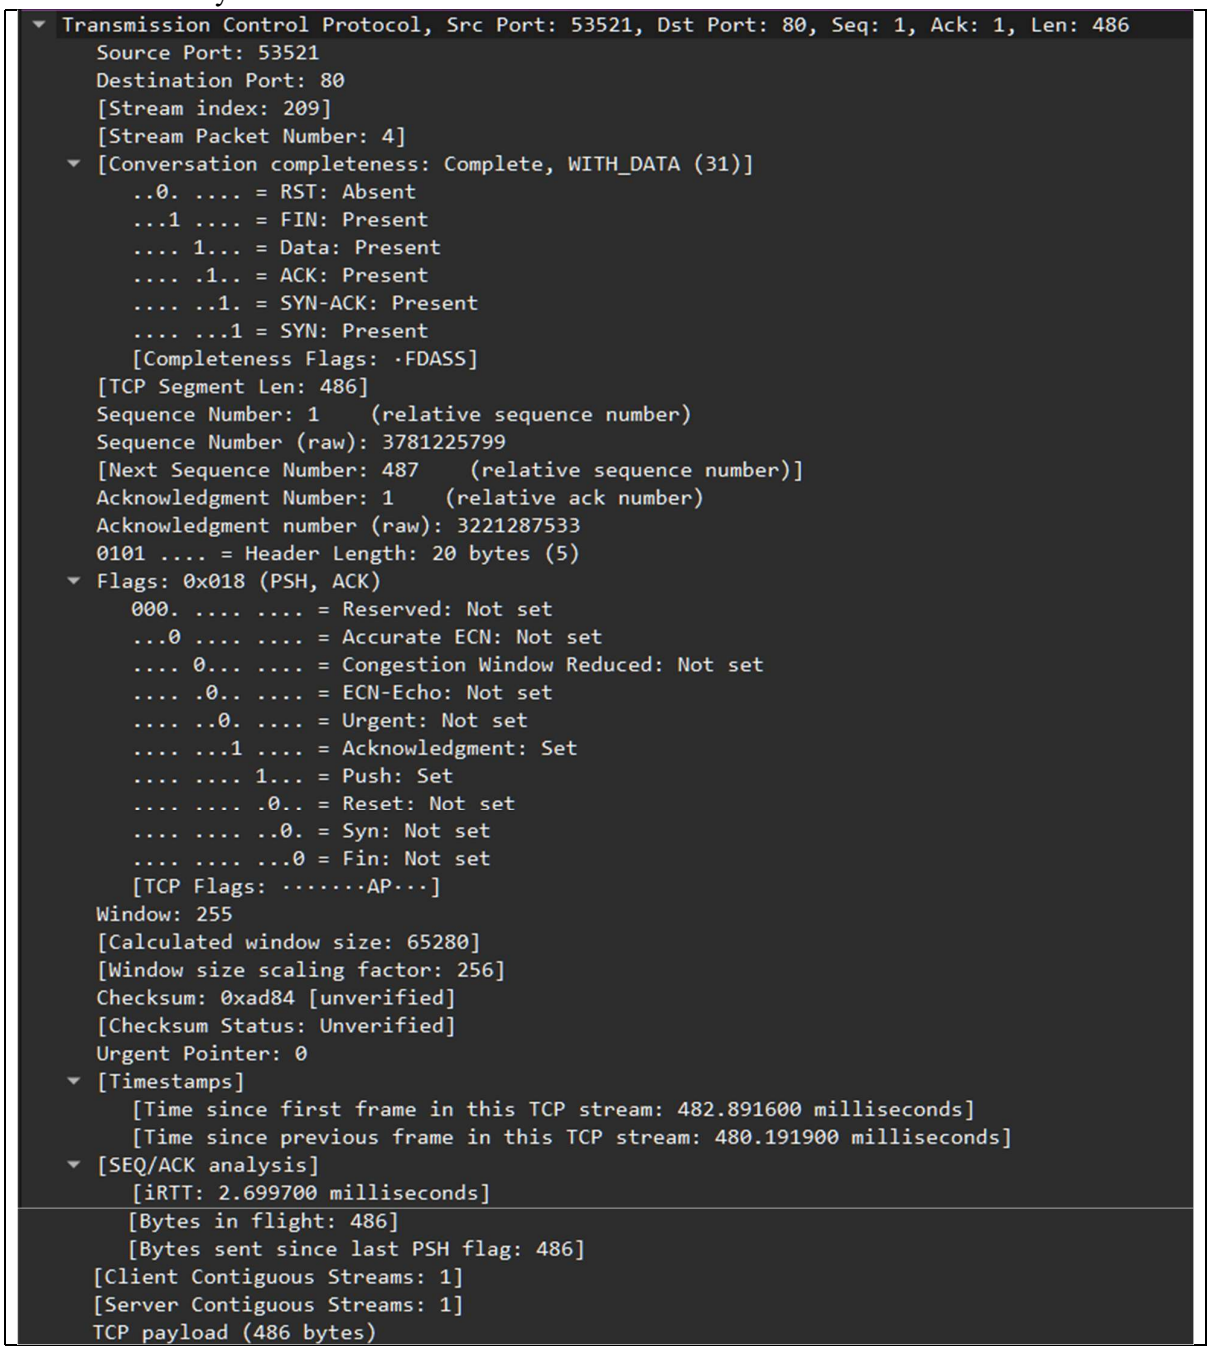

Internetnetwork Layer

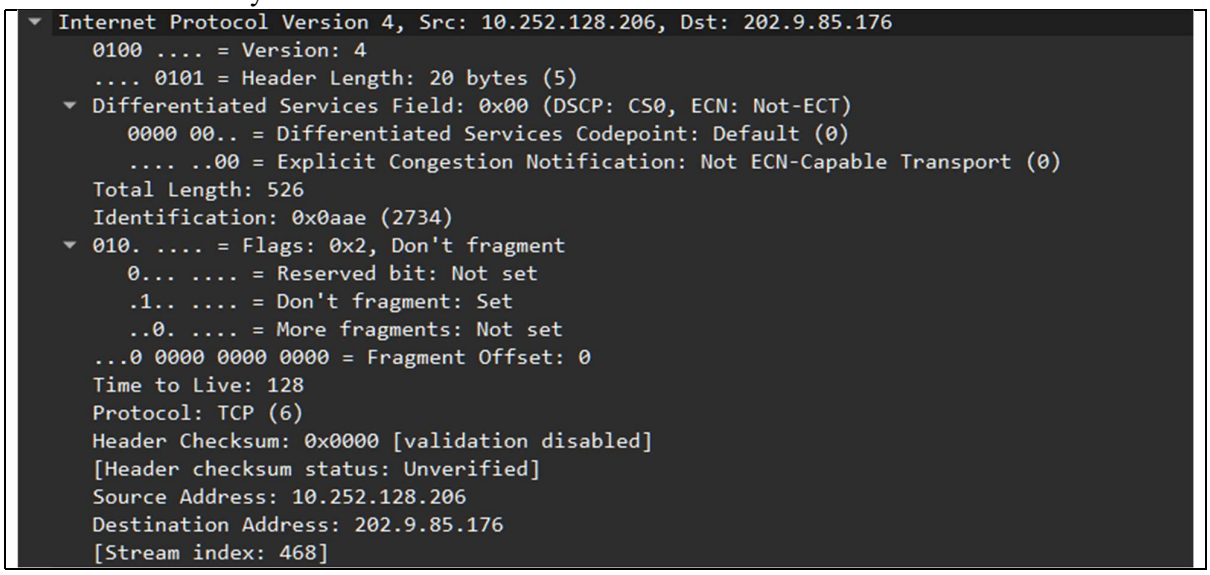

Network Interface Layer

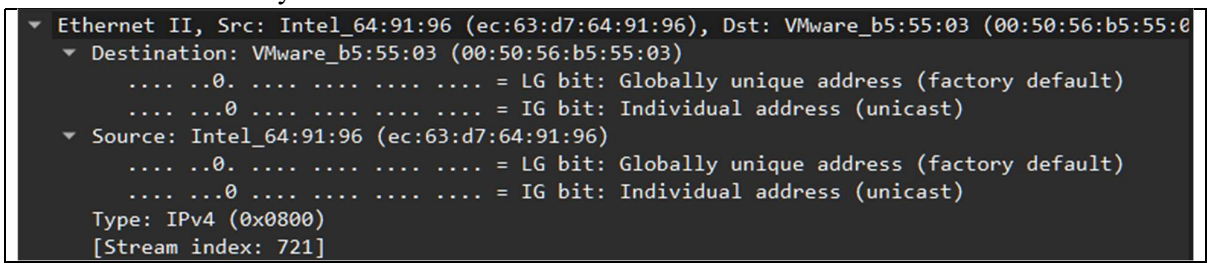

== http://lecturer.pens.ac.id/~dhoto ==