

zesty-piroshki-503b5d.netlify.app/viewApplications/681afc24790e2f10587cfb82

Sources Network Performance Memory Application Privacy and security Lighthouse Recorder Redux Components Profiler

Sign out

Application for this job: 1

Email

1 rifat392000@

Job Portal Ltd.  
Providing reliable job since 1992

Job Portal Ltd.  
Providing reliable job since 1992

Services

Branding  
Design  
Marketing  
Advertisement

Page Workspace

681afc24790e2f10587cfb82 backendManager.js index-Coak-jGA.js

```
path: "myApplications",
      element: jsxRuntimeExports.jsx(PrivateRoute, {
        children: jsxRuntimeExports.jsx(MyApplications, {})
      })
    },
    {
      path: "addJob",
      element: jsxRuntimeExports.jsx(PrivateRoute, {
        children: jsxRuntimeExports.jsx(AddJob, {})
      })
    },
    {
      path: "myPostedJobs",
      element: jsxRuntimeExports.jsx(PrivateRoute, {
        children: jsxRuntimeExports.jsx(MyPostedJobs, {})
      })
    },
    {
      path: "viewApplications/:job_id",
      element: jsxRuntimeExports.jsx(PrivateRoute, {
        children: jsxRuntimeExports.jsx(ViewApplications, {})
      }),
      loader: ({params: e}) => fetch(`https://job-server-plum.vercel.app/job-applications/jobs/${e.job_id}`)
    },
    {
      path: "register",
      element: jsxRuntimeExports.jsx(Register, {})
    },
    {
      path: "signIn",
      element: jsxRuntimeExports.jsx(SignIn, {})
    }
  ],
  getDefaultsFromPostinstall = () => {}
;
var define_process_env_default = {};
...
}

Line 146, Column 10223
```

Coverage: n/a

Console AI assistance

Default levels | 1 Issue: 1 |

pathname: '/viewApplications/681afc24790e2f10587cfb82', search: '', hash: '', state: null, key: 'djfqquw67'

index-Coak-jGA.js:80

DOM Breakpoints  
No DOM breakpoints

Global Listeners

message Window backendManager.

pagehide Window index-Coak-jGA.

popstate

Event Listener Breakpoints

- Ad Auction Worklet
- Animation
- Canvas
- Clipboard
- Control
- Device
- DOM Mutation
- Drag / drop
- Geolocation
- Keyboard
- Load
- Media
- Mouse
- Notification
- Parse
- Picture-in-Picture
- Pointer
- Script
- Shared Storage Worklet
- Timer
- Touch

job-server-plum.vercel.app/jobs?email=arrifat011@gmail.com

Pretty-print

```
[  
  {  
    "_id": "681ad81d133a357a02dc90c3",  
    "title": "a",  
    "location": "c",  
    "type": "Full-time",  
    "field": "Engineering",  
    "description": "asd",  
    "company": "as",  
    "company_logo": "https://i.ibb.co/sJ1Swc4Q/6.png",  
    "hr_name": "ddd",  
    "hr_email": "arrifat011@gmail.com",  
    "applicationDeadline": "2025-05-22",  
    "requirements": [  
      "a",  
      "d",  
      "d",  
      "d"  
    ],  
    "responsibilities": [  
      "p",  
      "p",  
      "o",  
      "  
    ],  
    "salaryRange": {  
      "min": "50000",  
      "max": "100000",  
      "currency": "BDT"  
    },  
    "applicationCount": 1  
  }]
```

not be a Public API

without login I can see even if I can other people doing Query

# Express res.cookie() Function

Last Updated : 12 Apr, 2025



The `res.cookie()` function is used to set a cookie in the client's browser. It allows you to assign a cookie by providing a name and a value. The value can be a simple string or an object, which will be automatically converted to JSON.

## Syntax:

```
res.cookie(name, value [, options])
```

- **name:** The name of the cookie.
- **value:** The value of the cookie. It can be a string or an object that is converted to JSON.
- **options (Optional):** An object that can contain properties like `expires`, `domain`, `path`, `secure`, etc. These help control the behavior of the cookie.

**Return Value:** It returns an Object.

G Quali Com Cous unive Hom Call engl Miley jour Md a m36 Chat New borg Draw Jersey

Finish update : All Bookmarks

arifat011@gmail.com

# JWT

## JSON WEB Token

**JWT is pronounced as “jot”**

36°C Haze 4:15 PM 5/7/2025

**JWT**

securely transmits information  
between two parties



Type here to search



36°C Haze

4:15 PM  
5/7/2025

# Why do we use JWT?

Without JWT you can access the protected route

`http://local:5000/orders?email=abc@gmail.com`



Type here to search



36°C Haze




4:16 PM  
5/7/2025



## With JWT you can't access the protected route

arrifat011@gmail.com

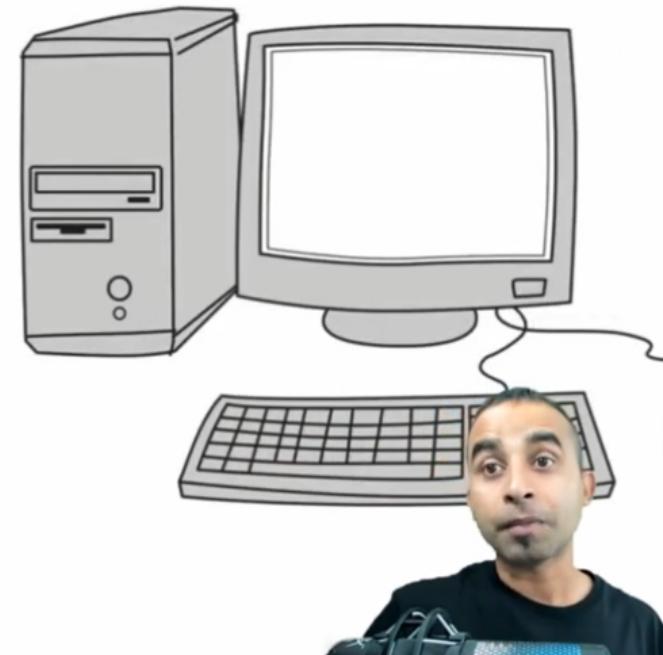

## With JWT you can't access the protected route




arrifat011@gmail.com

Type here to search

36°C Haze

4:16 PM  
5/7/2025

**JWT is mainly used for authorization purpose, not authentication**

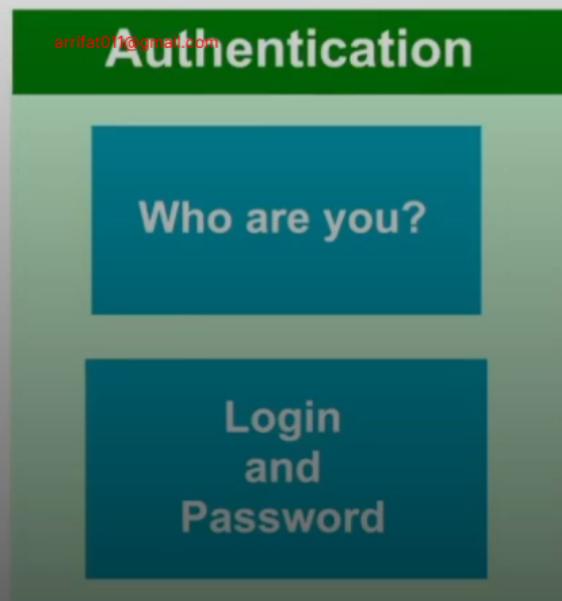

Quali Com Cous unive Hom Call E engli Miley jour Md a m36 Chat New borgi Draw Jersey

Finish update : All Bookmarks

arrifat011@gmail.com

0:32 / 2:24

Type here to search

36°C Haze 4:16 PM 5/7/2025

G Quali Com Cous unive Hom Call engl Miley jour Md a m36 Chat New borgi Draw web.programming-hero.com/update-1/video/update-1-60-1-project-status-and-introduction-to-jwt-token Finish update All Bookmarks arrifat011@gmail.com

## JWT is mainly used for authorization purpose, not authentication

**Authentication**

Who are you?

Login and Password

**Authorization**

What you can do?

Add photo  
Delete photo  
View photo


0:34 / 2:24

Type here to search

36°C Haze 4:16 PM 5/7/2025

# HOW JWT WORKS?

## 1. Client login with username and password



arrifat011@gmail.com



0:41 / 2:24



Type here to search




36°C Haze



4:17 PM  
5/7/2025



JWT is mainly used for authorization purpose, not authentication

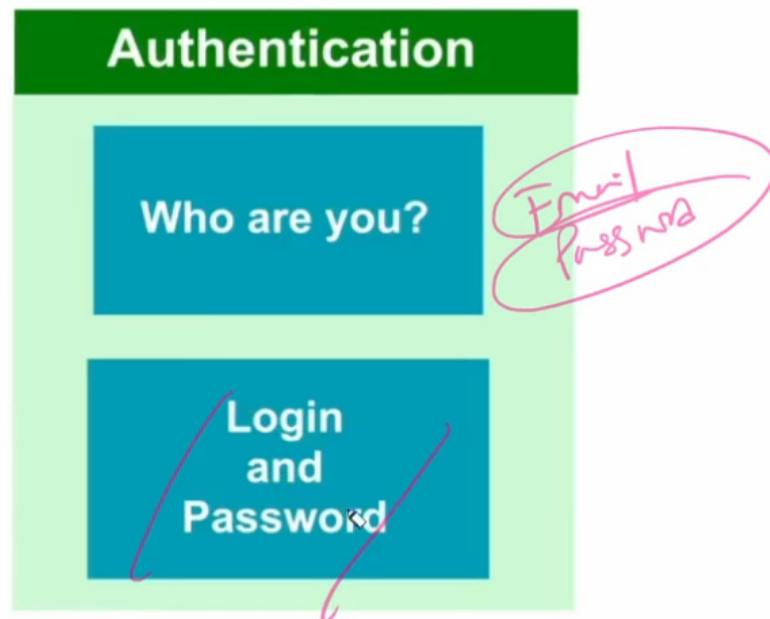

arrifat011@gmail.com



◀ ▶ 🔍 10:17 / 13:55



Type here to search



36°C Haze 4:17 PM 5/7/2025

# HOW JWT WORKS?

## 1. Client login with username and password



Quali Com Cous unive Hom Call E engli Miley jour Md a m36 Chat New borgi Draw Jersey

Finish update : All Bookmarks

0:43 / 2:24 arnifat01@gmail.com

Type here to search 36°C Haze 4:17 PM 5/7/2025

Quali Com Cous unive Hom Call E engl Miley jour Md a m36 Chat New borg Draw

Finish update : All Bookmarks

# HOW JWT WORKS?

## 2. Server creates a token for the client

0:45 / 2:24

arnifat01@gmail.com

Type here to search

36°C Haze 4:17 PM 5/7/2025

# HOW JWT WORKS?

2. Server creates a token for the client

0:47 / 2:24

arnifat01@gmail.com

Type here to search

36°C Haze

4:17 PM 5/7/2025

Quali | Coml | Cous | unive | Hom | Call E | engli | Miley | jour | Md a | m36 | Chat | New | borgi | Draw | P | X | G | Jersey | + | - | □ | X

web.programming-hero.com/update-1/video/update-1-60-1-project-status-and-introduction-to-jwt-token

Finish update : | All Bookmarks

# HOW JWT WORKS?

arrifat011@gmail.com

The diagram shows a user interface on a monitor with fields for 'user id / email' and 'password', and a 'SIGN IN' button. Below the monitor is a keyboard. To the right is a black server tower. In the bottom right corner, there is a video feed of a man speaking.

Type here to search

36°C Haze 4:17 PM 5/7/2025

# HOW JWT WORKS?

3. server sends a token to the client

arrifat011@gmail.com



token



# HOW JWT WORKS?

4. Client stores the token on either local storage or browser cookie

The diagram illustrates the fourth step in the JWT workflow. It features a central computer monitor displaying a login interface with fields for 'user id / email' and 'password', and a 'SIGN IN' button. To the left of the monitor, there are two storage options: 'Local Storage', represented by three blue cylinders, and 'Browser Cookie', represented by a red cookie icon inside a web browser window. Two arrows point from these icons towards the monitor, indicating that the token is stored on either the client's local machine or in the browser's cookie jar.

arifat01@gmail.com

0:58 / 2:24


Type here to search

36°C Haze

4:17 PM  
5/7/2025

# HOW JWT WORKS?

5. Next time the client makes a request, a copy of the token is send to the server for authorization.



Authorization: Bearer <token>



arrifat01@gmail.com

II 1:05 / 2:24



Type here to search



36°C Haze



4:18 PM  
5/7/2025



# HOW JWT WORKS?

5. Next time the client makes a request, a copy of the token is send to the server for authorization.

The diagram shows a client computer on the left with a monitor displaying a login screen for 'user id / email' and 'password'. A keyboard is shown below the monitor. An arrow points from the client to a server computer on the right, which is represented as a black tower. Above the arrow, the text 'Authorization: Bearer <token>' is written, with the word 'Authorization:' circled in pink. A small video feed of a man is visible in the bottom right corner of the slide.

arrifat011@gmail.com

36°C Haze 4:18 PM 5/7/2025

Quali | Coml | Cous | unive | Hom | Call E | engli | Miley | jour | Md a | m36 | Chat | New | borgi | Draw | P | X | G | C | web.programming-hero.com/update-1/video/update-1-60-1-project-status-and-introduction-to-jwt-token | Finish update : | All Bookmarks

# HOW JWT WORKS?

6. Server verifies the JWT signature before giving the authorization.

eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.  
eyJzdWIiOiIxMjM0NTY3ODkwIiwibmFtZSI6IkpvaG4gRG91IiwiaXNTb2NpYWwiOnRydWV9.  
4pcPyMD09olPSyXnrXCjTwXyr4BsezdI1AVTmud2fU4

Signature

arifat011@gmail.com

Type here to search

36°C Haze

4:18 PM  
5/7/2025

Quali | Coml | Cous | unive | Hom | Call E | engli | Miley | jour | Md a | m36 | Chat | New | borgi | Draw | P | X | G | C | web.programming-hero.com/update-1/video/update-1-60-1-project-status-and-introduction-to-jwt-token | Finish update : | All Bookmarks

# HOW JWT WORKS?

6. Server verifies the JWT signature before giving the authorization.

eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.  
eyJzdWIiOiIxMjM0NTY3ODkwIiwibmFtZSI6IkpvaG4  
gRG91IiwiaXNTb2NpYWwiOnRydWV9.  
4pcPyMD89olPSyXnrXCjTwXyr4BsezdI1AVTmud2fU4

Signature

arifat011@gmail.com

36°C Haze 4:18 PM 5/7/2025

# HOW JWT WORKS?

6. Server verifies the JWT signature before giving the authorization.

The diagram shows a user interface on a computer monitor and a server. A user logs in, and the server generates a JWT token. The token is a string of characters divided into three parts by dots. The middle part is highlighted in red and labeled 'Signature'. An arrow points from the text 'Server Checks the Signature.' to this red-highlighted section. The token itself is shown as:

eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.  
eyJzdWIiOiIxMjM0NTY3ODkwIiwibmFtZSI6IkpvaG4  
gRG91IiwiaXNTb2NpYWwiOnRydWV9.  
4pcPyMD09olPSyXnrXCjTwXyr4BsezdI1AVTmud2fU4

**arifat011@gmail.com**

Windows taskbar at the bottom:

- Type here to search
- Start button
- Icons for File Explorer, Edge, OneDrive, Task View, Snipping Tool, and others
- System tray showing 36°C Haze, battery level, and date/time (4:18 PM, 5/7/2025)

Quali | Coml | Cous | unive | Hom | Call E | engli | Miley | jour | Md a | m36 | Chat | New | borgi | Draw | P | X | G | web.programming-hero.com/update-1/video/update-1-60-1-project-status-and-introduction-to-jwt-token | Finish update : | All Bookmarks

# HOW JWT WORKS?

7. Server responds to the client's request.

The diagram shows a computer setup with a monitor displaying "My Order" and a keyboard. An arrow points from a server tower to the monitor, with the text "Responds" above it. To the right of the server tower, a man with dark hair and a beard is visible, wearing a black t-shirt. The server tower has "arrifat011@gmail.com" written on its side.

Windows Start Menu | Type here to search | 36°C Haze | 4:18 PM | 5/7/2025

G Quali Com Cous unive Hom Call E engli Miley jour Md a m36 Chat New borgi Draw Jersey

web.programming-hero.com/update-1/video/update-1-60-1-project-status-and-introduction-to-jwt-token

Finish update : All Bookmarks


# WHAT JWT LOOKS LIKE?



arrifat011@gmail.com



Type here to search 36°C Haze 4:18 PM 5/7/2025

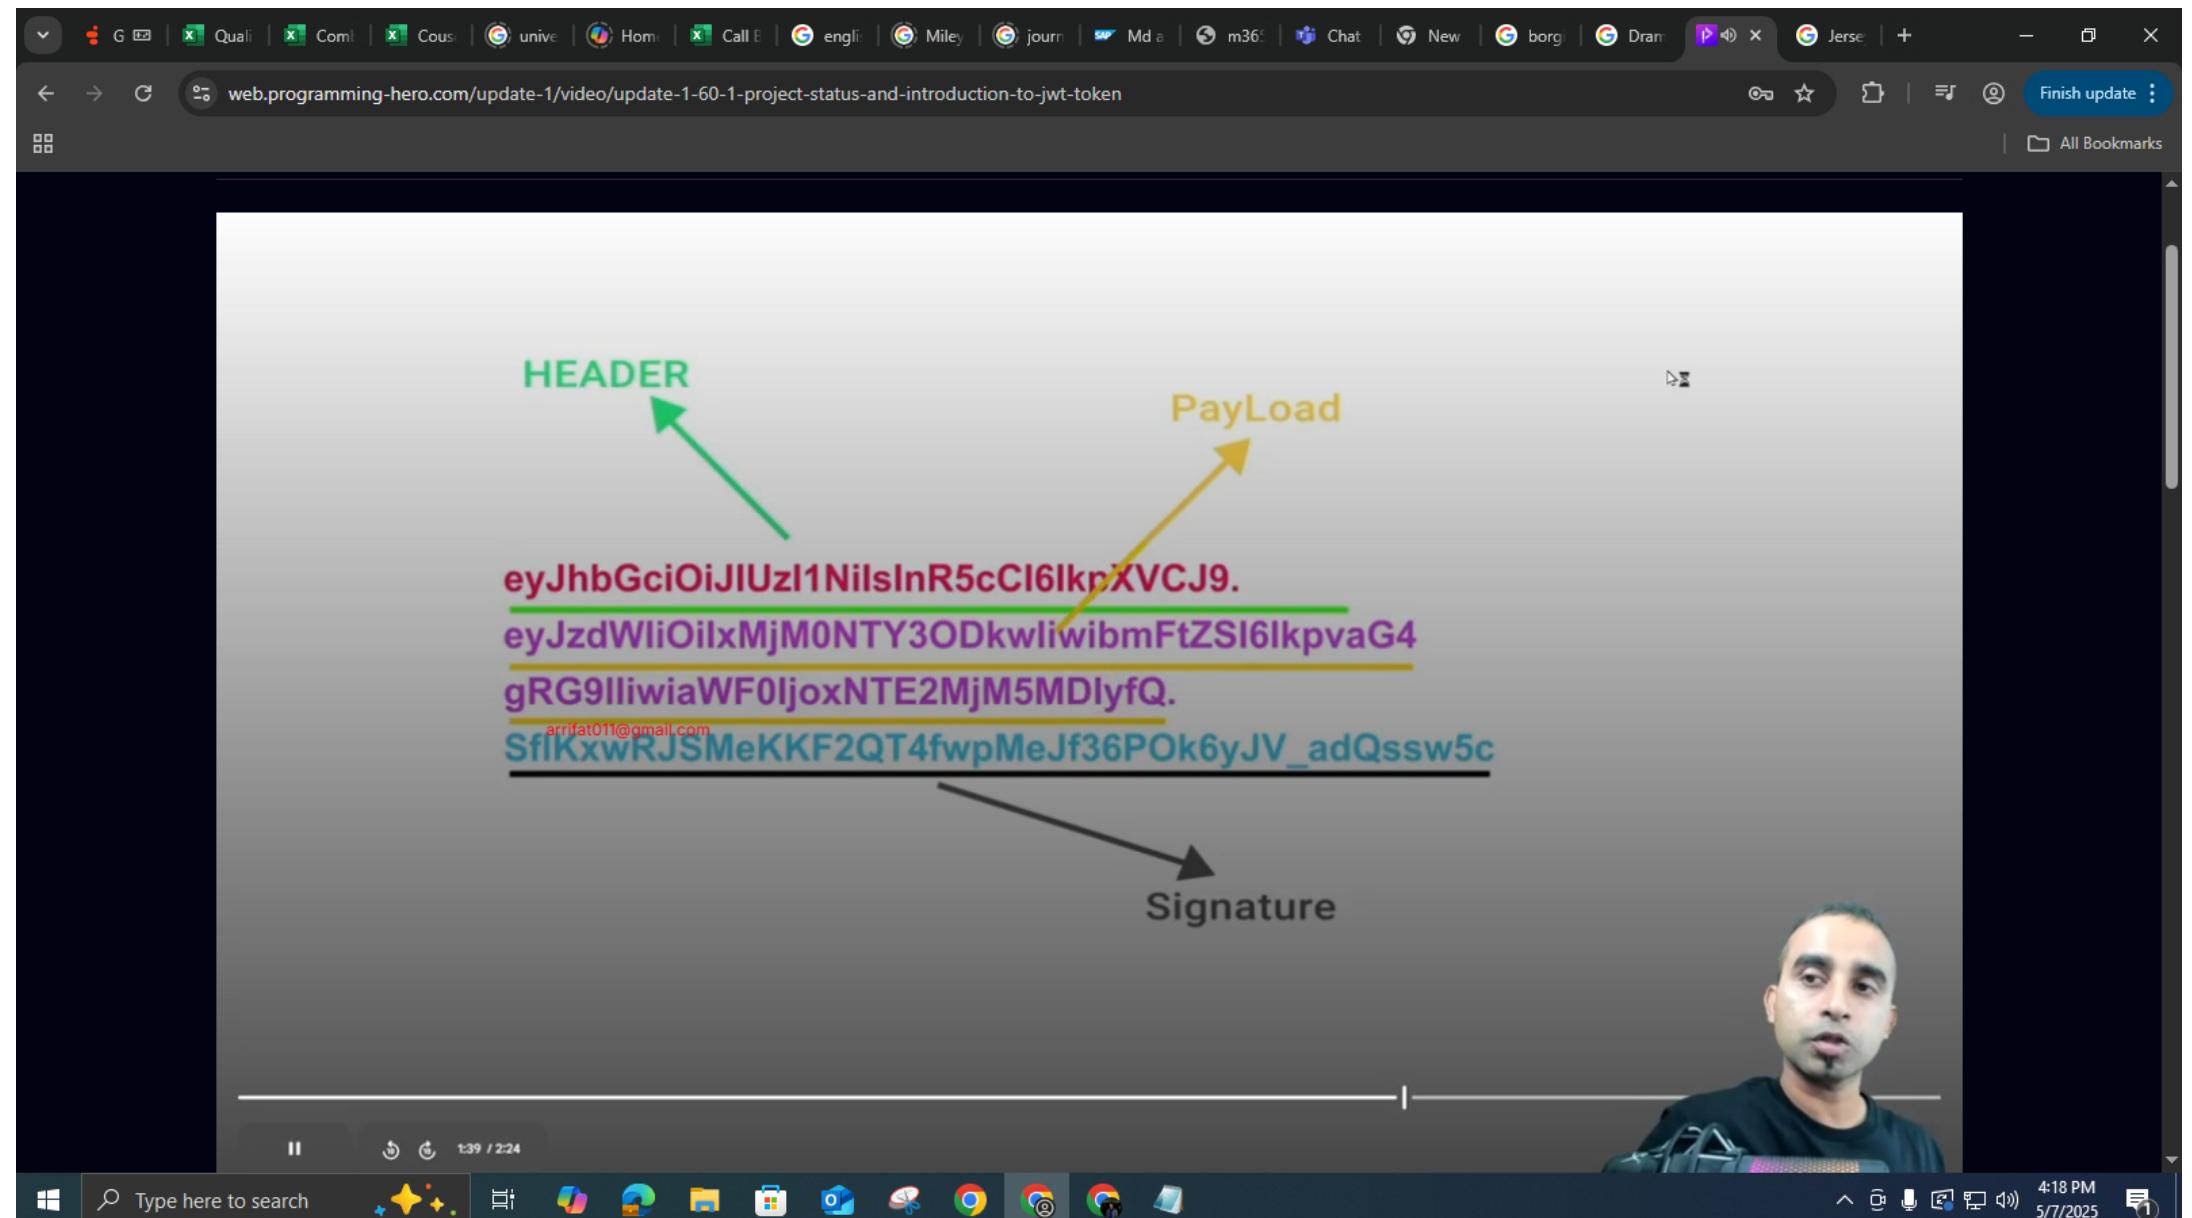

Quali | Coml | Cous | unive | Hom | Call E | engli | Miley | jour | Md a | m36 | Chat | New | borgi | Draw | P | X | G | X |

web.programming-hero.com/update-1/video/update-1-60-1-project-status-and-introduction-to-jwt-token

Finish update : All Bookmarks

## Structure of JSON Web Token (JWT)

The diagram illustrates the structure of a JSON Web Token (JWT). It consists of three main parts: HEADER, PAYLOAD, and SIGNATURE. The HEADER is represented by a yellow box containing the string "arrifat011@gmail.com". An arrow points from this box to a yellow callout bubble containing the JSON object: { "alg": "HS256", "typ": "JWT" }. The PAYLOAD is represented by a blue box, and the SIGNATURE is represented by a green box.

arrifat011@gmail.com

HEADER

PAYLOAD

SIGNATURE

JSON WEB TOKEN

```
{ "alg": "HS256", "typ": "JWT" }
```

Hot weather 4:19 PM 5/7/2025

arrifat011@gmail.com

## Structure of JSON Web Token (JWT)

The diagram illustrates the structure of a JSON Web Token (JWT). It consists of three main parts: HEADER, PAYLOAD, and SIGNATURE. The HEADER is represented by a yellow box containing the following JSON object:

```
{  
  "alg": "HS256",  
  "typ": "JWT"  
}
```

The PAYLOAD is represented by a blue box containing the following JSON object:

```
{  
  "sub": "1234567890",  
  "name": "John Doe",  
  "iat": "1516239022"  
}
```

The SIGNATURE is represented by a green box at the bottom.

JSON WEB TOKEN


1:46 / 2:24

Type here to search

Hot weather

4:19 PM  
5/7/2025

## Structure of JSON Web Token (JWT)

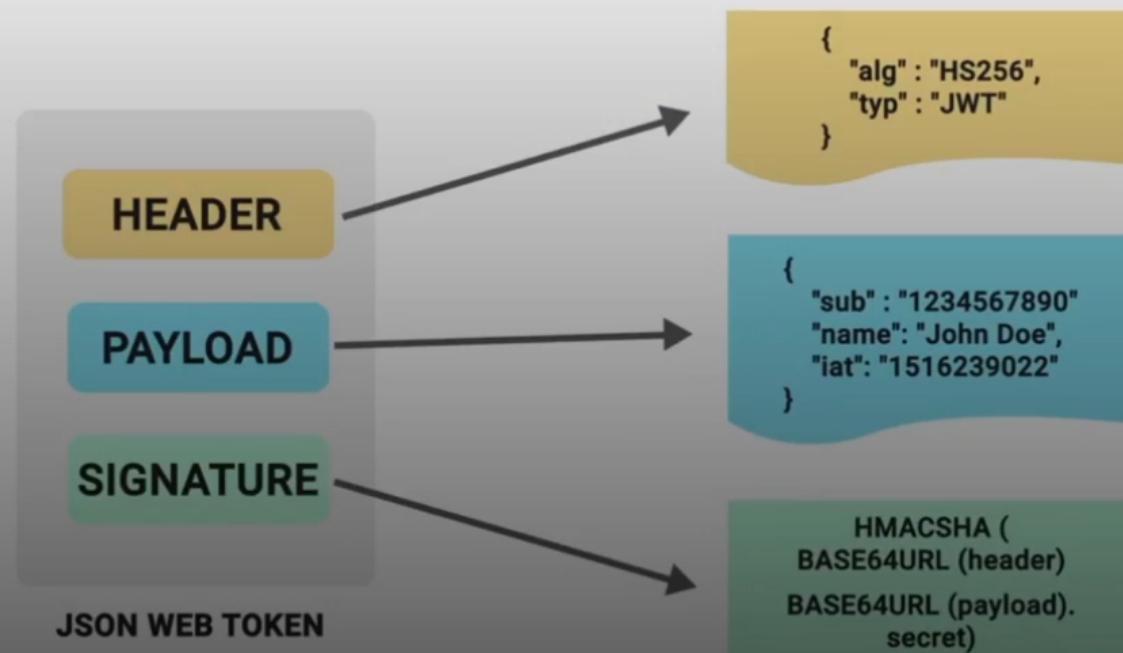

arrifat011@gmail.com

Hot weather 4:19 PM 5/7/2025

# SUMMARY

## JSON Web Token

### 1. INDUSTRY STANDARD RFC 7519

Updated by: [7797](#), [8725](#)

[IPR declarations](#)  
[Errata exist](#)

Internet Engineering Task Force (IETF)  
Request for Comments: 7519  
Category: Standards Track  
ISSN: 2070-1721

M. Jones  
Microsoft  
J. Bradley  
Ping Identity  
N. Sakimura  
NRI  
May 2015

#### JSON Web Token (JWT)

##### Abstract

JSON Web Token (JWT) is a compact, URL-safe means of representing claims to be transferred between two parties. The claims in a JWT are encoded as a JSON object that is used as the payload of a JSON Web Signature (JWS) structure or as the plaintext of a JSON Web Encryption (JWE) structure, enabling the claims to be digitally signed or integrity protected with a Message Authentication Code (MAC) and/or encrypted.

[arrifat01@gmail.com](#)

##### Status of This Memo

This is an Internet Standards Track document.

This document is a product of the Internet Engineering Task Force (IETF). It represents the consensus of the IETF community. It has



Type here to search



Hot weather



4:19 PM  
5/7/2025



# SUMMARY

## JSON Web Token

1.

arrifat011@gmail.com



Type here to search

Hot weather

4:19 PM  
5/7/2025

# SUMMARY

## JSON Web Token

2. Securely transmits information between parties as a J



Type here to search


Hot weather 4:19 PM 5/7/2025

## SUMMARY

### JSON Web Token

2. Securely transmits information between parties as a J

The screenshot shows a video player interface. The main content area displays a slide titled "SUMMARY" with the heading "JSON Web Token" and the point "2. Securely transmits information between parties as a J". Overlaid on the slide is a diagram of a JSON Web Token (JWT) structure. The token is shown as three parts separated by dots: "HEADER", "PAYLOAD", and "SIGNATURE". The HEADER contains the values "alg": "HS256" and "typ": "JWT". The PAYLOAD contains the value "arrifat011@gmail.com". Below the token diagram, there is a "VERIFY SIGNATURE" button. In the bottom right corner of the slide, there is a small video frame showing a man with dark hair and a beard, wearing a black t-shirt. The video player has a progress bar at the bottom indicating it is at 2:00 of 2:24. The Windows taskbar is visible at the bottom, showing various pinned icons and the system tray.

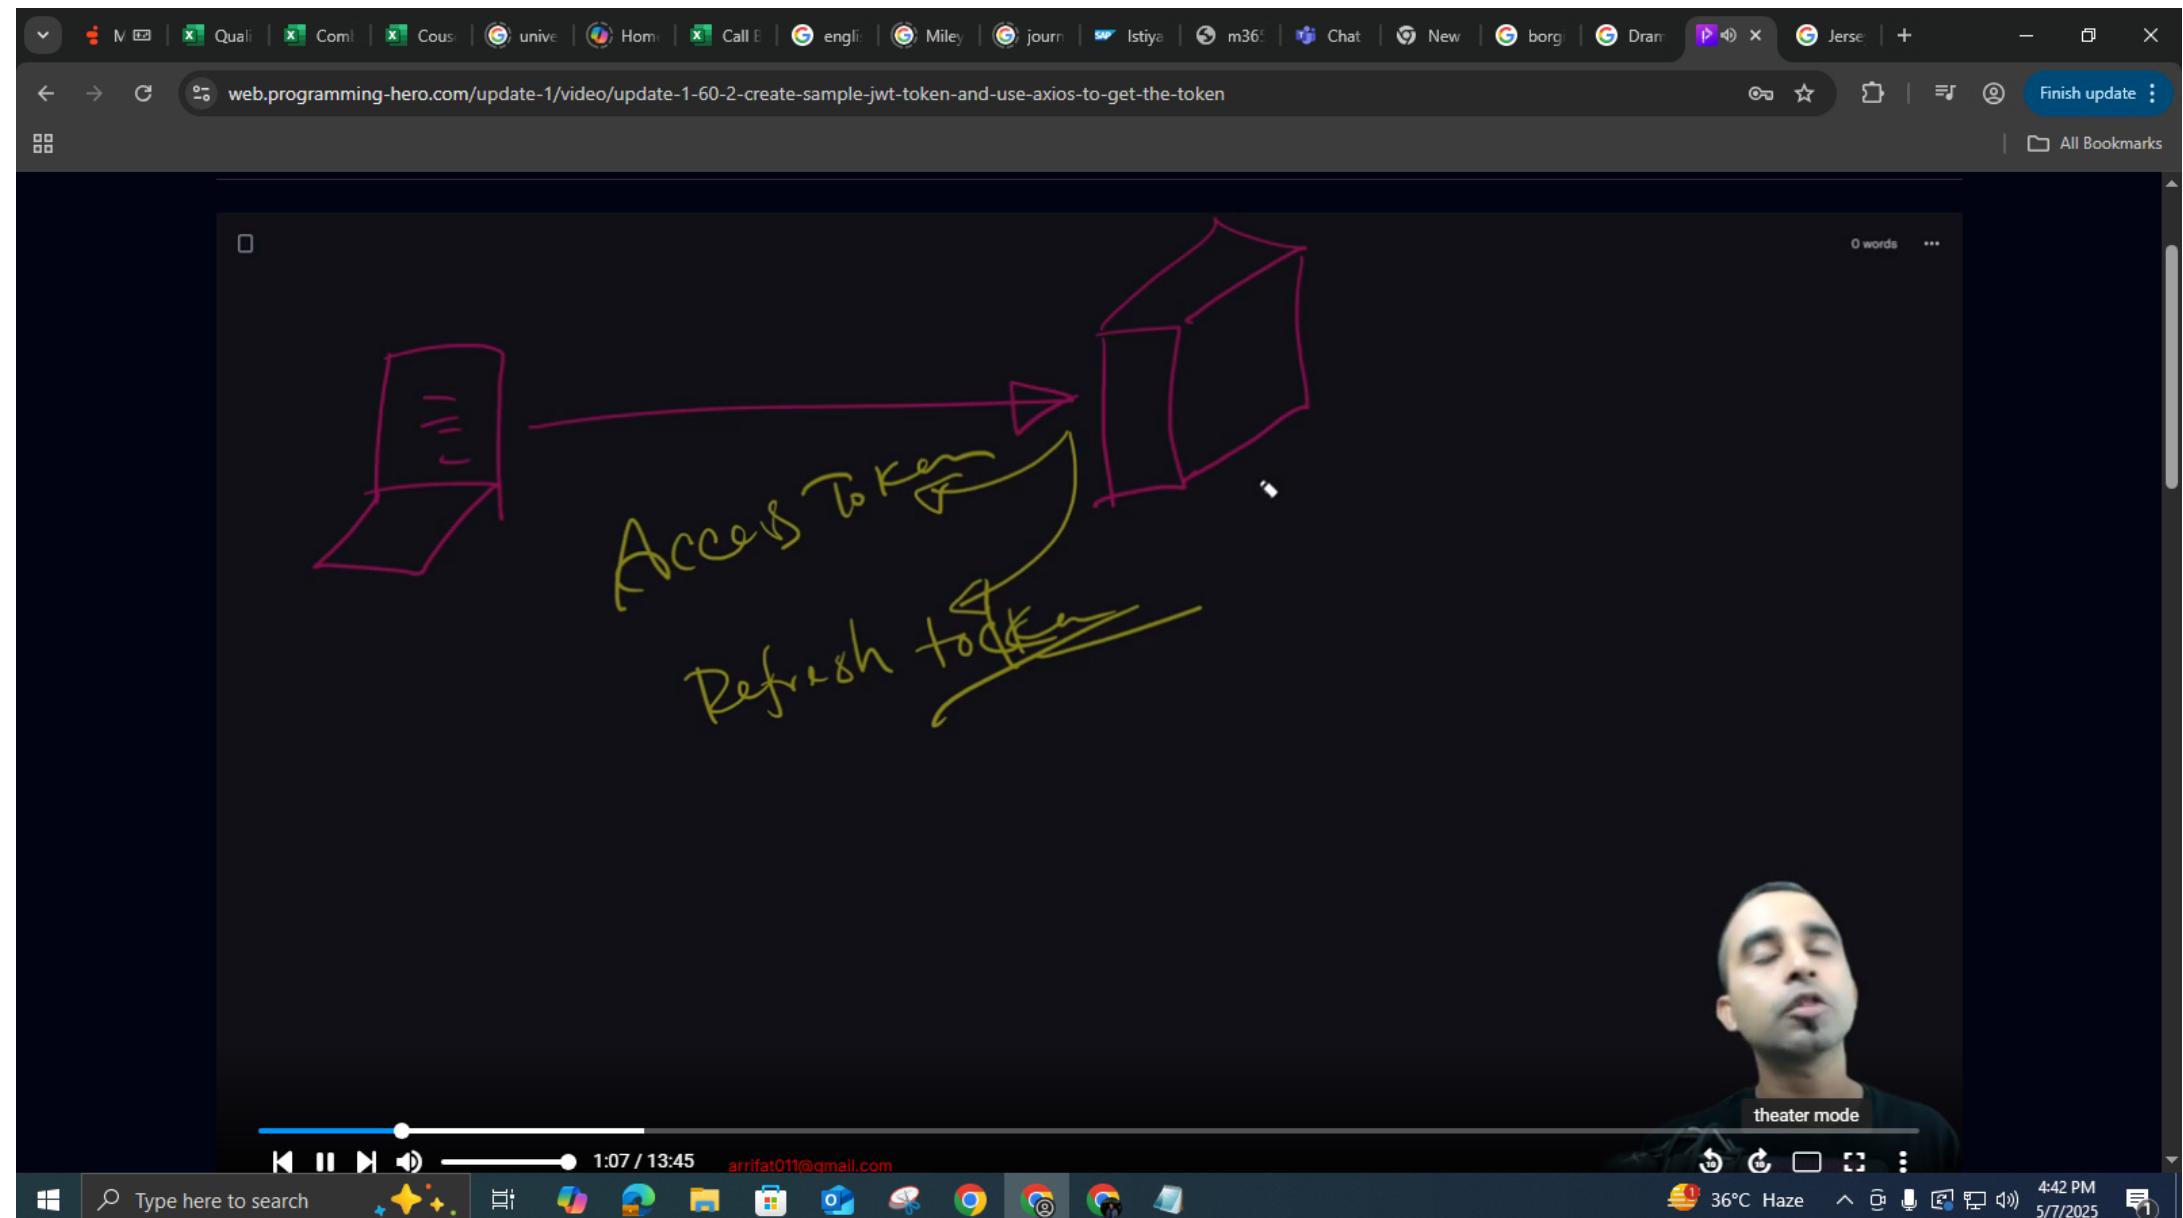

Quali Com Cous unive Hom Call engl Miley jour Istiya m36 Chat New borg Draw

Finish update : All Bookmarks

blank.page Job-Portal-Resources/readme... JobBox - Job Portal React Next Home - Google Drive Job Portal localhost5000/job-application JSON Web Tokens - jwt.io

Learn about the upcoming changes to jwt.io and share your feedback →

JWT Debugger Libraries Introduction Ask Crafted by Auth0 by Okta

JSON Web Tokens are an open, industry standard [RFC 7519](#) method for representing claims securely between two parties.

JWT.IO allows you to decode, verify and generate JWT.

LEARN MORE ABOUT JWT SEE JWT LIBRARIES

## Debugger

Warning: JWTs are credentials, which can grant access to resources. Be careful where you paste them! We do not record tokens, all validation and debugging is done on the client side.

arrifat011@gmail.com Algorithm HS256 2:37 / 13:45 theater mode

Type here to search

36°C Haze 4:43 PM 5/7/2025

Quali | Coml | Cous | unive | Hom | Call E | engli | Miley | jour | Istiya | m36 | Chat | New | borgi | Draw | Jersey | +

Finish update :

blank.page | Job-Portal-Resources/readme... | JobBox - Job Portal React Next | Home - Google Drive | Job Portal | localhost5000/job-application | JSON Web Tokens - jwt.io

Learn about the upcoming changes to jwt.io and share your feedback →

JWT Debugger Libraries Introduction Ask arrifat011@gmail.com Crafted by Auth0 by Okta

Warning: JWTs are credentials, which can grant access to resources. Be careful where you post them. We do not record tokens, so verification and debugging is done on the client side.

Algorithm HS256

Encoded PASTE A TOKEN HERE

```
eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJzdWIiOiIxMjM0NTY3ODkwIiwibmFtZSI6Ikpvag4gRG91IiwiZWFOIjoxNTE2MjM5MDIyfQ.S1KxwRJSMeKKF2QT4fwpMeJf36P0k6yJV_adQssw5c
```

Decoded EDIT THE PAYLOAD AND SECRET

HEADER: ALGORITHM & TOKEN TYPE

```
{ "alg": "HS256", "typ": "JWT" }
```

PAYOUT: DATA

```
{ "sub": "1234567890", "name": "John Doe", "iat": 1516239022 }
```

VERIFY SIGNATURE

```
HMACSHA256(  
base64UrlEncode(header) + "." +  
base64UrlEncode(payload),  
your-256-bit-secret  
)  secret base64 encoded
```

SHARE EDIT

Type here to search

Signature Verified

36°C Haze

4:44 PM 5/7/2025



Quali | Coml | Cous | unive | Hom | Call E | engli | Miley | jour | Istiya | m36 | Chat | New | borgi | Draw | Jersey | +

Finish update : All Bookmarks

blank.page | Job-Portal-Resources/readme... | JobBox - Job Portal React Next | Home - Google Drive | Job Portal | localhost5000/job-application | JSON Web Token Libraries - jwt.io | +

Learn about the upcoming changes to jwt.io and share your feedback →

**JWLT**

Debugger Libraries Introduction Ask

Crafted by Auth0 by Okta

Filter by All

**.NET**

Sign	HS256
✓ Sign	✓ HS256
✓ Verify	✓ HS384
✓ iss check	✓ HS512
✓ sub check	✓ PS256
✓ aud check	✓ PS384
✓ exp check	✓ PS512
✓ nbf check	✓ RS256
✓ iat check	✓ RS384
✓ jti check	✓ RS512
① typ check	✓ ES256
① ES256K	
✓ ES384	
✓ ES512	
① EdDSA	

**.NET**

Sign	HS256
✓ Sign	✓ HS256
✓ Verify	✓ HS384
✓ iss check	✓ HS512
✓ sub check	✗ PS256
✓ aud check	✗ PS384
✓ exp check	✗ PS512
✓ nbf check	✓ RS256
✓ iat check	✓ RS384
✗ jti check	✓ RS512
① typ check	✓ ES256
① ES256K	
✓ ES384	
✓ ES512	
① EdDSA	

**.NET**

Sign	HS256
✓ Sign	✓ HS256
✓ Verify	✓ HS384
✗ iss check	✓ HS512
✗ sub check	✓ PS256
✗ aud check	✓ PS384
✗ exp check	✓ PS512
✗ nbf check	✓ RS256
✗ iat check	✓ RS384
✗ jti check	✓ RS512
① typ check	✓ ES256
① ES256K	
✓ ES384	
✓ ES512	
① EdDSA	

arrifat011@gmail.com

theater mode

3:07 / 13:45

Type here to search

36°C Haze

4:44 PM 5/7/2025

Quali Com Cous unive Hom Call engl Miley jour Istiya m36 Chat New borg Draw

Finish update : All Bookmarks

blank.page Job-Portal-Resources/readme... JobBox - Job Portal React Next Home - Google Drive Job Portal localhost5000/job-application JSON Web Token Libraries - jwt

Learn about the upcoming changes to jwt.io and share your feedback →

**JWT**

Debugger Libraries Introduction Ask Crafted by Auth0 by Okta

✓ jti check ✓ RS512	✓ jti check ✓ RS512	✓ jti check ✓ RS512
✗ typ check ✓ ES256	✓ typ check ✓ ES256	✗ typ check ✗ ES256
✗ ES256K	✓ ES256K	✗ ES256K
✓ ES384	✓ ES384	✗ ES384
✓ ES512	✓ ES512	✗ ES512
✗ EdDSA	✓ EdDSA	✗ EdDSA

Auth0 View Repo Filip Skokan 5657 View Repo AWS 631 View Repo

npm install jsonwebtoken npm install jose npm install aws-jwt-verify

Auth0 by Okta

JWT.io is brought to you by [Auth0](#)

Securely implement authentication with JWTs using Auth0 on any stack and [arrifat01@gmail.com](mailto:arrifat01@gmail.com) any device in less than 10 minutes.

Type here to search 36°C Haze 4:44 PM 5/7/2025

Quali Com Cous unive Hom Call E engl Miley jour Istiya m36 Chat New borg Draw

Finish update : All Bookmarks

blank.page Job-Portal-Resources/readme... JobBox - Job Portal React Next Home - Google Drive Job Portal localhost5000/job-application JSON Web Token Libraries - jwt

Learn about the upcoming changes to jwt.io and share your feedback →

**JWT**

Debugger Libraries Introduction Ask Crafted by Auth0 by Okta

✓ jti check ✓ RS512	✓ jti check ✓ RS512	✓ jti check ✓ RS512
✗ typ check ✓ ES256	✓ typ check ✓ ES256	✗ typ check ✗ ES256
✗ ES256K	✓ ES256K	✗ ES256K
✓ ES384	✓ ES384	✗ ES384
✓ ES512	✓ ES512	✗ ES512
✗ EdDSA	✓ EdDSA	✗ EdDSA

Auth0 View Repo Filip Skokan 5657 View Repo AWS 631 View Repo

npm install jsonwebtoken npm install jose npm install aws-jwt-verify

Auth0 by Okta

JWT.io is brought to you by [Auth0](#)

arrifat011@gmail.com

Securely implement authentication with JWTs using Auth0 on any stack and any device in less than 10 minutes.

36°C Haze 4:44 PM 5/7/2025

Type here to search Air quality forecast ENG 1:32 AM 08-May-25

Mo X Introdu X Encode X backend X Gracie / X BADDIE X BABY J X Turtles X Brenda X SYBER X Baby J X Tye Tur X Sofia R X GitHub X JSON V X + - ☰ X

web.programming-hero.com/update-1/video/update-1-60-3-use-cookie-parser-and-set-token-to-httponly-cookie

System Design & A... Javascript Deploy GitHub Sources React Firebase Express Animations Dashboard - Program... Fav Icons WebD2: Common H... The W3C Markup V... The W3C CSS Validat... CSS FAQ - Learn we... All Bookmarks

File Edit Selection View Go Run Terminal Help job-portal-server

index.js x index.js > run

```
24  async function run() {  
35  
36  
37      // Auth related APIs  
38      app.post('/jwt', async (req, res) => {  
39          const user = req.body;
```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS SPELL CHECKER

```
Welcome to Node.js v20.15.0.  
Type ".help" for more information.  
> require('crypto').randomBytes(64)  
<Buffer 5b 76 cf a3 82 23 a5 5d 68 50 b7 7c 85 98 cc 61 b2 17 6b a2 21 9e 1d ed 9f de  
79 8f 1d 11 a2 3f e9 49 ca 83 85 ab 48 5d c0 f6 01 42 5c f9 56 41 08 67 ... 14 more bytes>  
> require('crypto').randomBytes(64).toString()  
'♦\x1DL♦m♦\x17H♦?♦~♦}♦>A♦♦-♦%♦aD\x01+-♦r8\r♦W♦♦\x0F\x0Fv♦C(♦♦♦m♦\x16s♦' G♦'  
> require('crypto').randomBytes(64).toString('hex')  
'6ec71fd92152746d3a1884654956e36e433d85235e8637df8809ed5ee30cc779ecd1b2477e59...d9dc6  
04b6b3ff62298da6d06a477261bf67bd59e44bb217f'  
>
```

Ln 43, Col 1 S

Activate Windows  
Go to Settings to activate Windows.

Previous Next

Type here to search

Air quality forecast ENG 1:34 AM INTL 08-May-25

Mo X Intro X Encode X backend X Gracie / X BADDIE X BABY J X Turtles X Brenda X SYBER X Baby J X Tye Tur X Sofia R X GitHub X JSON V X + - ☰

web.programming-hero.com/update-1/video/update-1-60-3-use-cookie-parser-and-set-token-to-httponly-cookie

System Design & A... Javascript Deploy GitHub Sources React Firebase Express Animations Dashboard - Program... Fav Icons WebD2: Common H... W3 The W3C Markup V... The W3C CSS Validat... M CSS FAQ - Learn we... » All Bookmarks

blankpage Job-Portal-Resources... JobBox - Job Portal R... Home - Google Drive... Job Portal localhost:5000/job-i... auth0/node-jsonweb... POST Requests | Axios JSON Web Tokens... +

ChatGPT New Tab

chatgpt.com/c/675cb76e-c12c-8007-bdf0-d1025d206c75

Share

res.cookie('token', jwtToken, { httpOnly: true, secure: true });

Copy code

- Benefits:
  - Cannot be accessed via JavaScript, reducing XSS risks.
  - Can automatically be sent with requests to the server.

arrifat011@gmail.com

## 2. Security Considerations

- XSS Protection: Implement Content Security Policy (CSP) and sanitize user inputs to prevent XSS attacks.

Message ChatGPT

ChatGPT can make mistakes. Check important info.

Activate Windows  
Go to Settings to activate Windows.

Previous Next

Type here to search

Air quality forecast ENG 1:35 AM INTL 08-May-25

M... Introduct... Encode... backend... Gracie /... BADDIE... BABY J... Turtles... Brenda... SYBER... Baby J... Tye Tur... Sofia R... GitHub... JSON V... + - ☰

System Design & A... Javascript Deploy GitHub Sources React Firebase Express Animations Dashboard - Program... Fav Icons WebD2: Common H... W3C The W3C Markup V... The W3C CSS Validat... M CSS FAQ - Learn we... » All Bookmarks

blankpage Job-Portal-Resources... JobBox - Job Portal... Home - Google Drive... Job Portal... localhost5000/job-i... authH/node-jsonweb... POST Requests | Axio... JSON Web Tokens... +

ChatGPT New Tab

chatgpt.com/c/675cb76e-cf2c-8007-bdf0-d1025d206c75

ChatGPT

THE ACCESS TOKEN EXPIRES.

Share

Best Practice Recommendation

For most secure applications, store the **JWT** in **HTTP-only cookies** to prevent JavaScript from accessing the token directly. Always pair this with server-side CSRF protection.

Would you like examples or more details on implementing any of these methods?

Message ChatGPT

arrifat01@gmail.com

ChatGPT can make mistakes. Check important info.

Activate Windows  
Go to Settings to activate Windows.

Previous Next

Type here to search

Air quality forecast ENG 1:35 AM 08-May-25

M... Introduct... Encode... backend... Gracie /... BADDIE... BABY J... Turtles... Brenda... SYBER... Baby J... Tye Tur... Sofia R... GitHub... JSON V... + -

System Design & A... Javascript Deploy GitHub Sources React Firebase Express Animations Dashboard - Program... Fav Icons WebD2: Common H... W3C The W3C Markup V... The W3C CSS Validat... M CSS FAQ - Learn we... » All Bookmarks

blankpage Job-Portal-Resources... JobBox - Job Portal... Home - Google Drive... Job Portal... localhost:5000/job-i... auth0/node-jsonweb... POST Requests | Axios... JSON Web Tokens... +

ChatGPT New Tab

chatgpt.com/c/675cb76e-cf2c-8007-bdf0-d1025d206c75

ChatGPT

THE ACCESS TOKEN EXPIRES.

Share

Best Practice Recommendation

For most secure applications, store the JWT in HTTP-only cookies to prevent JavaScript from accessing the token directly. Always pair this with server-side CSRF protection.

Would you like examples or more details on implementing any of these methods?

Q&A

arrifat011@gmail.com

give me an example of http only jwt token. i am using express on the backend and

ChatGPT can make mistakes. Check important info.

Activate Windows  
Go to Settings to activate Windows.

Previous Next

Type here to search

Air quality forecast ENG 1:35 AM INTL 08-May-25

M... Introduct... Encode... backend... Gracie /... BADDIE... BABY J... Turtles... Brenda... SYBER... Baby J... Tye Tur... Sofia R... GitHub... JSON V... + - ☰

System Design & A... Javascript Deploy GitHub Sources React Firebase Express Animations Dashboard - Program... Fav Icons WebD2: Common H... W3C The W3C Markup V... The W3C CSS Validat... M CSS FAQ - Learn we... » All Bookmarks

blankpage Job-Portal-Resources... JobBox - Job Portal... Home - Google Drive... Job Portal... localhost:5000/job-i... auth0/node-jsonwebt... POST Requests | Axios... JSON Web Tokens... +

ChatGPT New Tab

chatgpt.com/c/675cb76e-cf2c-8007-bd0-d1025d206c75

Share

ChatGPT

## Best Practice Recommendation

For most secure applications, store the JWT in HTTP-only cookies to prevent JavaScript from accessing the token directly. Always pair this with server-side CSRF protection.

Would you like examples or more details on implementing any of these methods?

arrifat011@gmail.com

give me an example of http only jwt token. i am using express on the backend and react axios in the client side

ChatGPT can make mistakes. Check important info.

Activate Windows  
Go to Settings to activate Windows.

Previous Next

blank.page Job-Portal-Resources JobBox - Job Portal Home - Google Drive Job Portal localhost:5000/job- auth0/node-jsonweb POST Requests | Axios JSON Web Tokens

ChatGPT New Tab chatgpt.com/c/675cb76e-cf2c-8007-bdf0-d1025d206c75

Share arrifat011@gmail.com

ChatGPT

```
// Authenticate user (this is just a demo; implement proper auth)
if (username === 'user' && password === 'password') {
    const token = jwt.sign({ username }, SECRET_KEY, { expiresIn: '1h' });

    // Set JWT in an HTTP-only cookie
    res.cookie('token', token, {
        httpOnly: true,
        secure: false, // Set true in production for HTTPS
        sameSite: 'strict',
    });

    return res.json({ message: 'Logged in successfully' });
}
```

Message ChatGPT

arrifat011@gmail.com

Activate Windows Go to Settings to activate Exit full screen

10:21 / 13:45 ChatGPT can make mistakes. Check important info.

ChatGPT

chatgpt.com/c/675d1bde-5eac-8007-97dd-11bd5c4f9c05

Share

What is Express Middleware?

Middleware in Express.js refers to functions that execute during the request-response cycle. Middleware functions have access to the **request object (req)**, the **response object (res)**, and the **next middleware function** in the application's request-response cycle.

The primary use cases for middleware include:

- Executing code.
- Modifying the request and response objects.
- Ending the request-response cycle.
- Calling the next middleware function.

Basic Syntax of Middleware

javascript

Message ChatGPT

Activate Windows  
Go to Settings to activate Windows.

0:55 / 12:59

ChatGPT can make mistakes. Check important info.

arfaidM@gmail.com

ChatGPT

chatgpt.com/c/675d1bde-5eac-8007-97dd-11bd5c4f9c05

Share

ChatGPT

- Calling the next middleware function.

## Basic Syntax of Middleware

```
javascript
```
app.use((req, res, next) => {
  // Middleware logic
  console.log('Middleware executed');
  next(); // Pass control to the next middleware
});
```
Copy code
```

## Real-World Examples of Middleware


Message ChatGPT

0 1

1:06 / 12:59

Activate Windows  
Go to Settings to activate Windows.

ChatGPT can make mistakes. Check important info.

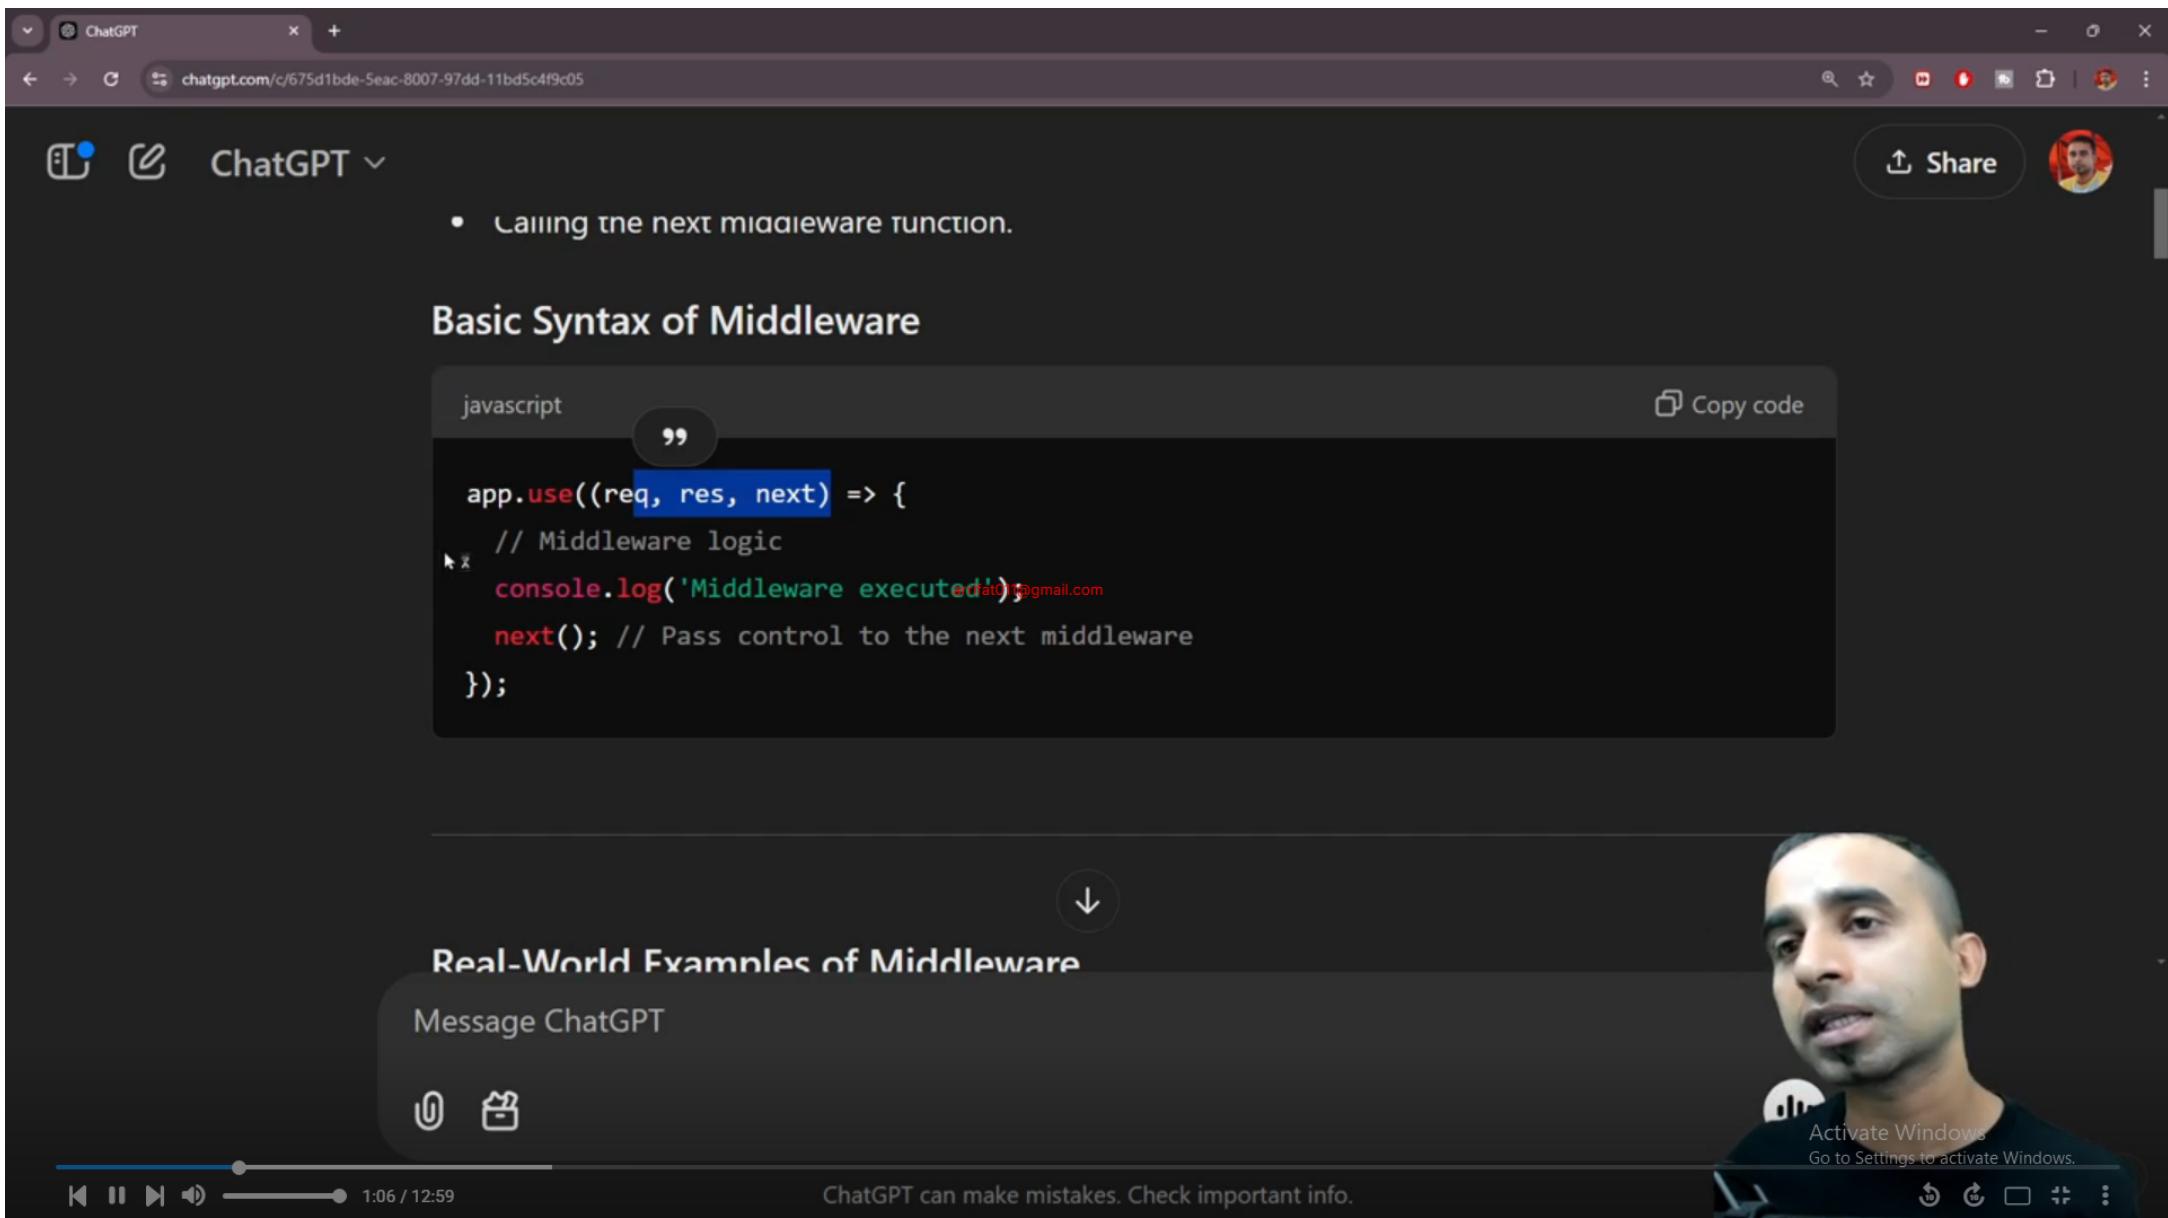

ChatGPT

chatgpt.com/c/675d1bde-5eac-8007-97dd-11bd5c4f9c05

Share arrifat01@gmail.com

4. **Security Middleware:** Add HTTP headers (e.g., using `helmet`), sanitize inputs, or prevent cross-site scripting (XSS).

5. **Caching:** Serve cached responses to improve performance.

Middleware makes Express highly flexible and modular, allowing developers to create robust, maintainable applications.

middleware for specific api

To apply middleware to a specific API (route) in Express.js

Message ChatGPT

Activate Windows  
Go to Settings to activate Windows.

2:20 / 12:59

ChatGPT can make mistakes. Check important info.

Here's a simple demonstration of how to use middleware for a specific API.

javascript

Copy code

```
const express = require('express');
const app = express(); // Define a middleware function

const apiLogger = (req, res, next) => {
    console.log(`API accessed: ${req.method} ${req.url}`);
    next(); // Pass control to the next middleware or route
};

// Apply the middleware only to the `/api/specific` route
app.get('/api/specific', apiLogger, (req, res) => {
    res.send('This is a specific API');
```

arrifat011@gmail.com

Message ChatGPT

2:39 / 12:59

ChatGPT can make mistakes. Check important info.

Activate Windows  
Go to Settings to activate Windows.

ChatGPT

chatgpt.com/?model=auto

ChatGPT

What can I help with?

explain express middleware with some real-world examples

0 ⌂

↑

Create image

Summarize text

arrifat011@gmail.com

Code

Make a plan

More

Activate Windows  
Go to Settings to activate Windows.

0:43 / 12:59

ChatGPT can make mistakes. Check important info.

ChatGPT

chatgpt.com/c/675d1bde-5eac-8007-97dd-11bd5c4f9c05

Share

ChatGPT

What is Express Middleware?

Middleware in Express.js refers to functions that execute during the request-response cycle. Middleware functions have access to the **request object (req)**, the **response object (res)**, and the **next middleware function** in the application's request-response cycle.

The primary use cases for middleware include:

- Executing code.
- Modifying the request and response objects.
- Ending the request-response cycle.
- Calling the next middleware function.

Basic Syntax of Middleware

↓


javascript


Message ChatGPT

0:54 / 12:59

ChatGPT can make mistakes. Check important info.

amit@011@gmail.com  
Activate Windows  
Go to Settings to activate Windows.

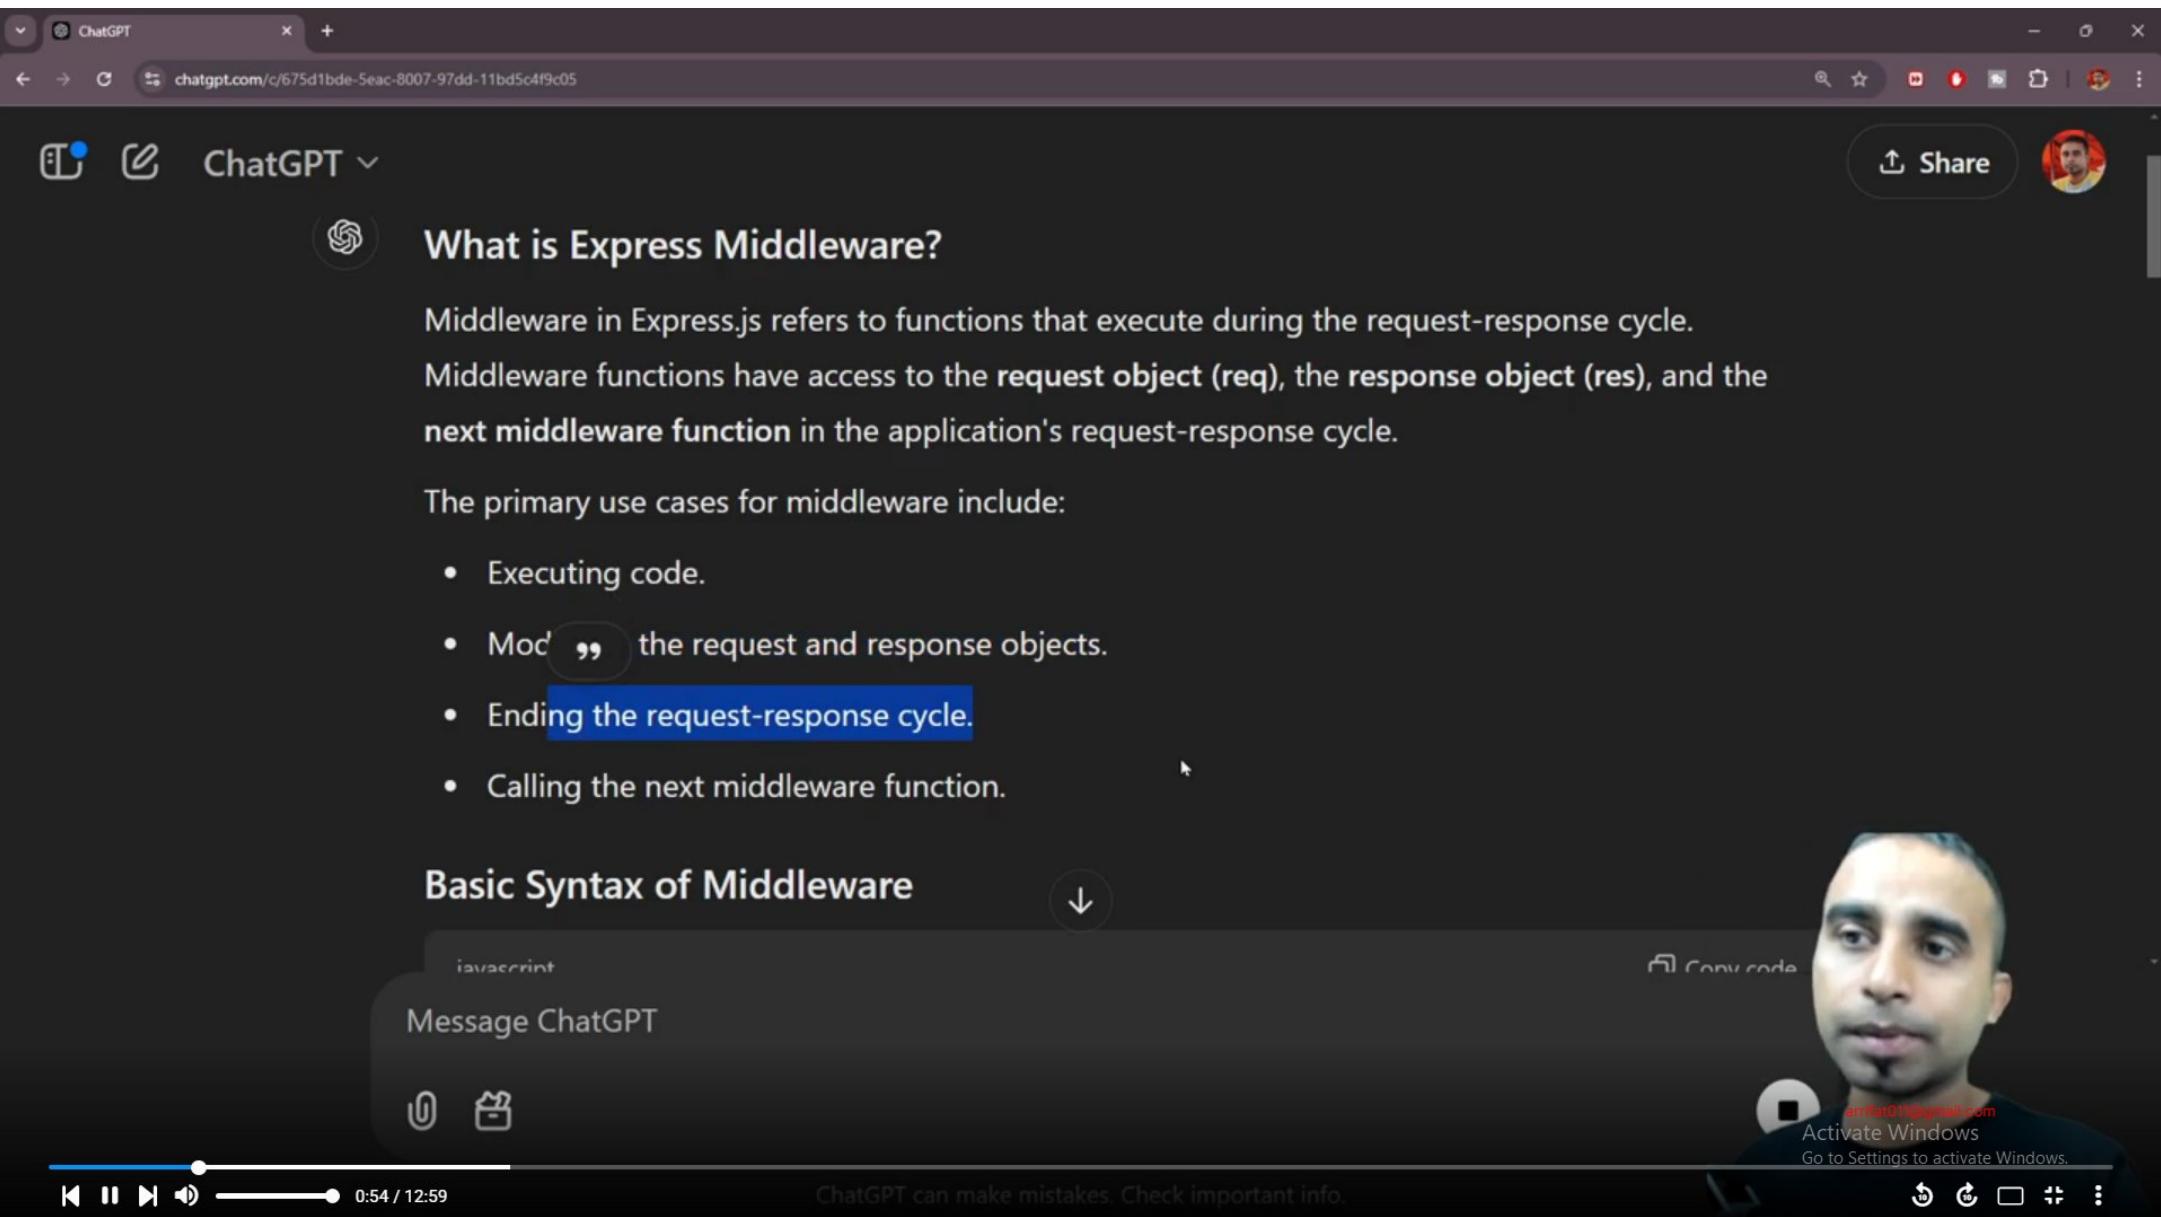

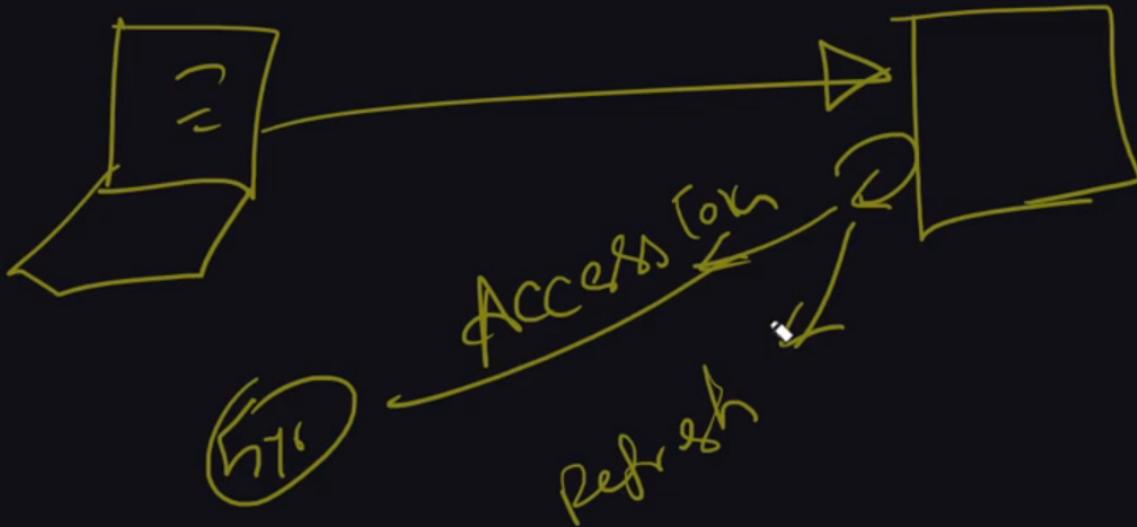

arrifat011@gmail.com



Type here to search

Module Detail - Programming | Job-Portal-Resources/client-de... | Introducing ChatGPT | OpenAI | Encode Decode Encryption Has... | backend - Google Search | The World Needs AI, But Th... | What is JWT token and JWT vs...

31°C Haze ENG 10:12 AM INTL 08-May-25

web.programming-hero.com/update-1/video/update-1-61-1-how-to-setup-existing-project-and-intro-to-jwt

System Design & A... Javascript Deploy GitHub Sources React Firebase Express Animations Dashboard - Program... Fav Icons WebD2: Common H... The W3C Markup V... The W3C CSS Validat... CSS FAQ - Learn we...

All Bookmarks

## 61-1 How To Setup Existing Project And Intro To Jwt

ChatGPT

when setting cookies, you can provide options like:

- maxAge : Time (in milliseconds) for the cookie to expire.
- httpOnly : Prevents client-side scripts from accessing the cookie.
- secure : Ensures cookies are transmitted over HTTPS only.
- path : Limits the scope of the cookie to a specific path.

arifat011@gmail.com

### Benefits of Using cookie-parser

1. Simplifies cookie parsing and management.
2. Makes accessing and verifying signed co ↓ s straightforward.

Message ChatGPT

Activate Windows  
Go to Settings to activate Windows.

13:24 / 13:46

ChatGPT can make mistakes. Check important info.

The screenshot shows a browser window with multiple tabs open. The active tab is 'localhost:5173/signin', displaying a login form with a blue 'Login' button and an 'OR' link for Google sign-in. The background features a dark-themed illustration of a person at a desk with a plant. The developer tools are open, with the 'Application' tab selected. The left sidebar shows storage categories: Local storage, Session storage, IndexedDB, and Cookies. Under Cookies, there are entries for 'http://localhost:5173' and 'https://job-po...'. The main table lists three cookies:

Name	Value	D...	Path	Expi...	Size	H...	Secure	Sam...	Part...	Cro...	Prio...
__Secure-3PSIDCC	AKEyXzXLvm8_rnZuk9zDbV4P1m6l...	.g...	/	202...	92	✓	✓	None			High
__Secure-3PSIDTS	sids-CjIB7wV3sV0I18XB2NaffT4UG...	.g...	/	202...	94	✓	✓	None			High
token	eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXV...	lo...	/	Sess...	181	✓					Me...

A message at the bottom says 'Select a cookie to preview its value'. A video overlay of a man's face is visible on the right side of the screen.

Blank page JobBox - Job Portal React Net... ProgrammingHero1/job-port... localhost:5000/jobs Job Portal auth0/node-jsonwebtoken.js Getting Started | Axios Docs

localhost:5173/signIn

# Job Portal

Home My Applications Add A Job My Posted Jobs Register Sign In

# Login now!

Email

Elements Console Sources Application Network Performance Memory Security > 2 21 21 ⚙️ ⚙️ X

Storage

- Local storage
- Session storage
- IndexedDB
- Cookies

http://localhost:5173/ https://job-portal.com/ Private state tok... Interest groups Shared storage

Filter Only show cookies with an issue

Name	Value	D...	Path	Expi...	Size	H...	Secure	Sam...	Part...	Cro...	Prio...
_Secure-3PSIDCC	AKEyXzXLvm8_rnZuk9zDbV4P1m6l...	.g...	/	202...	92	✓	✓	None			High
_Secure-3PSIDTS	sidts-CjIB7wV3sV0I18XB2NaffT4UG...	.g...	/	202...	94	✓	✓	None			High
token	eyJhbGciOiJIUzI1NilsInR5cCI6IkpXV...	lo...	/	Sess...	181	✓					Me...

Select a cookie to preview its value

Scanning (raise),

main\* 0 11 0 0 0 3 0 : Scanning...

Ln 42, Col 60 Spaces: 4 LF-8



Blank page JobBox - Job Portal React Net... ProgrammingHero1/job-port... localhost:5000/jobs Job Portal auth0/node-jsonwebtoken.js Getting Started | Axios Docs

localhost:5173/signin

# Job Portal

Home My Applications Add A Job My Posted Jobs Register Sign In

# Login now!

Email

...

Elements Console Sources Application Network Performance Memory Security > 2 21 21 ⚙️ ⚙️ X

Storage

- Local storage
- Session storage
- IndexedDB
- Cookies
  - http://localhost:5173/signin
  - https://job-po...
  - Private state tok...
  - Interest groups
  - Shared storage

Filter Only show cookies with an issue


Name	Value	D...	Path	Expi...	Size	H...	Secure	Sam...	Part...	Cro...	Prio...
SID	g.a000qgi0xr13--Mls8COvtco-0vS4...	.g...	/	202...	156						High
SIDCC	AKEyXzXAYSqda0TvOlwj1No9RRVLu...	.g...	/	202...	80						High
SSID	AOcNH-U2AtKOLMd83	.g...	/	202...	21	✓	✓				High
_Secure-1PAPISID	3_znXlwOsai65BQn/Aw_Fj0yR_fuvv7...	.g...	/	202...	51		✓				High
Secure-1PSID	o.a000aaioxr13--Mls8COvtco-0vS4...	o	/	202	167	✓	✓				

Select a cookie to preview its value

Scanning...,

main\* 0 11 0 0 0 3 0 0 : Scanning...

Ln 42, Col 60 Spaces: 4 LF-8

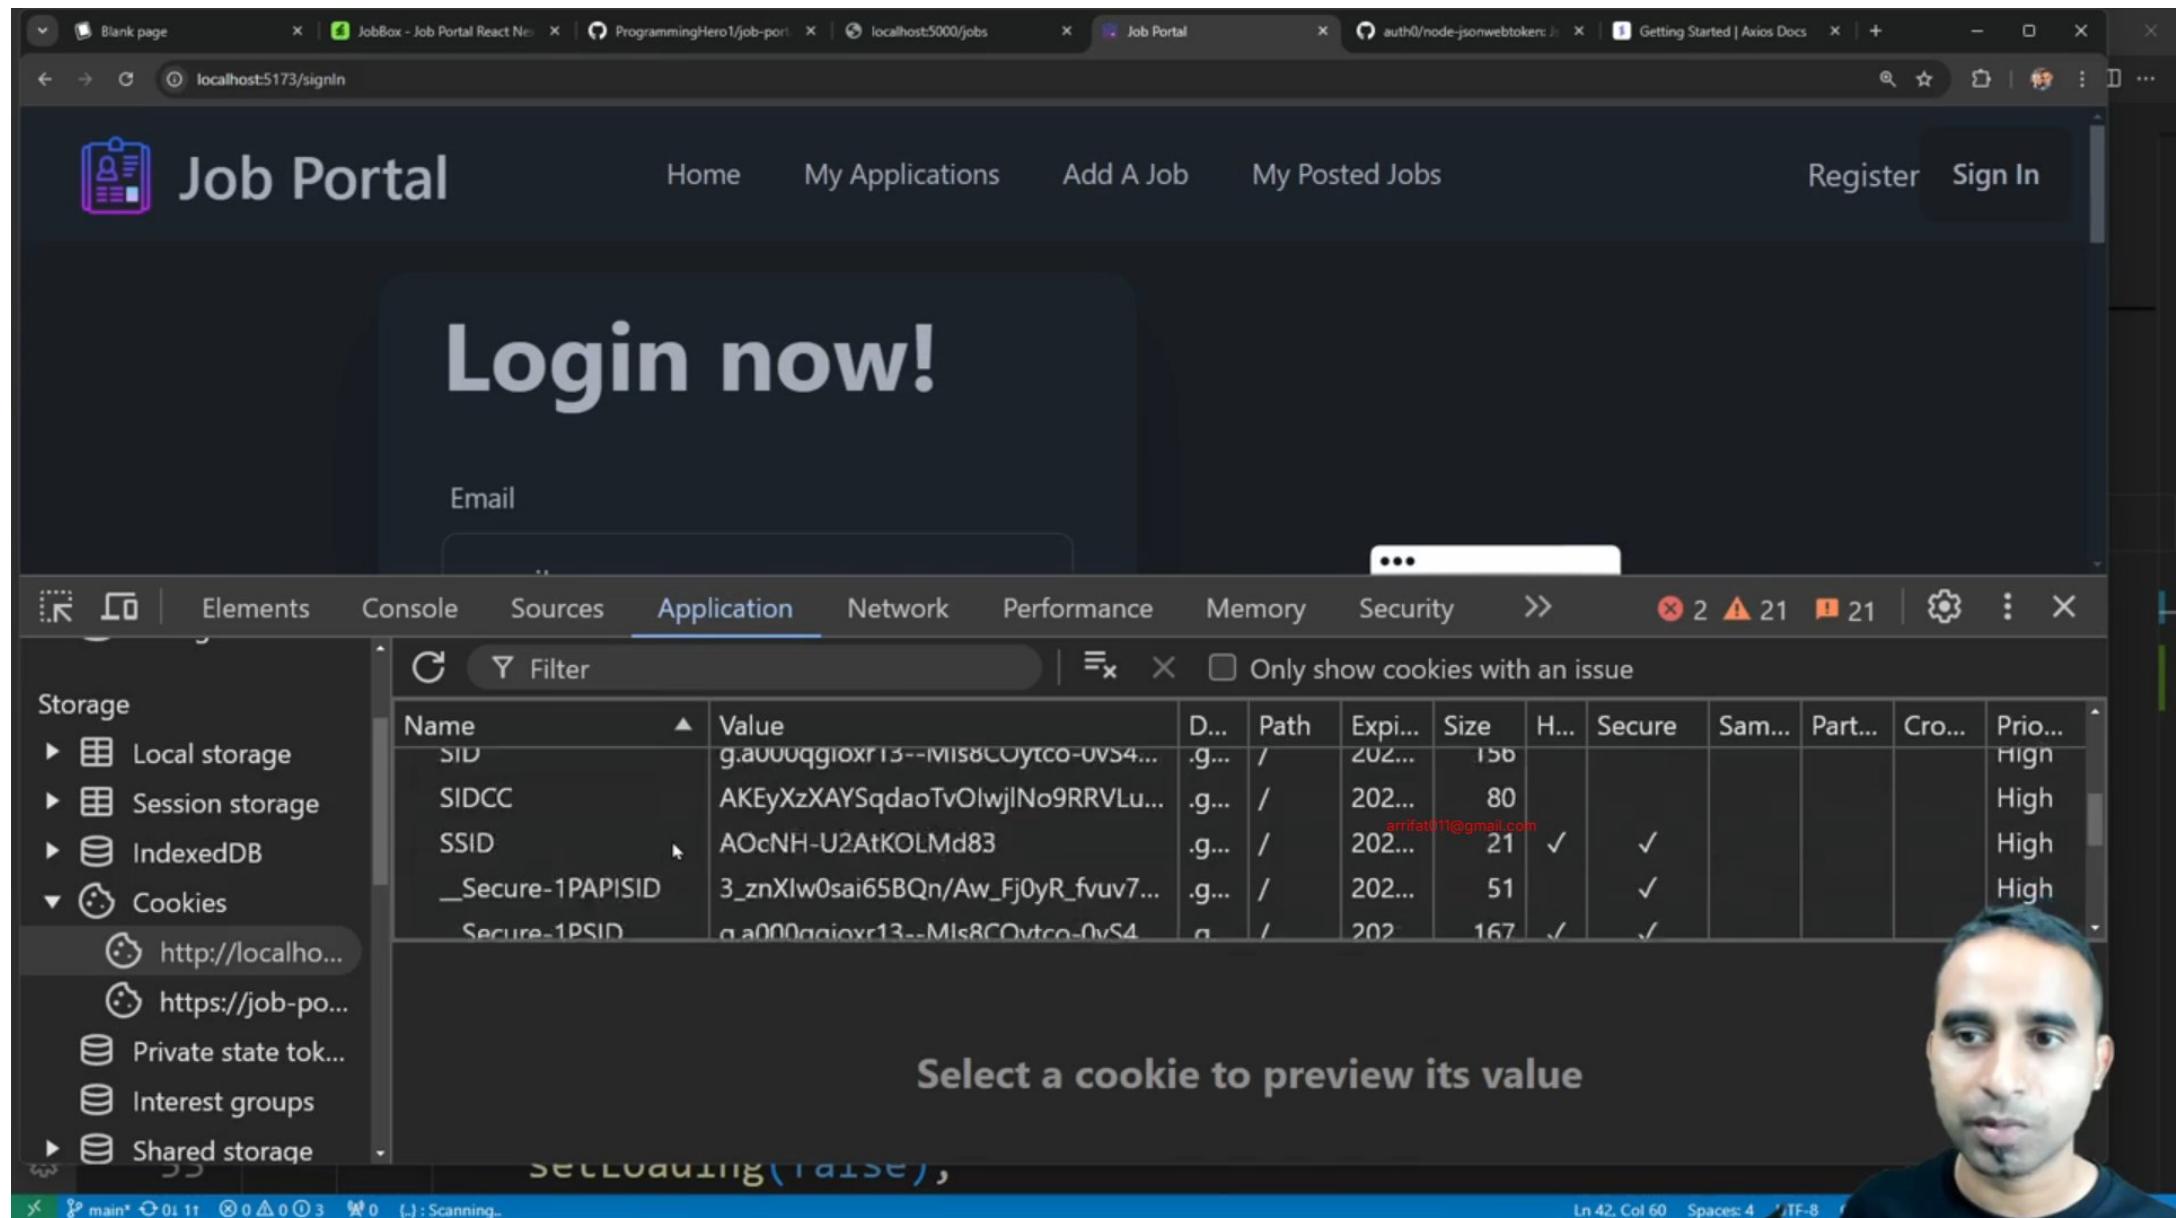

Axes

English

## Getting Started

- Introduction
- Example
- POST Requests

## Axes API

- Axes API
- The Axes Instance

### Request Config

```
// `method` is the request method to be used when making the request
method: 'get', // default

// `baseURL` will be prepended to `url` unless `url` is absolute.
// It can be convenient to set `baseURL` for an instance of axios to pass relative URLs
// to methods of that instance.
baseURL: 'https://some-domain.com/api', ↴

// `transformRequest` allows changes to the request data before it is sent to the server
// This is only applicable for request methods 'PUT', 'POST', 'PATCH' and 'DELETE'
// The last function in the array must return a string or an instance of Buffer, ArrayBuffer,
// FormData or Stream
// You may modify the headers object.
transformRequest: [function (data, headers) {
    // Do whatever you want to transform the data

    return data;
}],

// `transformResponse` allows changes to the response data to be made before
// it is passed to then/catch
transformResponse: [function (data) {
    // Do whatever you want to transform the data

    return data;
}]
```



arrifat011@gmail.com

Activate Windows  
Go to Settings to activate Windows.

8:06 / 13:07

Axes

English

# The Axios Instance

## Creating an instance


You can create a new instance of axios with a custom config.

```
axios.create([config])
```

```
const instance = axios.create({
  baseURL: 'https://some-domain.com/api/',
  timeout: 1000,
  headers: {'X-Custom-Header': 'foobar'}
});
```

## Instance methods

The available instance methods are listed below. The specified config will be merged with the instance config.

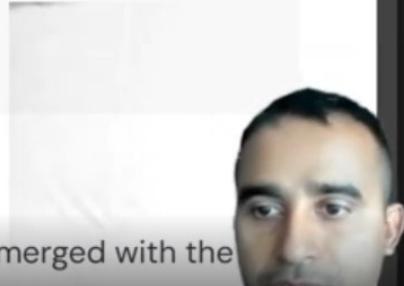

Activate Windows  
Go to Settings to activate Windows.

Blank page | JobBox - Job Portal | ProgrammingHero | localhost:5000/jobs | Job Portal | auth0/node-jsonwebtoken | Built-in React DOM | Jhankar Mahbub (jhankar) | Interceptors | Axios | + | - | X | axio... | arrifat011@gmail.com

# A X I O S

English

# Interceptors

You can intercept requests or responses before they are handled by `then` or `catch`.

```
// Add a request interceptor
axios.interceptors.request.use(function (config) {
  // Do something before request is sent
  return config;
}, function (error) {
  // Do something with request error
  return Promise.reject(error);
});

// Add a response interceptor
axios.interceptors.response.use(function (response) {
  // Any status code that lie within the range of 2xx cause this function to trigger
  // Do something with response data
  return response;
}, function (error) {
  // Any status codes that falls outside the range of 2xx cause this function to trigger
  // Do something with response error
});
```

Activate Windows  
Go to Settings to activate | Exit full screen