



Position of IPv4

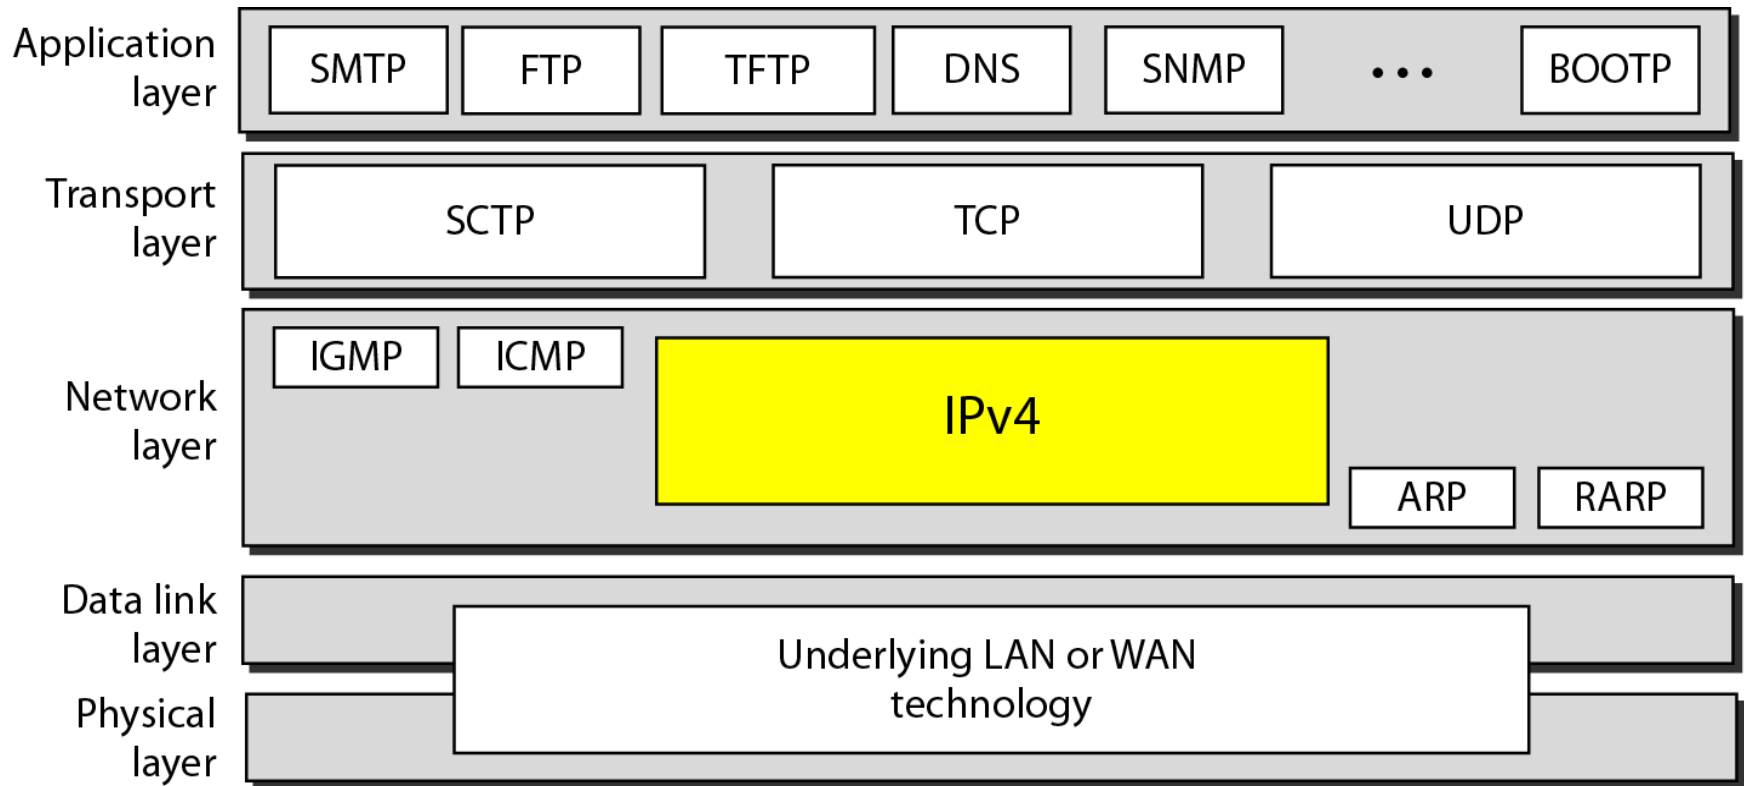

Internet Protocol


- The Internet Protocol version 4 (IPv4) is the delivery mechanism used by the TCP/IP protocols.
 - Delivers the datagram from source to destination.
 - an unreliable protocol.
 - does not provide flow control.
 - does not provide the error control.
 - Connectionless protocol.
 - Datagram may delivered out of order.
 - Best Effort delivery protocol.
 - Use IP Addresses.
 - Use the services provided by ARP, ICMP and others.
-

IPv4 Datagram Format

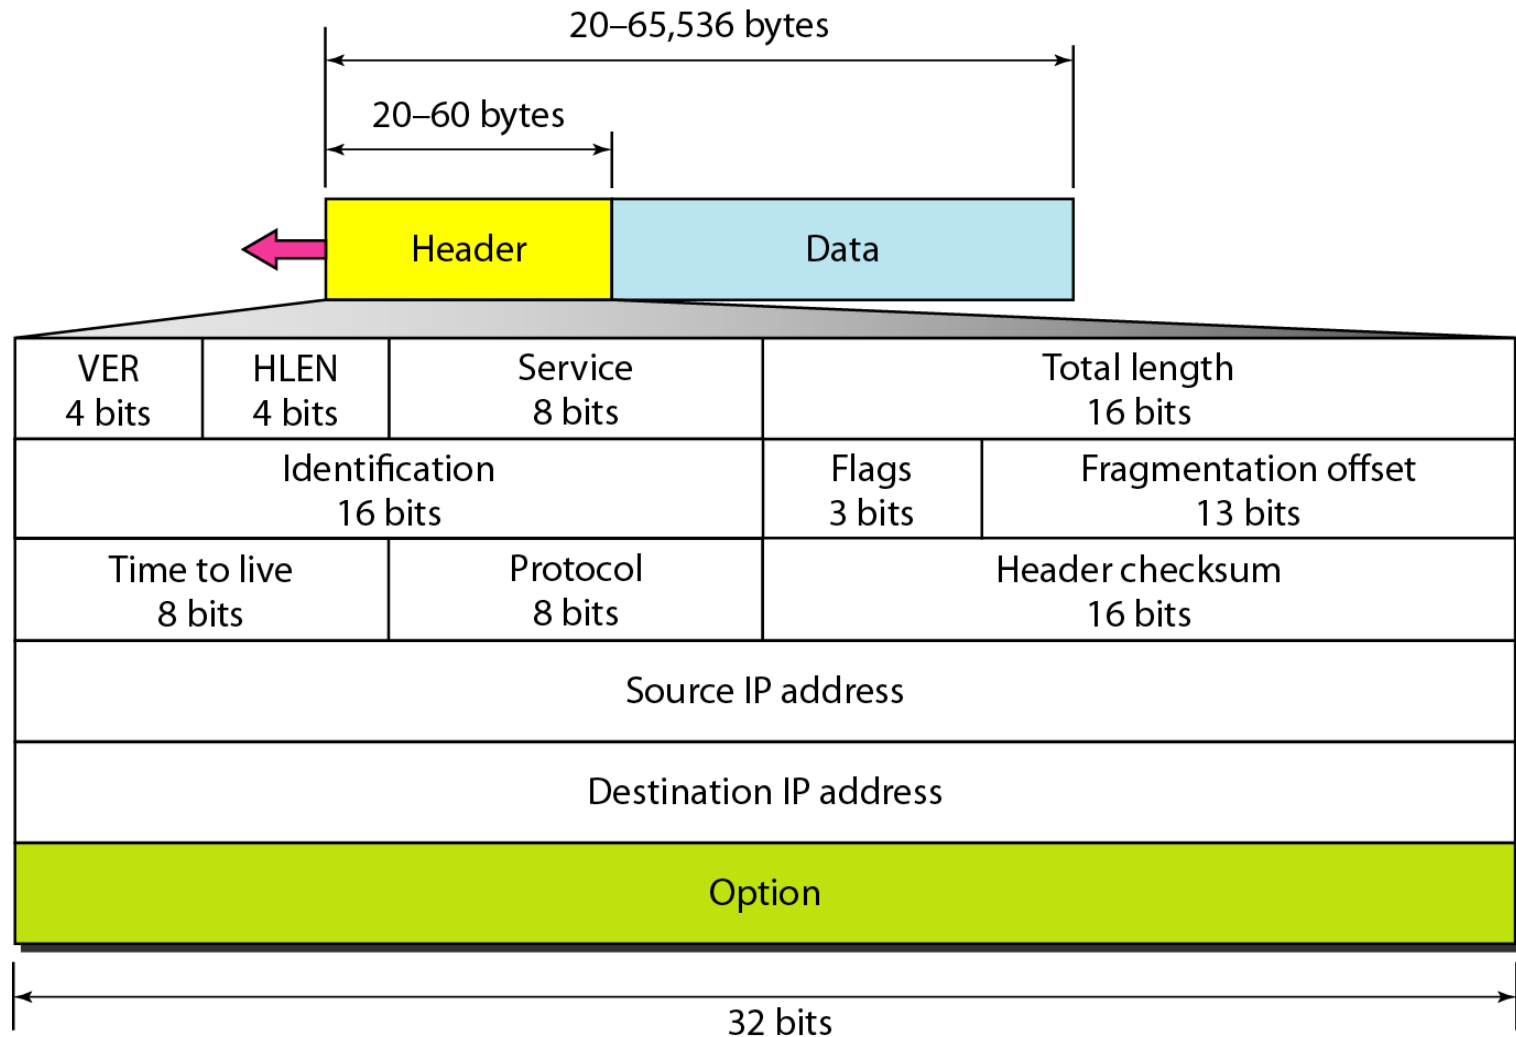


IPv4 Datagram Format

Service type or differentiated services

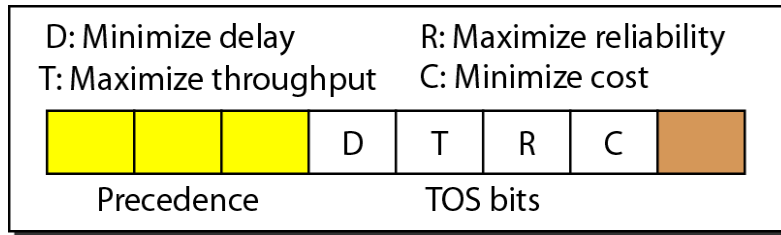

Service type

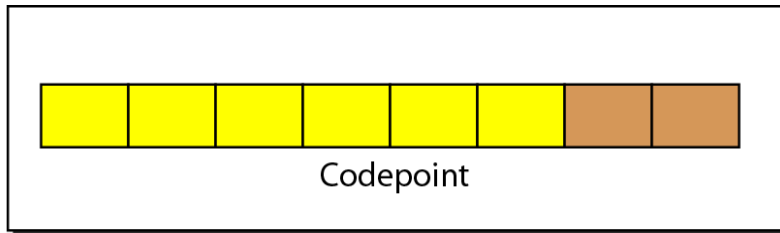

Differentiated services

<i>TOS Bits</i>	<i>Description</i>
0000	Normal (default)
0001	Minimize cost
0010	Maximize reliability
0100	Maximize throughput
1000	Minimize delay

IPv4 Datagram Format


Default types of Service

<i>Protocol</i>	<i>TOS Bits</i>	<i>Description</i>
ICMP	0000	Normal
BOOTP	0000	Normal
NNTP	0001	Minimize cost
IGP	0010	Maximize reliability
SNMP	0010	Maximize reliability
TELNET	1000	Minimize delay
FTP (data)	0100	Maximize throughput
FTP (control)	1000	Minimize delay
TFTP	1000	Minimize delay
SMTP (command)	1000	Minimize delay
SMTP (data)	0100	Maximize throughput
DNS (UDP query)	1000	Minimize delay
DNS (TCP query)	0000	Normal
DNS (zone)	0100	Maximize throughput

IPv4 Datagram Format

Default Protocol Fields value

<i>Value</i>	<i>Protocol</i>
1	ICMP
2	IGMP
6	TCP
17	UDP
89	OSPF

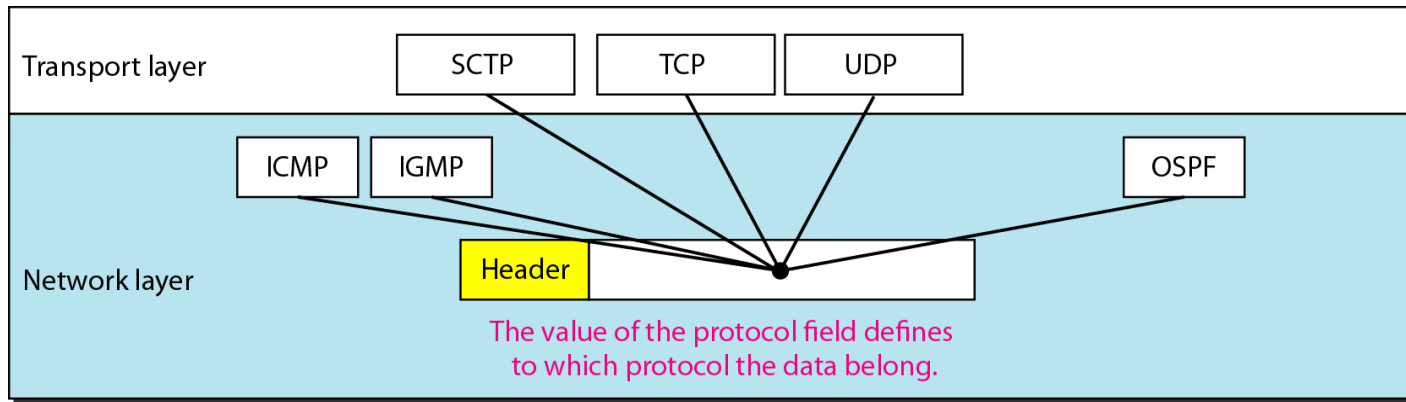

Example

An IPv4 packet has arrived with the first 8 bits as shown:

01000010

The receiver discards the packet. Why?

Solution

There is an error in this packet. The 4 leftmost bits (0100) show the version, which is correct. The next 4 bits (0010) show an invalid header length ($2 \times 4 = 8$). The minimum number of bytes in the header must be 20. The packet has been corrupted in transmission.

Example

In an IPv4 packet, the value of HLEN is 1000 in binary. How many bytes of options are being carried by this packet?

Solution

The HLEN value is 8, which means the total number of bytes in the header is 8×4 , or 32 bytes. The first 20 bytes are the base header, the next 12 bytes are the options.

Example

In an IPv4 packet, the value of HLEN is 5, and the value of the total length field is 0x0028. How many bytes of data are being carried by this packet?

Solution

The HLEN value is 5, which means the total number of bytes in the header is 5×4 , or 20 bytes (no options). The total length is 40 bytes, which means the packet is carrying 20 bytes of data ($40 - 20$).

Example

An IPv4 packet has arrived with the first few hexadecimal digits as shown.

0x45000028000100000102 . . .


How many hops can this packet travel before being dropped? The data belong to what upper-layer protocol?

Solution

To find the time-to-live field, we skip 8 bytes. The time-to-live field is the ninth byte, which is 01. This means the packet can travel only one hop. The protocol field is the next byte (02), which means that the upper-layer protocol is IGMP.

Internet Protocol

Maximum transfer unit (MTU)

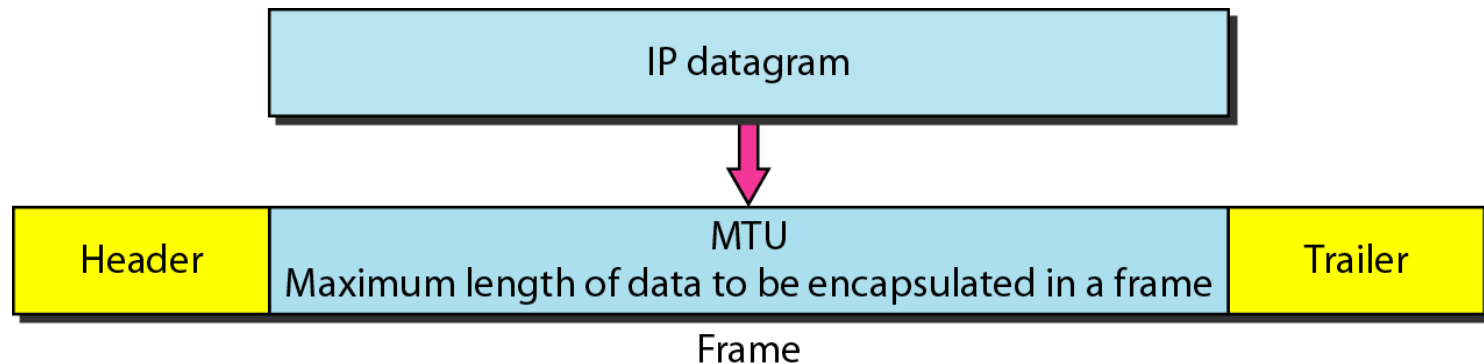


Internet Protocol

MTU for some networks

<i>Protocol</i>	<i>MTU</i>
Hyperchannel	65,535
Token Ring (16 Mbps)	17,914
Token Ring (4 Mbps)	4,464
FDDI	4,352
Ethernet	1,500
X.25	576
PPP	296

Internet Protocol


Flags used in fragmentation



D: Do not fragment
M: More fragments


Internet Protocol

Fragmentation example

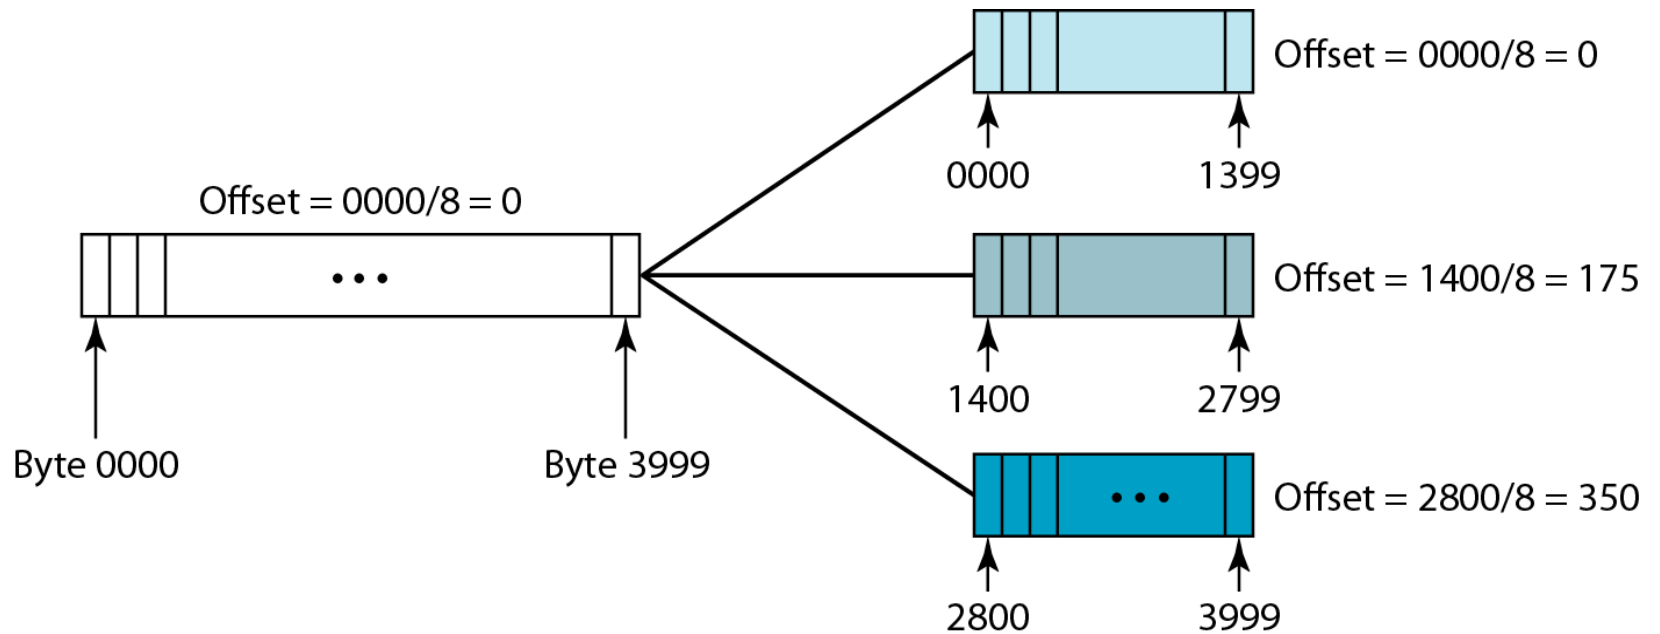


Internet Protocol

Fragmentation example

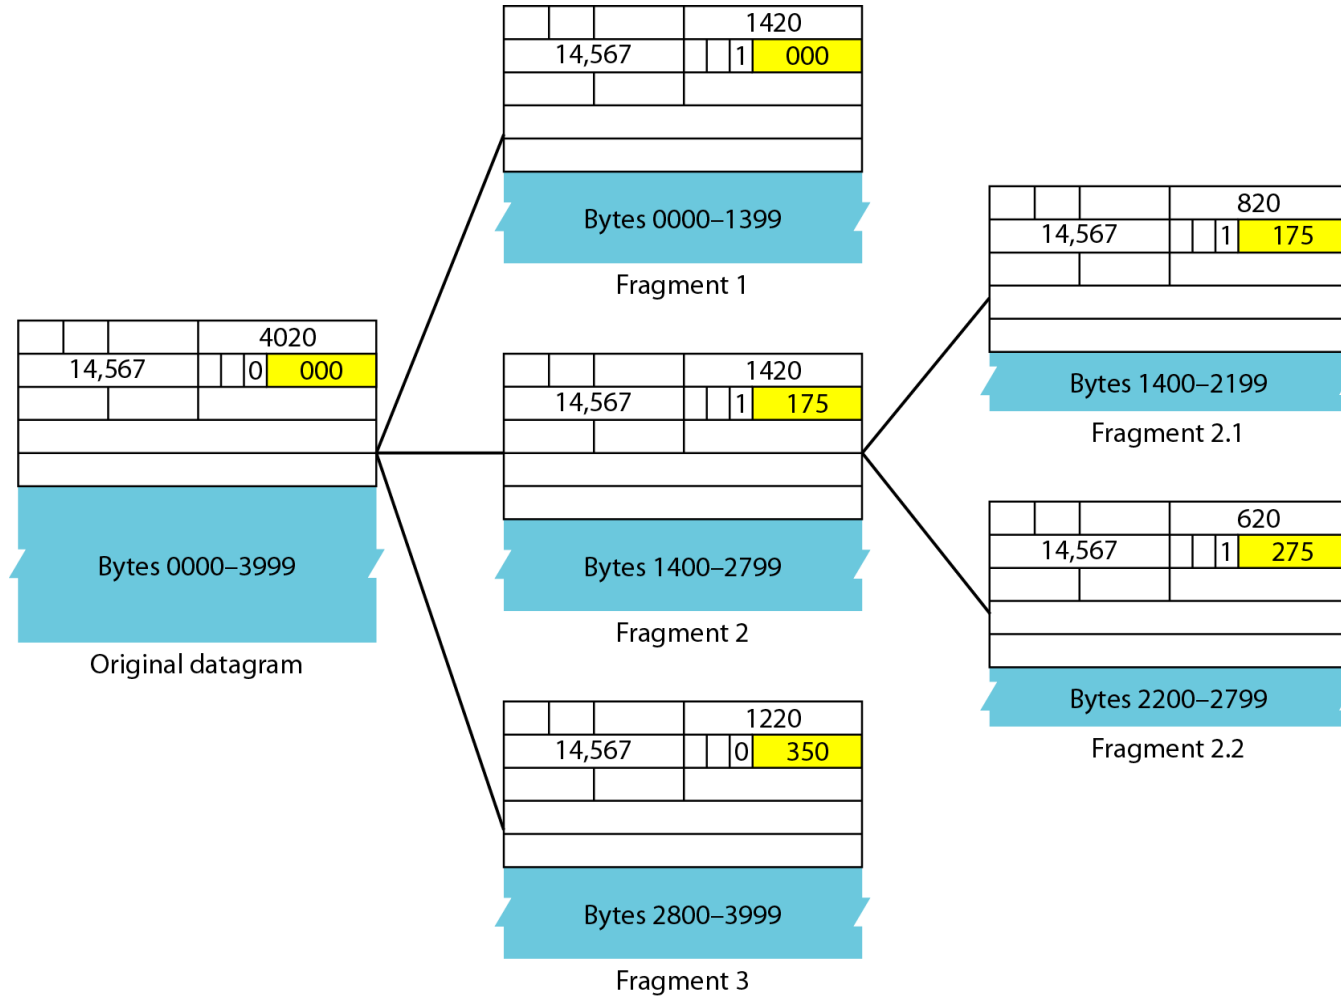

Internet Protocol

Fragmentation example

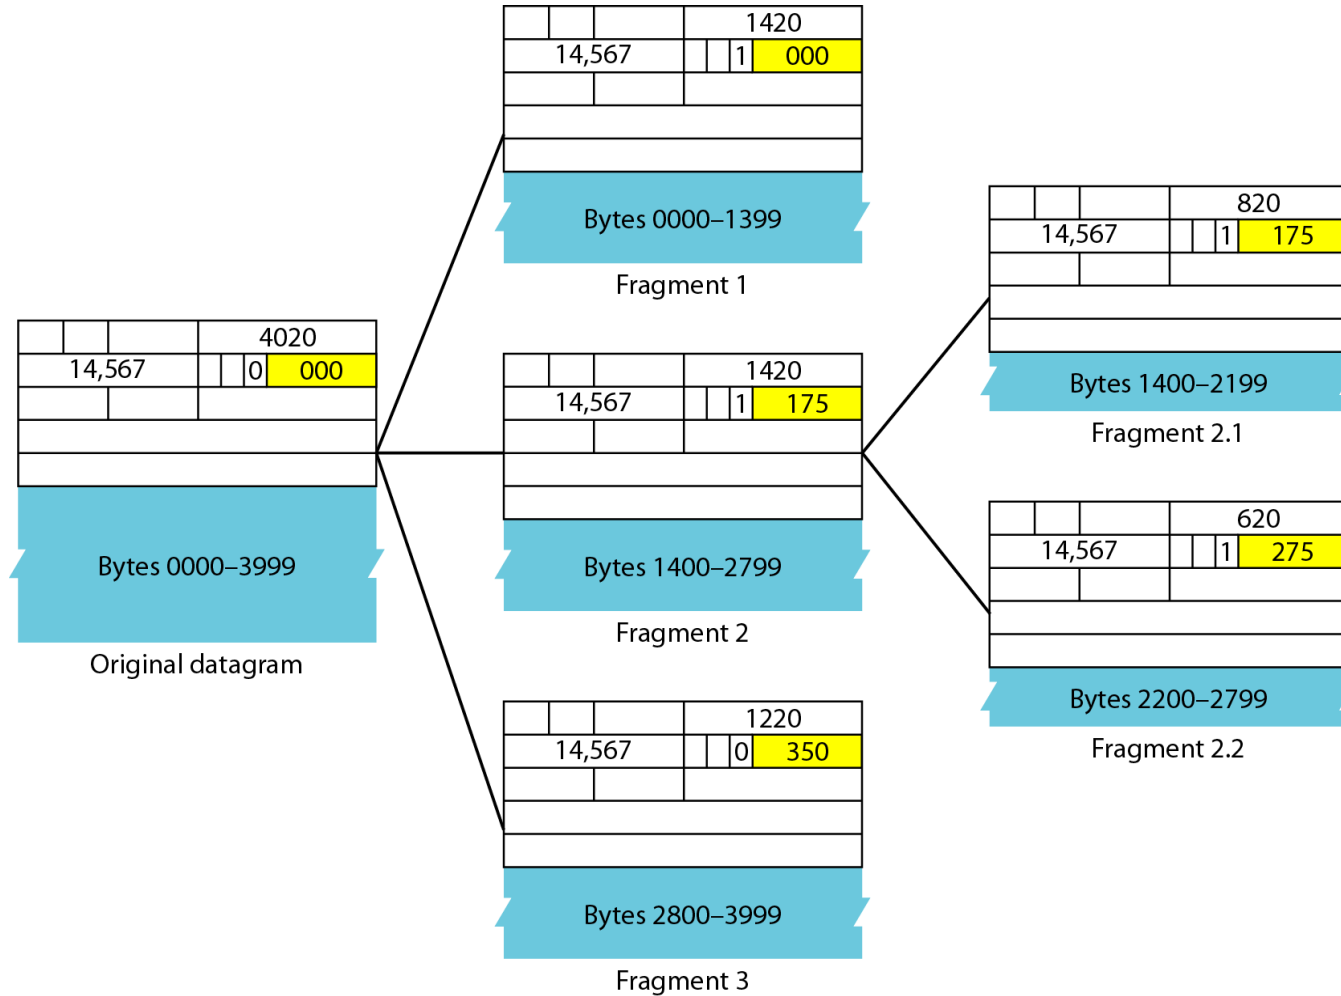

Example

A packet has arrived with an M bit value of 0. Is this the first fragment, the last fragment, or a middle fragment? Do we know if the packet was fragmented?

Solution

If the M bit is 0, it means that there are no more fragments; the fragment is the last one. However, we cannot say if the original packet was fragmented or not. A non-fragmented packet is considered the last fragment.

Example

A packet has arrived with an M bit value of 1. Is this the first fragment, the last fragment, or a middle fragment? Do we know if the packet was fragmented?

Solution

If the M bit is 1, it means that there is at least one more fragment. This fragment can be the first one or a middle one, but not the last one. We don't know if it is the first one or a middle one; we need more information (the value of the fragmentation offset).

Example

A packet has arrived with an M bit value of 1 and a fragmentation offset value of 0. Is this the first fragment, the last fragment, or a middle fragment?

Solution

Because the M bit is 1, it is either the first fragment or a middle one. Because the offset value is 0, it is the first fragment.

Example

A packet has arrived in which the offset value is 100, the value of HLEN is 5, and the value of the total length field is 100. What are the numbers of the first byte and the last byte?

Solution

The first byte number is $100 \times 8 = 800$. The total length is 100 bytes, and the header length is 20 bytes (5×4), which means that there are 80 bytes in this datagram. If the first byte number is 800, the last byte number must be 879.

Checksum calculation in IPv4

4	5	0	28
1		0	0
4	17	0	
10.12.14.5			
12.6.7.9			

4, 5, and 0	→	4	5	0	0
28	→	0	0	1	C
1	→	0	0	0	1
0 and 0	→	0	0	0	0
4 and 17	→	0	4	1	1
0	→	0	0	0	0
10.12	→	0	A	0	C
14.5	→	0	E	0	5
12.6	→	0	C	0	6
7.9	→	0	7	0	9
Sum	→	7	4	4	E
Checksum	→	8	B	B	1