

Лабораторная работа №1

Установка Rocky Linux в VirtualBox

Ришард Когенгар

2 сентября 2025

Российский университет дружбы народов, Москва, Россия

Цель работы

Установить Rocky Linux в VirtualBox, создать пользователя и проверить работу системы.

Ход выполнения работы

Создание виртуальной машины

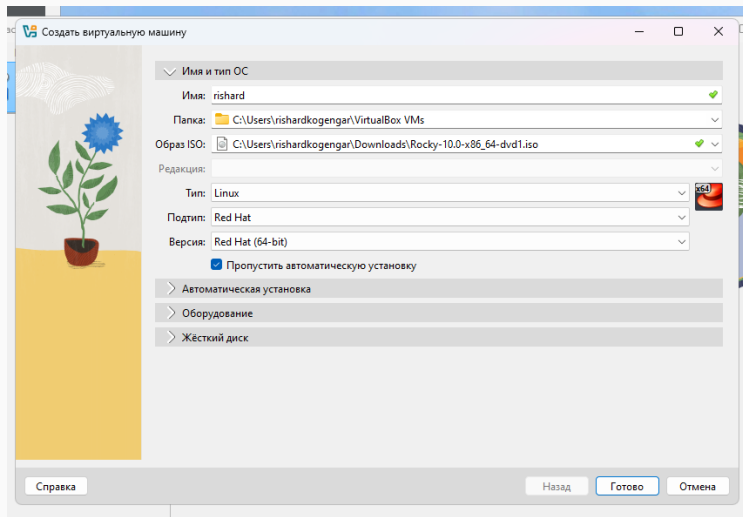


Рис. 1: Создание виртуальной машины

Настройка жёсткого диска

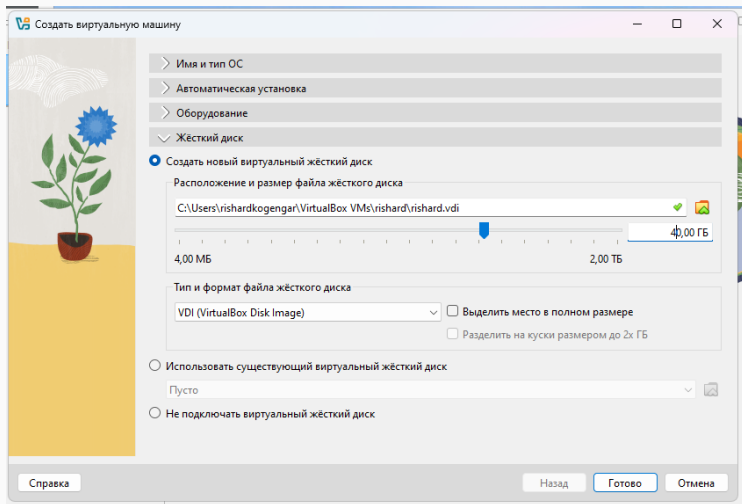


Рис. 2: Настройка жёсткого диска

Запуск установщика

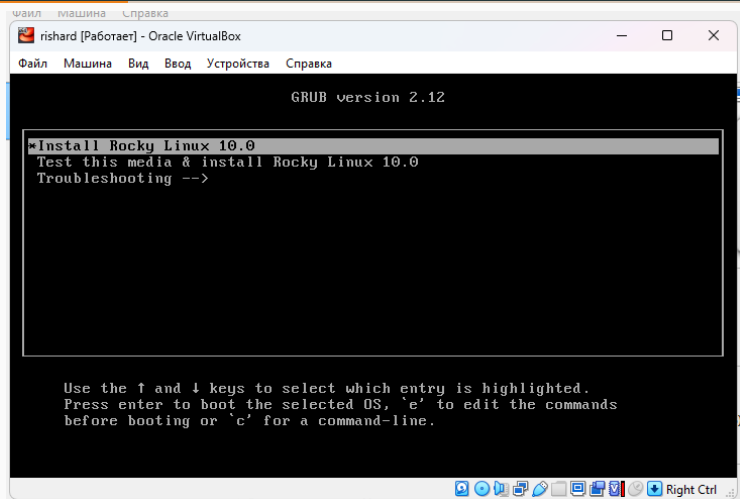


Рис. 3: Запуск установщика

Выбор языка установки

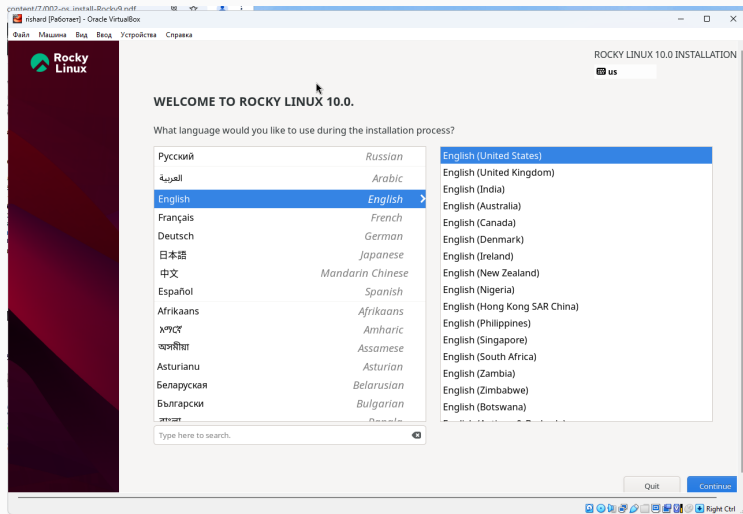


Рис. 4: Выбор языка установки

Настройка клавиатуры

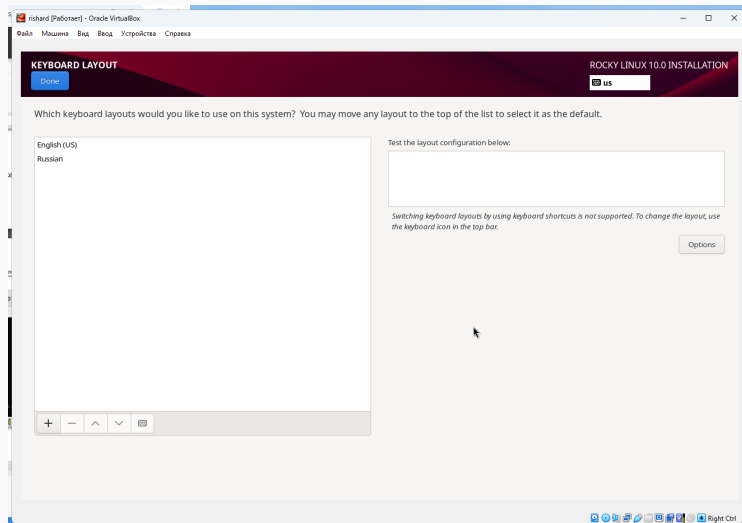


Рис. 5: Настройка клавиатуры

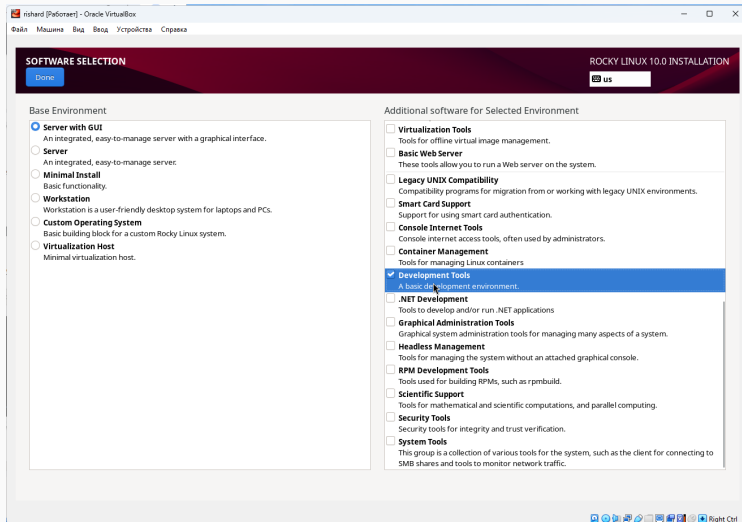


Рис. 6: Выбор окружения

Установка пароля root

ROOT ACCOUNT

Done

ROCKY LINUX 10.0 INSTALLATION

us

The root account is used for administering the system.

The root user (also known as super user) has complete access to the entire system. For this reason, logging into this system as the root user is best done only to perform system maintenance or administration.

☐ **Disable root account**

Disabling the root account will lock the account and disable remote access with root account. This will prevent unintended administrative access to the system.

☒ **Enable root account**

Enabling the root account will allow you to set a root password and optionally enable remote access to root account on this system.

Root Password: 

Weak

Confirm: 

☒ Allow root SSH login with password

 The password fails the dictionary check - it is too simplistic/systematic. You will have to press **Done** twice to confirm it.

Рис. 7: Установка пароля root

Создание пользователя

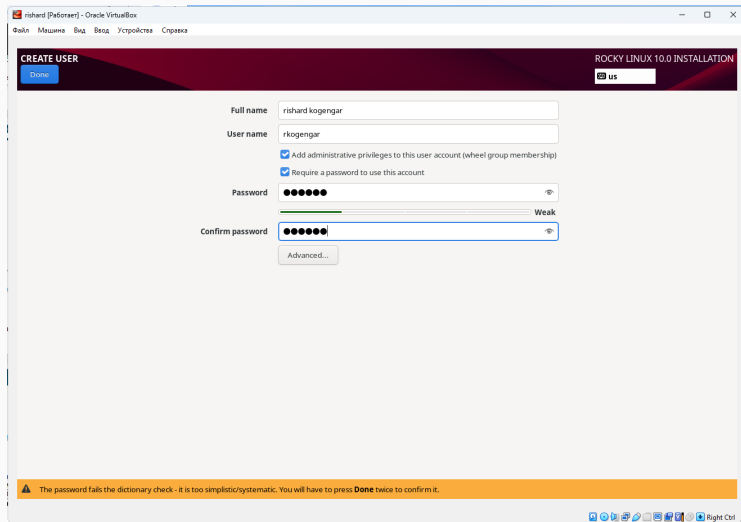


Рис. 8: Создание пользователя

Обзор параметров и установка

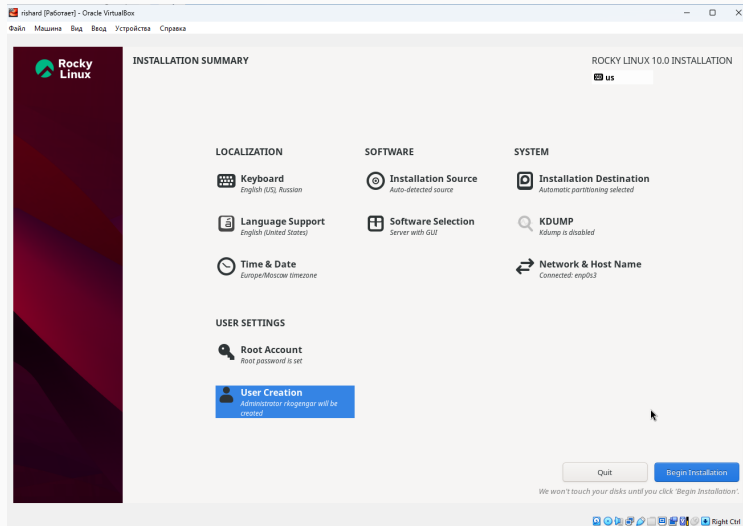


Рис. 9: Обзор параметров

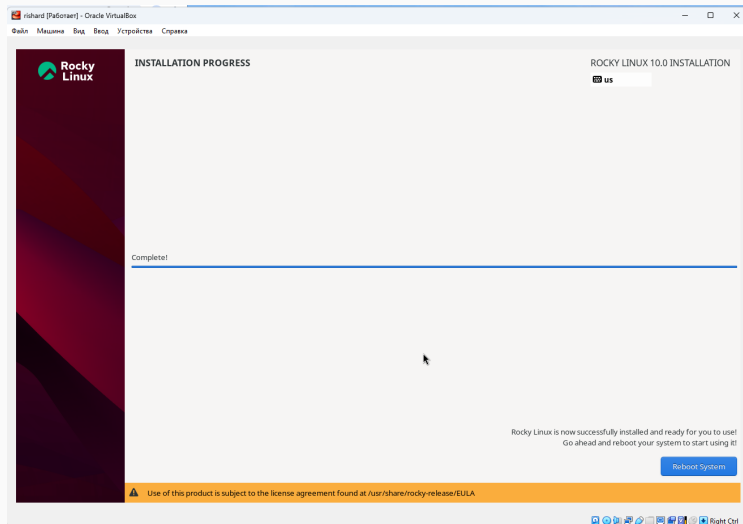


Рис. 10: Ход установки

We trust you have received the usual lecture from the local System Administrator. It usually boils down to these three things:

- #1) Respect the privacy of others.
- #2) Think before you type.
- #3) With great power comes great responsibility.

For security reasons, the password you type will not be visible.

[sudo] password for rkogengar:

```
root@rishardkogengar:~# cd /run/media/rkogengar/VBox_GAs_7.1.12/
```

```
root@rishardkogengar:/run/media/rkogengar/VBox_GAs_7.1.12# ls -a
```

.	OS2	VBoxLinuxAdditions.run
..	runasroot.sh	VBoxSolarisAdditions.pkg
AUTORUN.INF	TRANS.TBL	VBoxWindowsAdditions-amd64.exe
autorun.sh	VBoxDarwinAdditions.pkg	VBoxWindowsAdditions.exe
cert	VBoxDarwinAdditionsUninstall.tool	VBoxWindowsAdditions-x86.exe
NT3x	VBoxLinuxAdditions-arm64.run	windows11-bypass.reg

```
root@rishardkogengar:/run/media/rkogengar/VBox_GAs_7.1.12# ./VBoxLinuxAdditions.  
run
```

```
Verifying archive integrity... 100% MD5 checksums are OK. All good.
```

```
Uncompressing VirtualBox 7.1.12 Guest Additions for Linux 100%
```

```
VirtualBox Guest Additions installer
```

Анализ системы



```
root@rishardkogengar:/run/media/rkogengar/VBox_GAs_7.1.12#  
root@rishardkogengar:/run/media/rkogengar/VBox_GAs_7.1.12# dmesg | grep -i "Linux ver"  
[ 0.000000] Linux version 6.12.0-55.12.1.el10_0.x86_64 (mockbuild@iad1-prod-build001.bld.equ.rockylinux.org) (gcc (GCC) 14.2.1 20250110 (Red Hat 14.2.1-7), GNU ld version 2.41-53.el10) #1 SMP PREEMPT_DYNAMIC Fri May 23 17:41:02 UTC 2025  
root@rishardkogengar:/run/media/rkogengar/VBox_GAs_7.1.12# dmesg | grep -i "Detected Mhz"  
root@rishardkogengar:/run/media/rkogengar/VBox_GAs_7.1.12# dmesg | grep -i "MHz"  
[ 0.000003] tsc: Detected 3187.200 MHz processor  
[ 5.901812] e1000 0000:00:03:0 eth0: (PCI:33MHz:32-bit) 08:00:27:db:52:86  
root@rishardkogengar:/run/media/rkogengar/VBox_GAs_7.1.12# dmesg | grep -i "Memory"  
[ 0.000001] DMT: Memory state regulated: 0/0
```

Рис. 12: Информация о ядре и CPU

```
data, 14204K loaded, 4320K free, 0752K bss, 220120K reserved, 0K smd reserved,  
[ 0.159803] x86/mm: Memory block size: 128MB  
[ 0.272089] Freeing initrd memory: 30488K  
[ 0.275700] Non-volatile memory driver v1.3  
[ 0.591448] Freeing unused decrypted memory: 2028K  
[ 0.591848] Freeing unused kernel image (initmem) memory: 4320K  
[ 0.592004] Freeing unused kernel image (rodata/data gap) memory: 232K  
[ 1.432249] vmwgfx 0000:00:02.0: [drm] Legacy memory limits: VRAM = 16384 KiB  
, FIFO = 2048 KiB, surface = 507904 KiB  
[ 1.432252] vmwgfx 0000:00:02.0: [drm] Maximum display memory size is 16384 K  
iB  
root@rishardkogengar:/run/media/rkogengar/VBox_GAs_7.1.12#  
root@rishardkogengar:/run/media/rkogengar/VBox_GAs_7.1.12# dmesg | grep -i "Hype  
r"  
[ 0.000000] Hypervisor detected: KVM  
[ 1.432208] vmwgfx 0000:00:02.0: [drm] *ERROR* vmwgfx seems to be running on  
an unsupported hypervisor.  
root@rishardkogengar:/run/media/rkogengar/VBox_GAs_7.1.12#
```

Рис. 13: Проверка гипервизора

```
root@rishardkogengar:/run/media/rkogengar/VBox_GAs_7.1.12# mount
/dev/mapper/rl_vbox-root on / type xfs (rw,relatime,seclabel,attr2,inode64,logbufs=8,logbsize=32k,noquota)
devtmpfs on /dev type devtmpfs (rw,nosuid,seclabel,size=4096k,nr_inodes=495716,mode=755,inode64)
tmpfs on /dev/shm type tmpfs (rw,nosuid,nodev,seclabel,inode64)
devpts on /dev/pts type devpts (rw,nosuid,noexec,relatime,seclabel,gid=5,mode=620,ptmxmode=000)
sysfs on /sys type sysfs (rw,nosuid,nodev,noexec,relatime,seclabel)
securityfs on /sys/kernel/security type securityfs (rw,nosuid,nodev,noexec,relatime)
cgroup2 on /sys/fs/cgroup type cgroup2 (rw,nosuid,nodev,noexec,relatime,seclabel,nsdelegate,memory_recursiveprot)
pstore on /sys/fs/pstore type pstore (rw,nosuid,nodev,noexec,relatime,seclabel)
bpf on /sys/fs/bpf type bpf (rw,nosuid,nodev,noexec,relatime,mode=700)
configfs on /sys/kernel/config type configfs (rw,nosuid,nodev,noexec,relatime)
proc on /proc type proc (rw,nosuid,nodev,noexec,relatime)
tmpfs on /run type tmpfs (rw,nosuid,nodev,seclabel,size=800560k,nr_inodes=819200,mode=755,inode64)
selinuxfs on /sys/fs/selinux type selinuxfs (rw,nosuid,noexec,relatime)
systemd-1 on /proc/sys/fs/binfmt_misc type autofs (rw,relatime,fd=36,pgrp=1,timeout=0,minproto=5,maxproto=5,direct,pipe_ino=5658)
debugfs on /sys/kernel/debug type debugfs (rw,nosuid,nodev,noexec,relatime,secla
```

Рис. 14: Список файловых систем

Итоги работы

Rocky Linux установлен в VirtualBox. Создан root и пользователь, настроена клавиатура, добавлены Guest Additions. Система работает правильно и готова к использованию.