


11 Aug, 2024

JQuery :- (JS library)

DOM mei jyada code likhna padta hai

when using dom element with jquery
element use \$().

text → both as getter and setter

→ ~~ajax~~ axios / fetch → api

↓
prefer

→ DOM element , promise , ajax request
netflix → project , async await

Howo {
tmdb → movie lists , → popular,
use pagination , top rated,
upcoming
get your api key from tmdb

① social media app (no signup)

↳ first color

then code again after a week

② myntra nav bar

↳ main parts

pehle video dekhte side by side banas

then duori bar banao bina video
dekhe after 3-4 days.

{ use pure css }

→ mini project

JQuery :- It is a JS library.

JQuery ka use karne se code ki length kam ho jati hai.

How to install JQuery :-



jquery.com → click on download




scroll down to find jquery CDN



open minified version

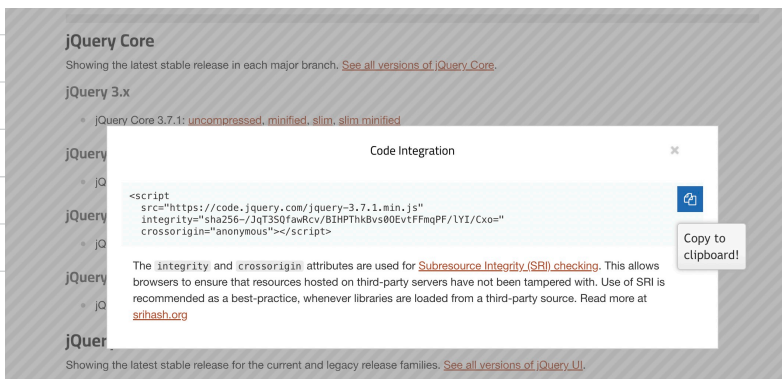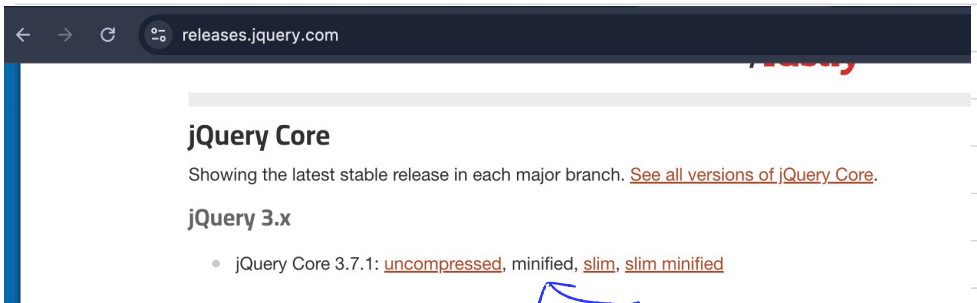


When you click on minified, you will the JS code. you can either paste the JS code in your HTML file header or get the link which is inside src, then open the link in your browser, you will see the code, copy the code, paste it inside file jquery.js as shown in the screenshot below. Then add its path in head tag of html file.

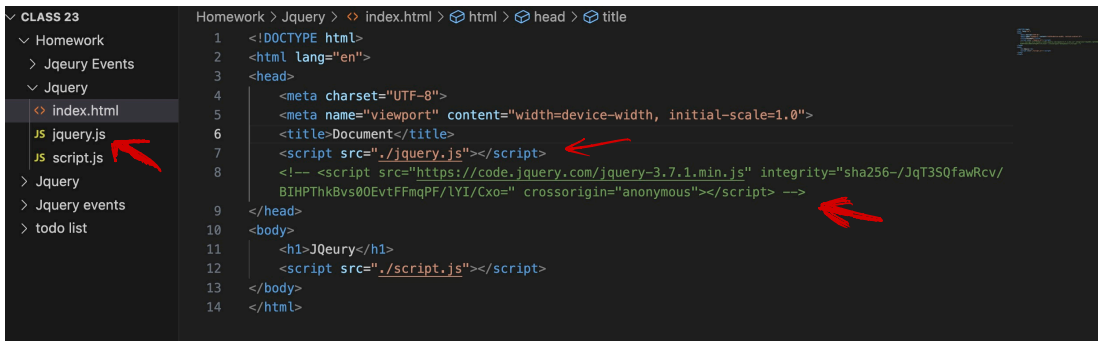

Homework > JQuery > index.html > html > head > title

```
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4   <meta charset="UTF-8">
5   <meta name="viewport" content="width=device-width, initial-scale=1.0">
6   <title>Document</title>
7   <script src="./jquery.js"></script>
8   <!-- <script src="https://code.jquery.com/jquery-3.7.1.min.js" integrity="sha256-/JqT3SqfawRcv/BIHPhThkBvs00EvTFFmqPF/lyI/Cxo=" crossorigin="anonymous"></script> -->
9 </head>
10 <body>
11   <h1>JQuery</h1>
12   <script src="./script.js"></script>
13 </body>
14 </html>
```

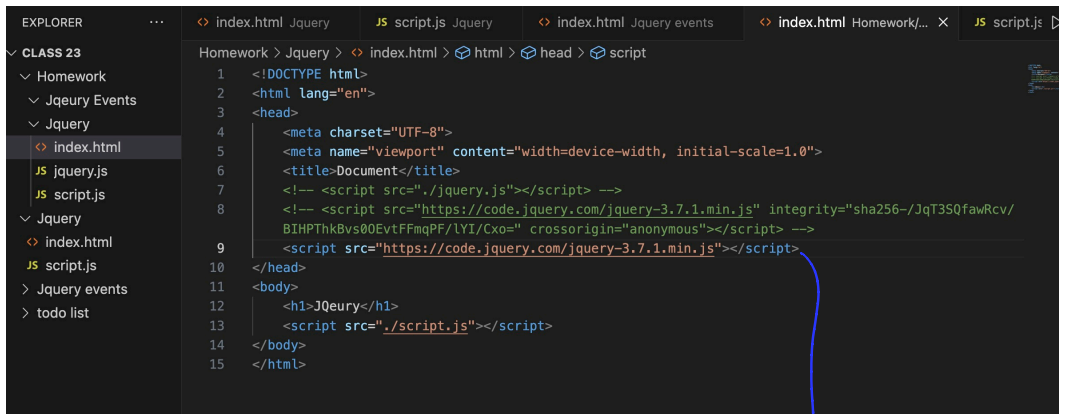


EXPLORER CLASS 23 Homework > JQuery > index.html > JQuery JS script.js JQuery index.html JQuery events index.html Homework/... JS script.js

```
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4   <meta charset="UTF-8">
5   <meta name="viewport" content="width=device-width, initial-scale=1.0">
6   <title>Document</title>
7   <!-- <script src="./jquery.js"></script> -->
8   <!-- <script src="https://code.jquery.com/jquery-3.7.1.min.js" integrity="sha256-/JqT3SqfawRcv/BIHPhThkBvs00EvTFFmqPF/lyI/Cxo=" crossorigin="anonymous"></script> -->
9   <script src="https://code.jquery.com/jquery-3.7.1.min.js"></script>
10 </head>
11 <body>
12   <h1>JQuery</h1>
13   <script src="./script.js"></script>
14 </body>
15 </html>
```

you can also write source link of minified version of jquery.

To check if ~~jQuery~~ jQuery is set up, write
\$ or jQuery in console.

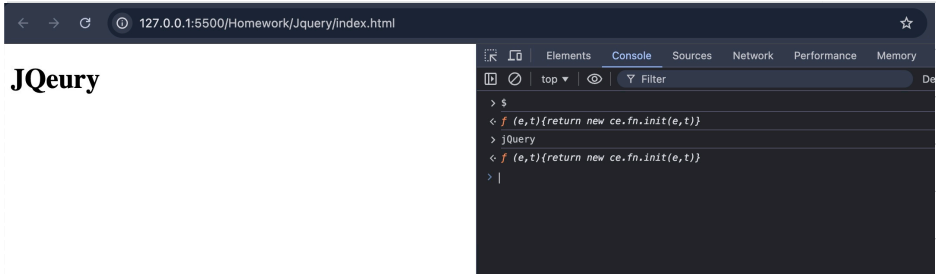

DOM ka code:-

`const ele = document.querySelector('#special');`


Jquery ka code:-

`const ele = $('#special');`

`$(' ')`

→ syntax
for selecting
something

you can also avoid storing it anywhere
and use `$('#special')` in your
code directly.

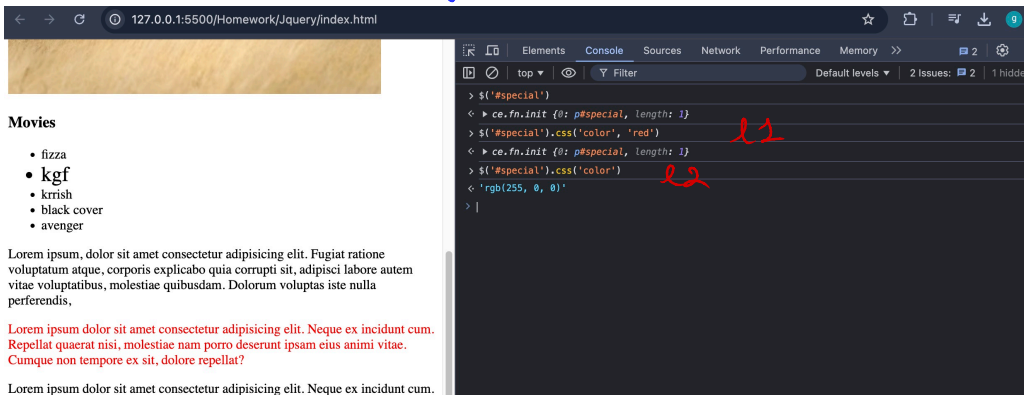

Upar wale code mei hamne sabse pehle select kiya using id = special.

.css can be used as both getter and setter.

l1 mei maine apne special id wale element ka color red set kar diya.

l2 mei maine apne special id wale element ki color property find kari.

l1 → .css as setter


l2 → .css as getter

```
$('#special').css('background-color', 'green')
```



gaha hum wo method follow karenge jo ham style.css file ke andar follow karte hai. We did not use camel case.

Ek aur tarika hai hamare pass css likhne / add karne ka. Hamne object banaya and we pass the object inside css.

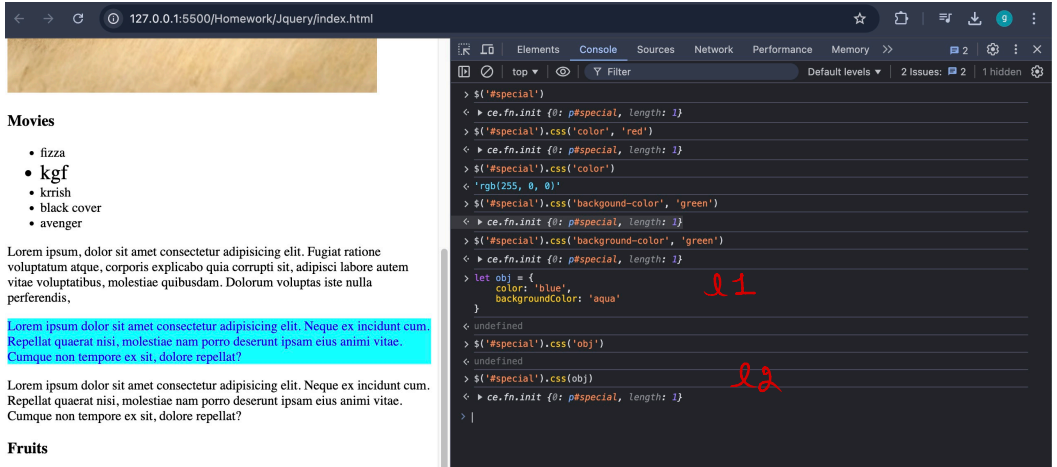

Movies

- fizza
- kgf
- krrish
- black cover
- avenger

Lorem ipsum, dolor sit amet consectetur adipisicing elit. Fugiat ratione voluptatum atque, corporis explicabo quia corrupti sit, adipisci labore autem vitae voluptatibus, molestiae quibusdam. Dolorum voluptas iste nulla perferendis,

l1

l2

l1 par object banaya.

l2 par object pass kar diya.

Hamne l1 par camelCase use kiya

↓

backgroundColor

→ Bcoz your object created belongs to JS code. That's why camelCase use hua.

Replacement :-

- ① document. query Selector ()
" . query Selector All ()
" . get Element By Id ()
" . get Element By Class Name ()
:
:

→ jitne bhi selector
hai unki jagah
simply use

\$ (' ')

put # if it is id.

put . if it is class.

- ② inner Text → . text
inner HTML → . html

element. text ();

element. text ('Hi there');



getter hai ye



check l1 on
next page



setter hai ye



check l2 on next
page

Learning JQ



Movies

- fizza
- kgf
- krrish
- black cover
- avenger

⌕ Elements Console Network Performance Memory >>

ID 🔍 top 🔍 Filter Default levels ▼ 2

```
> $('#special').css('color', 'red')
< ▶ ce.fn.init {0: p#special, length: 1}
> $('#special').css('color')
< 'rgb(255, 0, 0)'
> $('#special').css('background-color', 'green')
< ▶ ce.fn.init {0: p#special, length: 1}
> $('#special').css('background-color', 'green')
< ▶ ce.fn.init {0: p#special, length: 1}
> let obj = {
  color: 'blue',
  backgroundColor: 'aqua'
}
< undefined
> $('#special').css('obj')
< undefined
> $('#special').css(obj)
< ▶ ce.fn.init {0: p#special, length: 1}
> $('h1').text() l1
< 'Learning JQuery'
> $('h1').text('Learning JQuery Again') l2
< ▶ ce.fn.init {0: h1, length: 1, prevObject: ce.fn.init}
> $('h1').html() l3
< 'Learning JQuery Again'
> $('h1').html('<em>Learning JQ</em>') l4
< ▶ ce.fn.init {0: h1, length: 1, prevObject: ce.fn.init}
> $('h1').html() l5
< '<em>Learning JQ</em>'
> |
```

(getter) l3 par h1 ka inner content mila.

(setter) l4 par hamne html code change kar diya.

l5 par hamne html code ki value nikali which is inside h1.

< h1 > < em > learning JQ < /em > < / h1 >

③

- getAttribute()
- setAttribute()
- removeAttribute()

↓

• removeAttr()

→ get karne ke liye use

• attr()

→ set karne ke liye, use

• attr('property', 'value')

④

- `.classList.add()` → `.addClass()`
- `.remove()` → `.removeClass()`
- `.contains()` → `.hasClass()`
- `.toggle()` → `.toggleClass()`

(27:18)

Learning JQuery

type here... password



```

Elements Console Sources Network Performance Memory >> 2 Issues: 2
top Filter Default levels 2 Issues: 2
> $('h1').attr('style', 'color: red; background-color: aqua') l1
< > ce.fn.init {0: h1, length: 1, prevObject: ce.fn.init}
> $('h1').attr('style') l2
< 'color: red; background-color: aqua'
> $('img').attr('src') l3
< 'https://images.unsplash.com/photo-1684109580085-0b1783da8711?ixlib=rb-4.0.3&wvkf0E1DZzTVZqVEXTa2V8f-
MkHVG5Yfefa-IX7yJ9SMf18227a2wpdKCA')
> $('img').attr('src', 'https://play-lh.googleusercontent.com/ZyWNGIfzUyoajTfCd7NHMksHEZh37f-
MkHVG5Yfefa-IX7yJ9SMf18227a2wpdKCA')
Uncaught SyntaxError: missing ) after argument list VM998:1
> $('img').attr('src', 'https://play-lh.googleusercontent.com/ZyWNGIfzUyoajTfCd7NHMksHEZh37f-
MkHVG5Yfefa-IX7yJ9SMf18227a2wpdKCA')
Uncaught SyntaxError: missing ) after argument list VM1002:1
> $('img').attr('src', 'https://play-lh.googleusercontent.com/ZyWNGIfzUyoajTfCd7NHMksHEZh37f-
MkHVG5Yfefa-IX7yJ9SMf18227a2wpdKCA') l4
< > ce.fn.init {0: img, length: 1, prevObject: ce.fn.init}

```

l1 mei `.attr()` ka use karke style set kiya

l2 mei `.attr()` ka use karke, we got the value of style.

l3 mei src mei jo link hai, vo mila hamne using `.attr()`

l4 mei img tag mei src ka link change kar diya.

Learning JQuery

type here... password



```
Elements Console Sources Network Performance Memory >>
top Filter Default level
> $('h1').attr('style', 'color: red; background-color: aqua')
> ▶ ce.fn.init {0: h1, length: 1, prevObject: ce.fn.init}
> $('h1').attr('style')
< 'color: red; background-color: aqua'
> $('img').attr('src')
< 'https://images.unsplash.com/photo-1684109500005-0b17834a8711?ixlib=rb-4.0.3&wvK'
> $('img').attr('src', 'https://play-lh.googleusercontent.com/ZyWNGIfzUyoajtFcD7NHM
MkHVGrsYfefa-IX7yj9SMf182Z7a2wpdKCA')
Uncaught
SyntaxError: missing ) after argument list
> $('img').attr('src', 'https://play-lh.googleusercontent.com/ZyWNGIfzUyoajtFcD7NHM
MkHVGrsYfefa-IX7yj9SMf182Z7a2wpdKCA')
Uncaught
SyntaxError: missing ) after argument list
> $('img').attr('src', 'https://play-lh.googleusercontent.com/ZyWNGIfzUyoajtFcD7NHM
MkHVGrsYfefa-IX7yj9SMf182Z7a2wpdKCA')
> ▶ ce.fn.init {0: img, length: 1, prevObject: ce.fn.init}
> $('h1').removeAttr('style')
> ▶ ce.fn.init {0: h1, length: 1, prevObject: ce.fn.init}
> |
```

h1 mei hamne h1 ka
style remove kar diya
using .removeAttr()

127.0.0.1:5500/Homework/Jquery/index.html


Movies

- fizza
- **kgf**
- krish
- black cover
- avenger

```
Elements Console Sources Network Performance Memory >>
top Filter Default levels 2 Issues: 2
> $('.fav-movies').addClass('one')
> ▶ ce.fn.init {0: li.fav-movies.two.one, 1: li.fav-movies.one, 2: li.fav-movies.one, length: 3, prevObj
ect: ce.fn.init}
>
```

yaha hamne class add kardi
class add karte hi style
change ho gaya.

Note:- Hamne apne html
code mei style header
mei one class ka css
code likha hua hai.

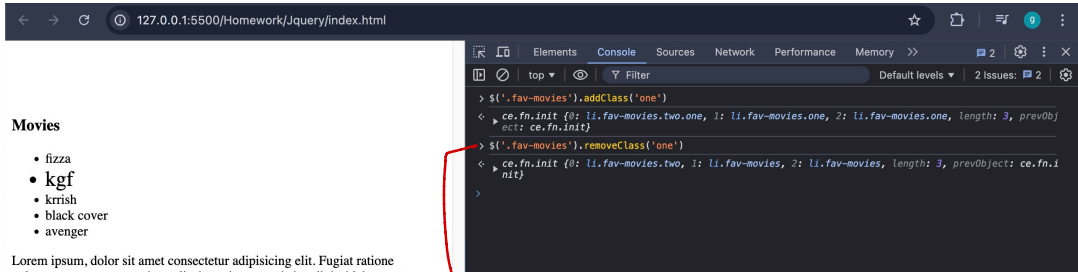


yaha hamne class remove kar di. Jiske karan style remove ho gaya.

Let's say if I write \$.('fava-movies').toggleClass('one');

↓
class add ho jayegi and style visible ho jayega

↓
Agar mai fir se toggle(class) karunga, then style hatt jayega kyunki "one" class hatt jayegi

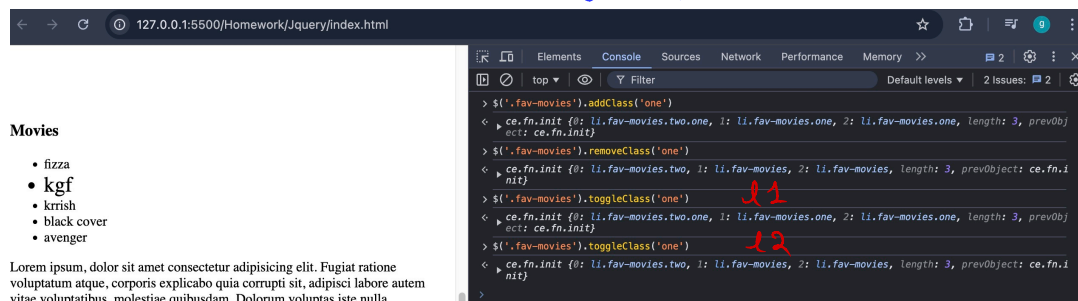

l1 → mei ~~the~~ green color visible ho gya tha.

l2 → mei green color hatthi gya.

.hasClass('one') → pehle hamne .addClass('one')
dikha, then .hasClass('one')
karne par value "true"
aayegi.

127.0.0.1:5500/Homework/Jquery/index.html

Learning JQuery

type here... password

```
Elements Console Sources Network Performance Memory >>
top Filter
> $('h1').addClass('one') J1
< ▶ ce.fn.init {0: h1.one, length: 1, prevObject: ce.fn.init}
> $('h1').hasClass('one') J2
< true
>
```

you can also write like this by ~~add~~ creating a variable.

```
const h1 = $('h1')
h1.removeClass('one')
```

⑤ Traversing :-

• parentElement	→	parent()
• children()	→	children()
• previousElementSibling	→	prev()
• nextElementSibling	→	next()

⑥


• createElement	→	\$('<div>')	} → dynamically creation
• append	→	append()	
• before	→	before()	
• after	→	after()	

\$ ('<div>') → instead of createElement



div create karne ke liye

\$ ('div') → div select karne ke liye

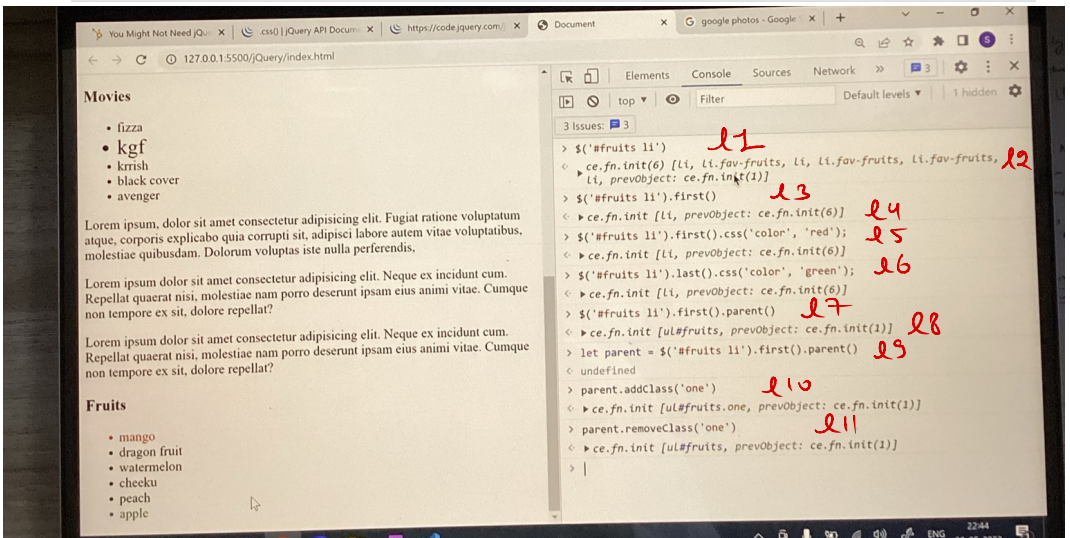

→ l1 par hamne fruits id ke sabhi li select kar liye

→ l2 par select kiye huye sabhi li visible ho gye

→ l3 par fruits li ka first li select kiga. l4 par first li visible ho gya.

→ l5 par first li par css property apply kari which is visible in the o/p.

→ l6 par last li par css property apply kari. It is visible in the o/p.

→ l7 par first li ka parent nikala which is ul → visible in l8

→ l9 par "parent" variable mei value store kari. l10 par "parent" variable mei class add kar di. Jiske karan style visible ho gya.

→ l11 par .remove (class ('one')) kar diya jisse style remove ho gya.

The screenshot shows a web browser with a jQuery demo. The page has three paragraphs of Lorem Ipsum text. The first paragraph is labeled 'l1', the second 'l2', and the third 'l3'. A red arrow points from the 'l2' label to the console log, which shows the jQuery chain: `$('#special').ce.fn.init [p#special].prev()`. The console also shows the next step: `$('#special').next()`.

beech wala (l2) → # special

↓
iska prev() hai l1

↓
iska next hai l3

Movies

- fizza
- kgf
- krish
- black cover
- avenger


Lorem ipsum dolor sit amet consectetur adipisicing elit. Fugiat ratione voluptatum atque, corporis explicabo quia corrupti sit, adipisci labore autem vitae voluptatibus, molestiae quibusdam. Dolorum voluptas iste nulla perferendis,

Lorem ipsum dolor sit amet consectetur adipisicing elit. Neque ex incididunt cum. Repellat quaeat nisi, molestiae nam porro deserunt ipsam eius animi vitae. Cumque non tempore ex sit, dolore repellat?

Lorem ipsum dolor sit amet consectetur adipisicing elit. Neque ex incididunt cum. Repellat quaeat nisi, molestiae nam porro deserunt ipsam eius animi vitae. Cumque non tempore ex sit, dolore repellat?

Fruits

- mango
- dragon fruit
- watermelon
- cheeku
- peach
- apple

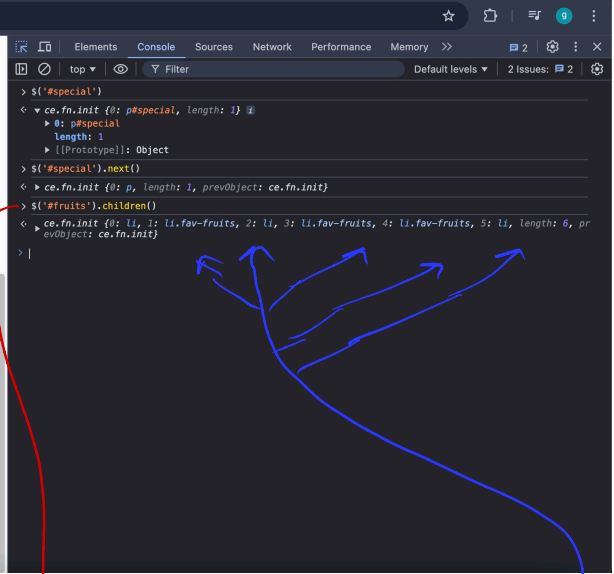


fruits id wale ul ke sabhi
children visible hogye

Learning JQuery

new heading

headingheading

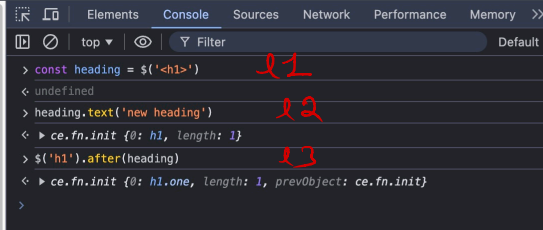

Hamne naya h1 add kar diya dynamically.

1 → mei hamne h1 create kar diya

2 → h1 mei text add kiya

3 → first h1 ke baad add kar diya new h1.

html code:-

```
<h1> Hithere </h1>  
<h1> Hello there </h1>
```

js code:-

```
l1 const heading = $('h1');
```

```
l2 console.log(heading);
```

```
l3 $('heading[0]).css('color', 'aqua');
```

l1 → all h1s are selected.

l2 → you will see array of h1

l3 → yaha heading[0] dom element hai.

Isliye use wrap to \$(dom element)

you cannot use ^{pure} dom element wlo wrapping

when using jquery.

JQuery Events :-

```
$('#button').on('click', (e) => {
```

```
})
```

→ Syntax

Q Create to do list using Jquery :-



code was ~~to~~ saved inside ~~to~~
vs code