


Samrasth Lec - 35

click and input are events.



→ click tab trigger hoga jab mai mouse mei click karunga.

input tab trigger hoga jab mai browser ke web page ke input field mei kuch type karunga.

username :

→ this is input field

```
const inpEl = document.querySelector('input');  
inpEl.addEventListener('input', function(){  
  console.log('input chal gya...');  
})
```

→ app.js

```
<body>  
  <h1>input event</h1>  
  <input type="text">  
  <script src="./app.js"></script>  
</body>
```

→ index.html

← → ↻ 127.0.0.1:5500/input%20events/index.html

input event

qwert



Elements Console
top Filter
input chal gya...

maine keyboard mei button dabaye, then mera console ki statement chalgayi, even for backspace.

Note:- Agar aap koi chiz add karke hataoge, then event trigger hoga, sirf khali backspace par event trigger nahi hota.

Ab-mai jobhi value type karunga, use console karaunga. ^{keyboard se,}

① ^{getting} .value → only for _n inputs (not for text)
Kisi element par,

② jab bhi aap ek event trigger karate ho, us event ka poora ka poora instance aapko mil jata hai.

event aapke function ke ander ek object bhejta hai.


↓
inpEl.addEventListner ('input', (event) => {
 console.log(event);

})

```
const inpEl = document.querySelector('input');  
inpEl.addEventListener('input', function(event){  
    console.log(event);  
})
```

input event

0

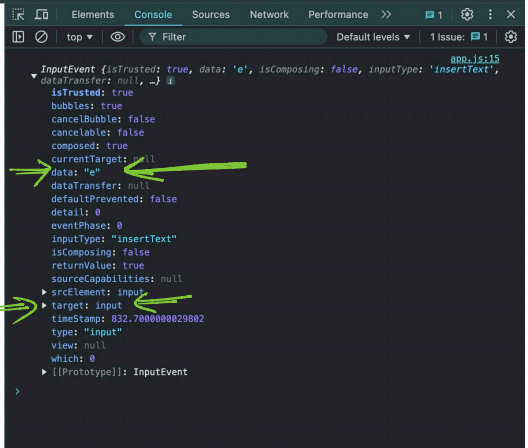

jaise hi maine input mei type kriga, mera event object console mei print ho gya.

"input" type ke element par event trigger hua.
check "target" in the ss shared above.

```
const inpEl = document.querySelector('input');  
inpEl.addEventListener('input', function(event){  
    console.log(event);  
    console.log(event.target);  
    console.log(event.target.value);  
})
```

- target → ye batayega ki konse element par event trigger hua hai.
- value → ye input mei di gyi value batayega.
(not for text)

input event

```

app.js:16
dataTransfer: null, ...
<input type="text">
q
app.js:16
dataTransfer: null, ...
<input type="text">
qw
app.js:16
dataTransfer: null, ...
<input type="text">
qwe
app.js:16
dataTransfer: null, ...
<input type="text">
qwer
app.js:16
dataTransfer: null, ...
<input type="text">
qwerty

```

Task :-

→ input box
 <h1> → h1 tag

task ye hai ki mai jabhi input mei likhu wo h1 mei chala jaye usi time.

```

const inpEl = document.querySelector('input');
const h1 = document.querySelector('h1');

inpEl.addEventListener('input', function(event){
  console.log(event.target.value);
  h1.innerText = event.target.value;
})

```

```

<body>
  <input type="text">
  <h1></h1>
  <script src="./app.js"></script>
</body>

```

<form> → me action batata hai ki form submit hokar kaha jayega.
(ki path par jayega)

<Form> me hum sirf do methods use kar sakte hai ⇒ get and post.

<form> me by default type is submit.

```
<body>
  <form action="#" method="get">

    <label for="name">Name:</label>

    <input type="text" id="name"
name="name"><br><br>

    <label for="password">Password:</label>

    <input type="password" id="password"
name="password"><br><br>

    <button type="reset">Reset</button>

    <button type="submit">Submit</button>

  </form>

  <script src="./app.js"></script>

</body>
```

→ index.
html

```
let formEle = document.querySelector('form');


formEle.addEventListener('submit',
function(event){
  console.log('form submitted bro');
});
```

→ app.js

127.0.0.1:5500/submit-event/index.html?name=qwerty&password=7890#

Name:

Password:

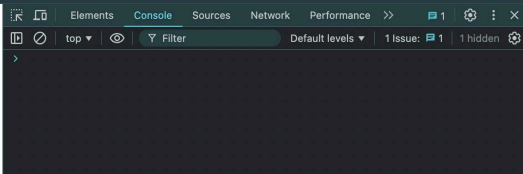

Jab maine value type karke submit kari, tab page refresh ho gya, mera username & password ki value url mei dikhne lagi. "Form submitted Bro" kuch milliseconds ke liye browser ke console mei dikha tha, fir gayab hogya, kyunki form submit karne par reload ho gya tha.

By default nature hai form ka ki vo submit hone par refresh / reload ho jata hai.

I want to prevent reloading. What to do?
event.preventDefault();

└──────────────────┘


→ this is the property of event triggered.

```
let formEle = document.querySelector('form');  
  
formEle.addEventListener('submit', function(event){  
  console.log('form submitted bro');  
  event.preventDefault();  
});
```

127.0.0.1:5500/submit-event/index.html

Name:


Password:



mai chahta hui ki type ki gaiji value wese
browser ke console mei print ho jaaye.

```
let formEle = document.querySelector('form');
```

```
formEle.addEventListener('submit', function(event){  
  console.log('form submitted bro'); → l1  
  event.preventDefault();  
  console.log(formEle.elements); → l2  
  console.log(formEle.elements[0]); → l3  
  console.log(formEle.elements[1]); → l4  
  console.log(formEle.elements[2]); → l5  
  console.log(formEle.elements[3]); → l6  
  console.log(formEle.elements[0].value); } l7, l8  
  console.log(formEle.elements[1].value);  
});
```

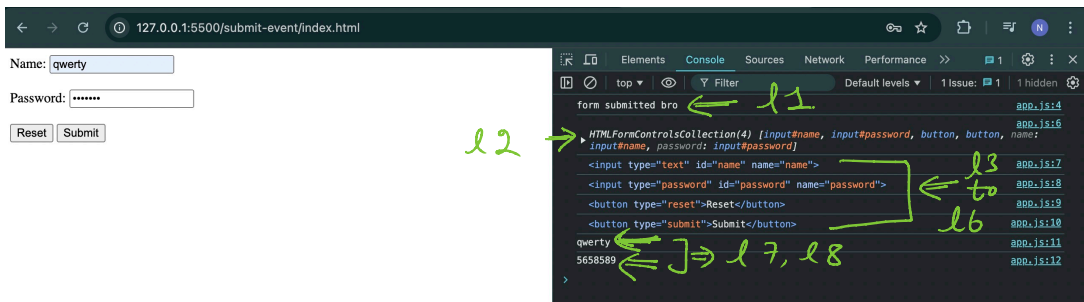

form ka phla element name wala input hai.

" " dusra " " password " " " "

and so on...

l7, l8 par hamne value nikal di.

(1:27:00) Break over


```
<body>
```

```
<h1>Note Taking App</h1>
```

```
<input type="text">
```

```
<button>add</button>
```

```
<ul id='list'>
```

```
</ul>
```

```
<script src="./app.js"></script>
</body>
```

→ Note making
App

→ index.html

```
let listt = document.querySelector('#list');
```

```
let btn = document.querySelector('button');
```

```
let inpEl = document.querySelector('input');
```

```
btn.addEventListener('click', function(event){
```

```
    let noteText = inpEl.value;
```

```
    let li = document.createElement('li');
```

```
    li.innerText = noteText;
```

```
    listt.appendChild(li);
```

```
    inpEl.value = "";
```

```
    li.addEventListener('click', function(e){
        li.remove();
    })
```

```
})
```

→ app.js

Doubt :-

li.addevent is inside btn.addevent when i click on any li, it gets deleted but why? the code execution is not going inside btn.addevent... because we didn't click the button or add

Great question! You're right that when you click on a `<li>`, the `btn.addEventListener` (attached to the button) does **not** execute again. Let's break this down step by step to explain **why the `li` gets deleted** even though the `btn.addEventListener` is not involved during the click on the `<li>`.

Key Concept: Event Listeners Are Persistent

When you create a new `<li>` element inside the `btn.addEventListener`, you immediately attach a **separate click event listener** to that `<li>`.

javascript

Copy code

```
li.addEventListener('click', function(e) {  
  li.remove();  
});
```

This `li.addEventListener` is executed **at the moment the button is clicked** (inside the button's event listener). Once this code runs, the `click` listener for the `<li>` is **attached permanently** to that specific `<li>`.

- The `li`'s `click` listener is independent of the button's `click` listener.
- Clicking the `<li>` later triggers only the `li`'s event listener, not the button's.

Why Does the Code Work This Way?

The `li.addEventListener` is **registered** during the button's click event, but it remains active for the lifetime of the `<li>`. Event listeners in JavaScript are persistent once attached, even if the code that created them has already executed and finished.

This separation of event listeners is what makes your app work as expected.

