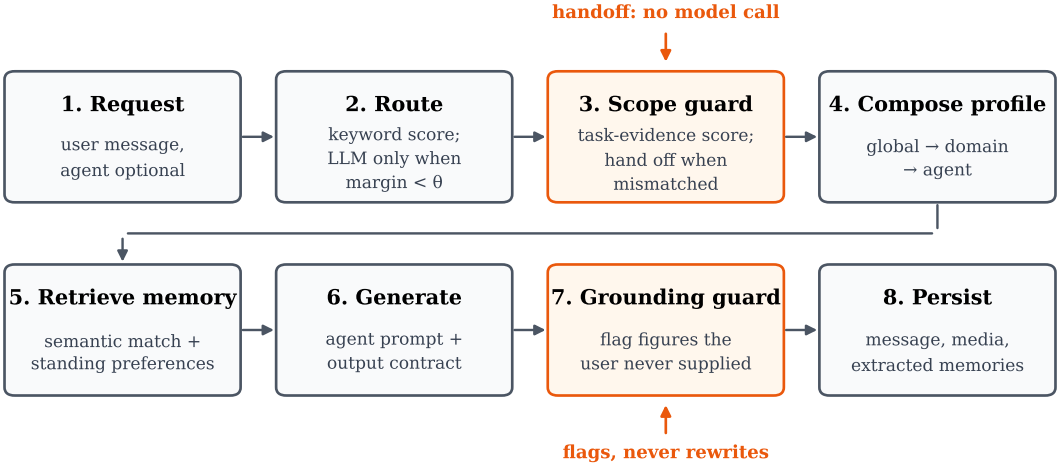
handoff: no model call
1. Request
user message, agent optional
2. Route
keyword score; LLM only when margin < θ
3. Scope guard
task-evidence score; hand off when mismatched
4. Compose profile
global → domain → agent
5. Retrieve memory
semantic match + standing preferences
6. Generate
agent prompt + output contract
7. Grounding guard
flag figures the user never supplied
8. Persist
message, media, extracted memories
flags, never rewrites