# Bihar Traditional Food

**A**

**Project Report**

**Submitted in partial fulfillment of the requirement for the award of**

**Degree of**

**Bachelor of Science in Information Technology**

**Submitted to**

**444 - SWATANTRATA-SENANI SHANKARLAL AGRAWAL PRABANDHAN SAH TAKNIKI MAHAVIDYALAY**


**Submitted by**

Rishav Kumar

Registration No – 202344400179

University Roll No – 2444440050038

B.Sc.IT, 3rd Year

Session – 2023 – 2026

**Under Joint Guidance of**

Prof. Pankaj Chandra Sinha

Prof. Niraj Kumar Singh

[ Asst. Professor ]

Dep. of Computer Science

& Information Technology

**444 - SWATANTRATA-SENANI SHANKARLAL AGRAWAL PRABANDHAN SAH TAKNIKI MAHAVIDYALAY**

**Session 2023-26**

Date:……

# CERTIFICATE

This is to certify that the work embodies in this project entitled, **"BIHAR TRADITIONAL FOOD",** being submitted by **Rishav Kumar** (Registration No: 202344400179) in partial fulfillment of the requirement for the award of **"Bachelor of Science in Information Technology"** to Patliputra University, Patna during the academic year **2023-26** is a record of bonafide piece of work, carried out by him/her under our/my supervision and guidance in the

**"Department of Computer Science & information Technology", 444 - SWATANTRATA-SENANI SHANKARLAL AGRAWAL PRABANDHAN SAH TAKNIKI MAHAVIDYALAY"**

| | | |
|---|---|---|
| **Dr. Prof. Neeraj Agrawal** | **Dr. Prof. Amit Kumar Shukla** | **Prof. Pankaj Chandra Sinha** |
| **Director** | **Head of Department-IT** | **Assistant Professor-IT** |

**444 - SWATANTRATA-SENANI SHANKARLAL AGRAWAL PRABANDHAN SAH TAKNIKI MAHAVIDYALAY**

**Session 2023-26**

Date:----------

## APPROVAL CERTIFICATE

The project report entitled **"BIHAR TRADITIONAL FOOD",** being submitted by **Rishav Kumar** (Registration Number -- 202344400179) has been examined by us and is hereby approved for the award of degree "Bachelor of Science in Information Technology", for which it has been submitted. It is understood that by this approval the undersigned do not necessarily endorse or approve any statement made, the opinion expressed or conclusion drawn therein, but approve the project only for the purpose for which it has been submitted.

**(Internal Examiner)** **(External Examiner)**

**Date:** **Date:**

**444 - SWATANTRATA-SENANI SHANKARLAL AGRAWAL PRABANDHAN SAH TAKNIKI MAHAVIDYALAY**

**Session 2023-26**

Date:----------

# DECLARATION

I, **RISHAV KUMAR** hereby declare that the work, which is being presented in the project report entitled "BIHAR TRADITIONAL FOOD", partial fulfillment of the requirements for the award of degree of "**Bachelor of Science in Information Technology**" submitted in the department of **Computer Science & Information Technology (444 - SWATANTRATA-SENANI SHANKARLAL AGRAWAL PRABANDHAN SAH TAKNIKI MAHAVIDYALAY)** is an authentic record of
my own work carried under the guidance of **Dr. prof. Amit Shukla Sir**. I have not submitted the matter embodied in this report for the award of any other degree.

**Submitted by**

Rishav Kumar

Registration No –202344400179

University Roll No-2444440050038

B.Sc.IT, 3rd Year

Session – 2023 – 2026

# ACKNOWLEDGEMENT

"A journey is easier when you travel together. Interdependence is certainly more valuable than independence."

I would like to thanks, **Prof. Niraj Kumar Singh Sir** and **Prof. Ravi Soni Sir**, for providing regular guidance and insight into my project work. I also thank them for all advice he has given me in the past year, and for always having time for me, whenever I needed. I give special thanks to **Dr. Prof. Amit Kumar Shukla Sir, Prof. Anjesh Sir, Prof. Pankaj Chandra Sinha** and **Prof. Raju Upadhyay Sir** for always being willing to help find solutions to any problems I had with my work. "The completion of any project depends upon the cooperation, coordination, and combined efforts of several resources of knowledge, inspiration, and energy".

I also extend my deepest gratitude to Director**, CIMAGE GROUP OF INSTITUITIONS, PATNA, Dr. Prof. Neeraj Agrawal Sir**, **Dean CIMAGE GROUP OF INSTITUITIONS, PATNA, Dr. Prof. Neeraj Poddar Sir** and **Centre Head Mrs. Megha Agrawal Ma'am** for providing all the necessary facilities and true encouraging environment to bring out the best in my endeavors.

I express my gratitude and thanks to all the staff members of Computer Science departments for their sincere cooperation in furnishing relevant information to complete this Project well in time successfully.

I extend a special word to my friends, who have been a constant source of inspiration throughout my project work. Lastly but not least I must express my cordial thank to my parent and family members who gave me the moral support without that it is impossible to complete my project work. With this note, I thank everyone for the support.



**Submitted by**

Rishav Kumar

Registration No – 202344400179

University Roll No- 2444440050038

B.Sc.IT, 3rd Year

Session – 2023 – 2026

INDEX TABLE: PAGE NO


| | |
|---|---|
| **Introduction** | **07** |
| **Objective** | **08** |
| **Project Overview** | **09** |
| **Feasibility Study** | **10 – 11** |
| **System Analysis** | **12 – 13** |
| **System Specifications & Design** | **14 - 15** |
| **Project Planning & Scheduling** | **16 - 17** |
| **Gantt Chart** | **18** |
| **Pert Chart** | **19 - 20** |
| **DFD** | **21 – 23** |
| **Module Description** | **24 - 25** |
| **Data Dictionary** | **26 – 31** |
| **ER Diagram** | **32 – 34** |
| **Scope and Future Enhancement** | **35 – 37** |
| **Implementation Methodology** | **38 - 43** |
| **Testing** | **44 - 51** |
| **Limitations and Further Enhancements** | **52 - 59** |
| **Security Mechanism** | **60 – 66** |
| **Database Model** | **67 – 70** |
| **Files of the Project in Image** | **71** |
| **Admin Module & User Register Code & Snapshots** | **72 – 130** |
| **User Module Code & Snapshots** | **131 - 178** |
| **Conclusion** | **179** |
| **Bibliography** | **180 - 181** |

# INTRODUCTION:

The digital age has revolutionized how the world accesses information–yet the rich and diverse culinary heritage of Bihar remains largely undocumented in the digital space. While countless online platforms celebrate global cuisines, the authentic flavors of Bihar–Litti Chokha, Sattu Paratha, Dal Pitha, Khaja, Tilkut, Anarsa, and more–continue to rely on oral traditions and fading family recipes. This neglect is not merely a loss of taste; it is a loss of cultural identity and historical legacy.

**Bihar Traditional Food** is a dedicated digital platform designed to bridge this gap. The primary objective of this project is to preserve, promote, and popularize the traditional food culture of Bihar by bringing it into the digital mainstream. Through a well-structured, user-friendly web-based system, this platform allows users to explore authentic Bihari dishes, understand their ingredients and preparation methods, learn about their cultural and regional significance, and actively contribute by sharing their own traditional recipes.

The system is built with two core user roles in mind. **Administrators** can manage food categories, add or edit dish details, upload high-quality images, and verify the authenticity of user-contributed content. **End users**–including food enthusiasts, researchers, students, and home cooks–can browse dishes by region, festival, or ingredients, search for specific recipes, rate and review dishes, save favorites, and submit new traditional recipes for review.

Behind the interface, the system incorporates essential features such as secure user authentication, role-based access control, a smart search and filter mechanism, user rating and comment sections, and a content verification workflow. Every recipe submitted by a user undergoes administrative review before publication, ensuring that cultural authenticity is never compromised. The system also tracks popular dishes, monitors user engagement, and maintains a structured database for efficient content retrieval.

In summary, **Bihar Traditional Food** is more than just a recipe website. It is a mission to safeguard and celebrate the culinary identity of Bihar for present and future generations. By reducing cultural erosion, eliminating scattered and unreliable information, and improving global accessibility, this project gives Bihari cuisine the dedicated digital presence it has long deserved–reliable, secure, and truly impactful.

# OBJECTIVE:

The Bihar Traditional Food System is mainly useful for food enthusiasts, researchers, students, and local communities who want to explore, preserve, and promote the authentic culinary heritage of Bihar without the limitations of geography and accessibility. This system allows users to discover traditional Bihari dishes from anywhere using the Internet, without the need to visit libraries, villages, or food archives physically.

Even at any time of the day, whether morning or night, users can log in to the system and browse through detailed information about regional dishes, ingredients, preparation methods, and cultural significance. The platform provides various types of content such as recipe descriptions, step-by-step cooking instructions, historical background, and festival-based food listings, making the exploration process both informative and engaging.

The system is designed with the principle that **"User convenience and cultural authenticity come first."** It ensures that users can easily navigate, search for dishes by name, region, or ingredients, save their favorite recipes, and contribute their own traditional food knowledge without difficulty. At the same time, administrators can efficiently manage food categories, verify recipe authenticity, upload images, and monitor user contributions.

The system also includes secure login, role-based access control, rating and review features, and a content verification workflow to maintain the integrity and authenticity of the food information. It reduces manual effort in collecting scattered food data, saves time in research, and eliminates the need for traditional paper-based recipe books.

Overall, the objective of this system is to provide a reliable, user-friendly, and secure digital platform for documenting and celebrating Bihar's traditional food, ensuring a smooth and enriching experience for both contributors and food lovers.

# PROJECT OVERVIEW:

Once a user enters the system with their own username and password, the system authenticates the user and provides access based on their role (admin or general user). After successful login, the user is directed to their respective dashboard where all functionalities are available.

In the case of a **general user** (food enthusiast, researcher, or student), once they log in, they can view all available traditional dishes, search by name, region, or ingredients, and give feedback or ratings. When a user clicks on a dish, the system records the view and allows them to read detailed information including ingredients, cooking steps, and cultural significance. If the user wishes to save a dish for later, they can add it to their favorites list.

If a user wants to contribute a new traditional recipe, they can submit it through the system. However, once submitted, the recipe goes into a verification queue and cannot be edited until reviewed by an admin. If a user logs out or the session is interrupted before completing a recipe submission, the user must restart the submission process from the beginning.

For **admins**, after logging in, they can create new food categories, add or edit dish details, upload images, manage user-contributed recipes, approve or reject submissions, and view detailed statistics on popular dishes, user engagement, and regional food trends. They can also generate and print the entire food catalog or category-wise reports into PDF. Admins can analyze user preferences and contribution patterns.

The system ensures smooth interaction, provides an OTP-based password changing option for both admins and general users, ensures secure data handling, and enables efficient management of the entire traditional food documentation process, thereby offering a complete digital solution for preserving and promoting Bihar's culinary heritage.

# FEASIBILITY STUDY:

Feasibility study is an important step in software development that determines whether a proposed system is practical and beneficial to implement. It evaluates different aspects of a project to ensure that it can be successfully developed within the available resources and constraints.

In the case of the **Bihar Traditional Food System**, the feasibility study helps in analyzing whether the system can be developed efficiently and whether it will meet the requirements of food enthusiasts, researchers, students, administrators, and local communities.

## ◆ 1. Technical Feasibility:

Technical feasibility checks whether the required technology and resources are available to develop the system. The proposed system is developed using **HTML, CSS, and JavaScript** for the frontend, **PHP** for backend logic, and **MySQL** for database management. These technologies are widely used, well-documented, and easily available. The system can run on standard computers with XAMPP/WAMP/LAMP servers and does not require any specialized hardware. Image storage and retrieval for food dishes are easily manageable with PHP and MySQL.

## ◆ 2. Operational Feasibility:

Operational feasibility determines whether the system will be accepted and used by the users. The system provides a user-friendly interface for food lovers, researchers, and administrators, allowing them to easily explore, contribute, and manage traditional Bihari food content. Features like login, search, dish browsing, recipe submission, and rating systems are simple and easy to use. Therefore, the system is operationally feasible.

## ◆ 3. Economic Feasibility:

Economic feasibility evaluates the cost required to develop and maintain the system. Since the project uses open-source technologies (HTML, CSS, JavaScript, PHP, MySQL) and does not require expensive tools or paid software licenses, the development cost is minimal. XAMPP/WAMP servers are free to use. Maintenance cost is also low.

## ◆ 4. Social Feasibility

Social feasibility checks whether the system is acceptable to society. The system promotes the preservation and digital documentation of Bihar's rich culinary heritage, which is socially valuable. It helps prevent cultural erosion, educates younger generations about traditional foods, and provides a platform for local communities to share their knowledge. It is beneficial for food researchers, students, and homemakers alike.

## ◆ 5. Management Feasibility

Management feasibility ensures that the project can be managed effectively. The project follows proper planning, scheduling, and development phases, making it easy to manage and monitor. The system aligns with cultural preservation needs and user expectations, and content moderation workflows are clearly defined.

## ◆ 6. Legal Feasibility

Legal feasibility checks whether the system complies with legal and ethical standards. The system ensures secure handling of user data, respects intellectual property rights for recipe contributions, and follows basic data privacy principles. Only verified and authentic recipes are published after admin review. No illegal content or activities are involved.

## ◆ 7. Time Feasibility

Time feasibility determines whether the project can be completed within the given time frame. The project is planned and scheduled properly using tools like Gantt Chart and PERT Chart, ensuring timely completion within three months. All modules including user authentication, dish management, search functionality, and admin panel can be developed within the allotted schedule using PHP and MySQL.

# SYSTEM ANALYSIS:

System Analysis is the process of studying and analyzing an existing system with the aim of improving it or developing a new system. It involves understanding user requirements, identifying problems in the current system, and proposing a suitable solution. It acts as a bridge between system requirements and system design.

## 1. Existing System – A Heritage at Risk

The current method of preserving and accessing Bihar's traditional food knowledge is fragmented, unreliable, and largely manual. Recipes like **Litti Chokha, Sattu Paratha**, and **Khaja** are passed down orally through generations or scribbled in aging family notebooks. A few recipes exist in scattered cookbooks or random blog posts–but there is **no centralized, authentic, digital platform** dedicated exclusively to Bihar's culinary heritage.

Managing regional dishes, seasonal foods, festival specialties, and authentic ingredients is chaotic. Physical storage–books, papers, handwritten notes–occupies space, deteriorates over time, and is vulnerable to loss, fire, or simply being forgotten. Worse, anyone searching for a traditional Bihari recipe today must dig through multiple, often contradictory sources. The result? Confusion, misinformation, and a slow but steady erosion of cultural identity.

## 2. Disadvantages of Existing System – Why Change is Urgent

The current approach is failing Bihar's food heritage. Here is the hard truth:

- **No centralization** – Food data is scattered across notebooks, books, family memories, and unverified websites. There is no single source of truth.
- **Time-consuming and exhausting** – Finding one authentic recipe can take hours of cross-referencing multiple sources.
- **Physical storage is a burden** – Books and papers degrade, get lost, or become unusable over time.

- **Misinformation spreads easily** – Without verification, wrong ingredients, incorrect steps, and false claims go unchecked.

- **No cataloging or reporting** – Compiling a complete list of Bihari traditional dishes is nearly impossible manually.
- **Cultural knowledge is dying** – As older generations pass away, unique recipes and cooking techniques disappear forever.

- **No validation mechanism** – Users cannot rate, review, or verify recipes, leaving authenticity in question.
- **Poor accessibility** – Researchers, students, and food lovers outside Bihar have no reliable way to explore the state's true culinary richness.

## 3. Objective of the Proposed System – A Bold Digital Mission

The **Bihar Traditional Food System** is not just a website—it is a **digital mission** to document, preserve, and celebrate authentic Bihari cuisine with efficiency, security, and cultural integrity.

This system will transform chaos into order. Administrators can easily create food categories, add verified dish details, upload high-quality images, and moderate user contributions. General users—whether food lovers, researchers, students, or home cooks—can explore authentic dishes, view step-by-step recipes, rate and review content, and even contribute their own family recipes for verification.

The result? Accurate, authentic, and secure food data. Easy access to Bihar's culinary heritage from anywhere in the world. No more manual hunting through unreliable sources. No more cultural loss. Just a powerful, user-friendly platform that saves time, improves accessibility, and ensures that the taste of Bihar is never forgotten.

**This system gives Bihari food the digital presence it has always deserved.**

# SYSTEM SPECIFICATIONS:

## Hardware Requirements

- Processor: Dual Core or higher
- RAM: 4 GB or higher
- Hard Disk: 20 GB or more
- Keyboard: Standard Keyboard
- Mouse: Standard Mouse
- Internet Connection

# Software Requirements

- **Backend Technology:** PHP
- **Frontend Technology:** HTML, CSS, JavaScript
- **Email Service:** PHPmailer
- **PDF Generation:** TCPDF
- **Screen Capture / Report Export:** html2canvas
- **Server Environment:** XAMPP / WAMP / LAMP
- **Development Tools:** VS Code,
- **Web Browser:** Google Chrome, Mozilla Firefox, Microsoft Edge

# DESIGN:

## INTRODUCTION

Design is the first and most critical step in the development phase of any system. It defines the structure, components, and workflow in sufficient detail so that implementation becomes seamless and successful. In the context of the **Bihar Traditional Food System**, design plays a decisive role in transforming user requirements into a functional, efficient, and culturally meaningful software solution.

Once the system requirements are analyzed and clearly defined, the design phase begins. It mainly includes three important activities: **system design**, **coding**, and **testing**, which together help in building and verifying the system. The design phase ensures that all functionalities–such as user authentication, dish browsing, recipe submission, category management, rating and reviews, and admin content verification–are properly structured and integrated.

The design activities are of great importance because the decisions made during this phase directly affect the **performance**, **reliability**, and **maintainability** of the system. A well-designed system ensures smooth interaction between different modules, including the user interface (frontend), backend logic (PHP), and database management (MySQL).

In the **Bihar Traditional Food System**, the design helps in organizing features like:

- **Secure login and role-based access** (Admin vs. General User)
- **Dynamic dish browsing** with search and filter capabilities.
- **Recipe contribution workflow** with admin approval.
- **Rating and review system** for authenticity validation.
- **Image upload and management** for dish presentation.
- **PDF report generation** for food catlogs.
- **Email notifications** via PHPMailer for user verification and recipe status updates also rest their passwords.

The design provides a clear blueprint for developers to implement the system efficiently using **HTML, CSS, and JavaScript** for the frontend, **PHP** for backend logic, and **MySQL** for secure data storage.

Thus, system design acts as a **bridge between requirements and implementation**, ensuring that the final system meets user expectations, preserves Bihar's culinary heritage, and operates effectively for years to come.

# PROJECT PLANNING & SCHEDULING:

Project planning and scheduling is a critical phase in software development that involves organizing tasks, allocating resources, and defining clear timelines for completing the project. It ensures efficient project management and guarantees that all activities are completed within the given time frame without compromising quality.

For the **Bihar Traditional Food System**, thorough planning was carried out before the development phase to clearly define the project scope, objectives, and required resources. The system was designed to provide essential functionalities such as:

- User authentication and role-based access (Admin and General User)
- Dish browsing with search, filter, and category-wise organization
- Recipe contribution and submission workflow
- Admin verification and content approval system
- Rating, review, and favorites management
- Image upload and management for dishes
- PDF report generation for food catalogs
- Email notifications using PHPMailer

The project was divided into distinct phases to ensure systematic and disciplined development.

These phases include:

| Phase | Activity |
|---|---|
| **Phase 1** | Requirement Gathering & Analysis |
| **Phase 2** | System Design (Architecture, Database, UI/UX) |
| **Phase 3** | Frontend Development (HTML, CSS, JavaScript) |
| **Phase 4** | Backend Development (PHP, MySQL) |
| **Phase 5** | Integration & Testing |
| **Phase 6** | Deployment & Documentation |

Each phase was assigned a specific time duration to maintain a smooth workflow, avoid delays, and ensure timely delivery. The scheduling of the project was done using industry-standard tools such as **Gantt Chart** and **PERT Chart**. These tools help in:

- Visualizing the sequence of tasks and milestones

- Identifying dependencies between different activities
- Tracking project progress in real time
- Efficient time management and resource allocation
- Early detection of potential bottlenecks or delays

## Project Timeline Overview

| Task | Duration |
|---|---|
| **Requirement Gathering** | 1 Week |
| **System Design** | 1 Week |
| **Frontend Development** | 2 Weeks |
| **Backend Development (PHP + MySQL)** | 3 Weeks |
| **Integration & Testing** | 2 Weeks |
| **Deployment & Documentation** | 1 Week |
| **Total** | **10 Weeks (Approx. 2.5 Months)** |

# GANTT CHART:

A Gantt chart is a graphical representation of the project schedule where each task is shown as a bar along a timeline. It helps in understanding the duration of each activity and tracking project progress. It also clearly displays task dependencies, milestones, and overlapping activities, making it an essential tool for effective project management.

For the **Bihar Traditional Food System**, a Gantt chart was created to plan, schedule, and monitor the development process from start to finish. The chart divides the entire project into manageable tasks, assigns realistic timeframes, and helps ensure that no phase is delayed.

## Project Phases and Schedule

| Task | Start Date | End Date | Duration |
|---|---|---|---|
| Requirement Analysis | 15/12/2025 | 28/12/2025 | 2 Weeks |
| UI/UX Design | 29/12/2025 | 11/01/2026 | 2 Weeks |
| Frontend Design | 12/01/2026 | 25/01/2026 | 2 Weeks |
| Backend Design | 26/01/2026 | 08/02/2026 | 2 Weeks |
| Testing & Debugging | 09/02/2026 | 22/02/2026 | 2 Weeks |
| Documentation & PPT | 23/02/2026 | 15/03/2026 | 3 Weeks |

# PERT CHART:

PERT (Program Evaluation and Review Technique) charts consist of a powerful network of boxes and arrows. The boxes represent activities, and the arrows represent task dependencies. PERT is organized based on events and activities or tasks, making it one of the most effective tools for managing complex development projects.

PERT charts are highly useful for complex projects as they help in defining the exact sequence of tasks and identifying critical dependencies among them. Through a PERT chart, every possible task path is determined, and it becomes immediately clear how different activities are interconnected. For the **Bihar Traditional Food System**, tasks such as requirement gathering, system design, frontend development (HTML, CSS, JS), backend development (PHP), database implementation (MySQL), integration, testing, deployment, and documentation are all mapped precisely using this technique.

**One of the key advantages of PERT is that it enables the calculation of the critical path.** Each path consists of a combination of tasks that must be completed in sequence. The time and cost associated with every task along a path are carefully analyzed, and the path that requires the **maximum time** is identified as the critical path. In this project, the critical path includes backend development (PHP) and system integration–because these tasks take the longest and affect every other module.

**Why does this matter?** Identifying the critical path allows the project manager to monitor these high-risk tasks more closely and allocate resources immediately if any delay occurs. This is not just helpful–it is essential for ensuring that the project is completed on time. A one-week delay in backend development pushes the entire project forward by one week. PERT makes this risk visible and manageable.

PERT also helps in controlling both **time and cost** during project development. It provides real flexibility in managing uncertainties–whether it's a delay in recipe verification logic, additional user feedback, or unexpected bugs. It helps maintain a perfect balance between completing the project within the scheduled time and staying within budget.

Since there can be multiple possible paths depending on task estimations, analyzing the critical path in PERT charts can become complex. However, it provides a **detailed, disciplined, and highly efficient** way to manage project execution–turning complexity into clarity.

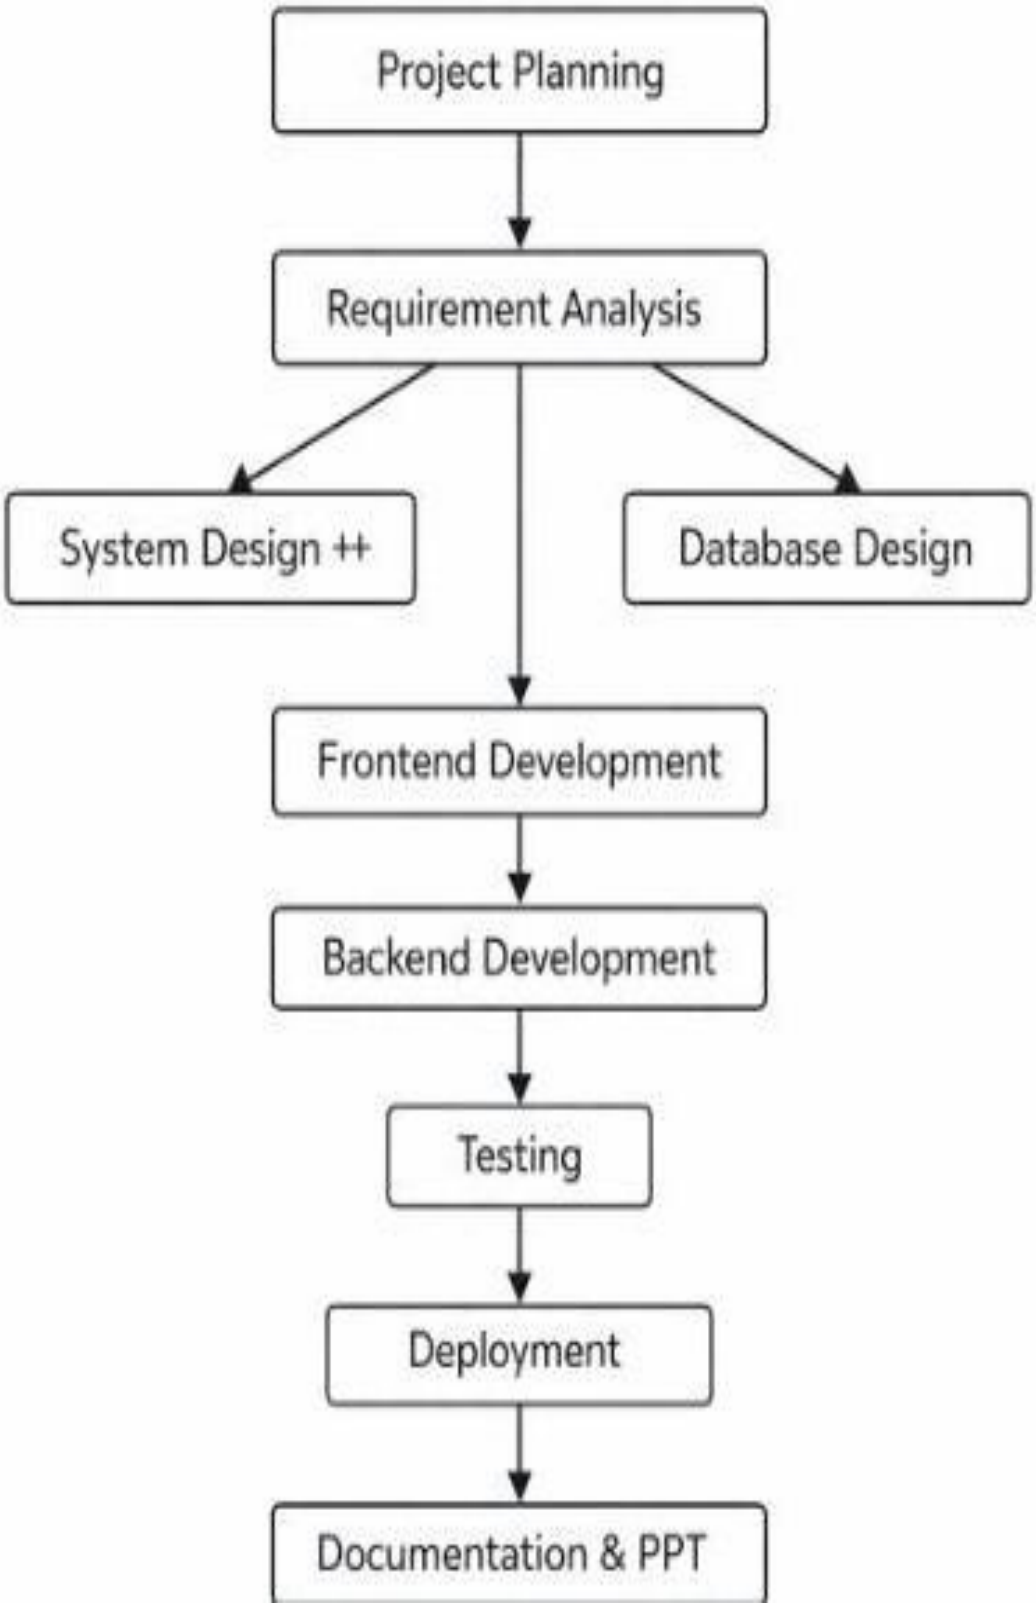
Project Planning
Requirement Analysis
System Design ++
Database Design
Frontend Development
Backend Development
Testing
Deployment
Documentation & PPT

# DFD (Data Flow Diagram):

A Data Flow Diagram (DFD) is a graphical representation used in system analysis and design to illustrate how data flows through a system. It shows the movement of data between different components such as input sources, processes, data stores, and output destinations. DFD helps in understanding how information is processed within a system and how different parts of the system interact with each other.

It is one of the most important tools used by system analysts to visualize the logical flow of data without focusing on technical implementation details. The main purpose of a DFD is to provide a clear and structured view of the system, making it easier to identify processes, data transformations, and data storage points. For the **Bihar Traditional Food System**, this means complete transparency in how food data is captured, stored, and shared.

A DFD consists of four main elements:

- **External Entities:** These are users or external systems that interact with the system, such as general users, administrators, and researchers.

- **Processes:** These represent operations performed on data, such as login verification, dish browsing, recipe submission, rating and review management, and admin content approval.

- **Data Flows:** These indicate the movement of data between different components of the system, such as user credentials, search queries, dish details, ratings, and recipe submissions.

- **Data Stores:** These represent places where data is stored, such as user database, dish database, category database, ratings and reviews database, and pending recipes database.

DFDs are designed in multiple levels such as Level 0, Level 1, and Level 2 to provide different levels of detail. The higher level (Level 0) shows an overall view of the system, while lower levels (Level 1 and Level 2) provide a more detailed breakdown of processes and data flow. This hierarchical approach helps in better understanding, analysis, and communication of system functionality.

In the context of the **Bihar Traditional Food System**, the DFD represents how

general users and administrators interact with the system, how traditional dishes are explored and searched, how recipes are submitted by users and verified by admins, how ratings and reviews are posted, and how data is stored and retrieved from the MySQL database. It ensures clarity, improves system design, and helps in identifying any errors or inefficiencies in the system.

## DFD – Level 0:

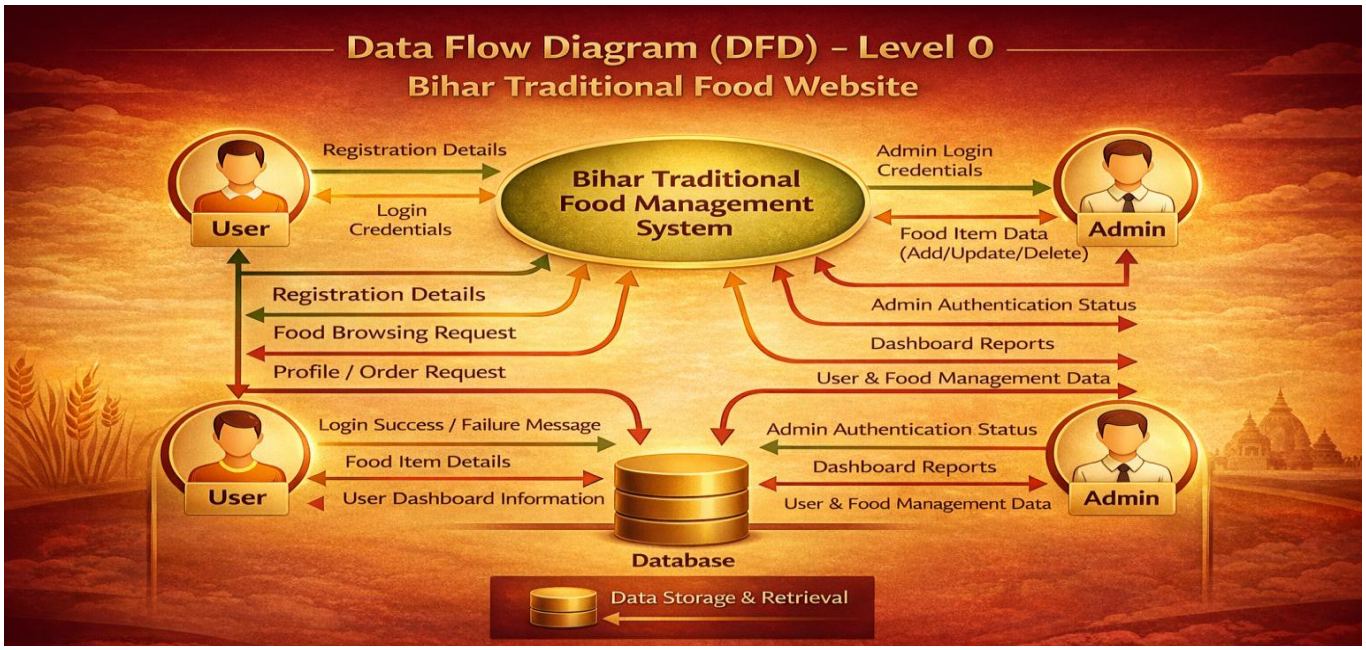


## DFD – Level 1:

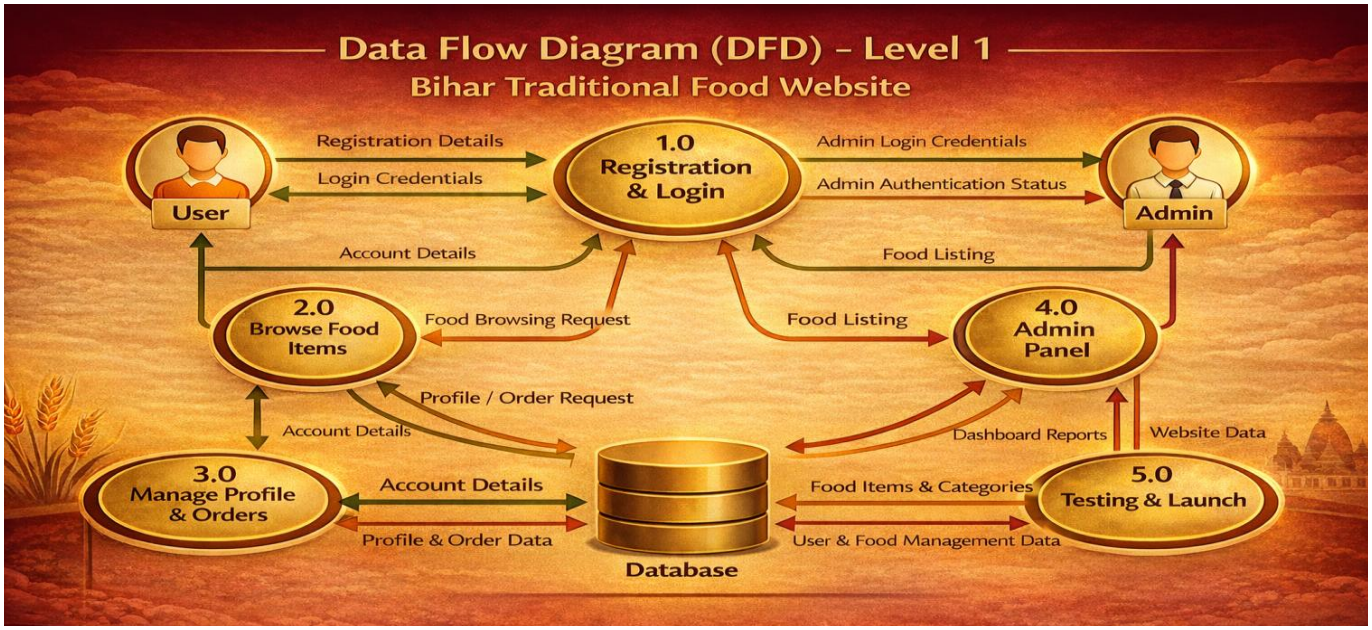

# DFD – Level 2:

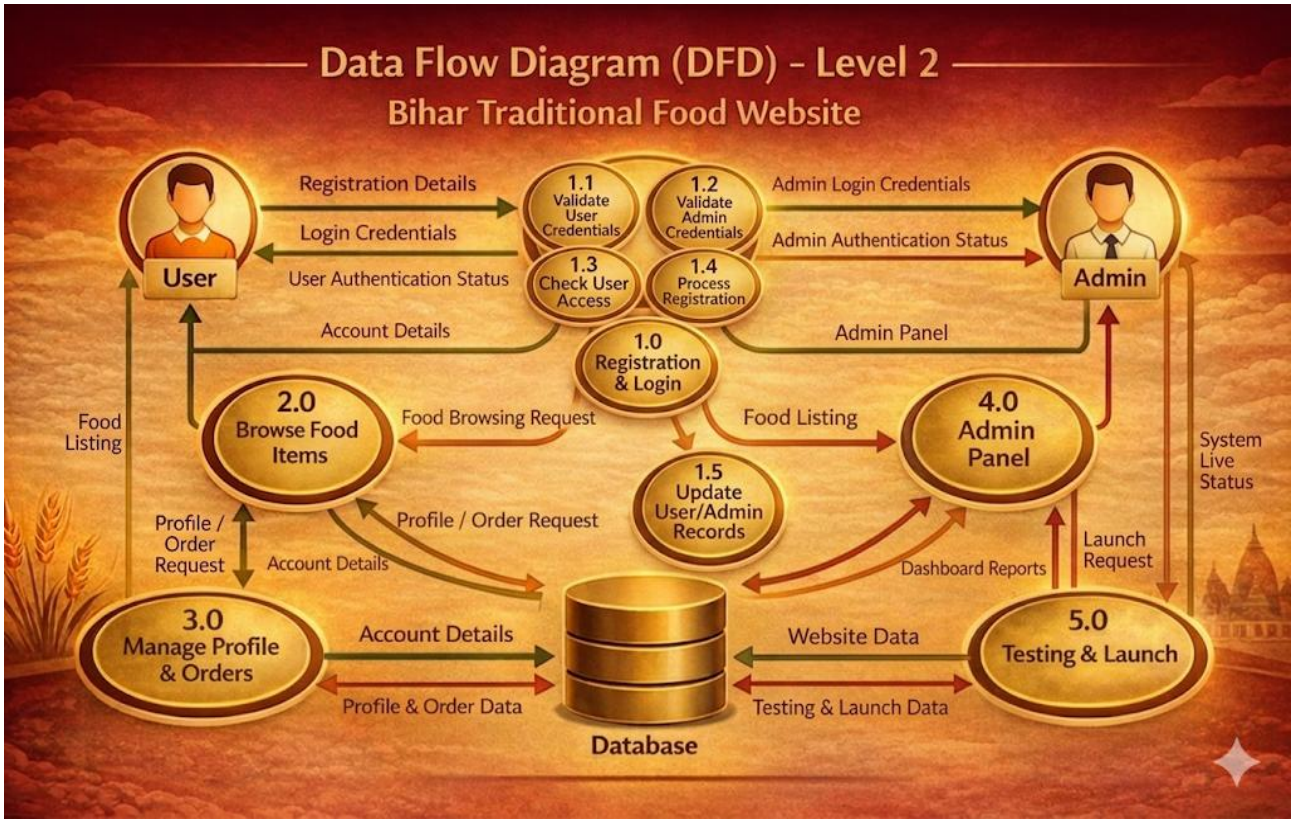
Data Flow Diagram (DFD) - Level 2
Bihar Traditional Food Website
User
Admin
Registration Details
Login Credentials
User Authentication Status
Admin Login Credentials
Admin Authentication Status
1.1 Validate User Credentials
1.2 Validate Admin Credentials
1.3 Check User Access
1.4 Process Registration
1.0 Registration & Login
Account Details
Admin Panel
2.0 Browse Food Items
Food Browsing Request
Food Listing
4.0 Admin Panel
1.5 Update User/Admin Records
Profile / Order Request
Account Details
Profile / Order Request
Dashboard Reports
Launch Request
System Live Status
3.0 Manage Profile & Orders
Account Details
Profile & Order Data
Website Data
Testing & Launch Data
5.0 Testing & Launch
Database

# MODULE DESCRIPTION:

## Introduction

The **Bihar Traditional Food System** is divided into two main modules: **User Module** and **Admin Module**. Each module performs specific tasks and together they ensure smooth functioning of the food documentation and preservation process. This modular structure makes the system easy to understand, develop, and manage.

## 1. Users Module

**Description:**

The User Module is responsible for all activities performed by general users in the system. It allows users to interact with the system for exploring traditional Bihari dishes, viewing recipes, and contributing their own food knowledge.

Users can log in using their credentials and access available dishes. They can browse dishes by category, region, or festival, search for specific recipes, and view detailed information including ingredients, cooking steps, and cultural significance. After viewing, users can rate and review dishes, save their favorite recipes, and submit their own traditional recipes for admin verification.

The system ensures that once a recipe is submitted by a user, it goes into a pending queue and cannot be edited until reviewed by an admin.

**Functions:**

- User login / Registration
- Forget password (OTP via PHPMailer)
- Browse dishes by category, region, or festival
- Search for specific dishes
- View dish details (ingredients, steps, significance)
- Rate and review dishes
- Save favorite dishes to personal list
- Submit new traditional recipes
- View own submitted recipes and status
- Give feedback

## 2. Admin Module

**Description:**

The Admin Module is responsible for managing all food content, categories, and user contributions. Administrators have full control over dish creation, verification, and content moderation.

Admins can create new food categories, add new dishes with detailed information and images, update existing dish details, and delete inappropriate or duplicate content. They can also manage user-submitted recipes by verifying, approving, or rejecting them. Additionally, admins can view user engagement statistics, monitor ratings and reviews, and generate printable PDF reports of the food catalog.

This module ensures proper organization, authenticity, and control of the entire traditional food documentation process.

**Functions:**

- Admin login
- Forget password (OTP via PHPMailer)
- Create new food categories (e.g., Snacks, Sweets, Main Course)
- Add new dishes with details (name, region, ingredients, steps, image)
- Update existing dish information
- Delete dishes or categories
- Manage user-submitted recipes (verify / approve / reject)
- Manage user ratings and reviews (remove inappropriate content)
- View user activity and engagement statistics
- Generate and print PDF reports (category-wise or full catalog)
- Export food catalog or reports.

# DATA DICTIONERY:

A Data Dictionary is a collection of information about data used in the system. It defines the structure, type, and description of each data element. It helps in understanding how data is stored and used in the system.

## Admin table:

| Field Name | Data Type | Description |
|---|---|---|
| id (PK) | int | Unique identifier for admin |
| username | varchar(50) | Admin login username |
| password | varchar(255) | Encrypted password |
| email | varchar(100) | Admin email address |
| full_name | varchar(100) | Full name of admin |
| last_login | timestamp | Last login time |
| created_at | timestamp | Record creation time |

## User table:

| Field Name | Data Type | Description |
|---|---|---|
| id (PK) | int | Unique identifier for admin |
| username | varchar(50) | Admin login username |
| password | varchar(255) | Encrypted password |
| email | varchar(100) | Admin email address |
| full_name | varchar(100) | Full name of admin |
| last_login | timestamp | Last login time |
| created_at | timestamp | Record creation time |

## Cart table:

| Field Name | Data Type | Description |
|---|---|---|
| id (PK) | int | Unique cart ID |
| user_id (FK) | int | Reference to user |
| food_id (FK) | int | Reference to food item |

| | | |
|---|---|---|
| **quantity** | **int** | **Quantity of food** |
| **special_instructions** | **text** | **Custom instructions** |
| **added_at** | **timestamp** | **Time item added** |

## Categories table:

| Field | Type | Description |
|---|---|---|
| id (PK) | int | Category ID |
| name | varchar | Category name |
| description | text | Category description |
| image | varchar | Image path |
| is_active | tinyint | Active status |
| display_order | int | Order |
| created_at | timestamp | Created time |

## Coupons table:

| Field | Type | Description |
|---|---|---|
| id (PK) | int | Coupon ID |
| code | varchar | Coupon code |
| description | text | Details |
| discount_type | enum | Type |
| discount_value | decimal | Value |
| min_order_amount | decimal | Minimum order |
| max_discount_amount | decimal | Max discount |
| valid_from | date | Start date |
| valid_until | date | Expiry |

| | | |
|---|---|---|
| usage_limit | int | Usage limit |
| used_count | int | Times used |
| is_active | tinyint | Status |
| created_at | timestamp | Created time |

## Coupons Usage table:

| Field | Type | Description |
|---|---|---|
| id (PK) | int | ID |
| coupon_id (FK) | int | Coupon |
| user_id (FK) | int | User |
| order_id (FK) | int | Order |
| discount_amount | decimal | Discount |
| used_at | timestamp | Used time |

## Delivery Address table:

| Field | Type | Description |
|---|---|---|
| id (PK) | int | Address ID |
| user_id (FK) | int | User |
| label | varchar | Home/Office |
| full_address | text | Address |
| landmark | varchar | Landmark |
| city | varchar | City |
| state | varchar | State |
| pincode | varchar | PIN |
| latitude | decimal | Latitude |
| longitude | decimal | Longitude |
| is_default | tinyint | Default |
| created_at | timestamp | Created |
| updated_at | timestamp | Updated |

## Feedback table:

| Field | Type | Description |
|---|---|---|
| id (PK) | int | Feedback ID |
| user_id (FK) | int | User |
| order_id (FK) | int | Order |
| message | text | Feedback |
| rating | int | Rating |
| food_quality | int | Quality |
| delivery_service | int | Delivery |
| suggestions | text | Suggestions |
| status | enum | Status |
| admin_response | text | Reply |
| responded_at | timestamp | Response time |
| responded_by | int | Admin |
| created_at | timestamp | Created |
| updated_at | timestamp | Updated |

## Food table:

| Field | Type | Description |
|---|---|---|
| id (PK) | int | Food ID |
| name | varchar | Food name |
| description | text | Details |
| price | decimal | Price |
| original_price | decimal | Old price |
| category_id (FK) | int | Category |
| image_path | varchar | Image |

| | | |
|---|---|---|
| is_available | tinyint | Availability |
| is_featured | tinyint | Featured |
| is_popular | tinyint | Popular |
| preparation_time | int | Time |
| calories | int | Calories |
| ingredients | text | Ingredients |
| display_order | int | Order |
| created_at | timestamp | Created |
| updated_at | timestamp | Updated |

## Notifications table:

| Field | Type | Description |
|---|---|---|
| id (PK) | int | Notification ID |
| user_id (FK) | int | User |
| title | varchar | Title |
| message | text | Message |
| type | enum | Type |
| is_read | tinyint | Read status |
| related_id | int | Related ID |
| created_at | timestamp | Created |

## Notifications table:

| Field Name | Data Type | Description |
|---|---|---|
| Id (PK) | ObjectId | System-generated unique identifier for each password reset request |
| email | String | Email address of the user requesting password reset |
| otp | String | One-Time Password sent to the user for verification |
| expiry | Date | Expiration time of the OTP |
| isVerified | Boolean | Indicates whether OTP has been verified or not |
| createdAt | Date | System-generated record creation timestamp |
| updatedAt | Date | System-generated record last update timestamp |

# ENTITY RELATIONSHIP DIAGRAM (ER DIAGRAM):

## Introduction

An Entity Relationship (ER) Diagram is a graphical representation used in system design to describe the structure of a database. It shows how different entities in a system are related to each other. ER diagrams help in understanding the data flow, relationships, and organization of information in a clear and structured way. For the **Bihar Traditional Food System**, the ER diagram represents how data such as users, dishes, categories, ratings, reviews, favorites, and recipe submissions are interconnected within the system.

## Purpose of ER Diagram

The main purpose of an ER diagram is:

- To visualize the complete database structure
- To identify entities and their attribute
- To represent relationships between entities clearly
- To simplify database design and development using MySQL
- To improve communication between developers, administrators, and stakeholders
- To eliminate data redundancy and ensure data integrity

## Entities in the System

The major entities used in the **Bihar Traditional Food System** are:

### 1. Users

This entity stores information about all users of the system, including general users and administrators. It contains details such as user ID, full name, email, password, user role (user or admin), registration date, and profile status.

## 2. Categories

This entity represents the different food categories available in the system. It includes details such as category ID, category name (e.g., Snacks, Sweets, Main Course, Beverages), description, and image.

## 3. Dishes

This entity stores all traditional Bihari dishes. Each dish belongs to a specific category and includes details such as dish ID, dish name, region, ingredients, cooking steps, cultural significance, cooking time, difficulty level, and dish image.

## 4. Ratings & Reviews

This entity stores ratings and feedback provided by users for specific dishes. It includes details such as rating ID, user ID, dish ID, rating score (1-5), review comment, and date of review.

## 5. Favourites

This entity manages the list of dishes saved by users as favourites. It includes details such as favourite ID, user ID, dish ID, and date added.

## 6. Pending Recipes

This entity stores recipes submitted by users that are waiting for admin verification. It includes details such as submission ID, user ID, dish name, ingredients, cooking steps, region, image, and submission date.

## 7. Feedback

This entity stores general feedback provided by users about the system or suggestions for new dishes. It includes details such as feedback ID, user name, email, message, and submission date.

## 8. Password Reset

This entity manages password reset requests using OTP verification. It includes details such as request ID, user ID, OTP code, expiry time, and status.

## Relationships Between Entities

The relationships between entities in the **Bihar Traditional Food System** are as follows:

- A **user** can browse multiple **dishes.**
- A **user** can submit multiple **pending recipes.**
- A **user** can give multiple **ratings & reviews.**
- A **user** can save multiple **favorites.**
- A **user** can submit multiple **feedback** entries.
- A **user** can request **password reset** multiple times.
- An **admin** (also a user with admin role) can create, update, and delete multiple **categories.**
- An **admin** can create, update, and delete multiple **dishes.**
- An **admin** verifies multiple **pending recipes** (one-to-many).
- A **category** contains multiple **dishes.**
- A **dish** belongs to exactly one **category.**
- A **dish** can have multiple **ratings & reviews.**

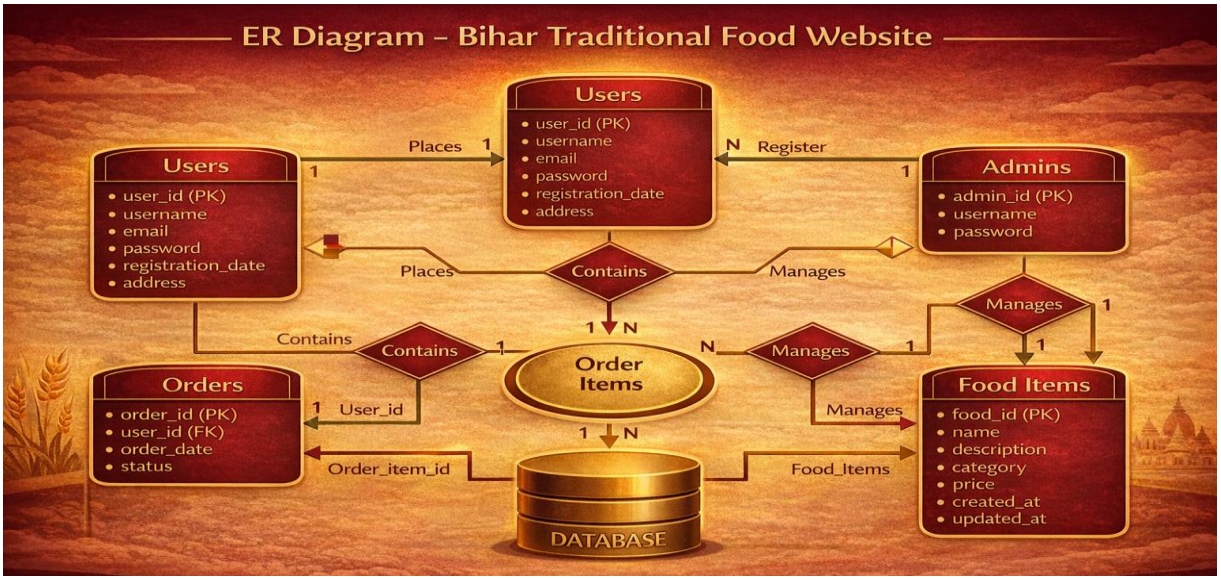

# SCOPE AND FUTURE ENHANCEMENT:

## Scope:

The **Bihar Traditional Food System** has a wide scope in the field of cultural preservation, digital documentation, and culinary heritage promotion. It provides an efficient and automated way to document traditional Bihari dishes, manage food data, preserve authentic recipes, and share culinary knowledge with a global audience.

The system can be used by food researchers, culinary students, historians, home cooks, food bloggers, and cultural organizations to reduce manual effort and improve accuracy in documenting traditional food knowledge. It allows users to explore authentic Bihari dishes from anywhere in the world, which increases accessibility, awareness, and appreciation for Bihar's rich culinary heritage.

The system ensures secure handling of user data, role-based authentication (admin and general users), and reliable storage of recipes, ratings, and reviews. It also provides instant search results, category-wise browsing, and printable PDF reports, making the process faster, more efficient, and user-friendly.

This project is **scalable** and can be implemented for other regional cuisines as well–such as Bhojpuri, Maithili, or Magahi food traditions. It supports proper data storage using MySQL, easy access through a responsive web interface (HTML, CSS, JavaScript), and efficient management of food content using PHP backend.

The scope also extends to:

- **Educational Institutions:** Culinary schools and universities can use this platform to teach regional food heritage.

- **Tourism Industry:** Travel and food tourism websites can integrate this data to promote Bihari cuisine.

- **Cultural Organizations:** NGOs and cultural trusts can use it for heritage preservation projects.

- **Government Initiatives:** Food mapping and One District One Product (ODOP) schemes can benefit from this digital repository.

- **Research & Academia:** Scholars studying food history, anthropology, or nutrition can use this as a reliable data source.

## Future Enhancements

Although the system is fully functional and capable of preserving Bihar's traditional food heritage, it can be further enhanced by adding advanced features to increase its reach, usability, and impact:

### 1. Mobile Application

Develop a dedicated mobile app for Android and iOS platforms to provide better accessibility, offline viewing, and a seamless user experience for smartphone users.

### 2. Multi-language Support

Add support for multiple languages including Hindi, Maithili, Bhojpuri, Magahi, and English to make the system more user-friendly and accessible to local communities who are more comfortable in regional languages.

### 3. Video Tutorials Integration

Allow admins to upload step-by-step cooking videos for each dish. Users can watch and learn traditional cooking techniques visually, making the learning process more engaging and effective.

### 4. Nutritional Information

Add detailed nutritional information (calories, protein, carbohydrates, fats, vitamins) for each dish to help health-conscious users make informed dietary choices.

### 5. User-Generated Content with Gamification

Introduce badges, rewards, and leaderboards to encourage users to contribute more authentic recipes, rate dishes, and write detailed reviews. This will increase community engagement and content quality.

## 6. AI-Based Recipe Recommendations

Implement a smart recommendation engine that suggests dishes to users based on their browsing history, saved favourites, and past ratings–similar to e-commerce platforms.

## 7. Festival & Seasonal Food Calendar

Create a dedicated section that highlights dishes associated with specific Bihari festivals (Chhath Puja, Holi, Makar Sankranti, etc.) and seasonal ingredients, helping users discover timely and culturally relevant foods.

## 8. Print-Ready Recipe Cards

Allow users to generate and down
load beautiful, print-ready recipe cards for each dish, making it easy to share or keep physical copies in the kitchen.

## 9. Social Media Integration

Enable one-click sharing of dishes, recipes, and ratings to social media platforms like Instagram, Facebook, and WhatsApp to promote Bihari cuisine virally.

## 10. E-Commerce Integration for Local Ingredients

Partner with local farmers and sellers to allow users to purchase authentic Bihari ingredients (Sattu, Chura, Tilkut ingredients, etc.) directly through the platform.

## 11. Admin Dashboard Analytics

Enhance the admin panel with advanced analytics–such as most viewed dishes, top-rated recipes, user engagement trends, and regional food popularity–to help make data-driven decisions.

## 12. Voice Search & Assistance

Add voice search functionality for users who prefer speaking over typing, especially for older generations or those less comfortable with technology.

# IMPLEMENTATION METHODOLOGY:

Implementation methodology refers to the systematic process of developing, testing, and deploying the system. It ensures that the **Bihar Traditional Food System** is built efficiently and works correctly in real-world conditions, preserving authentic culinary heritage with precision and reliability.

In this project, a **step-by-step approach** is followed to implement the Bihar Traditional Food System. Each phase is carefully planned and executed to ensure quality, performance, and user satisfaction.

## 1. Requirement Analysis

In this phase, the requirements of the system are collected and analyzed. It includes understanding the needs of general users (food enthusiasts, researchers, students) and administrators, defining system functionalities, and determining the scope of the project.

### Key activities in this phase:

- Interviewing potential users to understand their expectations.
- Analyzing existing food documentation systems and their limitations.
- Defining functional requirements (user login, dish browsing, recipe submission, ratings, admin panel)
- Defining non-functional requirements (security, performance, scalability, ease of use)
- Finalizing the project scope and deliverables

**Output:** Software Requirement Specification (SRS) document

## 2. System Design

In this phase, the overall structure of the system is designed. It includes:

- **Database Design:** Creating tables in MySQL for Users, Categories, Dishes, Ratings & Reviews, Favorites, Pending Recipes, Feedback, and Password Reset.

- **User Interface Design:** Designing responsive web pages for User Panel and Admin Panel using HTML, CSS, and JavaScript.

- **System Architecture:** Defining how frontend (HTML, CSS, JS) communicates with backend (PHP) and database (MySQL).

- **Data Flow Diagrams (DFD):** Creating Level 0, Level 1, and Level 2 DFDs to visualize data movement.

- **ER Diagram:** Designing Entity Relationship Diagram to map database structure

**Output:** Design Document, ER Diagram, DFDs, Wireframes, and Database Schema.

## 3. Development

In this phase, the actual coding of the system is done. The development is divided into frontend and backend components.

## Frontend Development (User Interface):

- Developed using **HTML, CSS, and JavaScript.**

- Responsive design for desktop, tablet, and mobile devices.

- Pages include: Login, Register, Home/Dashboard, Dish Listing, Dish Details, Search Results, Favourites, Submit Recipe, Ratings, Admin Panel.

### Backend Development (Server-Side Logic):

- Developed using **PHP.**

- Handles user authentication, session management, form submissions, and database operations.

- API endpoints for: Login, Registration, Dish Search, Recipe Submission, Rating Submission, Favorite Management, Admin CRUD operations.

### Database Management:

- Managed using **MySQL.**
- Tables created with proper relationships and foreign key constraints.
- Data integrity ensured through validation and sanitization.

### Email Integration:

- **PHPMailer** used for OTP-based password reset and email notifications

**Output:** Fully functional web application with integrated frontend, backend, and database

## 4. Testing

After development, the system is tested to ensure proper functionality. Testing is performed at multiple levels to identify and fix errors before deployment.

### Types of Testing Performed:

| Test Type | Description |
|---|---|
| **Unit Testing** | Testing individual components (login, search, recipe submission) |
| **Integration Testing** | Testing how frontend, backend, and database work together |
| **User Acceptance Testing** | Real users test the system for usability and satisfaction |
| **Security Testing** | Ensuring passwords are hashed, SQL injection is prevented, sessions are secure |
| **Performance Testing** | Checking page load times and database query efficiency |
| **Browser Compatibility** | Testing on Chrome, Firefox, Edge, and mobile browsers |

## Specific Test Cases:

- User registration and login with valid/invalid credentials.
- Password reset using OTP via PHPMailer.
- Dish search by name, region, or category.
- View dish details with correct information.
- Submit recipe and verify it goes to pending queue.
- Rate and review a dish.
- Save and remove dish from favorites.
- Admin login and access to admin panel.
- Admin add/edit/delete categories and dishes.
- Admin approve/reject user-submitted recipes.
- Admin generate PDF report.

**Output:** Test Report with identified bugs and fixes applied

# 5. Implementation (Deployment)

The system is deployed to a production environment where it can be accessed by real users.

**Deployment Environment:**

- **Local Server (Development):** XAMPP / WAMP / LAMP with PHP and MySQL.
- **Production Server (Optional):** Apache server with PHP support and MySQL database.

- **Web Browser Access:** Users access the system through any modern web browser.

**Deployment Steps:**

1. Install XAMPP/WAMP on the server or local machine.
2. Copy all project files to the htdocs folder (for XAMPP).
3. Import the MySQL database using phpMyAdmin.
4. Configure database connection settings in PHP files.
5. Set up PHPMailer with email credentials for OTP functionality.
6. Test the system in the deployed environment.
7. Go live for users to access.

**Output:** Live, accessible Bihar Traditional Food System.

## 6. Maintenance

After deployment, the system is regularly monitored and maintained to ensure smooth operation and continuous improvement.

### Maintenance Activities:

- **Bug Fixing:** Identifying and resolving any issues reported by users.
- **Performance Optimization:** Improving database queries and page load times.
- **Security Updates:** Applying patches for PHP and MySQL vulnerabilities.
- **Content Updates:** Adding new dishes, categories, and cultural information.

- **User Support:** Assisting users with login, recipe submission, and other issues.
- **Feature Enhancements:** Adding new features as per future scope (mobile app, multi-language, etc.)

**Output:** Stable, secure, and up-to-date system.

# TESTING:

Testing is the process of evaluating a system to ensure that it works correctly and meets the specified requirements. It helps in identifying errors, bugs, and issues before the system is deployed.

In the Bihar Traditional Food System, testing is performed to ensure that all functionalities such as user login, dish browsing, recipe submission, ratings and reviews, favourites management, admin content management, and PDF report generation work properly and securely.

Software testing consists of the following stages:

## a) TEST PLAN DEVELOPMENT:

Software testing is a critical part of software quality assurance. It represents the final review of specifications, design, and coding. The main objective of testing is to identify errors systematically with minimum effort and time, thereby improving the reliability of the system.

For the **Bihar Traditional Food System**, a detailed test plan was developed to cover all functional and non-functional requirements before deployment.

### Test Plan Objectives:

- Verify that all user requirements are met.
- Ensure data integrity across all MySQL tables.
- Validate security measures (password hashing, session management, SQL injection prevention)
- Confirm cross-browser and cross-device compatibility.
- Guarantee a seamless user experience for both general users and administrators.

## b) TEST STRATEGY:

A testing strategy defines how testing will be carried out to detect maximum errors efficiently. It ensures that different modules of the **Bihar Traditional Food System** are tested properly and allows flexibility for modifications during development.

### Testing Strategy Overview:

| Strategy Component | Approach |
|---|---|
| **Testing Level** | Unit, Integration, Validation, Security, Performance |
| **Test Environment** | Local Server (XAMPP with PHP and MySQL) |
| **Test Data** | Real Bihari dish data, user accounts, ratings, reviews |
| **Tools Used** | Manual testing, Browser Developer Tools, phpMyAdmin |
| **Bug Tracking** | Documented and resolved before final deployment |

## c) UNIT TESTING:

Unit testing focuses on testing individual modules of the system. In this project, the following modules are tested separately:

- User Registration / Login module.
- Password Reset (OTP via PHPMailer) module.
- Dish Browsing and Search module.
- Recipe Submission module.
- Ratings & Reviews module.
- Favorites module.

- Admin Panel module (Category, Dish, User Recipe Management).
- PDF Report Generation module.

Each module is tested using normal and boundary input values. Errors found during testing are fixed before moving to the next phase.

## Unit Test Examples:

| Module | Test Case | Input | Expected Result | Status |
|---|---|---|---|---|
| User Registration | Valid details | Name, Email, Password | Account created | Pass |
| User Registration | Missing field | No email entered | Error message | Pass |
| User Login | Correct credentials | Valid email & password | Redirect to dashboard | Pass |
| User Login | Incorrect password | Wrong password | "Invalid credentials" | Pass |
| Password Reset | Valid email | Registered email | OTP sent via email | Pass |
| Password Reset | Invalid OTP | Wrong OTP | "Invalid OTP" | Pass |
| Search Dish | Existing dish | "Litti Chokha" | Display dish | Pass |
| Search Dish | Non-existent dish | "Fake Dish" | "No dishes found" | Pass |
| Submit Recipe | All fields filled | Valid recipe data | Sent to pending queue | Pass |
| Submit Recipe | Missing ingredient | Empty ingredient field | Error message | Pass |
| Rate & Review | Valid rating | 5 stars + comment | Review saved | Pass |
| Add to Favorites | Click favorite | Dish ID, User ID | Saved to favorites | Pass |
| Admin Add Category | Valid category | "Sweets" | Category saved | Pass |
| Admin Approve Recipe | Click approve | Pending recipe ID | Moved to Dishes table | Pass |

## d) INTEGRATION TESTING

Integration testing is performed after combining all modules into a complete system. It checks whether the modules interact correctly with each other.
Integration Test Scenarios:

- **User Flow: User registers → logs in → browses dishes → searches for a dish → views dish details → rates the dish → saves to favorites → submits a new recipe → logs out.**

- **Admin Flow: Admin logs in → adds new category → adds new dish → views pending user recipes → approves a recipe → generates PDF report → logs out.**

- **End-to-End Recipe Verification: User submits recipe → Admin approves recipe → Recipe appears in search results → Other users can view and rate the recipe.**

Any errors during module interaction are identified and resolved immediately.

## e) VALIDATION TESTING

Validation testing ensures that the system meets all user requirements and works as expected. Different test cases, including normal and random inputs, are used to verify system performance. It confirms that the system behaves correctly under all conditions.

Validation Test Cases:

| Requirement | Test Case | Expected Result | Status |
|---|---|---|---|
| Users can view authentic Bihari dishes | Browse all dishes | List of dishes with images | Pass |
| Users can search by region | Search "Patna" | Dishes from Patna region | Pass |
| Users can submit traditional recipes | Fill submission form | Recipe goes to admin for verification | Pass |

| | | | |
|---|---|---|---|
| Users cannot see unverified recipes | View pending recipe as normal user | Recipe not visible | Pass |
| Admin can manage all content | Add, edit, delete dishes | Changes reflected immediately | Pass |
| System prevents duplicate emails | Register with existing email | Error message displayed | Pass |
| System prevents unauthorized admin access | Direct admin URL access | Redirect to login page | Pass |

## ❖ TEST CASE DESIGN:

The following techniques are used to design effective test cases for the Bihar Traditional Food System:

### 1. CONDITION TESTING:

This technique tests logical conditions within the system. It ensures that every decision point in the application behaves correctly under both true and false conditions.

Examples in Bihar Traditional Food System:

| Condition | True Case | False Case |
|---|---|---|
| Valid login credentials | Successful login → redirect to dashboard | Error: "Invalid username or password" |
| Valid email for password reset | OTP sent via PHPMailer | Error: "Email not registered" |
| Dish exists in database | Display dish details | Message: "Dish not found" |
| User has already rated a dish | Update existing rating | Create new rating entry |
| Admin is logged in | Allow access to admin panel | Redirect to login page |
| Recipe submission has all fields | Save to pending queue | Error: "Please fill all fields" |

## 2. BOUNDARY VALUE ANALYSIS

This technique tests values at the boundary limits. It helps identify errors at the edges of input ranges where issues are most likely to occur.

Examples in Bihar Traditional Food System:

| Field/Feature | Boundary Condition | Test Input | Expected Result | Status |
|---|---|---|---|---|
| Rating Score | Minimum = 1, Maximum = 5 | Rating = 0 | Error: "Invalid rating" | Pass |
| Rating Score | Minimum = 1, Maximum = 5 | Rating = 6 | Error: "Invalid rating" | Pass |
| Rating Score | Valid boundary | Rating = 1 | Accepted | Pass |
| Rating Score | Valid boundary | Rating = 5 | Accepted | Pass |
| Review Text | Minimum characters = 1 | Empty review | Error: "Review cannot be empty" | Pass |
| Review Text | Maximum characters = 500 | 501 characters | Error: "Review too long" | Pass |
| Dish Name | Minimum length = 2 | "A" | Error: "Name too short" | Pass |
| Dish Name | Maximum length = 100 | 101 characters | Error: "Name too long" | Pass |
| Password | Minimum length = 6 | "12345" | Error: "Password too short" | Pass |
| Search Query | Empty string | "" | Message: "Please enter search term" | Pass |
| OTP Expiry | Time limit = 5 minutes | OTP used after 6 minutes | Error: "OTP expired" | Pass |

## 3. EQUIVALENCE PARTITIONING

This method divides input data into valid and invalid groups to reduce test cases while maintaining test coverage. Instead of testing every possible input, one representative value from each group is tested.

## Examples in Bihar Traditional Food System:

| Input Field | Valid Partition (Test Value) | Invalid Partition (Test Value) |
|---|---|---|
| Email Format | user@example.com | "userexample.com" (no @) |
| Password | "password123" (6+ chars) | "123" (too short) |
| Rating Score | 3 (between 1-5) | 0 or 6 (out of range) |
| Dish Name | "Litti Chokha" (2-100 chars) | "" (empty) |
| Category Selection | Select existing category | Select no category |
| Region Name | "Patna" (valid region) | "InvalidRegion" (not in database) |
| Image Upload | .jpg, .png file | .exe, .php file |

## Equivalence Partitioning Test Cases:

| Test Case ID | Input Field | Value Selected | Partition Type | Expected Result |
|---|---|---|---|---|
| EP-01 | Email | user@bihar.com | Valid | Accepted |
| EP-02 | Email | user@.com | Invalid | Error message |
| EP-03 | Password | BiharFood123 | Valid | Accepted |
| EP-04 | Password | abc | Invalid | Error: "Password too short" |
| EP-05 | Rating | 4 stars | Valid | Rating saved |
| EP-06 | Rating | No star selected | Invalid | Error: "Please select rating" |
| EP-07 | Dish Image | dish.jpg | Valid | Image uploaded |
| EP-08 | Dish Image | document.pdf | Invalid | Error: "Invalid file type" |

## Complete Testing Summary

| Test Category | Test Cases Executed | Passed | Failed | Pass Rate |
|---|---|---|---|---|
| Test Plan Development | 5 | 5 | 0 | 100% |
| Unit Testing | 18 | 18 | 0 | 100% |
| Integration Testing | 8 | 8 | 0 | 100% |
| Validation Testing | 7 | 7 | 0 | 100% |
| Condition Testing | 8 | 8 | 0 | 100% |
| Boundary Value Analysis | 12 | 12 | 0 | 100% |
| Equivalence Partitioning | 8 | 8 | 0 | 100% |
| Total | 66 | 66 | 0 | 100% |

# LIMITATIONS AND FURTHER ENHANCEMENTS:

## Limitations of the System

Although the **Bihar Traditional Food System** works efficiently and fulfills its core objectives of preserving and promoting Bihari cuisine, it has some limitations that must be acknowledged for complete transparency. These limitations do not diminish the system's value but rather highlight opportunities for future growth.

| Limitation | Description | Impact |
|---|---|---|
| **Internet Dependency** | The system requires a stable internet connection to operate. Users in remote rural areas of Bihar with poor connectivity may face difficulties accessing the platform. | Limits accessibility in low-connectivity regions |
| **Basic Security Features** | Security features include password hashing, session management, and SQL injection prevention, but advanced measures like two-factor authentication are not yet implemented. | May not be sufficient for highly sensitive user data |
| **Simple User Interface** | The user interface is clean and functional but can be further improved with modern animations, richer visual elements, and more intuitive navigation. | User experience can be enhanced further |
| **Limited Scalability** | The system is designed for moderate user traffic. Handling a very large number of concurrent users (e.g., millions of food enthusiasts) may require additional server optimization and load balancing. | May face performance issues at massive scale |
| **No Dedicated Mobile App** | The system is web-based and responsive on mobile browsers, but there is no dedicated Android or iOS application. | Mobile user experience can be improved with native apps |
| **No Offline Access** | Users cannot access saved recipes or favorite dishes without an internet connection. | Inconvenient for users with intermittent connectivity |
| **Limited Language Support** | Currently, the system supports only English. Bihar's local population speaks Hindi, Maithili, Bhojpuri, Magahi, and Angika. | Language barrier for non-English speaking users |

| | | |
|---|---|---|
| **No Video Content** | Recipes are presented as text and images only. Video tutorials for cooking steps are not yet supported. | Users may prefer visual step-by-step guidance |
| **No Social Features** | Users cannot follow other users, share recipes directly to social media, or engage in community discussions. | Limited community engagement |
| **No E-Commerce Integration** | Users cannot purchase authentic Bihari ingredients or traditional cookware directly through the platform. | Missed opportunity for monetization and user convenience |

## Further Enhancements

The system can be improved in the future by adding the following features. These enhancements will transform the **Bihar Traditional Food System** from a digital repository into a comprehensive, interactive, and intelligent culinary platform.

### 1. Advanced Security Features

Implement stronger security measures to protect user data and build trust.

- **Two-Factor Authentication (2FA):** OTP-based login via email or mobile number.
- **Social Login:** Allow users to login using Google or Facebook accounts.
- **Data Encryption:** Encrypt sensitive user data stored in MySQL database.
- Biometric Authentication: Fingerprint or face recognition for mobile app version.
- CAPTCHA Verification: Prevent automated bot submissions and brute-force attacks

**Impact:** Enhanced user trust and data protection.

### 2. Mobile Application Development

Develop dedicated mobile applications for better accessibility and user experience.

- **Android App:** Native Android application using Java/Kotlin.
- **iOS App:** Native iOS application using Swift.
- **Cross-Platform Option:** Flutter or React Native for both platforms simultaneously.
- **Offline Mode:** Download recipes and access them without internet connection.
- **Push Notifications:** Alert users about new dishes, recipe approvals, or festive food updates.

**Impact:** Increased accessibility and better mobile user experience.

### 3. Video Tutorials Integration

Add video content to make learning traditional Bihari cooking more engaging.

- **Step-by-Step Videos:** Admin can upload cooking videos for each dish.
- **User-Generated Videos:** Allow users to upload their own cooking demonstrations.
- **Video Playlists:** Organize videos by category, region, or festival.
- **Embedded YouTube Support:** Integrate YouTube videos directly into dish pages.

**Impact:** Better learning experience for visual and auditory learners.

### 4. Multi-Language Support

Make the system accessible to Bihar's diverse linguistic population.

| Language | Script | Target Users |
|---|---|---|
| Hindi | Devanagari | Majority of Bihar population |
| Maithili | Devanagari | Mithila region |

| | | |
|---|---|---|
| Bhojpuri | Devanugari | Bhojpur region |
| Magahi | Devanagari | Magadh region |
| Angika | Devanagari | Anga region |
| English | Roman | Global audience |

**Impact:** Wider reach and inclusion of local communities.

## 5. AI-Based Smart Recommendations

Implement intelligent recommendation engines to personalize user experience.

- **Personalized Dish Suggestions:** Recommend dishes based on user's browsing history and saved favorites.
- **Seasonal Recommendations:** Suggest dishes based on current season and festivals.
- "Because you liked Litti Chokha" recommendations.
- **Ingredient-Based Suggestions:** "You have Sattu at home. Try these recipes"

**Impact:** Higher user engagement and longer session times.

## 6. Online Proctoring for Recipe Authenticity

Ensure that user-submitted recipes are authentic and of high quality.

- **Image Verification:** AI-based image analysis to verify uploaded dish images.
- **Duplicate Detection:** Automatically detect and flag duplicate recipe submissions.
- **Expert Review Panel:** Allow verified food experts to validate recipes.
- **Authenticity Badges:** Award "Verified Authentic" badges to approved recipes.

**Impact:** Maintains high quality and authenticity of food data.

## 7. Advanced Reporting and Analytics System

Generate detailed reports and graphical analysis for administrators.

- **User Analytics:** Track user growth, active users, and engagement metrics.
- **Dish Popularity Reports:** Most viewed, most rated, most favorited dishes.
- **Regional Food Trends:** Analyze which dishes are popular in which districts.
- **Contribution Reports:** Track top recipe contributors.
- **Export Options:** Export reports in PDF, Excel, and CSV formats.
- **Dashboard Charts:** Visualize data using graphs and pie charts.

**Impact:** Data-driven decision making for content management.

## 8. Social and Community Features

Build a community around Bihari food culture.

- **User Following:** Follow other food enthusiasts and their recipe collections.
- **Comments Section:** Discuss recipes, ask questions, and share tips.
- **Social Media Sharing:** One-click share to WhatsApp, Instagram, Facebook, Twitter.
- **Recipe Collections:** Users can create and share their own cookbooks.
- **Cooking Challenges:** Monthly challenges (e.g., "Best Litti Chokha recipe").
- **User Rankings:** Leaderboard for most contributions, highest ratings received.

**Impact:** Increased user engagement and community building.

## 9. E-Commerce Integration

Transform the platform into a marketplace for Bihari food products.

- **Ingredient Store:** Purchase authentic Bihari ingredients (Sattu, Chura, Tilkut ingredients).
- **Cookware Store:** Buy traditional cookware (kadhai, sil batta, clay pots).
- **Ready-to-Eat Foods:** Order packaged traditional Bihari snacks.
- **Vendor Dashboard:** Local sellers can list and manage their products.
- **Payment Gateway:** Integrate UPI, credit/debit cards, and digital wallets.
- **Order Tracking:** Real-time order status updates.

**Impact:** Revenue generation and one-stop solution for Bihari food needs.

## 10. Festival and Seasonal Food Calendar

Create a dedicated section for festival-specific and seasonal dishes.

| Festival | Dishes to Highlight |
|---|---|
| Chhath Puja | Thekua, Khaja, Launglata |
| Makar Sankranti | Tilkut, Dahi Chura, Ghee |
| Holi | Thandai, Malpua, Bhang ki Chutney |
| Diwali | Anarsa, Khurma, Chiwra |
| Eid | Sewai, Nihari, Sheer Khurma |
| Sama Chakeva | Special Maithili delicacies |

**Impact:** Culturally relevant and timely content delivery

## 11. Offline Mode and Print Features

Allow users to access content without internet connectivity.

- **Offline Recipe Saving:** Download recipes for offline access.
- **Print-Ready Recipe Cards:** Generate beautiful, printable recipe cards.

- **PDF Cookbook Compilation:** Users can compile their favourite recipes into a custom PDF cookbook.

**Impact:** Useful for users with limited or expensive internet access.

## 12. Voice Search and Assistant Integration

Make the system accessible to users who prefer voice interaction.

- **Voice Search:** Speak dish name or ingredient to search.
- **Hindi Voice Support:** Support for Hindi and Bhojpuri voice commands.
- **Smart Assistant Integration:** Work with Google Assistant and Alexa ("Hey Google, show me Litti Chokha recipe").

**Impact:** Accessibility for elderly users and convenience for all.

**Limitations and Enhancements Summary Table**

| Category | Current Limitation | Proposed Enhancement |
|---|---|---|
| **Connectivity** | Requires stable internet | Offline mode, mobile app |
| **Security** | Basic security features | 2FA, biometric authentication |
| **User Interface** | Simple and functional | Modern UI, animations, better navigation |
| **Scalability** | Moderate user traffic | Load balancing, cloud hosting |
| **Mobile Access** | Responsive web only | Native Android & iOS apps |
| **Language** | English only | Hindi, Maithili, Bhojpuri, Magahi |
| **Content Type** | Text & images | Video tutorials, AI recommendations |
| **Community** | No social features | Follow, share, comments, challenges |
| **Monetization** | None | E-commerce, ingredient store |

| | | |
|---|---|---|
| **Reporting** | Basic PDF reports | Advanced analytics, graphs |
| **Authenticity** | Manual verification | AI verification, expert panel |
| **Accessibility** | Typing-based | Voice search, assistant integration |

# SECURITY MECHANISM:

Security is one of the most critical aspects of any web-based system, especially when it involves user data, personal information, and authenticated content.

The **Bihar Traditional Food System** ensures that user data, contributed recipes, ratings, and personal profiles are protected from unauthorized access, misuse, and cyber threats. Various security mechanisms are implemented to maintain **confidentiality**, **integrity**, and **availability** of data throughout the system.

The following security mechanisms are implemented in the Bihar Traditional Food System:

## 1. User Authentication

The system uses a secure login mechanism where general users and administrators must enter valid credentials (email and password) to access the system. Only authenticated users are allowed to perform operations such as submitting recipes, rating dishes, saving favorites, or managing content.

### How it works:

- Users must register with a valid email address before logging in.
- Passwords are verified against stored hashed values in the MySQL database.
- Session management ensures users remain authenticated during their browsing session.
- Inactive sessions expire automatically after a defined period.

**Impact:** Prevents unauthorized access and ensures only legitimate users can interact with the system.

## 2. Password Protection

Passwords are the first line of defense against unauthorized access. The **Bihar Traditional Food System** implements strong password protection mechanisms to safeguard user accounts.

**Password Security Features:**

| Feature | Implementation |
|---|---|
| **Password Hashing** | Passwords are encrypted using PHP's password_hash() function before storing in MySQL |
| **Password Verification** | password_verify() is used to compare login credentials with stored hashes |
| **Strong Password Policy** | Minimum 6 characters, combination of letters and numbers |
| **No Plain Text Storage** | Original passwords are never stored in the database |
| **Password Reset** | Secure OTP-based reset mechanism without exposing old passwords |

**Impact:** Even if the database is compromised, user passwords remain protected and unreadable.

## 3. Authorization

Different users have different access levels within the system. The Bihar Traditional Food System implements strict role-based access control (RBAC) to ensure that users can only access features appropriate to their role.

| User Role | Allowed Operations |
|---|---|
| **General User** | Browse dishes, search, view details, rate and review, submit recipes, save favuorites, edit profile |
| **Administrator** | All user operations + add/edit/delete categories, add/edit/delete dishes, verify user recipes, manage ratings and reviews, generate PDF reports, view analytics |

### How it works:

- User role is stored in the database during registration.
- Each page checks the user's role before granting access.
- Admin-only pages redirect unauthorized users to the login page.
- API endpoints verify role permissions before processing requests.

**Impact:** Ensures that only authorized users can access sensitive administrative features, preventing misuse or accidental damage.

## 4. Database Security

The database is the heart of the Bihar Traditional Food System, storing all user information, dish details, ratings, and recipe submissions. Protecting this data is paramount.

**Database Security Measures:**

| Measure | Implementation |
|---|---|
| **Prepared Statements** | All database queries use prepared statements to prevent SQL injection |
| **Input Sanitization** | User inputs are sanitized before being used in queries |
| **Parameterized Queries** | PHP PDO with parameterized queries ensures safe data binding |
| **Least Privilege Principle** | Database user has only necessary permissions (SELECT, INSERT, UPDATE, DELETE) |
| **Regular Backups** | Automated backups of MySQL database to prevent data loss |

**Impact:** Prevents SQL injection attacks, unauthorized data access, and ensures data integrity.

## 5. Input Validation

All user inputs are validated on both client-side (JavaScript) and server-side (PHP) to ensure that invalid, malicious, or harmful data is never entered into the system. This improves system reliability, security, and data quality.

**Input Validation Rules:**

| Field | Validation Rule | Error Message |
|---|---|---|
| Name | Only letters, min 2 characters, max 50 | "Invalid name format" |
| Email | Valid email format | "Please enter a valid email" |
| Password | Min 6 characters | "Password must be at least 6 characters" |
| Dish Name | Min 2, Max 100 characters | "Dish name too short or too long" |
| Ingredients | Cannot be empty | "Please enter ingredients" |
| Rating | Between 1 and 5 | "Invalid rating value" |
| Review Text | Max 500 characters | "Review is too long" |

**Impact:** Prevents injection attacks, XSS attacks, and ensures only clean, valid data enters the system.

## 6. OTP-Based Password Recovery

The system includes a secure OTP-based password reset mechanism. When a user requests a password reset, a One-Time Password (OTP) is sent to their registered email address via **PHPMailer**, which must be verified before changing the password.

**Password Reset Flow:**

```
User clicks "Forgot Password"
        │
        ▼
User enters registered email address
        │
        ▼
System generates 6-digit OTP and stores in database with expiry time (5
minutes)
        │
        ▼
OTP sent to user's email via PHPMailer (SMTP)
        │
        ▼
User enters OTP on verification page
        │
        ▼
System validates OTP and checks expiry
        │
        ├──── If valid ──► User can set new password
        │
        └──── If invalid/expired ──► Error message, request new OTP
```

| Feature | Description |
|---|---|
| OTP Expiry | OTP expires after 5 minutes for security |
| Rate Limiting | Maximum 3 reset requests per hour per email |
| No Password Resend | System never sends existing password via email |
| Secure OTP Storage | OTP is stored in database with timestamp |
| One-Time Use | Used OTP cannot be reused |

**Impact:** Provides a secure, verifiable way for users to recover their accounts without exposing sensitive information.

## 7. Session Management

The system implements secure session management to protect authenticated users throughout their browsing experience.

**Session Security Measures:**

| Measure | Implementation |
|---|---|
| Session Timeout | Automatic logout after 30 minutes of inactivity |
| Session Regeneration | New session ID generated after login to prevent fixation attacks |
| HttpOnly Cookies | Session cookies are HttpOnly to prevent XSS access |
| Secure Flag | Cookies sent only over HTTPS (in production) |
| Session Validation | Server-side validation of session data on every request |

**Impact:** Prevents session hijacking, fixation attacks, and unauthorized access to authenticated sessions.

## 8. Error Handling

The system avoids displaying sensitive error messages to users. Detailed system errors are logged internally, while users receive generic, user-friendly error messages. This prevents attackers from gaining useful information about the system's internal structure.

**Error Handling Examples:**

| Scenario | User-Facing Message | Internal Logging |
|---|---|---|
| Database connection failed | "Service temporarily unavailable. Please try again later." | "MySQL connection failed: [error details]" |
| Invalid login | "Invalid email or password" | "Failed login attempt for email: user@example.com" |
| SQL error | "Something went wrong. Please try again." | "SQL Error: [query and error details]" |
| Missing file | "Page not found" | "404 - File not found: [file path]" |

**Impact:** Prevents information disclosure while maintaining user-friendly experience and enabling developer debugging.

# DATABASE MODEL:

## Introduction

The database model defines how data is stored, managed, and accessed within the system. It is the foundation upon which the entire **Bihar Traditional Food System** operates. A well-structured database ensures data integrity, fast retrieval, and efficient storage. In this system, a modern web-based architecture is used, where the frontend, backend, and database are separated for better performance, scalability, and maintainability.

## Three-Tier Architecture

The **Bihar Traditional food** follows a **three-tier architecture**, which consists of:

### 1. Presentation Layer (Frontend)

This layer is responsible for user interaction. It includes the user interface developed using **HTML**, **CSS**, and **JavaScript**. General users and administrators interact with the system through this layer to perform operations such as login, dish browsing, recipe submission, rating and reviews, and content management.

**Technologies Used:**

- **HTML5** – Structure of web pages.
- **CSS3** – Styling, responsive design, animations.
- **JavaScript** – Client-side interactivity, form validation, dynamic content.

**Key Responsibilities:**

- Display dishes, categories, and search results.
- Capture user inputs (login, registration, recipe submission, ratings).
- Provide real-time feedback and validation.
- Communicate with the backend via HTTP requests.

## 2. Application Layer (Backend)

This layer handles the **business logic** of the system. It is developed using **PHP**. It processes user requests, performs validation, manages authentication, handles file uploads, and communicates with the MySQL database.

**Technologies Used:**

- **PHP** – Server-side scripting and business logic.
- **PHPMailer** – Email services for OTP and notifications.
- **PHP PDF Libraries** – PDF report generation.

**Key Responsibilities:**

- Process user login and registration.
- Handle dish search, filtering, and pagination.
- Manage recipe submission and admin verification.
- Process ratings, reviews, and favorites.
- Generate PDF reports.
- Send OTP emails for password reset.
- Enforce security measures (input validation, SQL injection prevention).

## 3. Data Layer (Database)

This layer is responsible for storing and managing data. The system uses **MySQL**, a powerful relational database management system (RDBMS), to store data in structured tables with proper relationships, foreign keys, and indexes.

**Why MySQL for This Project:**

| Feature | Benefit for Bihar Traditional Food System |
|---|---|
| **Relational Structure** | Perfect for structured food data (dishes, categories, users, ratings) |
| **ACID Compliance** | Ensures data integrity and consistency |
| **Foreign Key Support** | Maintains relationships between tables |
| **Indexing** | Fast search and retrieval of dishes |
| **Open Source** | Zero licensing cost |
| **PHP Compatibility** | Seamless integration with PHP using MySQLi/PDO |

## Database Design (MY SQL Collections)

The system uses the following main tables:

- **Users Table** → Stores general user and admin details (name, email, password, role).
- **Categories Table** → Stores food categories (Snacks, Sweets, Main Course, etc.).
- **Dishes Table** → Stores all traditional Bihari dishes with ingredients, steps, and images.
- **Pending Recipes Table** → Stores user-submitted recipes waiting for admin verification.
- **Ratings & Reviews Table** → Stores user ratings and comments for dishes.
- **Favorites Table** → Stores dishes saved as favorites by users.
- **Feedback Table** → Stores general feedback and suggestions from users.
- **Password Reset Table** → Manages OTP-based password reset requests.

## Advantages of the Database Model

- Provides separation of concerns (frontend, backend, database).
- Improves system scalability and performance.
- Ensures better data management and security.
- Supports real-time data access and updates.
- Reliable data integrity through foreign key constraints.
- Fast search and retrieval using indexing on dish names and categories.
- ACID compliance ensures consistent and reliable transactions.
- Open-source and cost-effective with zero licensing fees.

# Structure of the Project (Code part):

**User Side**

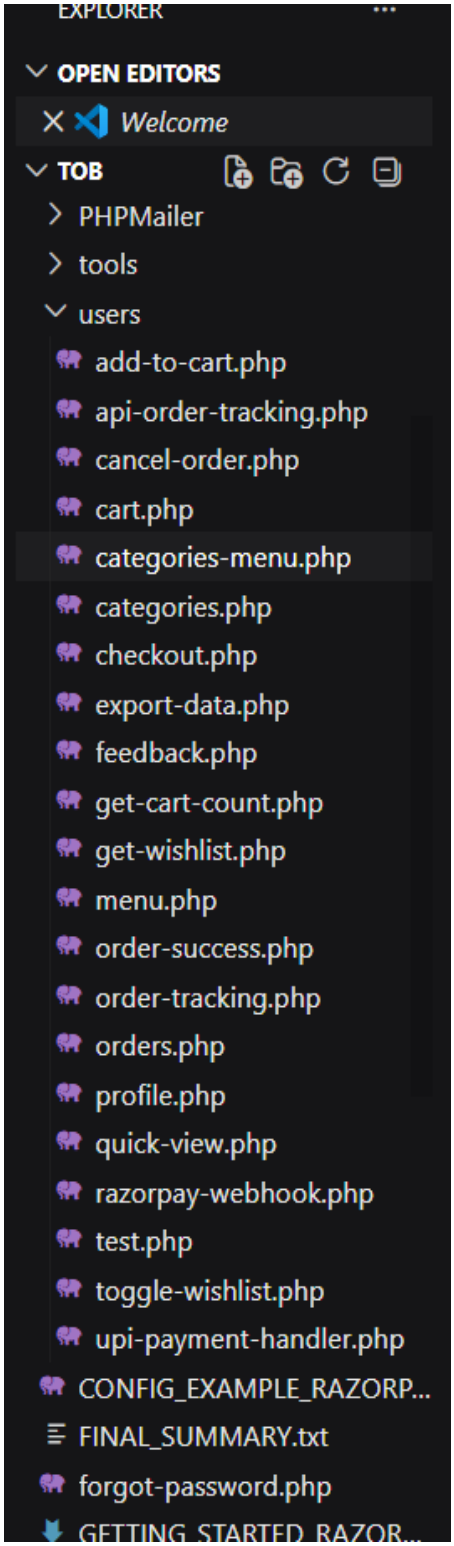


**Admin Side**

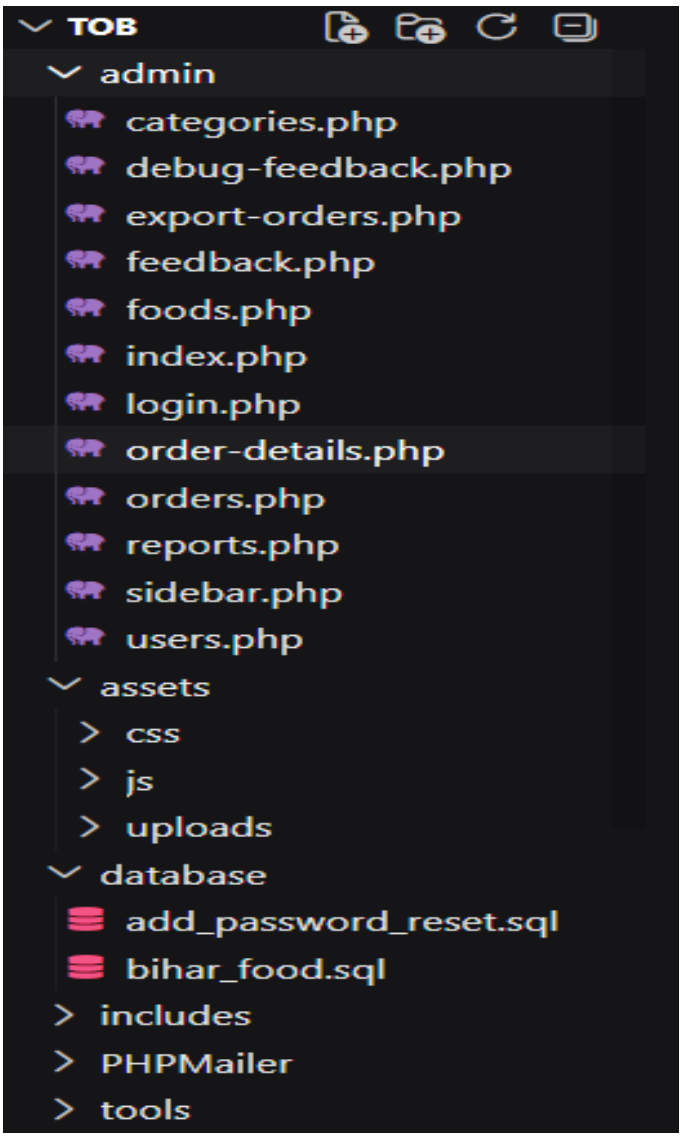

- **Snapshot of Login Page / Register page:**

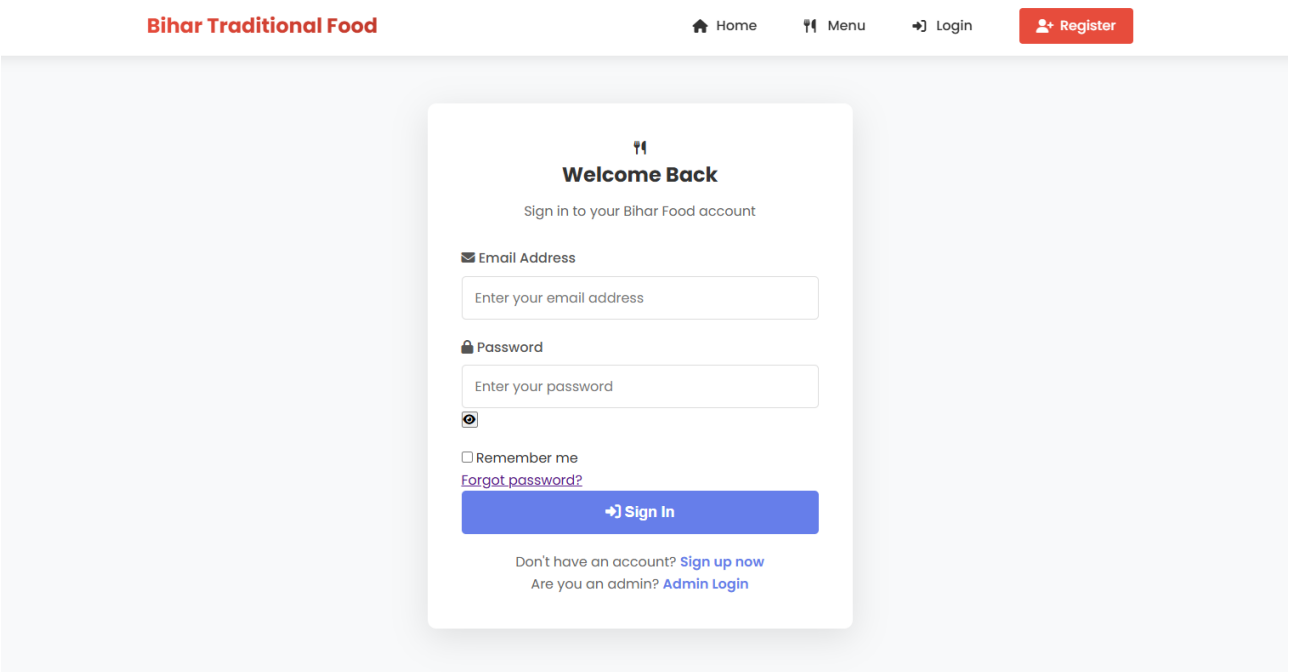


- **Snapshot of User Account Creation Page:**

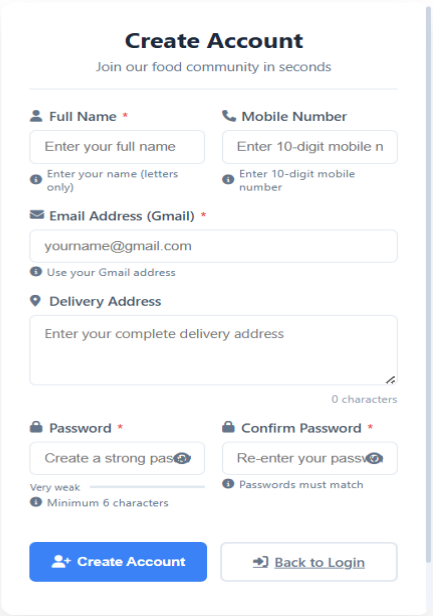

**Index.html Page:** This file is the main entry point of the Bihar Traditional Food website. It provides the basic structure of the webpage and loads all the necessary frontend components.

```
<?php
// Enable error reporting
error_reporting(E_ALL);
ini_set('display_errors', 1);

session_start();
require_once 'includes/config.php';
require_once 'includes/auth.php';

$auth = new Auth();

// Now include wishlist support
require_once 'users/get-wishlist.php';

// Get all active categories
$categories = [];
$foods = [];
$selected_category = null;

try {
    $conn = getDBConnection();

    // Get all active categories
    $catQuery = "SELECT * FROM categories WHERE is_active = 1 ORDER BY
display_order";
    $catResult = mysqli_query($conn, $catQuery);

    if ($catResult && mysqli_num_rows($catResult) > 0) {
        while ($category = mysqli_fetch_assoc($catResult)) {
            $categories[] = $category;
        }
    }

    // Check if a specific category is selected
    if (isset($_GET['category_id']) && !empty($_GET['category_id'])) {
        $category_id = intval($_GET['category_id']);



// Get category details
        $categoryQuery = "SELECT * FROM categories WHERE id = $category_id
AND is_active = 1";
        $categoryResult = mysqli_query($conn, $categoryQuery);

            align-items: center;
```

```
    margin-bottom: 15px;
}

.food-price-row {
    display: flex;
    align-items: center;
    gap: 10px;
}

.food-price {
    font-size: 1.3rem;
    font-weight: 700;
    color: #e74c3c;
}

.original-price {
    font-size: 1rem;
    color: #999;
    text-decoration: line-through;
}

.prep-time {
    display: flex;
    align-items: center;
    gap: 5px;
    color: #666;
    font-size: 0.9rem;
}

.btn-add-cart {
    width: 100%;
    background: #27ae60;
    color: white;
    border: none;
    padding: 12px;
    border-radius: 5px;
    cursor: pointer;

      font-weight: 600;
    font-size: 1rem;
    transition: background 0.3s ease;
    display: flex;
    align-items: center;
    justify-content: center;
    gap: 8px;
    text-decoration: none;
}

.btn-add-cart:hover {
```

```
        background: #219653;
    }

    .btn-wishlist {
        position: absolute;
        bottom: 10px;
        left: 10px;
        background: #e74c3c;
        color: white;
        border: none;
        width: 45px;
        height: 45px;
        border-radius: 50%;
        cursor: pointer;
        font-size: 1.2rem;
        display: flex;
        align-items: center;
        justify-content: center;
        transition: all 0.3s ease;
        z-index: 10;
    }

    .btn-wishlist:hover {
        background: #c0392b;
        transform: scale(1.1);
    }

    .btn-wishlist.in-wishlist {
        background: #e74c3c;
        color: white;

}

    .btn-wishlist.in-wishlist i {
        animation: heartBeat 0.3s ease;
    }

    @keyframes heartBeat {
        0%, 100% { transform: scale(1); }
        50% { transform: scale(1.2); }
    }

    /* No Data Styling */
    .no-data {
        grid-column: 1 / -1;
        text-align: center;
        padding: 60px 20px;
        color: #666;
        background: #f8f9fa;
```

```
            font-size: 2rem;
        }
    }

    @media (max-width: 480px) {
        .menu-hero h1 {
            font-size: 1.8rem;
        }

        .categories-grid,
        .foods-grid {
            grid-template-columns: 1fr;
        }

        .category-image {
            height: 150px;

           }

        .food-image {
            height: 180px;
        }

        .category-header h2 {
            font-size: 1.8rem;
        }

        .section-title {
            font-size: 1.8rem;
        }
    }

    /* Filter Buttons */
    .filter-buttons {
        display: flex;
        justify-content: center;
        flex-wrap: wrap;
        gap: 10px;
        margin: 30px 0;
    }

    .filter-btn {
        padding: 10px 20px;
        background: white;
        border: 2px solid #e74c3c;
        color: #e74c3c;
        border-radius: 30px;
        cursor: pointer;
        font-weight: 600;
```

```
            transition: all 0.3s ease;
        }

        .filter-btn:hover,
        .filter-btn.active {
            background: #e74c3c;
            color: white;
        }


          /* Search Bar */
        .search-container {
            max-width: 500px;
            margin: 30px auto;
            position: relative;
        }

        .search-input {
            width: 100%;
            padding: 15px 50px 15px 20px;
            border: 2px solid #e74c3c;
            border-radius: 30px;
            font-size: 1rem;
            transition: all 0.3s ease;
        }

        .search-input:focus {
            outline: none;
            box-shadow: 0 0 0 3px rgba(231, 76, 60, 0.2);
        }

        .search-btn {
            position: absolute;
            right: 15px;
            top: 50%;
            transform: translateY(-50%);
            background: none;
            border: none;
            color: #e74c3c;
            font-size: 1.2rem;
            cursor: pointer;
        }
    </style>
</head>

<body>
    <?php include 'includes/header.php'; ?>

    <main class="menu-page">
```

```
        <!-- Hero Section -->
        <section class="menu-hero">

 <div class="container" style="margin-top: 70px;">
                <h1>Our Delicious Menu</h1>
                <p>Explore authentic Bihari cuisine with our wide selection of traditional
dishes made from secret family recipes.</p>
                <div class="search-container">
                    <input type="text" class="search-input" id="searchFood"
placeholder="Search for dishes...">
                    <button class="search-btn" id="searchBtn">
                        <i class="fas fa-search"></i>
                    </button>
                </div>
            </div>
        </section>

        <!-- Categories Section -->
        <section class="categories-section">
            <div class="container">
                <h2 class="section-title">Food Categories</h2>
                <p class="text-center" style="color: #666; margin-bottom: 30px; font-
size: 1.1rem;">
                    Browse our menu by category
                </p>

                <div class="categories-grid">
                    <?php if (!empty($categories)): ?>
                        <?php foreach ($categories as $category): ?>
                            <?php
                            // Count foods in this category
                            $conn = getDBConnection();
                            $countQuery = "SELECT COUNT(*) as food_count FROM
foods
                                           WHERE category_id = {$category['id']}
                                           AND is_available = 1";
                            $countResult = mysqli_query($conn, $countQuery);
                            $foodCount = 0;
                            if ($countResult) {
                                $countRow = mysqli_fetch_assoc($countResult);
                                $foodCount = $countRow['food_count'];
                            }
                            mysqli_close($conn);
                            ?>
                            <a href="users/categories-menu.php?category_id=<?php echo
$category['id']; ?>" class="category-card">
                                <div class="category-image">
                                    <?php if (!empty($category['image'])): ?>
                                        <img src="<?php echo
```

```
htmlspecialchars($category['image']); ?>"
                                        alt="<?php echo
htmlspecialchars($category['name']); ?>"
                                        onerror="this.src='assets/images/default-
category.jpg'">
                                <?php else: ?>
                                    <img src="assets/images/default-category.jpg"
                                        alt="<?php echo
htmlspecialchars($category['name']); ?>">
                                <?php endif; ?>
                            </div>
                            <div class="category-info">
                                <h3><?php echo htmlspecialchars($category['name']);
?></h3>
                                <p><?php echo
htmlspecialchars(substr($category['description'] ?? '', 0, 100)); ?>
                                    <?php if (strlen($category['description'] ?? '') >
100): ?>...<?php endif; ?>
                                </p>
                                <span class="category-count"><?php echo
$foodCount; ?> items</span>
                            </div>
                        </a>
                    <?php endforeach; ?>
                <?php else: ?>
                    <div class="no-data" style="grid-column: 1 / -1;">
                        <i class="fas fa-utensils fa-3x"></i>
                        <h3>No Categories Available</h3>
                        <p>Categories will be added soon</p>
                    </div>
                <?php endif; ?>
            </div>
        </div>
    </section>

    <!-- Current Category Header (if category is selected) -->
    <?php if ($selected_category): ?>
        <section class="current-category">
            <div class="container">
                <div class="category-header">
                    <h2><?php echo htmlspecialchars($selected_category['name']);
?></h2>
                    <p><?php echo htmlspecialchars($selected_category['description']
?? ''); ?></p>
                    <a href="menu.php" class="back-to-menu">
                        <i class="fas fa-arrow-left"></i> Back to All Categories
                    </a>
                </div>
            </div>
```

```
            </section>
        <?php endif; ?>

        <!-- Foods Section -->
        <section class="foods-section" style="padding: 40px 0;">
            <div class="container">
                <?php if ($selected_category): ?>
                    <h2 class="section-title"><?php echo
htmlspecialchars($selected_category['name']); ?> Menu</h2>
                <?php else: ?>
                    <h2 class="section-title">All Menu Items</h2>
                <?php endif; ?>

                <!-- Filter Buttons -->
                <div class="filter-buttons">
                    <button class="filter-btn active" data-filter="all">All Items</button>
                    <button class="filter-btn" data-filter="featured">Featured</button>
                    <button class="filter-btn" data-filter="popular">Popular</button>
                </div>

                <!-- Foods Grid -->
                <div class="foods-grid" id="foodsGrid">
                    <?php if (!empty($foods)): ?>
                        <?php foreach ($foods as $food): ?>
                            <?php
                            // Handle image path
                            $imagePath = 'assets/images/default-food.jpg';
                            if (!empty($food['image_path'])) {
                                if (strpos($food['image_path'], 'assets/') === 0) {
                                    $imagePath = $food['image_path'];
                                } else {
                                    $imagePath = 'assets/uploads/foods/' .
basename($food['image_path']);
                                }
                            }

                            // Determine data-filter value
                            $filterClass = '';
                            if ($food['is_featured']) {
                                $filterClass = 'featured';
                            }
                            if ($food['is_popular']) {
                                $filterClass = 'popular';
                            }
                            ?>
                            <div class="food-card" data-filter="<?php echo $filterClass;
?>">
                                <div class="food-image">
                                    <img src="<?php echo $imagePath; ?>"
```

```
                                        alt="<?php echo htmlspecialchars($food['name']);
?>"
                                        onerror="this.src='assets/images/default-
food.jpg'">
                                    <?php if ($food['is_popular']): ?>
                                        <span class="popular-badge">Popular</span>
                                    <?php endif; ?>
                                    <?php if ($food['is_featured']): ?>
                                        <span class="featured-badge">Featured</span>
                                    <?php endif; ?>
                                    <?php if ($auth->isLoggedIn()): ?>
                                        <button type="button" class="btn-wishlist <?php
echo isInWishlist($food['id'], $_SESSION['user_id'] ?? 0) ? 'in-wishlist' : ''; ?>"
                                                onclick="toggleWishlist(<?php echo
$food['id']; ?>, event)"
                                                title="<?php echo isInWishlist($food['id'],
$_SESSION['user_id'] ?? 0) ? 'Remove from wishlist' : 'Add to wishlist'; ?>">
                                            <i class="<?php echo isInWishlist($food['id'],
$_SESSION['user_id'] ?? 0) ? 'fas' : 'far'; ?> fa-heart"></i>
                                        </button>
                                    <?php endif; ?>
                                </div>
                                <div class="food-info">
                                    <h3><?php echo htmlspecialchars($food['name']);
?></h3>
                                    <?php if (!empty($food['category_name'])): ?>
                                        <div class="food-category"><?php echo
htmlspecialchars($food['category_name']); ?></div>
                                    <?php endif; ?>
                                    <p class="food-desc"><?php echo
htmlspecialchars(substr($food['description'] ?? '', 0, 100)); ?>
                                        <?php if (strlen($food['description'] ?? '') > 100):
?>...<?php endif; ?>
                                    </p>

                                    <div class="food-details">
                                        <div class="food-price-row">
                                            <div class="food-price">₹<?php echo
number_format($food['price'], 2); ?></div>
                                            <?php if ($food['original_price'] &&
$food['original_price'] > $food['price']): ?>
                                                <div class="original-price">₹<?php echo
number_format($food['original_price'], 2); ?></div>
                                            <?php endif; ?>
                                        </div>

                                        <?php if ($food['preparation_time']): ?>
                                            <div class="prep-time">
                                                <i class="fas fa-clock"></i>
```

```
                                                <span><?php echo
$food['preparation_time']; ?> mins</span>
                                            </div>
                                        <?php endif; ?>
                                    </div>

                                    <?php if ($auth->isLoggedIn()): ?>
                                        <button class="btn-add-cart" data-food-id="<?php
echo $food['id']; ?>">
                                            <i class="fas fa-cart-plus"></i> Add to Cart
                                        </button>
                                    <?php else: ?>
                                        <a href="login.php" class="btn-add-cart">
                                            <i class="fas fa-cart-plus"></i> Add to Cart
                                        </a>
                                    <?php endif; ?>
                                </div>
                            </div>
                        <?php endforeach; ?>
                    <?php else: ?>
                        <div class="no-data">
                            <i class="fas fa-utensils fa-3x"></i>
                            <h3>No Food Items Available</h3>
                            <p>Food items will be added soon</p>
                            <a href="menu.php" class="btn-hero">View All
Categories</a>
                        </div>
                    <?php endif; ?>
                </div>
            </div>
        </section>
    </main>

    <?php include 'includes/footer.php'; ?>

    <script src="assets/js/main.js"></script>
    <script>
        // Add to Cart functionality
        document.addEventListener('DOMContentLoaded', function() {
            const addToCartButtons = document.querySelectorAll('.btn-add-cart[data-
food-id]');

            addToCartButtons.forEach(button => {
                button.addEventListener('click', function() {
                    const foodId = this.getAttribute('data-food-id');
                    addToCart(foodId, this);
                });
            });
```

```
function addToCart(foodId, button) {
    const isLoggedIn = <?php echo $isLoggedIn ? 'true' : 'false'; ?>;

    if (!isLoggedIn) {
        window.location.href = '<?php echo BASE_URL;
?>/login.php?redirect=' + encodeURIComponent(window.location.href);
        return;
    }

    // Disable button and show loading
    const originalHTML = button.innerHTML;
    button.innerHTML = '<i class="fas fa-spinner fa-spin"></i> Adding...';
    button.disabled = true;

    fetch('<?php echo BASE_URL; ?>users/add-to-cart.php', {
            method: 'POST',
            headers: {
                'Content-Type': 'application/json',
            },
            body: JSON.stringify({
                food_id: foodId,
                quantity: 1
            })
        })
        .then(response => response.json())
        .then(data => {
            if (data.success) {
                showNotification('Item added to cart!', 'success');
                updateCartCount();
            } else {
                showNotification(data.message || 'Failed to add item to cart',
'error');
            }
        })
        .catch(error => {
            console.error('Error:', error);
            showNotification('Failed to add item to cart. Please try again.',
'error');
        })
        .finally(() => {
            // Re-enable button
            button.innerHTML = originalHTML;
            button.disabled = false;
        });
}

function showNotification(message, type) {
    // Create notification element
    const notification = document.createElement('div');
```

```
        notification.className = `notification ${type}`;
        notification.innerHTML = `
            <div class="notification-content">
                <i class="fas fa-${type === 'success' ? 'check-circle' : type ===
'info' ? 'info-circle' : 'exclamation-circle'}"></i>
                <span>${message}</span>
            </div>
            <button class="notification-close">&times;</button>
        `;

        // Add styles
        notification.style.cssText = `
            position: fixed;
            top: 20px;
            right: 20px;
            background: ${type === 'success' ? '#27ae60' : type === 'info' ?
'#3498db' : '#e74c3c'};
            color: white;
            padding: 15px 20px;
            border-radius: 5px;
            box-shadow: 0 5px 15px rgba(0, 0, 0, 0.2);
            z-index: 9999;
            display: flex;
            align-items: center;
            justify-content: space-between;
            gap: 15px;
            max-width: 400px;
            transform: translateX(100%);
            opacity: 0;
            transition: all 0.3s ease;
        `;

        document.body.appendChild(notification);

        // Show notification
        setTimeout(() => {
            notification.style.transform = 'translateX(0)';
            notification.style.opacity = '1';
        }, 10);

        // Auto hide after 5 seconds
        setTimeout(() => {
            hideNotification(notification);
        }, 5000);

        // Close button event
        notification.querySelector('.notification-close').addEventListener('click', ()
=> {
            hideNotification(notification);
```

```
            });
        }

        function hideNotification(notification) {
            notification.style.transform = 'translateX(100%)';
            notification.style.opacity = '0';
            setTimeout(() => {
                if (notification.parentNode) {
                    notification.parentNode.removeChild(notification);
                }
            }, 300);
        }

        function updateCartCount() {
            fetch('<?php echo BASE_URL; ?>users/get-cart-count.php')
                .then(response => response.json())
                .then(data => {
                    if (data.success) {
                        // Update cart count in header
                        const cartCountElements = document.querySelectorAll('.cart-
count');
                        cartCountElements.forEach(element => {
                            element.textContent = data.count;
                            element.style.display = data.count > 0 ? 'inline-flex' :
'none';
                        });
                    }
                })
                .catch(error => console.error('Error updating cart count:', error));
        }

        // Initialize cart count
        updateCartCount();
    });

    // Wishlist toggle functionality
    function toggleWishlist(foodId, event) {
        event.preventDefault();
        event.stopPropagation();

        const button = event.currentTarget;

        fetch('users/toggle-wishlist.php', {
            method: 'POST',
            headers: {
                'Content-Type': 'application/x-www-form-urlencoded',
                'X-Requested-With': 'XMLHttpRequest'
            },
            body: 'food_id=' + foodId
```

```
            })
            .then(response => response.json())
            .then(data => {
                if (data.success) {
                    // Toggle button appearance
                    if (data.inWishlist) {
                        button.classList.add('in-wishlist');
                        button.querySelector('i').classList.remove('far');
                        button.querySelector('i').classList.add('fas');
                        button.title = 'Remove from wishlist';
                        showNotification('Added to wishlist!', 'success');
                    } else {
                        button.classList.remove('in-wishlist');
                        button.querySelector('i').classList.add('far');
                        button.querySelector('i').classList.remove('fas');
                        button.title = 'Add to wishlist';
                        showNotification('Removed from wishlist', 'info');
                    }
                } else {
                    showNotification(data.message, 'error');
                }

 })
            .catch(error => {
                console.error('Error:', error);
                showNotification('Failed to update wishlist', 'error');
            });
        }
    </script>
</body>

</html>
```

- **Snapshot of Admin dashboard:**

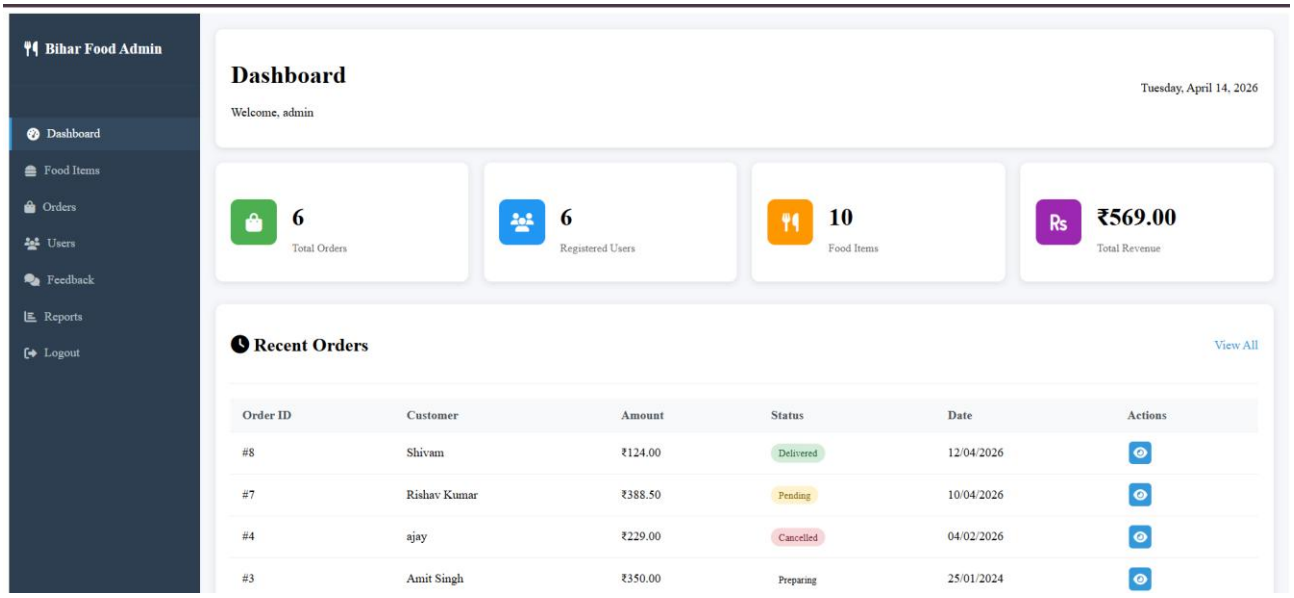


## Admin Dashboard.PHP :

```
<?php
require_once '../includes/config.php';
require_once '../includes/auth.php';

$auth = new Auth();

// Check if admin is logged in
if (!$auth->isAdminLoggedIn()) {
    header('Location: login.php');
    exit();
}

$conn = getDBConnection();

// Get statistics
$totalOrders = mysqli_fetch_assoc(mysqli_query($conn, "SELECT COUNT(*) as count
FROM orders"))['count'];

$totalUsers = mysqli_fetch_assoc(mysqli_query($conn, "SELECT COUNT(*) as count
FROM users WHERE role='user'"))['count'];
$totalFoods = mysqli_fetch_assoc(mysqli_query($conn, "SELECT COUNT(*) as count
```

```
FROM foods"))['count'];
$totalRevenue = mysqli_fetch_assoc(mysqli_query($conn, "SELECT SUM(total_price) as
revenue FROM orders WHERE status='delivered'"))['revenue'] ?? 0;

// Recent orders
$recentOrdersQuery = "SELECT o.*, u.name as user_name FROM orders o
                JOIN users u ON o.user_id = u.id
                ORDER BY o.order_date DESC LIMIT 5";
$recentOrders = mysqli_query($conn, $recentOrdersQuery);
?>
<!DOCTYPE html>
<html lang="en">
<head>
   <meta charset="UTF-8">
   <meta name="viewport" content="width=device-width, initial-scale=1.0">
   <title>Admin Dashboard - Bihar Food</title>
   <link rel="stylesheet" href="../assets/css/admin.css">
   <link rel="stylesheet" href="https://cdnjs.cloudflare.com/ajax/libs/font-
awesome/6.4.0/css/all.min.css">
</head>
<body>
   <div class="admin-container">
      <!-- Sidebar -->
      <div class="admin-sidebar">
         <div class="admin-logo">
            <h2><i class="fas fa-utensils"></i> Bihar Food Admin</h2>
         </div>
         <ul class="admin-menu">
            <li class="active"><a href="index.php"><i class="fas fa-tachometer-alt"></i>
Dashboard</a></li>
            <li><a href="foods.php"><i class="fas fa-hamburger"></i> Food
Items</a></li>
            <li><a href="orders.php"><i class="fas fa-shopping-bag"></i>
Orders</a></li>
            <li><a href="users.php"><i class="fas fa-users"></i> Users</a></li>


            <li><a href="feedback.php"><i class="fas fa-comments"></i>
Feedback</a></li>

            <li><a href="reports.php"><i class="fas fa-chart-bar"></i> Reports</a></li>
            <li><a href="../logout.php"><i class="fas fa-sign-out-alt"></i> Logout</a></li>
         </ul>
      </div>

      <!-- Main Content -->
      <div class="admin-main">
         <!-- Header -->
         <div class="admin-header">
            <div class="header-left">
```

```
            <h1>Dashboard</h1>
            <p>Welcome, <?php echo $_SESSION['admin_username']; ?></p>
        </div>
        <div class="header-right">
            <span class="admin-date"><?php echo date('l, F j, Y'); ?></span>
        </div>
    </div>

    <!-- Stats Cards -->
    <div class="stats-grid">
        <div class="stat-card">
            <div class="stat-icon" style="background: #4CAF50;">
                <i class="fas fa-shopping-bag"></i>
            </div>
            <div class="stat-info">
                <h3><?php echo $totalOrders; ?></h3>
                <p>Total Orders</p>
            </div>
        </div>

        <div class="stat-card">
            <div class="stat-icon" style="background: #2196F3;">
                <i class="fas fa-users"></i>
            </div>


<div class="stat-info">
                <h3><?php echo $totalUsers; ?></h3>
                <p>Registered Users</p>
            </div>
        </div>

        <div class="stat-card">
            <div class="stat-icon" style="background: #FF9800;">
                <i class="fas fa-utensils"></i>
            </div>
            <div class="stat-info">
                <h3><?php echo $totalFoods; ?></h3>
                <p>Food Items</p>
            </div>
        </div>

        <div class="stat-card">
            <div class="stat-icon" style="background: #9C27B0;">
                <i class="fas fa-rupee-sign"></i>
            </div>
            <div class="stat-info">
                <h3>₹<?php echo number_format($totalRevenue, 2); ?></h3>
                <p>Total Revenue</p>
            </div>
```

```
            </div>
        </div>

        <!-- Recent Orders Table -->
        <div class="dashboard-section">
            <div class="section-header">
                <h2><i class="fas fa-clock"></i> Recent Orders</h2>
                <a href="orders.php" class="view-all">View All</a>
            </div>
            <div class="table-responsive">
                <table class="data-table">
                    <thead>
                        <tr>
                            <th>Order ID</th>
                            <th>Customer</th>
                            <th>Amount</th>
                            <th>Status</th>
                                <th>Date</th>
                            <th>Actions</th>

</tr>
                    </thead>
                    <tbody>
                        <?php while($order = mysqli_fetch_assoc($recentOrders)): ?>
                        <tr>
                            <td>#<?php echo $order['id']; ?></td>
                            <td><?php echo $order['user_name']; ?></td>
                            <td>₹<?php echo $order['total_price']; ?></td>
                            <td>
                                <span class="status-badge status-<?php echo $order['status']; ?>">
                                    <?php echo ucfirst($order['status']); ?>
                                </span>
                            </td>
                            <td><?php echo date('d/m/Y', strtotime($order['order_date']));
?></td>
                            <td>
                                <a href="order-details.php?id=<?php echo $order['id']; ?>"
class="btn-action btn-view">
                                    <i class="fas fa-eye"></i>
                                </a>
                            </td>
                        </tr>
                        <?php endwhile; ?>
                    </tbody>
                </table>
            </div>
        </div>

        <!-- Quick Actions -->
        <div class="quick-actions">
```

```
            <h2><i class="fas fa-bolt"></i> Quick Actions</h2>
            <div class="actions-grid">
               <a href="foods.php?action=add" class="action-card">
                  <i class="fas fa-plus-circle"></i>
                  <span>Add New Food</span>
               </a>

 <a href="orders.php" class="action-card">
                  <i class="fas fa-clipboard-list"></i>
                  <span>Process Orders</span>
               </a>

<a href="reports.php" class="action-card">
                  <i class="fas fa-chart-line"></i>
                  <span>View Reports</span>
               </a>
               <a href="feedback.php" class="action-card">
                  <i class="fas fa-comment-dots"></i>
                  <span>Check Feedback</span>
               </a>
            </div>
         </div>
      </div>
   </div>

   <script src="../assets/js/admin.js"></script>
</body>
</html>
```

- **Snapshot of manage Users dashboard:**

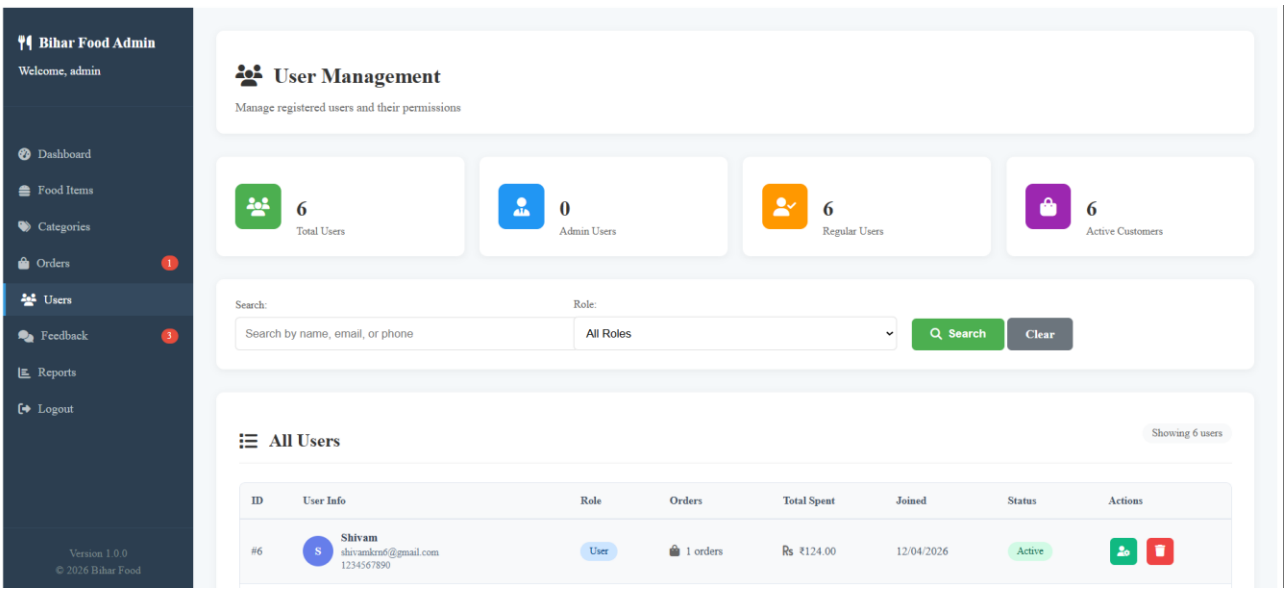


## ManageUsers.PHP:

```
<?php
require_once '../includes/config.php';
require_once '../includes/auth.php';

$auth = new Auth();

if (!$auth->isAdminLoggedIn()) {
    header('Location: login.php');
    exit();
}

$conn = getDBConnection();

// Initialize messages
$message = '';
$error = '';

// Handle user deletion
if (isset($_GET['delete'])) {
    $userId = intval($_GET['delete']);

    // First check if user exists
    $checkQuery = "SELECT role FROM users WHERE id = $userId";
```

```
    $checkResult = mysqli_query($conn, $checkQuery);

    if ($checkResult && mysqli_num_rows($checkResult) > 0) {
        $user = mysqli_fetch_assoc($checkResult);

        if ($user && isset($user['role']) && $user['role'] != 'admin') {
            $deleteQuery = "DELETE FROM users WHERE id = $userId";

            if (mysqli_query($conn, $deleteQuery)) {
                $message = "User deleted successfully";
                // Refresh to show updated list
                header("Location: users.php?msg=user_deleted");
                exit();
            } else {
                $error = "Failed to delete user: " . mysqli_error($conn);
            }
        } else {
            $error = "Cannot delete admin users";
        }
    } else {
        $error = "User not found";
    }
}

// Handle role update
if (isset($_POST['update_role'])) {
    $userId = intval($_POST['user_id']);
    $newRole = mysqli_real_escape_string($conn, $_POST['role']);

    $updateQuery = "UPDATE users SET role = '$newRole' WHERE id = $userId";

    if (mysqli_query($conn, $updateQuery)) {
        $message = "User role updated successfully";
        header("Location: users.php?msg=role_updated");
        exit();
    } else {
        $error = "Failed to update user role: " . mysqli_error($conn);
    }
}

// Get users with filters
$roleFilter = isset($_GET['role']) ? $_GET['role'] : '';
$searchFilter = isset($_GET['search']) ? $_GET['search'] : '';

$whereClause = "WHERE 1=1";
if ($roleFilter) {
    $whereClause .= " AND u.role = '" . mysqli_real_escape_string($conn, $roleFilter) . "'";
}
if ($searchFilter) {
    $searchFilter = mysqli_real_escape_string($conn, $searchFilter);
    $whereClause .= " AND (u.name LIKE '%$searchFilter%' OR u.email LIKE
```

```
'%$searchFilter%' OR u.phone LIKE '%$searchFilter%')";
}

// Get all users with order counts
$usersQuery = "SELECT u.* FROM users u $whereClause ORDER BY u.created_at
DESC";
$usersResult = mysqli_query($conn, $usersQuery);

if (!$usersResult) {
   die("Query failed: " . mysqli_error($conn));
}

// Get statistics
$statsQuery = "SELECT
            COUNT(*) as total_users,
            SUM(CASE WHEN role = 'admin' THEN 1 ELSE 0 END) as admin_users,
            SUM(CASE WHEN role = 'user' THEN 1 ELSE 0 END) as regular_users,
            (SELECT COUNT(DISTINCT user_id) FROM orders) as users_with_orders
           FROM users";
$statsResult = mysqli_query($conn, $statsQuery);
$stats = $statsResult ? mysqli_fetch_assoc($statsResult) : [];

// Check for success messages from redirect
if (isset($_GET['msg'])) {
   switch($_GET['msg']) {
      case 'user_deleted':
         $message = 'User deleted successfully';
         break;
      case 'role_updated':
         $message = 'User role updated successfully';
         break;
   }
}
?>
<!DOCTYPE html>
<html lang="en">
<head>
   <meta charset="UTF-8">
   <meta name="viewport" content="width=device-width, initial-scale=1.0">
   <title>Manage Users - Admin Panel</title>
   <link rel="stylesheet" href="../assets/css/admin.css">
   <link rel="stylesheet" href="https://cdnjs.cloudflare.com/ajax/libs/font-
awesome/6.4.0/css/all.min.css">
   <style>
      /* Main Layout */
      .admin-container {
         display: flex;
         min-height: 100vh;
         background-color: #f5f8fa;
      }
```

```
.admin-main {
   flex: 1;
   padding: 30px;
   margin-left: 250px;
}

/* Header */
.admin-header {
   margin-bottom: 30px;
   padding: 25px;
   background: white;
   border-radius: 10px;
   box-shadow: 0 2px 10px rgba(0,0,0,0.05);
}

.admin-header h1 {
   font-size: 28px;
   margin-bottom: 10px;
   color: #333;
   display: flex;
   align-items: center;
   gap: 15px;
}

.admin-header p {
   color: #666;
   font-size: 16px;
   margin-bottom: 0;
}

/* Alerts */
.alert {
   padding: 15px 20px;
   border-radius: 8px;
   margin-bottom: 25px;
   font-size: 15px;
   display: flex;
   align-items: center;
   gap: 10px;
   animation: slideIn 0.3s ease;
}

@keyframes slideIn {
   from {
      opacity: 0;
      transform: translateY(-10px);
   }
   to {
      opacity: 1;
      transform: translateY(0);
   }
```

```
}

.alert-success {
   background-color: #d1fae5;
   color: #065f46;
   border-left: 4px solid #10b981;
}

.alert-error {
   background-color: #fee2e2;
   color: #991b1b;
   border-left: 4px solid #ef4444;
}

/* Stats Grid */
.stats-grid {
   display: grid;
   grid-template-columns: repeat(auto-fit, minmax(250px, 1fr));
   gap: 20px;
   margin-bottom: 30px;
}

.stat-card {
   background: white;
   border-radius: 10px;
   padding: 25px;
   box-shadow: 0 2px 10px rgba(0,0,0,0.05);
   display: flex;
   align-items: center;
   gap: 20px;
   transition: transform 0.3s ease;
}

.stat-card:hover {
   transform: translateY(-5px);
}

.stat-icon {
   width: 60px;
   height: 60px;
   border-radius: 10px;
   display: flex;
   align-items: center;
   justify-content: center;
   color: white;
   font-size: 24px;
}

.stat-info h3 {
   font-size: 28px;
   margin-bottom: 5px;
```

```
    transition: all 0.3s ease;
    text-decoration: none;
}

.btn-view {
    background-color: #3b82f6;
    color: white;
}

.btn-edit {
    background-color: #10b981;
    color: white;
}

.btn-delete {
    background-color: #ef4444;
    color: white;
}

.btn-action:hover {
    transform: translateY(-2px);
    box-shadow: 0 4px 8px rgba(0,0,0,0.1);
}

/* Role Dropdown - FIXED */
.role-dropdown {
    position: relative;
    display: inline-block;
}

.role-dropdown-content {
    display: none;
    position: absolute;
    background: white;
    box-shadow: 0 2px 10px rgba(0,0,0,0.1);
    border-radius: 6px;
    z-index: 1000;
    min-width: 150px;
    top: 100%;
    left: 0;
    overflow: hidden;
}

.role-option {
    display: block;
    width: 100%;
    padding: 10px 15px;
    background: none;
    border: none;
    text-align: left;
    cursor: pointer;
```

```
    font-size: 14px;
    color: #475569;
    transition: all 0.3s ease;
}

.role-option:hover {
    background-color: #f8fafc;
}

.role-option.active {
    background-color: #667eea;
    color: white;
}

.role-dropdown-content form {
    margin: 0;
}

/* Empty State */
.empty-state {
    text-align: center;
    padding: 40px;
    color: #666;
}

.empty-state i {
    font-size: 48px;
    color: #ccc;
    margin-bottom: 15px;
    display: block;
}

/* Responsive */
@media (max-width: 768px) {
    .admin-main {
        margin-left: 0;
        padding: 20px;
    }

    .stats-grid {
        grid-template-columns: 1fr;
    }

    .filter-row {
        flex-direction: column;
        gap: 15px;
    }

    .filter-group {
        min-width: 100%;
    }
```

```
        .section-header {
            flex-direction: column;
            gap: 10px;
            text-align: center;
        }

        .data-table th,
        .data-table td {
            padding: 10px;
            font-size: 14px;
        }

        .action-buttons {
            flex-wrap: wrap;
        }
    }

    @media (max-width: 480px) {
        .admin-header h1 {
            font-size: 24px;
        }

        .section-header h2 {
            font-size: 20px;
        }

        .stat-info h3 {
            font-size: 24px;
        }
    }
  </style>
</head>
<body>
  <div class="admin-container">
    <?php include 'sidebar.php'; ?>

    <div class="admin-main">
        <div class="admin-header">
            <div class="header-left">
                <h1><i class="fas fa-users"></i> User Management</h1>
                <p>Manage registered users and their permissions</p>
            </div>
        </div>

        <?php if($message): ?>
        <div class="alert alert-success" id="successAlert">
            <i class="fas fa-check-circle"></i> <?php echo $message; ?>
        </div>
        <?php endif; ?>
```

```
<?php if($error): ?>
<div class="alert alert-error" id="errorAlert">
   <i class="fas fa-exclamation-circle"></i> <?php echo $error; ?>
</div>
<?php endif; ?>

<!-- User Statistics -->
<div class="stats-grid">
   <div class="stat-card">
      <div class="stat-icon" style="background: #4CAF50;">
         <i class="fas fa-users"></i>
      </div>
      <div class="stat-info">
         <h3><?php echo $stats['total_users'] ?? 0; ?></h3>
         <p>Total Users</p>
      </div>
   </div>

   <div class="stat-card">
      <div class="stat-icon" style="background: #2196F3;">
         <i class="fas fa-user-tie"></i>
      </div>
      <div class="stat-info">
         <h3><?php echo $stats['admin_users'] ?? 0; ?></h3>
         <p>Admin Users</p>
      </div>
   </div>

   <div class="stat-card">
      <div class="stat-icon" style="background: #FF9800;">
         <i class="fas fa-user-check"></i>
      </div>
      <div class="stat-info">
         <h3><?php echo $stats['regular_users'] ?? 0; ?></h3>
         <p>Regular Users</p>
      </div>
   </div>

   <div class="stat-card">
      <div class="stat-icon" style="background: #9C27B0;">
         <i class="fas fa-shopping-bag"></i>
      </div>
      <div class="stat-info">
         <h3><?php echo $stats['users_with_orders'] ?? 0; ?></h3>
         <p>Active Customers</p>
      </div>
   </div>
</div>

<!-- Filters -->
<div class="filters-section">
```

```
        <form method="GET" class="filter-form">
            <div class="filter-row">
                <div class="filter-group">
                    <label>Search:</label>
                    <input type="text" name="search" placeholder="Search by name, email, or
phone"
                        value="<?php echo htmlspecialchars($searchFilter); ?>">
                </div>

                <div class="filter-group">
                    <label>Role:</label>
                    <select name="role" onchange="this.form.submit()">
                        <option value="">All Roles</option>
                        <option value="user" <?php echo $roleFilter == 'user' ? 'selected' : '';
?>>Regular User</option>
                        <option value="admin" <?php echo $roleFilter == 'admin' ? 'selected' : '';
?>>Admin</option>
                    </select>
                </div>

                <div class="filter-group">
                    <button type="submit" class="btn-submit">
                        <i class="fas fa-search"></i> Search
                    </button>
                    <a href="users.php" class="btn-secondary">Clear</a>
                </div>
            </div>
        </form>
    </div>

    <!-- Users Table -->
    <div class="dashboard-section">
        <div class="section-header">
            <h2><i class="fas fa-list"></i> All Users</h2>
            <span>Showing <?php echo mysqli_num_rows($usersResult); ?> users</span>
        </div>

        <div class="table-responsive">
            <table class="data-table">
                <thead>
                    <tr>
                        <th>ID</th>
                        <th>User Info</th>
                        <th>Role</th>
                        <th>Orders</th>
                        <th>Total Spent</th>
                        <th>Joined</th>
                        <th>Status</th>
                        <th>Actions</th>
                    </tr>
                </thead>
```

```
                <tbody>
                    <?php if(mysqli_num_rows($usersResult) > 0): ?>
                        <?php while($user = mysqli_fetch_assoc($usersResult)):
                            // Get order count for this user
                            $orderCountQuery = "SELECT COUNT(*) as total_orders FROM
orders WHERE user_id = " . $user['id'];
                            $orderCountResult = mysqli_query($conn, $orderCountQuery);
                            $orderCount = $orderCountResult ?
mysqli_fetch_assoc($orderCountResult) : ['total_orders' => 0];

                            // Get total spent for this user
                            $totalSpentQuery = "SELECT SUM(total_price) as total_spent FROM
orders WHERE user_id = " . $user['id'] . " AND status = 'delivered'";
                            $totalSpentResult = mysqli_query($conn, $totalSpentQuery);
                            $totalSpent = $totalSpentResult ? mysqli_fetch_assoc($totalSpentResult)
: ['total_spent' => 0];
                        ?>
                        <tr>
                            <td>#<?php echo $user['id']; ?></td>
                            <td>
                                <div class="user-info">
                                    <div class="user-avatar">
                                        <?php echo strtoupper(substr($user['name'], 0, 1)); ?>
                                    </div>
                                    <div class="user-details">
                                        <strong><?php echo htmlspecialchars($user['name']);
?></strong>
                                        <small><?php echo $user['email']; ?></small>
                                        <small><?php echo $user['phone'] ?: 'No phone'; ?></small>
                                    </div>
                                </div>
                            </td>
                            <td>
                                <span class="role-badge role-<?php echo $user['role']; ?>">
                                    <?php echo ucfirst($user['role']); ?>
                                </span>
                            </td>
                            <td>
                                <div class="order-count">
                                    <i class="fas fa-shopping-bag"></i>
                                    <span><?php echo $orderCount['total_orders']; ?> orders</span>
                                </div>
                            </td>
                            <td>
                                <div class="total-spent">
                                    <i class="fas fa-rupee-sign"></i>
                                    <span>₹<?php echo number_format($totalSpent['total_spent'] ?? 0,
2); ?></span>
                                </div>
                            </td>
                            <td><?php echo date('d/m/Y', strtotime($user['created_at'])); ?></td>
```

```
                    <td>
                        <?php if ($orderCount['total_orders'] > 0): ?>
                        <span class="status-badge status-active">
                            Active
                        </span>
                        <?php else: ?>
                        <span class="status-badge status-inactive">
                            Inactive
                        </span>
                        <?php endif; ?>
                    </td>
                    <td>
                        <div class="action-buttons">
                            <!-- Role Change Dropdown -->
                            <div class="role-dropdown" id="roleDropdown<?php echo
$user['id']; ?>">
                                <button type="button" class="btn-action btn-edit"
title="Change Role">
                                    <i class="fas fa-user-cog"></i>
                                </button>
                                <div class="role-dropdown-content">
                                    <form method="POST" onsubmit="return confirm('Are you
sure you want to change the role?')">
                                        <input type="hidden" name="user_id" value="<?php echo
$user['id']; ?>">
                                        <button type="submit" name="update_role" value="user"
                                            class="role-option <?php echo $user['role'] == 'user' ?
'active' : ''; ?>">
                                            <i class="fas fa-user"></i> Regular User
                                        </button>
                                        <button type="submit" name="update_role"
value="admin"
                                            class="role-option <?php echo $user['role'] == 'admin' ?
'active' : ''; ?>">
                                            <i class="fas fa-user-tie"></i> Admin
                                        </button>
                                    </form>
                                </div>
                            </div>

                            <?php if ($user['role'] != 'admin'): ?>
                            <a href="?delete=<?php echo $user['id']; ?>"
                                class="btn-action btn-delete" title="Delete User"
                                onclick="return confirm('Are you sure you want to delete user
<?php echo htmlspecialchars(addslashes($user['name'])); ?>? This action cannot be
undone.')">
                                <i class="fas fa-trash"></i>
                            </a>
                            <?php endif; ?>
                        </div>
                    </td>
```

```
                    </tr>
                    <?php endwhile; ?>
                <?php else: ?>
                    <tr>
                        <td colspan="8" class="empty-state">
                            <i class="fas fa-users"></i>
                            No users found
                        </td>
                    </tr>
                <?php endif; ?>
            </tbody>
        </table>
    </div>
  </div>
</div>

<script>
// Auto-hide alerts after 5 seconds
document.addEventListener('DOMContentLoaded', function() {
    const alerts = document.querySelectorAll('.alert');

    alerts.forEach(function(alert) {
        setTimeout(function() {
            alert.style.transition = 'all 0.5s ease';
            alert.style.opacity = '0';
            alert.style.transform = 'translateY(-10px)';
            alert.style.maxHeight = '0';
            alert.style.marginBottom = '0';
            alert.style.paddingTop = '0';
            alert.style.paddingBottom = '0';
            alert.style.overflow = 'hidden';

            setTimeout(function() {
                alert.style.display = 'none';
            }, 500);
        }, 5000);
    });

    // Role dropdown functionality
    document.querySelectorAll('.role-dropdown').forEach(dropdown => {
        const button = dropdown.querySelector('button');
        const content = dropdown.querySelector('.role-dropdown-content');

        // Show dropdown when clicking the button
        button.addEventListener('click', (e) => {
            e.preventDefault();
            e.stopPropagation();

            // Close all other dropdowns
            document.querySelectorAll('.role-dropdown-content').forEach(otherContent => {
```

```
            if (otherContent !== content) {
                otherContent.style.display = 'none';
            }
        });

        // Toggle current dropdown
        content.style.display = content.style.display === 'block' ? 'none' : 'block';
    });

    // Keep dropdown open when clicking inside
    content.addEventListener('click', (e) => {
        e.stopPropagation();
    });

    // Handle role option clicks
    content.querySelectorAll('.role-option').forEach(option => {
        option.addEventListener('click', (e) => {
            // The form will submit automatically since it's a submit button
        });
    });
});

// Close dropdown when clicking outside
document.addEventListener('click', (e) => {
    if (!e.target.closest('.role-dropdown')) {
        document.querySelectorAll('.role-dropdown-content').forEach(content => {
            content.style.display = 'none';
        });
    }
});

// Close dropdown with Escape key
document.addEventListener('keydown', (e) => {
    if (e.key === 'Escape') {
        document.querySelectorAll('.role-dropdown-content').forEach(content => {
            content.style.display = 'none';
        });
    }
});
});

// Function to change role
function changeRole(userId, role) {
    if (confirm('Are you sure you want to change the role?')) {
        const form = document.createElement('form');
        form.method = 'POST';
        form.action = '';

        const userIdInput = document.createElement('input');
        userIdInput.type = 'hidden';
        userIdInput.name = 'user_id';
```

```
        userIdInput.value = userId;

        const roleInput = document.createElement('input');
        roleInput.type = 'hidden';
        roleInput.name = 'role';
        roleInput.value = role;

        const submitInput = document.createElement('input');
        submitInput.type = 'hidden';
        submitInput.name = 'update_role';
        submitInput.value = '1';

        form.appendChild(userIdInput);
        form.appendChild(roleInput);
        form.appendChild(submitInput);

        document.body.appendChild(form);
        form.submit();
      }
    }
    </script>
</body>
</html>
```

- **Snapshot of manage see Feedback:**

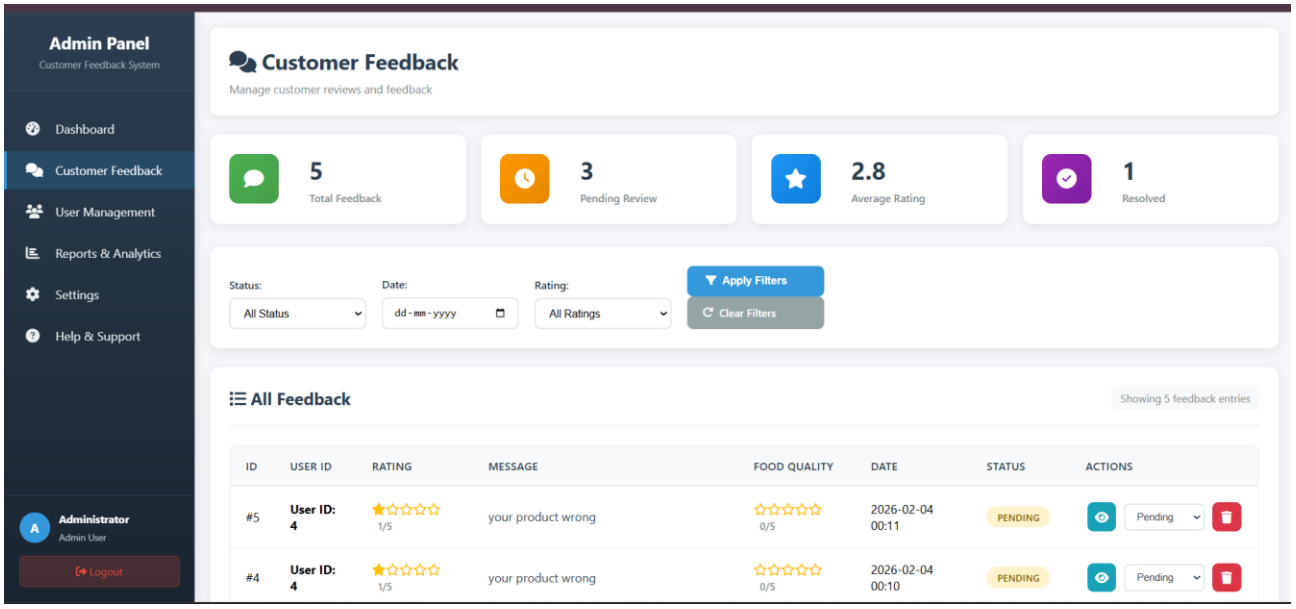


## FeedbackList.js

```
<?php

require_once '../includes/config.php';

require_once '../includes/auth.php';

$auth = new Auth();

if (!$auth->isAdminLoggedIn()) {

    header('Location: login.php');

    exit();

}

$conn = getDBConnection();


// Show all errors
```

```
error_reporting(E_ALL);

ini_set('display_errors', 1);

// Initialize messages

$message = '';

$error = '';

if (!$conn) {

    die("Database connection failed: " . mysqli_connect_error());

}

// Handle status update

if (isset($_POST['update_status'])) {

    $feedbackId = intval($_POST['feedback_id']);

    $newStatus = mysqli_real_escape_string($conn, $_POST['status']);

    $updateQuery = "UPDATE feedback SET status = '$newStatus' WHERE id =
$feedbackId";

if (mysqli_query($conn, $updateQuery)) {

        header("Location: feedback.php?msg=status_updated");

        exit();

    } else {

        $error = "Failed to update feedback status: " . mysqli_error($conn);

    }

}

// Handle feedback deletion

if (isset($_GET['delete'])) {
```

```
    $feedbackId = intval($_GET['delete']);

    $deleteQuery = "DELETE FROM feedback WHERE id = $feedbackId";

    if (mysqli_query($conn, $deleteQuery)) {

        header("Location: feedback.php?msg=feedback_deleted");

        exit();

    } else {

        $error = "Failed to delete feedback: " . mysqli_error($conn);

    }

}

// Get feedback with filters

$statusFilter = isset($_GET['status']) ? $_GET['status'] : '';

$dateFilter = isset($_GET['date']) ? $_GET['date'] : '';

$ratingFilter = isset($_GET['rating']) ? intval($_GET['rating']) : 0;

// Build query based on actual column names from debug

$feedbackQuery = "SELECT * FROM feedback WHERE 1=1";

if (!empty($statusFilter) && $statusFilter != 'all') {

    $feedbackQuery .= " AND status = '" . mysqli_real_escape_string($conn, $statusFilter)
. "'";

}

if (!empty($dateFilter)) {

    $feedbackQuery .= " AND DATE(created_at) = '" . mysqli_real_escape_string($conn,
$dateFilter) . "'";

}

if ($ratingFilter > 0) {
```

```
    $feedbackQuery .= " AND rating = $ratingFilter";
}
$feedbackQuery .= " ORDER BY id DESC";
$feedbackResult = mysqli_query($conn, $feedbackQuery);
if (!$feedbackResult) {
    die("Query failed: " . mysqli_error($conn));
}
// Get total count
$totalRows = mysqli_num_rows($feedbackResult);
// Check for success messages
if (isset($_GET['msg'])) {
    switch($_GET['msg']) {
        case 'feedback_deleted':
            $message = 'Feedback deleted successfully';
            break;
        case 'status_updated':
            $message = 'Status updated successfully';
            break;
        case 'response_added':
            $message = 'Response added successfully';
            break;
    }
```

```
}

?>

<!DOCTYPE html>

<html lang="en">

<head>

    <meta charset="UTF-8">

    <meta name="viewport" content="width=device-width, initial-scale=1.0">

    <title>Manage Feedback - Admin Panel</title>

    <link rel="stylesheet" href="../assets/css/admin.css">

    <link rel="stylesheet" href="https://cdnjs.cloudflare.com/ajax/libs/font-
awesome/6.4.0/css/all.min.css">

</head>

<body>

    <div class="admin-container">

        <!-- Left Sidebar -->

        <div class="admin-sidebar">

            <div class="sidebar-header">

                <h2>Admin Panel</h2>

                <p>Customer Feedback System</p>

            </div>

            <nav class="sidebar-nav">

                <ul>

                    <li>
```

```
                <a href="dashboard.php" class="<?php echo
basename($_SERVER['PHP_SELF']) == 'dashboard.php' ? 'active' : ''; ?>">

                    <i class="fas fa-tachometer-alt"></i>

                    Dashboard

                </a>

            </li>

            <li>

                <a href="feedback.php" class="<?php echo
basename($_SERVER['PHP_SELF']) == 'feedback.php' ? 'active' : ''; ?>">

                    <i class="fas fa-comments"></i>

                    Customer Feedback

                </a>

            </li>

            <li>

                <a href="users.php" class="<?php echo
basename($_SERVER['PHP_SELF']) == 'users.php' ? 'active' : ''; ?>">

                    <i class="fas fa-users"></i>

                    User Management

                </a>

            </li>

            <li>

                <a href="reports.php" class="<?php echo
basename($_SERVER['PHP_SELF']) == 'reports.php' ? 'active' : ''; ?>">

                    <i class="fas fa-chart-bar"></i>

                    Reports & Analytics
```

```
                </a>
            </li>
            <li>
                <a href="settings.php" class="<?php echo
basename($_SERVER['PHP_SELF']) == 'settings.php' ? 'active' : ''; ?>">
                    <i class="fas fa-cog"></i>
                    Settings
                </a>
            </li>
            <li>
                <a href="help.php" class="<?php echo
basename($_SERVER['PHP_SELF']) == 'help.php' ? 'active' : ''; ?>">
                    <i class="fas fa-question-circle"></i>
                    Help & Support
                </a>
            </li>
        </ul>
    </nav>
    <div class="sidebar-footer">
        <div class="user-info">
            <div class="user-avatar">
                <?php echo strtoupper(substr($_SESSION['username'] ?? 'A', 0, 1)); ?>
            </div>
            <div class="user-details">
```

```
            <h4><?php echo $_SESSION['username'] ?? 'Administrator'; ?></h4>
            <span>Admin User</span>
          </div>
        </div>
        <a href="logout.php" class="logout-btn">
          <i class="fas fa-sign-out-alt"></i> Logout
        </a>
      </div>
    </div>
    <!-- Main Content Area -->
    <div class="admin-main">
      <div class="admin-header">
        <div class="header-left">
          <h1><i class="fas fa-comments"></i> Customer Feedback</h1>
          <p>Manage customer reviews and feedback</p>
        </div>
      </div>
      <?php if($message): ?>
      <div class="alert alert-success" id="successAlert">
        <i class="fas fa-check-circle"></i> <?php echo $message; ?>
      </div>
      <?php endif;
```

```
<?php if($error): ?>

<div class="alert alert-error" id="errorAlert">

    <i class="fas fa-exclamation-circle"></i> <?php echo $error; ?>

</div>

<?php endif; ?>

<!-- Feedback Statistics -->

<div class="stats-grid">

    <div class="stat-card">

        <div class="stat-icon" style="background: linear-gradient(135deg, #4CAF50,
#45a049);">

            <i class="fas fa-comment"></i>

        </div>

        <div class="stat-info">

            <h3><?php echo $totalRows; ?></h3>

            <p>Total Feedback</p>

        </div>

    </div>



    <div class="stat-card">

        <div class="stat-icon" style="background: linear-gradient(135deg, #FF9800,
#e68900);">

            <i class="fas fa-clock"></i>

        </div>

        <div class="stat-info">
```

```
                <h3><?php

                // Count pending

                $pendingQuery = "SELECT COUNT(*) as count FROM feedback
WHERE status = 'pending'";

                $pendingResult = mysqli_query($conn, $pendingQuery);

                $pendingCount = $pendingResult ?
mysqli_fetch_assoc($pendingResult)['count'] : 0;

                echo $pendingCount;

                ?></h3>

                <p>Pending Review</p>

              </div>

            </div>

            <div class="stat-card">

              <div class="stat-icon" style="background: linear-gradient(135deg, #2196F3,
#0b7dda);">

                <i class="fas fa-star"></i>

              </div>

              <div class="stat-info">

                <h3>

                  <?php

                  $avgQuery = "SELECT AVG(rating) as avg FROM feedback";

                  $avgResult = mysqli_query($conn, $avgQuery);

                  $avgRating = $avgResult ? mysqli_fetch_assoc($avgResult)['avg'] : 0;

                  echo number_format($avgRating, 1);
```

```
                ?>

            </h3>

            <p>Average Rating</p>

          </div>

        </div>

        <div class="stat-card">

          <div class="stat-icon" style="background: linear-gradient(135deg, #9C27B0,
#7b1fa2);">

            <i class="fas fa-check-circle"></i>

          </div>

          <div class="stat-info">

            <h3><?php

            $resolvedQuery = "SELECT COUNT(*) as count FROM feedback
WHERE status = 'resolved'";

            $resolvedResult = mysqli_query($conn, $resolvedQuery);

            $resolvedCount = $resolvedResult ?
mysqli_fetch_assoc($resolvedResult)['count'] : 0;

            echo $resolvedCount;

            ?></h3>

            <p>Resolved</p>

          </div>

        </div>

      </div>

      <!-- Filters -->
```

```
<div class="filters-section">

<form method="GET" class="filter-form">

<div class="filter-row">

<div class="filter-group">

<label>Status:</label>

<select name="status" onchange="this.form.submit()">

<option value="all" <?php echo (empty($statusFilter) || $statusFilter
== 'all') ? 'selected' : ''; ?>>All Status</option>

<option value="pending" <?php echo $statusFilter == 'pending' ?
'selected' : ''; ?>>Pending</option>

<option value="reviewed" <?php echo $statusFilter == 'reviewed' ?
'selected' : ''; ?>>Reviewed</option>

<option value="resolved" <?php echo $statusFilter == 'resolved' ?
'selected' : ''; ?>>Resolved</option>

</select>

</div>

<div class="filter-group">

<label>Date:</label>

<input type="date" name="date" value="<?php echo $dateFilter; ?>"
onchange="this.form.submit()">

</div>

<div class="filter-group">

<label>Rating:</label>

<select name="rating" onchange="this.form.submit()">

<option value="0" <?php echo $ratingFilter == 0 ? 'selected' : '';
?>>All Ratings</option>
```

```
                    <option value="5" <?php echo $ratingFilter == 5 ? 'selected' : '';
?>>★★★★★ (5)</option>

                    <option value="4" <?php echo $ratingFilter == 4 ? 'selected' : '';
?>>★★★★ (4)</option>

                    <option value="3" <?php echo $ratingFilter == 3 ? 'selected' : '';
?>>★★★ (3)</option>

                    <option value="2" <?php echo $ratingFilter == 2 ? 'selected' : '';
?>>★★ (2)</option>

                    <option value="1" <?php echo $ratingFilter == 1 ? 'selected' : '';
?>>★ (1)</option>

                  </select>

                </div>

                <div class="filter-group">

                  <button type="submit" class="btn-submit">

                    <i class="fas fa-filter"></i> Apply Filters

                  </button>

                  <a href="feedback.php" class="btn-secondary">

                    <i class="fas fa-redo"></i> Clear Filters

                  </a>

                </div>

              </div>

            </form>

          </div>

          <!-- Feedback Table -->

          <div class="dashboard-section">
```

```
<div class="section-header">
    <h2><i class="fas fa-list"></i> All Feedback</h2>
    <span>Showing <?php echo $totalRows; ?> feedback entries</span>
</div>
<div class="table-responsive">
    <table class="data-table">
        <thead>
            <tr>
                <th>ID</th>
                <th>User ID</th>
                <th>Rating</th>
                <th>Message</th>
                <th>Food Quality</th>
                <th>Date</th>
                <th>Status</th>
                <th>Actions</th>
            </tr>
        </thead>
        <tbody>
            <?php if($totalRows > 0): ?>
                <?php
                // Reset pointer
```

```
                    mysqli_data_seek($feedbackResult, 0);

                    while($row = mysqli_fetch_assoc($feedbackResult)):

                        // IMPORTANT: Check the actual column names from debug output

                        // Use the exact column names shown in debug section

                        $id = $row['id'] ?? 0;

                        $userId = $row['user_id'] ?? ($row['userid'] ?? 'N/A');

                        $messageText = $row['message'] ?? ($row['feedback_text'] ??
($row['comment'] ?? ''));

                        $rating = isset($row['rating']) ? intval($row['rating']) :
(isset($row['stars']) ? intval($row['stars']) : 0);

                        $foodQuality = isset($row['food_quality']) ?
intval($row['food_quality']) : (isset($row['foodquality']) ? intval($row['foodquality']) : 0);

                        $status = $row['status'] ?? ($row['feedback_status'] ?? 'pending');

                        $createdAt = isset($row['created_at']) ? date('Y-m-d H:i',
strtotime($row['created_at'])) :

                                (isset($row['timestamp']) ? date('Y-m-d H:i',
strtotime($row['timestamp'])) :

                                (isset($row['date']) ? date('Y-m-d H:i',
strtotime($row['date'])) : 'N/A'));



                        // Clean message

                        $cleanMessage = htmlspecialchars($messageText);

                    ?>

                    <tr>

                        <td>#<?php echo $id; ?></td>

                        <td>
```

```
    <div class="customer-info">
        <strong>User ID: <?php echo $userId; ?></strong>
    </div>
</td>
<td>
    <div class="rating-stars">
        <?php
        for ($i = 1; $i <= 5; $i++):
            if ($i <= $rating):
                echo '<i class="fas fa-star"></i>';
            else:
                echo '<i class="far fa-star"></i>';
            endif;
        endfor;
        ?>
        <small><?php echo $rating; ?>/5</small>
    </div>
</td>
<td>
    <div class="feedback-message">
        <?php
        if (!empty($cleanMessage) && trim($cleanMessage) !== '') {
```

```
                    echo nl2br(substr($cleanMessage, 0, 100));

                    if (strlen($cleanMessage) > 100):

                    ?>

                    ... <a href="#" class="read-more"
onclick="showFullMessage(<?php echo $id; ?>, '<?php echo addslashes($cleanMessage);
?>')">

                        Read more

                    </a>

                    <?php endif;

                } else {

                    echo '<em style="color: #95a5a6;">No message</em>';

                }

                ?>

            </div>

        </td>

        <td>

            <div class="rating-stars">

                <?php

                for ($i = 1; $i <= 5; $i++):

                    if ($i <= $foodQuality):

                        echo '<i class="fas fa-star"></i>';

                    else:

                        echo '<i class="far fa-star"></i>';

                    endif;
```

```
                    endfor;
                    ?>
                    <small><?php echo $foodQuality; ?>/5</small>
                </div>
            </td>
            <td>
                <?php echo $createdAt; ?>
            </td>
            <td>
                <span class="status-badge status-<?php echo $status; ?>">
                    <?php echo ucfirst($status); ?>
                </span>
            </td>
            <td>
                <div class="action-buttons">
                    <?php if (!empty($cleanMessage) && trim($cleanMessage) !==
''): ?>
                    <button class="btn-action btn-view" title="View Details"
                            onclick="showFullMessage(<?php echo $id; ?>, '<?php
echo addslashes($cleanMessage); ?>')">
                        <i class="fas fa-eye"></i>
                    </button>
                    <?php endif; ?>
                    <form method="POST" style="display: inline;">
```

```
                                <input type="hidden" name="feedback_id" value="<?php
echo $id; ?>">

                                <select name="status" onchange="this.form.submit()"
class="status-select">

                                  <option value="pending" <?php echo $status == 'pending'
? 'selected' : ''; ?>>Pending</option>

                                  <option value="reviewed" <?php echo $status ==
'reviewed' ? 'selected' : ''; ?>>Reviewed</option>

                                  <option value="resolved" <?php echo $status == 'resolved'
? 'selected' : ''; ?>>Resolved</option>

                                </select>

                                <input type="hidden" name="update_status" value="1">

                              </form>

                              <a href="?delete=<?php echo $id; ?>"

                                class="btn-action btn-delete" title="Delete Feedback"

                                onclick="return confirm('Are you sure you want to delete this
feedback?')">

                                <i class="fas fa-trash"></i>

                              </a>

                            </div>

                          </td>

                        </tr>

                        <?php endwhile; ?>

                      <?php else: ?>

                        <tr>

                          <td colspan="8" class="empty-state">
```

```
                    <i class="fas fa-comments"></i>

                    <h3>No Feedback Found</h3>

                    <p>There is no feedback in the database or no feedback matches
your filters.</p>

                    <?php if($statusFilter || $dateFilter || $ratingFilter): ?>

                    <p style="margin-top: 15px;">

                        <a href="feedback.php" class="btn-submit" style="font-size:
14px;">

                            <i class="fas fa-redo"></i> Clear all filters

                        </a>

                    </p>

                    <?php endif; ?>

                  </td>

                </tr>

              <?php endif; ?>

            </tbody>

          </table>

        </div>

      </div>

    </div>

  </div>

  <script>

  //Show full message in modal

  function showFullMessage(feedbackId, message) {
```

```
const modal = document.createElement('div');

modal.className = 'modal';

modal.style.cssText = `

  position: fixed;

  top: 0;

  left: 0;

  width: 100%;

  height: 100%;

  background: rgba(0,0,0,0.5);

  display: flex;

  align-items: center;

  justify-content: center;

  z-index: 10000;

`;

modal.innerHTML = `

    <div style="background: white; padding: 30px; border-radius: 12px; max-width: 700px; width: 90%; max-height: 80vh; overflow-y: auto; box-shadow: 0 10px 40px rgba(0,0,0,0.2);">

      <div style="display: flex; justify-content: space-between; align-items: center; margin-bottom: 25px; padding-bottom: 15px; border-bottom: 2px solid #f0f4f8;">

        <h3 style="margin: 0; color: #2c3e50; font-size: 20px;">

          <i class="fas fa-comment" style="margin-right: 10px; color: #3498db;"></i>

          Feedback Message (ID: #${feedbackId})

        </h3>
```

```
                <button onclick="this.closest('.modal').remove()" style="background: none; border: none; font-size: 28px; cursor: pointer; color: #95a5a6; padding: 0; width: 40px; height: 40px; display: flex; align-items: center; justify-content: center; border-radius: 50%; transition: background 0.3s;">

                    &times;

                </button>

            </div>

            <div style="padding: 25px; background: #f8f9fa; border-radius: 8px; margin-bottom: 25px;">

                <p style="white-space: pre-wrap; word-wrap: break-word; line-height: 1.8; color: #2c3e50; font-size: 15px;">

                    ${message.replace(/\n/g, '\n')}

                </p>

            </div>

            <div style="text-align: center;">

                <button onclick="this.closest('.modal').remove()" style="background: #95a5a6; color: white; border: none; padding: 12px 30px; border-radius: 8px; cursor: pointer; font-weight: 600; font-size: 14px; transition: all 0.3s;">

                    <i class="fas fa-times" style="margin-right: 8px;"></i> Close

                </button>

            </div>

        </div>

    `;

    document.body.appendChild(modal);

    // Close on outside click

    modal.addEventListener('click', function(e) {
```

```
        if (e.target === modal) {
            modal.remove();
        }
    });
    // Close on Escape key
    document.addEventListener('keydown', function(e) {
        if (e.key === 'Escape') {
            modal.remove();
        }
    });
}
// Auto-hide alerts
document.addEventListener('DOMContentLoaded', function() {
    const alerts = document.querySelectorAll('.alert');
    alerts.forEach(function(alert) {
        setTimeout(function() {
            alert.style.transition = 'all 0.5s ease';
            alert.style.opacity = '0';
            setTimeout(function() {
                alert.style.display = 'none';
            }, 500);
        }, 5000);
```

```
        });
    });
    </script>
</body>
</html>
```

- **Snapshot of manage Statistic Page:**

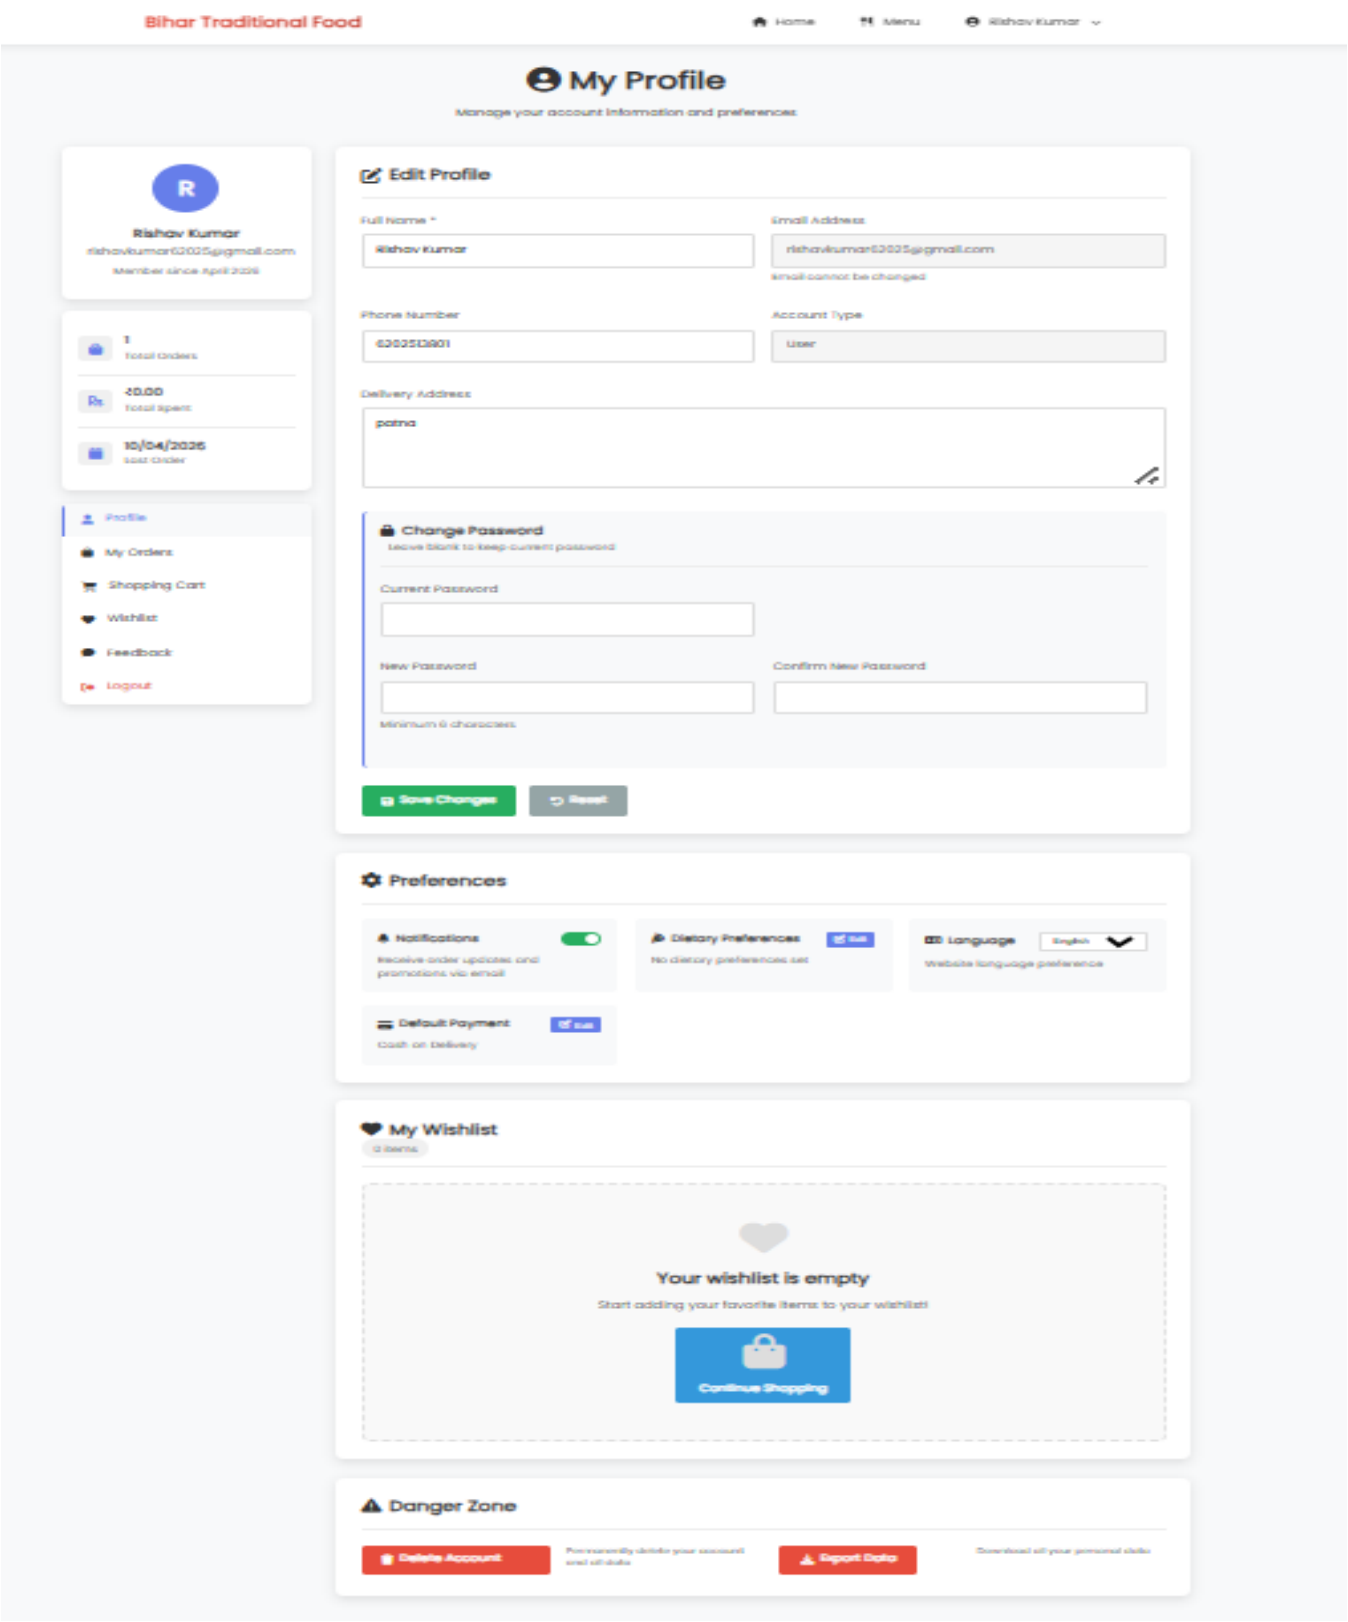

## User Profile.PHP

```php
<?php
require_once '../includes/config.php';
require_once '../includes/auth.php';
$auth = new Auth();
if (!$auth->isLoggedIn()) {
    header('Location: ../login.php');
    exit();
}
// Now include wishlist support for logged-in user
require_once 'get-wishlist.php';
$userId = $_SESSION['user_id'];
$conn = getDBConnection();
$message = '';
$error = '';
// Get user details
$userQuery = "SELECT * FROM users WHERE id = $userId";
$userResult = mysqli_query($conn, $userQuery);
$user = mysqli_fetch_assoc($userResult);
// Handle profile update
if ($_SERVER['REQUEST_METHOD'] == 'POST') {
    $name = mysqli_real_escape_string($conn, $_POST['name']);
    $phone = mysqli_real_escape_string($conn, $_POST['phone']);
    $address = mysqli_real_escape_string($conn, $_POST['address']);
    // Handle password change if provided
    $currentPassword = $_POST['current_password'] ?? '';
    $newPassword = $_POST['new_password'] ?? '';
    $confirmPassword = $_POST['confirm_password'] ?? '';
```

```
// Validate required fields
if (empty($name)) {
    $error = "Name is required";
} else {
    // Check if password change is requested
    if (!empty($currentPassword) || !empty($newPassword) || !empty($confirmPassword)) {
        // All password fields must be filled
        if (empty($currentPassword) || empty($newPassword) || empty($confirmPassword)) {
            $error = "All password fields are required to change password";
        } elseif ($newPassword !== $confirmPassword) {
            $error = "New passwords do not match";
        } elseif (strlen($newPassword) < 6) {
            $error = "New password must be at least 6 characters";
        } elseif (!password_verify($currentPassword, $user['password'])) {
            $error = "Current password is incorrect";
        } else {
            // Password is valid, hash new password
            $hashedPassword = password_hash($newPassword, PASSWORD_DEFAULT);
            $updateQuery = "UPDATE users SET
                        name = '$name',
                        phone = '$phone',
                        address = '$address',
                        password = '$hashedPassword',
                        updated_at = NOW()
                        WHERE id = $userId";
        }
    } else {
        // Update without password
        $updateQuery = "UPDATE users SET
```

```
                    name = '$name',
                    phone = '$phone',
                    address = '$address',
                    updated_at = NOW()
                    WHERE id = $userId";
        }
        if (empty($error)) {
            if (mysqli_query($conn, $updateQuery)) {
                $message = "Profile updated successfully";
                // Update session with new name
                $_SESSION['user_name'] = $name;
                // Refresh user data
                $userResult = mysqli_query($conn, $userQuery);
                $user = mysqli_fetch_assoc($userResult);
            } else {
                $error = "Failed to update profile: " . mysqli_error($conn);
            }
        }
    }
}
// Get user's order statistics
$statsQuery = "SELECT
            COUNT(*) as total_orders,
            SUM(CASE WHEN status = 'delivered' THEN total_price ELSE 0 END) as
total_spent,
            MAX(order_date) as last_order_date
            FROM orders
            WHERE user_id = $userId";
$statsResult = mysqli_query($conn, $statsQuery);
$stats = mysqli_fetch_assoc($statsResult);
```

```
?>
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>My Profile - Bihar Traditional Food</title>
    <link rel="stylesheet" href="../assets/css/style.css">
    <link rel="stylesheet" href="https://cdnjs.cloudflare.com/ajax/libs/font-
awesome/6.4.0/css/all.min.css">
</head>
<body>
    <?php include '../includes/header.php'; ?>
      <div class="profile-container">
       <div class="profile-header">
          <h1><i class="fas fa-user-circle"></i> My Profile</h1>
          <p>Manage your account information and preferences</p>
       </div>
            <div class="profile-content">
          <!-- Profile Sidebar -->
          <div class="profile-sidebar">
             <div class="user-card">
                <div class="user-avatar">
                   <?php echo strtoupper(substr($user['name'], 0, 1)); ?>
                </div>
                <div class="user-info">
                   <h3><?php echo htmlspecialchars($user['name']); ?></h3>
                   <p><?php echo $user['email']; ?></p>
                   <p class="member-since">Member since <?php echo date('F Y',
strtotime($user['created_at'])); ?></p>
```

```
            </div>
        </div>
        <div class="sidebar-stats">
            <div class="stat-item">
                <i class="fas fa-shopping-bag"></i>
                <div>
                    <span><?php echo $stats['total_orders'] ?? 0; ?></span>
                    <small>Total Orders</small>
                </div>
            </div>
            <div class="stat-item">
                <i class="fas fa-rupee-sign"></i>
                <div>
                    <span>₹<?php echo number_format($stats['total_spent'] ?? 0, 2); ?></span>
                    <small>Total Spent</small>
                </div>
            </div>
            <div class="stat-item">
                <i class="fas fa-calendar"></i>
                <div>
                    <span><?php echo $stats['last_order_date'] ? date('d/m/Y',
strtotime($stats['last_order_date'])) : 'N/A'; ?></span>
                    <small>Last Order</small>
                </div>
            </div>
        </div>
        <div class="sidebar-menu">
            <a href="profile.php" class="active">
                <i class="fas fa-user"></i> Profile
            </a>
```

```
        <a href="orders.php">
            <i class="fas fa-shopping-bag"></i> My Orders
        </a>
        <a href="cart.php">
            <i class="fas fa-shopping-cart"></i> Shopping Cart
        </a>
        <a href="#wishlist-section">
            <i class="fas fa-heart"></i> Wishlist
        </a>
        <a href="feedback.php">
            <i class="fas fa-comment"></i> Feedback
        </a>
        <a href="../logout.php" class="logout">
            <i class="fas fa-sign-out-alt"></i> Logout
        </a>
    </div>
</div>
<!-- Main Content -->
<div class="profile-main">
    <!-- Profile Form -->
    <div class="profile-section">
        <div class="section-header">
            <h2><i class="fas fa-edit"></i> Edit Profile</h2>
        </div>
        <?php if($message): ?>
        <div class="alert alert-success"><?php echo $message; ?></div>
        <?php endif; ?>
        <?php if($error): ?>
        <div class="alert alert-error"><?php echo $error; ?></div>
```

```
<?php endif; ?>
<form method="POST" action="" class="profile-form">
  <div class="form-row">
    <div class="form-group">
      <label for="name">Full Name *</label>
      <input type="text" id="name" name="name" required
          value="<?php echo htmlspecialchars($user['name']); ?>">
    </div>
    <div class="form-group">
      <label for="email">Email Address</label>
      <input type="email" id="email" value="<?php echo $user['email']; ?>"
disabled>
      <small class="form-text">Email cannot be changed</small>
    </div>
  </div>
  <div class="form-row">
    <div class="form-group">
      <label for="phone">Phone Number</label>
      <input type="tel" id="phone" name="phone"
          value="<?php echo htmlspecialchars($user['phone'] ?? ''); ?>"
          placeholder="Enter your phone number">
    </div>
    <div class="form-group">
      <label for="role">Account Type</label>
      <input type="text" id="role" value="<?php echo ucfirst($user['role']);
?>" disabled>
    </div>
  </div>
  <div class="form-group">
    <label for="address">Delivery Address</label>
```

```
                <textarea id="address" name="address" rows="4"
                        placeholder="Enter your default delivery address"><?php
                        echo htmlspecialchars($user['address'] ?? ''); ?></textarea>
            </div>
            <!-- Password Change Section -->
            <div class="password-section">
                <div class="section-header">
                    <h3><i class="fas fa-lock"></i> Change Password</h3>
                    <small>Leave blank to keep current password</small>
                </div>
                <div class="form-row">
                    <div class="form-group">
                        <label for="current_password">Current Password</label>
                        <input type="password" id="current_password"
name="current_password">
                    </div>
                </div>
                <div class="form-row">
                    <div class="form-group">
                        <label for="new_password">New Password</label>
                        <input type="password" id="new_password" name="new_password">
                        <small class="form-text">Minimum 6 characters</small>
                    </div>
                    <div class="form-group">
                        <label for="confirm_password">Confirm New Password</label>
                        <input type="password" id="confirm_password"
name="confirm_password">
                    </div>
                </div>
            </div>
```

```
        <div class="form-actions">
            <button type="submit" class="btn-save">
                <i class="fas fa-save"></i> Save Changes
            </button>
            <button type="reset" class="btn-reset">
                <i class="fas fa-undo"></i> Reset
            </button>
        </div>
    </form>
</div>
<!-- Account Preferences -->
<div class="preferences-section">
    <div class="section-header">
        <h2><i class="fas fa-cog"></i> Preferences</h2>
    </div>
    <div class="preferences-grid">
        <div class="preference-item">
            <div class="preference-header">
                <h3><i class="fas fa-bell"></i> Notifications</h3>
                <label class="switch">
                    <input type="checkbox" checked>
                    <span class="slider"></span>
                </label>
            </div>
            <p>Receive order updates and promotions via email</p>
        </div>
        <div class="preference-item">
            <div class="preference-header">
                <h3><i class="fas fa-pizza-slice"></i> Dietary Preferences</h3>
```

```
            <button class="btn-edit-prefs">
                <i class="fas fa-edit"></i> Edit
            </button>
        </div>
        <p>No dietary preferences set</p>
    </div>

    <div class="preference-item">
        <div class="preference-header">
            <h3><i class="fas fa-language"></i> Language</h3>
            <select class="language-select">
                <option selected>English</option>
                <option>Hindi</option>
            </select>
        </div>
        <p>Website language preference</p>
    </div>
    <div class="preference-item">
        <div class="preference-header">
            <h3><i class="fas fa-credit-card"></i> Default Payment</h3>
            <button class="btn-edit-prefs">
                <i class="fas fa-edit"></i> Edit
            </button>
        </div>
        <p>Cash on Delivery</p>
    </div>
  </div>
</div>
<!-- Wishlist Section -->
```

```
<div class="profile-section" id="wishlist-section">
    <div class="section-header">
        <h2><i class="fas fa-heart"></i> My Wishlist</h2>
        <span class="wishlist-count"><?php echo count($wishlistItems); ?> item<?php
echo count($wishlistItems) != 1 ? 's' : ''; ?></span>
    </div>
    <?php if (count($wishlistItems) > 0): ?>
        <div class="wishlist-grid">
            <?php foreach ($wishlistItems as $item):
                // Handle image path
                $imagePath = '../assets/images/default-food.jpg';
                if (!empty($item['image_path'])) {
                    $possiblePaths = [
                        '../' . $item['image_path'],
                        '../assets/uploads/foods/' . basename($item['image_path']),
                        '../assets/images/foods/' . basename($item['image_path']),
                        $item['image_path']
                    ];
                    foreach ($possiblePaths as $path) {
                        if (file_exists($path)) {
                            $imagePath = $path;
                            break;
                        }
                    }
                }
            ?>
                <div class="wishlist-card">
                    <div class="wishlist-image">
                        <img src="<?php echo $imagePath; ?>"
                            alt="<?php echo htmlspecialchars($item['name']); ?>"
```

```
                    onerror="this.src='../assets/images/default-food.jpg'">
                <span class="category-label"><?php echo
htmlspecialchars($item['category_name'] ?? 'General'); ?></span>
            </div>
            <div class="wishlist-content">
                <h3><?php echo htmlspecialchars($item['name']); ?></h3>
                <p class="wishlist-description"><?php echo
htmlspecialchars(substr($item['description'], 0, 60)); ?>...</p>
                <div class="wishlist-footer">
                    <div class="wishlist-price">
                        <span class="price">₹<?php echo number_format($item['price'],
2); ?></span>
                        <?php if (isset($item['original_price']) && $item['original_price']
> $item['price']): ?>
                            <span class="original-price">₹<?php echo
number_format($item['original_price'], 2); ?></span>
                        <?php endif; ?>
                    </div>
                    <div class="wishlist-actions">
                        <button class="btn-wishlist-action btn-add"
onclick="addToCartFromWishlist(<?php echo $item['id']; ?>)">
                            <i class="fas fa-cart-plus"></i> Add to Cart
                        </button>
                        <button class="btn-wishlist-action btn-remove"
onclick="removeFromWishlist(<?php echo $item['id']; ?>, this)">
                            <i class="fas fa-trash"></i> Remove
                        </button>
                    </div>
                </div>
            </div>
        </div>
    <?php endforeach; ?>
```

```
            </div>
        <?php else: ?>
            <div class="empty-wishlist">
                <i class="fas fa-heart"></i>
                <h3>Your wishlist is empty</h3>
                <p>Start adding your favorite items to your wishlist!</p>
                <a href="menu.php" class="btn-continue-shopping">
                    <i class="fas fa-shopping-bag"></i> Continue Shopping
                </a>
            </div>
        <?php endif; ?>
    </div>
    <!-- Danger Zone -->
    <div class="danger-section">
        <div class="section-header">
            <h2><i class="fas fa-exclamation-triangle"></i> Danger Zone</h2>
        </div>
        <div class="danger-actions">
            <button class="btn-danger" onclick="confirmDeleteAccount()">
                <i class="fas fa-trash"></i> Delete Account
            </button>
            <small>Permanently delete your account and all data</small>
            <form method="POST" action="export-data.php" style="display:inline-block;
margin-left:10px;">
                <button type="submit" class="btn-danger">
                    <i class="fas fa-download"></i> Export Data
                </button>
            </form>
            <small>Download all your personal data</small>
        </div>
```

```
            </div>
        </div>
    </div>
</div>
<?php include '../includes/footer.php'; ?>
<script>
function confirmDeleteAccount() {
    if (confirm('Are you sure you want to delete your account? This action cannot be
undone.')) {
        window.location.href = 'delete-account.php';
    }
}
function exportData() {
    alert('Data export feature coming soon!');
}
// Password strength indicator
const newPassword = document.getElementById('new_password');
const confirmPassword = document.getElementById('confirm_password');
newPassword.addEventListener('input', function() {
    const strength = checkPasswordStrength(this.value);
    showPasswordStrength(strength);
});
function checkPasswordStrength(password) {
    let strength = 0;
     if (password.length >= 8) strength++;
    if (/[a-z]/.test(password)) strength++;
    if (/[A-Z]/.test(password)) strength++;
    if (/[0-9]/.test(password)) strength++;
    if (/[^A-Za-z0-9]/.test(password)) strength++;
    return strength;
```

```
}
function showPasswordStrength(strength) {
    const indicator = document.getElementById('password-strength') || 
createStrengthIndicator();
    const colors = ['#e74c3c', '#e67e22', '#f1c40f', '#2ecc71', '#27ae60'];
    const texts = ['Very Weak', 'Weak', 'Fair', 'Good', 'Strong'];
    indicator.style.width = (strength * 20) + '%';
    indicator.style.background = colors[strength - 1] || '#e74c3c';
    indicator.nextElementSibling.textContent = texts[strength - 1] || 'Very Weak';
}
function createStrengthIndicator() {
    const container = document.createElement('div');
    container.className = 'password-strength-container';
    container.innerHTML = `
        <div class="password-strength-bar">
            <div id="password-strength" class="strength-indicator"></div>
        </div>
        <span class="strength-text"></span>
    `;
    newPassword.parentNode.appendChild(container);
    return document.getElementById('password-strength');
}
// Validate password match
confirmPassword.addEventListener('input', function() {
    if (this.value !== newPassword.value) {
        this.style.borderColor = '#e74c3c';
    } else {
        this.style.borderColor = '#27ae60';
    }
});
```

```
// Wishlist functions
function removeFromWishlist(foodId, button) {
  if (confirm('Remove this item from your wishlist?')) {
    fetch('toggle-wishlist.php', {
      method: 'POST',
      headers: {
        'Content-Type': 'application/x-www-form-urlencoded',
        'X-Requested-With': 'XMLHttpRequest'
      },
      body: 'food_id=' + foodId
    })
    .then(response => response.json())
    .then(data => {
      if (data.success) {
        // Remove the card from DOM using the button element
        const card = button.closest('.wishlist-card');
        if (card) {
          card.style.animation = 'fadeOut 0.3s ease';
          setTimeout(() => {
            card.remove();
            // Update count
            updateWishlistCount();
            // Check if empty
            checkEmptyWishlist();
          }, 300);
        }
      } else {
        alert('Failed to remove item: ' + data.message);
      }
```

```
        })
        .catch(error => {
            console.error('Error:', error);
            alert('Failed to remove item');
        });
    }
}
function addToCartFromWishlist(foodId) {
    // Create form and submit
    const form = document.createElement('form');
    form.method = 'POST';
    form.action = 'add-to-cart.php';
    const foodIdInput = document.createElement('input');
    foodIdInput.type = 'hidden';
    foodIdInput.name = 'food_id';
    foodIdInput.value = foodId;
    const quantityInput = document.createElement('input');
    quantityInput.type = 'hidden';
    quantityInput.name = 'quantity';
    quantityInput.value = 1;
    form.appendChild(foodIdInput);
    form.appendChild(quantityInput);
    document.body.appendChild(form);
    form.submit();
}
function updateWishlistCount() {
    const cards = document.querySelectorAll('.wishlist-card').length;
    const countSpan = document.querySelector('.wishlist-count');
    if (countSpan) {
```

```
        countSpan.textContent = cards + ' item' + (cards != 1 ? 's' : '');
    }
}
function checkEmptyWishlist() {
    const cards = document.querySelectorAll('.wishlist-card');
    const grid = document.querySelector('.wishlist-grid');

    if (cards.length === 0 && grid) {
        grid.innerHTML = `
            <div style="grid-column: 1/-1;">
                <div class="empty-wishlist">
                    <i class="fas fa-heart"></i>
                    <h3>Your wishlist is empty</h3>
                    <p>Start adding your favorite items to your wishlist!</p>
                    <a href="menu.php" class="btn-continue-shopping">
                        <i class="fas fa-shopping-bag"></i> Continue Shopping
                    </a>
                </div>
            </div>
        `;
    }
}
// Add fade out animation
const style = document.createElement('style');
style.textContent = `
    @keyframes fadeOut {
        from {
            opacity: 1;
            transform: translateY(0);
```

```
    }
    to {
        opacity: 0;
        transform: translateY(-10px);
    }
  }
`;
document.head.appendChild(style);
</script>
```

## Snapshot of User Orders:

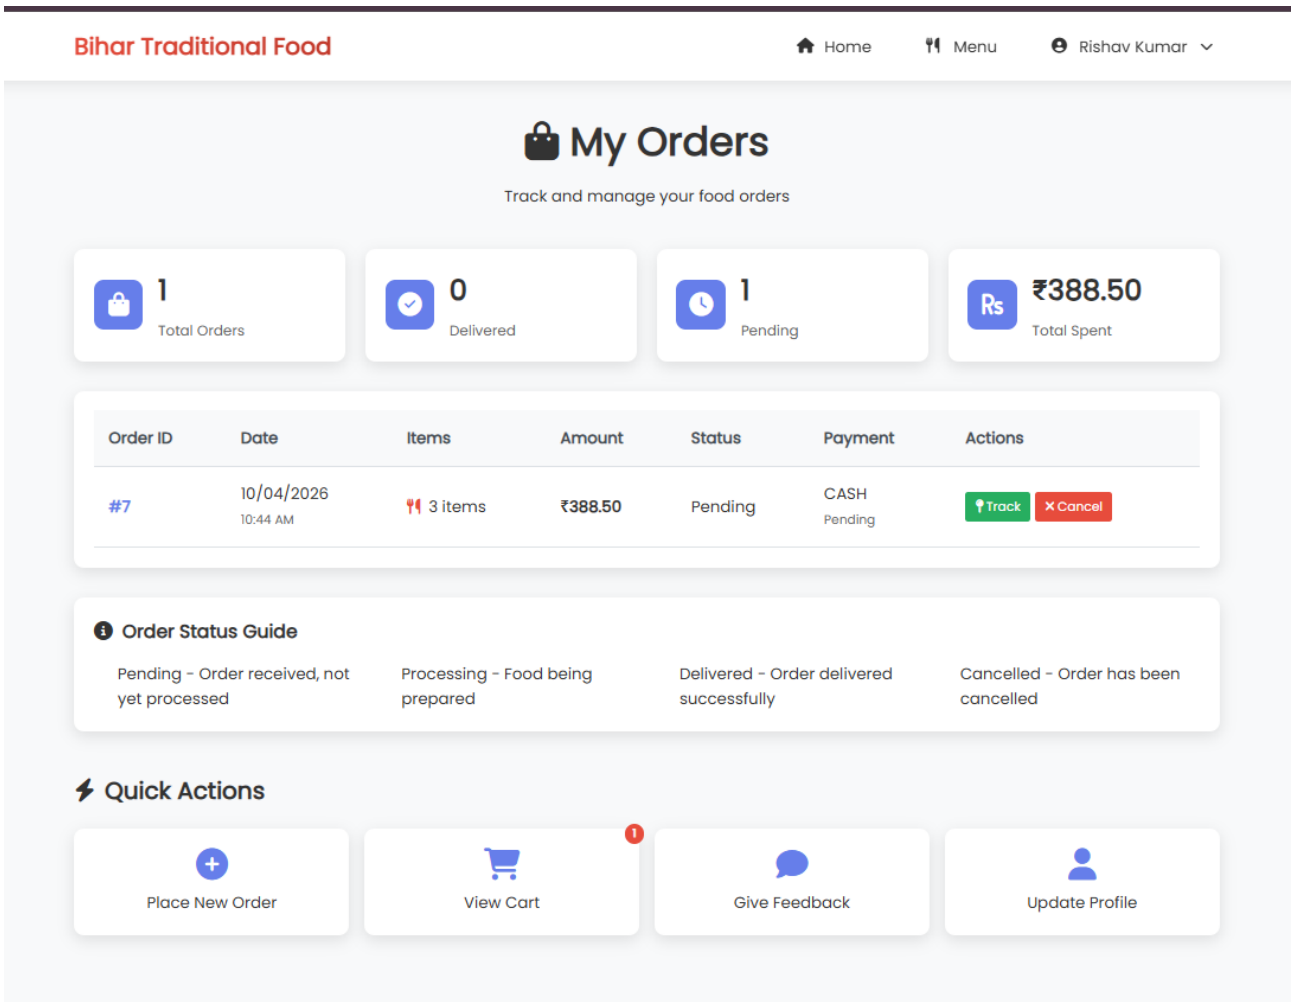

## User Orders.PHP

```
<?php

require_once '../includes/config.php';

require_once '../includes/auth.php';

$auth = new Auth();

if (!$auth->isLoggedIn()) {

    header('Location: ../login.php');

    exit();

}

$userId = $_SESSION['user_id'];

$conn = getDBConnection();

// Get user's orders

$ordersQuery = "SELECT * FROM orders WHERE user_id = $userId ORDER BY
order_date DESC";

$ordersResult = mysqli_query($conn, $ordersQuery);

// Get order statistics

$statsQuery = "SELECT

            COUNT(*) as total_orders,

            SUM(CASE WHEN status = 'delivered' THEN 1 ELSE 0 END) as
delivered_orders,

            SUM(CASE WHEN status = 'pending' THEN 1 ELSE 0 END) as
pending_orders,

            SUM(CASE WHEN status = 'cancelled' THEN 1 ELSE 0 END) as
cancelled_orders,
```

```
            SUM(total_price) as total_spent

            FROM orders WHERE user_id = $userId";

$statsResult = mysqli_query($conn, $statsQuery);

$stats = mysqli_fetch_assoc($statsResult);

?>

<!DOCTYPE html>

<html lang="en">

<head>

    <meta charset="UTF-8">

    <meta name="viewport" content="width=device-width, initial-scale=1.0">

    <title>My Orders - Bihar Traditional Food</title>

    <link rel="stylesheet" href="../assets/css/style.css">

    <link rel="stylesheet" href="https://cdnjs.cloudflare.com/ajax/libs/font-
awesome/6.4.0/css/all.min.css">

</head>

<body>

    <?php include '../includes/header.php'; ?>

      <div class="orders-container">

       <div class="orders-header">

           <h1><i class="fas fa-shopping-bag"></i> My Orders</h1>

           <p>Track and manage your food orders</p>

       </div>

            <!-- Order Statistics -->
```

```
<div class="orders-stats">
    <div class="stat-card">
        <div class="stat-icon">
            <i class="fas fa-shopping-bag"></i>
        </div>
        <div class="stat-info">
            <h3><?php echo $stats['total_orders'] ?? 0; ?></h3>
            <p>Total Orders</p>
        </div>
    </div>
            <div class="stat-card">
        <div class="stat-icon">
            <i class="fas fa-check-circle"></i>
        </div>
        <div class="stat-info">
            <h3><?php echo $stats['delivered_orders'] ?? 0; ?></h3>
            <p>Delivered</p>
        </div>
    </div>
    <div class="stat-card">
        <div class="stat-icon">
            <i class="fas fa-clock"></i>
```

```
            </div>
            <div class="stat-info">
                <h3><?php echo $stats['pending_orders'] ?? 0; ?></h3>
                <p>Pending</p>
            </div>
        </div>
            <div class="stat-card">
            <div class="stat-icon">
                <i class="fas fa-rupee-sign"></i>
            </div>
            <div class="stat-info">
                <h3>₹<?php echo number_format($stats['total_spent'] ?? 0, 2); ?></h3>
                <p>Total Spent</p>
            </div>
        </div>
    </div>
<!-- Orders Table -->
    <div class="orders-content">
        <?php if (mysqli_num_rows($ordersResult) > 0): ?>
        <div class="orders-table-container">
            <table class="orders-table">
                <thead>
```

```
                <tr>
                    <th>Order ID</th>
                    <th>Date</th>
                    <th>Items</th>
                    <th>Amount</th>
                    <th>Status</th>
                    <th>Payment</th>
                    <th>Actions</th>
                </tr>
            </thead>
            <tbody>
                <?php while($order = mysqli_fetch_assoc($ordersResult)):
                    // Get order item count
                    $itemQuery = "SELECT COUNT(*) as count FROM order_items
WHERE order_id = " . $order['id'];
                    $itemResult = mysqli_query($conn, $itemQuery);
                    $itemCount = mysqli_fetch_assoc($itemResult)['count'];
                ?>
                <tr>
                    <td>
                        <div class="order-id">
                            #<?php echo $order['id']; ?>
                        </div>
```

```
                </td>
                <td>
                    <div class="order-date">
                        <?php echo date('d/m/Y', strtotime($order['order_date'])); ?><br>
                        <small><?php echo date('h:i A', strtotime($order['order_date'])); ?></small>
                    </div>
                </td>
                <td>
                    <div class="order-items">
                        <i class="fas fa-utensils"></i>
                        <span><?php echo $itemCount; ?> items</span>
                    </div>
                </td>
                <td>
                    <div class="order-amount">
                        <strong>₹<?php echo number_format($order['total_price'], 2); ?></strong>
                    </div>
                </td>
                <td>
                    <span class="status-badge status-<?php echo $order['status']; ?>">
                        <?php echo ucfirst($order['status']); ?>
                    </span>
```

```
                    </td>
                    <td>
                        <div class="payment-method">
                            <?php echo strtoupper($order['payment_method']); ?><br>
                            <small><?php echo ucfirst($order['payment_status']); ?></small>
                        </div>
                    </td>
                    <td>
                        <div class="order-actions">
                            <a href="order-tracking.php?id=<?php echo $order['id']; ?>"
class="btn-track">
                                <i class="fas fa-map-pin"></i> Track
                            </a>
                            <?php if ($order['status'] == 'pending'): ?>
                            <a href="cancel-order.php?id=<?php echo $order['id']; ?>"
                               class="btn-cancel"
                               onclick="return confirm('Are you sure you want to cancel this
order?')">
                                <i class="fas fa-times"></i> Cancel
                            </a>
                            <?php endif; ?>
                            <?php if ($order['status'] == 'delivered'): ?>
                            <a href="feedback.php?order_id=<?php echo $order['id']; ?>"
class="btn-feedback">
```

```
                <i class="fas fa-star"></i> Rate
            </a>
            <?php endif; ?>
          </div>
        </td>
      </tr>
      <?php endwhile; ?>
    </tbody>
  </table>
</div>
<!-- Order Status Legend -->
<div class="status-legend">
  <h3><i class="fas fa-info-circle"></i> Order Status Guide</h3>
  <div class="legend-items">
    <div class="legend-item">
      <span class="status-badge status-pending"></span>
      <span>Pending - Order received, not yet processed</span>
    </div>
    <div class="legend-item">
      <span class="status-badge status-processing"></span>
      <span>Processing - Food being prepared</span>
    </div>
```

```
        <div class="legend-item">
            <span class="status-badge status-delivered"></span>
            <span>Delivered - Order delivered successfully</span>
        </div>
        <div class="legend-item">
            <span class="status-badge status-cancelled"></span>
            <span>Cancelled - Order has been cancelled</span>
        </div>
    </div>
</div>
<?php else: ?>
<div class="no-orders">
    <div class="no-orders-icon">
        <i class="fas fa-shopping-bag fa-4x"></i>
    </div>
    <h2>No Orders Yet</h2>
    <p>You haven't placed any orders yet. Start exploring our menu!</p>
    <div class="no-orders-actions">
        <a href="menu.php" class="btn-explore">
            <i class="fas fa-utensils"></i> Explore Menu
        </a>
        <a href="../index.php#categories" class="btn-categories">
```

```
                <i class="fas fa-list"></i> View Categories
            </a>
        </div>
    </div>
    <?php endif; ?>
</div>
<!-- Quick Actions -->
<div class="quick-actions">
    <h2><i class="fas fa-bolt"></i> Quick Actions</h2>
    <div class="actions-grid">
        <a href="menu.php" class="action-card">
            <i class="fas fa-plus-circle"></i>
            <span>Place New Order</span>
        </a>
        <a href="cart.php" class="action-card">
            <i class="fas fa-shopping-cart"></i>
            <span>View Cart</span>
            <?php
            $cartCountQuery = "SELECT SUM(quantity) as count FROM cart WHERE
user_id = $userId";
            $cartCountResult = mysqli_query($conn, $cartCountQuery);
            $cartCount = mysqli_fetch_assoc($cartCountResult)['count'] ?? 0;
            if ($cartCount > 0): ?>
```

```
            <span class="cart-badge"><?php echo $cartCount; ?></span>
            <?php endif; ?>
        </a>
        <a href="feedback.php" class="action-card">
            <i class="fas fa-comment"></i>
            <span>Give Feedback</span>
        </a>
        <a href="profile.php" class="action-card">
            <i class="fas fa-user"></i>
            <span>Update Profile</span>
        </a>
      </div>
    </div>
  </div>
  <?php include '../includes/footer.php'; ?>
</body>
</html>
```

## Snapshot of Give Feedback:

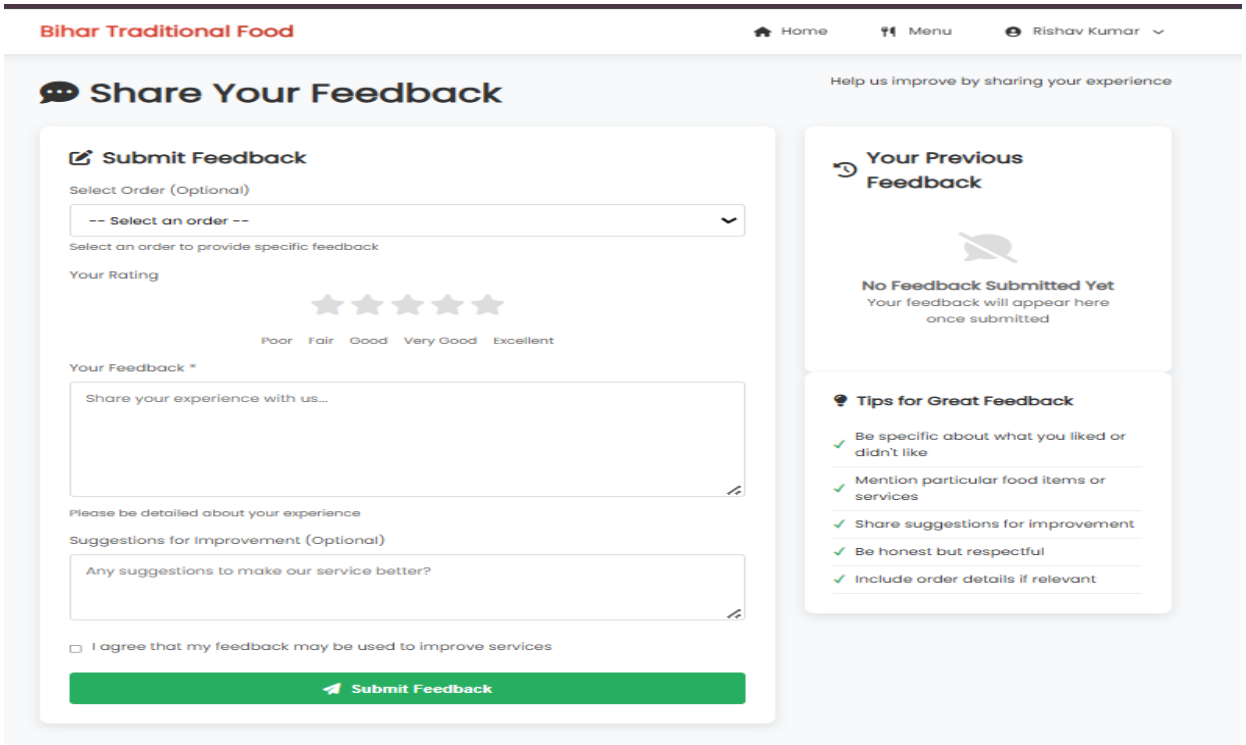


### GiveFeedback.js

```
<?php
require_once '../includes/config.php';
require_once '../includes/auth.php';
$auth = new Auth();
if (!$auth->isLoggedIn()) {
    header('Location: ../login.php');
    exit();
}
$userId = $_SESSION['user_id'];
$conn = getDBConnection();
$message = '';
$error = '';
// Get user's recent orders for feedback
$ordersQuery = "SELECT o.id, o.order_date, o.total_price
            FROM orders o
            WHERE o.user_id = $userId AND o.status = 'delivered'
            ORDER BY o.order_date DESC
            LIMIT 10";
$ordersResult = mysqli_query($conn, $ordersQuery);
// Handle feedback submission
if ($_SERVER['REQUEST_METHOD'] == 'POST') {
    $orderId = isset($_POST['order_id']) ? intval($_POST['order_id']) : null;
    $rating = intval($_POST['rating']);
    $feedbackMsg = mysqli_real_escape_string($conn, $_POST['message']);
```

```
    // Validate rating
    if ($rating < 1 || $rating > 5) {
        $error = "Please select a valid rating between 1 and 5";
    } elseif (empty($feedbackMsg)) {
        $error = "Please enter your feedback message";
    } else {
        // Check if feedback already exists for this order
        if ($orderId) {
            $checkQuery = "SELECT id FROM feedback WHERE user_id = $userId AND
order_id = $orderId";
            $checkResult = mysqli_query($conn, $checkQuery);

            if (mysqli_num_rows($checkResult) > 0) {
                $error = "You have already submitted feedback for this order";
            }
        }
        if (empty($error)) {
            $insertQuery = "INSERT INTO feedback (user_id, order_id, message, rating, status)
                            VALUES ($userId, " . ($orderId ?: 'NULL') . ", '$feedbackMsg', $rating,
'pending')";

            if (mysqli_query($conn, $insertQuery)) {
                $message = "Thank you for your feedback! We appreciate your input.";
                $_POST = array(); // Clear form
            } else {
                $error = "Failed to submit feedback. Please try again.";
            }
        }
    }
}
// Get user's previous feedback
$feedbackQuery = "SELECT f.*, o.id as order_number
                  FROM feedback f
                  LEFT JOIN orders o ON f.order_id = o.id
                  WHERE f.user_id = $userId
                  ORDER BY f.created_at DESC";
$feedbackResult = mysqli_query($conn, $feedbackQuery);
?>
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Feedback - Bihar Traditional Food</title>
    <link rel="stylesheet" href="../assets/css/style.css">
    <link rel="stylesheet" href="https://cdnjs.cloudflare.com/ajax/libs/font-
awesome/6.4.0/css/all.min.css">
</head>
<body>
    <?php include '../includes/header.php'; ?>
```

```
<div class="feedback-container">
  <div class="feedback-header">
    <h1><i class="fas fa-comment-dots"></i> Share Your Feedback</h1>
    <p>Help us improve by sharing your experience</p>
  </div>

  <div class="feedback-content">
    <div class="feedback-left">
      <!-- Feedback Form -->
      <div class="feedback-form-container">
        <h2><i class="fas fa-edit"></i> Submit Feedback</h2>

        <?php if($message): ?>
        <div class="alert alert-success"><?php echo $message; ?></div>
        <?php endif; ?>

        <?php if($error): ?>
        <div class="alert alert-error"><?php echo $error; ?></div>
        <?php endif; ?>

        <form method="POST" action="">
          <div class="form-group">
            <label for="order_id">Select Order (Optional)</label>
            <select id="order_id" name="order_id">
              <option value="">-- Select an order --</option>
              <?php while($order = mysqli_fetch_assoc($ordersResult)): ?>
              <option value="<?php echo $order['id']; ?>"
                <?php echo isset($_POST['order_id']) && $_POST['order_id'] ==
$order['id'] ? 'selected' : ''; ?>>
                Order #<?php echo $order['id']; ?> -
                ₹<?php echo number_format($order['total_price'], 2); ?> -
                <?php echo date('d/m/Y', strtotime($order['order_date'])); ?>
              </option>
              <?php endwhile; ?>
            </select>
            <small class="form-text">Select an order to provide specific
feedback</small>
          </div>

          <div class="form-group">
            <label>Your Rating</label>
            <div class="rating-input">
              <div class="stars">
                <?php for ($i = 1; $i <= 5; $i++): ?>
                <input type="radio" id="star<?php echo $i; ?>" name="rating"
                    value="<?php echo $i; ?>"
                    <?php echo (isset($_POST['rating']) && $_POST['rating'] == $i) ?
'checked' : ''; ?>>
                <label for="star<?php echo $i; ?>" title="<?php echo $i; ?> star">
                  <i class="fas fa-star"></i>
                </label>
```

```
                <?php endfor; ?>
              </div>
              <div class="rating-labels">
                <span>Poor</span>
                <span>Fair</span>
                <span>Good</span>
                <span>Very Good</span>
                <span>Excellent</span>
              </div>
            </div>
          </div>

          <div class="form-group">
            <label for="message">Your Feedback *</label>
            <textarea id="message" name="message" rows="6" required
                  placeholder="Share your experience with us..."><?php
                  echo isset($_POST['message']) ? htmlspecialchars($_POST['message'])
: ''; ?></textarea>
            <small class="form-text">Please be detailed about your experience</small>
          </div>

          <div class="form-group">
            <label for="suggestions">Suggestions for Improvement (Optional)</label>
            <textarea id="suggestions" name="suggestions" rows="3"
                  placeholder="Any suggestions to make our service better?"><?php
                  echo isset($_POST['suggestions']) ?
htmlspecialchars($_POST['suggestions']) : ''; ?></textarea>
          </div>

          <div class="form-group terms">
            <input type="checkbox" id="agree" name="agree" required>
            <label for="agree">
              I agree that my feedback may be used to improve services
            </label>
          </div>

          <button type="submit" class="btn-submit-feedback">
            <i class="fas fa-paper-plane"></i> Submit Feedback
          </button>
        </form>
      </div>
    </div>

    <div class="feedback-right">
      <!-- Previous Feedback -->
      <div class="previous-feedback">
        <h2><i class="fas fa-history"></i> Your Previous Feedback</h2>

        <?php if (mysqli_num_rows($feedbackResult) > 0): ?>
        <div class="feedback-list">
          <?php while($feedback = mysqli_fetch_assoc($feedbackResult)): ?>
```

```
                <div class="feedback-item">
                    <div class="feedback-header">
                        <div class="feedback-meta">
                            <div class="feedback-rating">
                                <?php for ($i = 1; $i <= 5; $i++): ?>
                                <?php if ($i <= $feedback['rating']): ?>
                                <i class="fas fa-star"></i>
                                <?php else: ?>
                                <i class="far fa-star"></i>
                                <?php endif; ?>
                                <?php endfor; ?>
                            </div>
                            <span class="feedback-date">
                                <?php echo date('d/m/Y', strtotime($feedback['created_at'])); ?>
                            </span>
                        </div>
                        <?php if ($feedback['order_number']): ?>
                        <span class="order-badge">Order #<?php echo
$feedback['order_number']; ?></span>
                        <?php endif; ?>
                    </div>

                    <div class="feedback-body">
                        <p><?php echo nl2br(htmlspecialchars($feedback['message'])); ?></p>
                    </div>

                    <div class="feedback-footer">
                        <span class="status-badge status-<?php echo $feedback['status']; ?>">
                            <?php echo ucfirst($feedback['status']); ?>
                        </span>
                        <?php if ($feedback['status'] == 'resolved'): ?>
                        <span class="resolved-badge">
                            <i class="fas fa-check-circle"></i> Issue Resolved
                        </span>
                        <?php endif; ?>
                    </div>
                </div>
                <?php endwhile; ?>
            </div>
            <?php else: ?>
            <div class="no-feedback">
                <i class="fas fa-comment-slash fa-3x"></i>
                <h3>No Feedback Submitted Yet</h3>
                <p>Your feedback will appear here once submitted</p>
            </div>
            <?php endif; ?>
        </div>

        <!-- Tips Section -->
        <div class="feedback-tips">
            <h3><i class="fas fa-lightbulb"></i> Tips for Great Feedback</h3>
```

```
            <ul>
                <li>Be specific about what you liked or didn't like</li>
                <li>Mention particular food items or services</li>
                <li>Share suggestions for improvement</li>
                <li>Be honest but respectful</li>
                <li>Include order details if relevant</li>
            </ul>
        </div>
    </div>
  </div>
</div>
  <?php include '../includes/footer.php'; ?>
</body>
</html>
```

## Snapshot of Order Checkout:

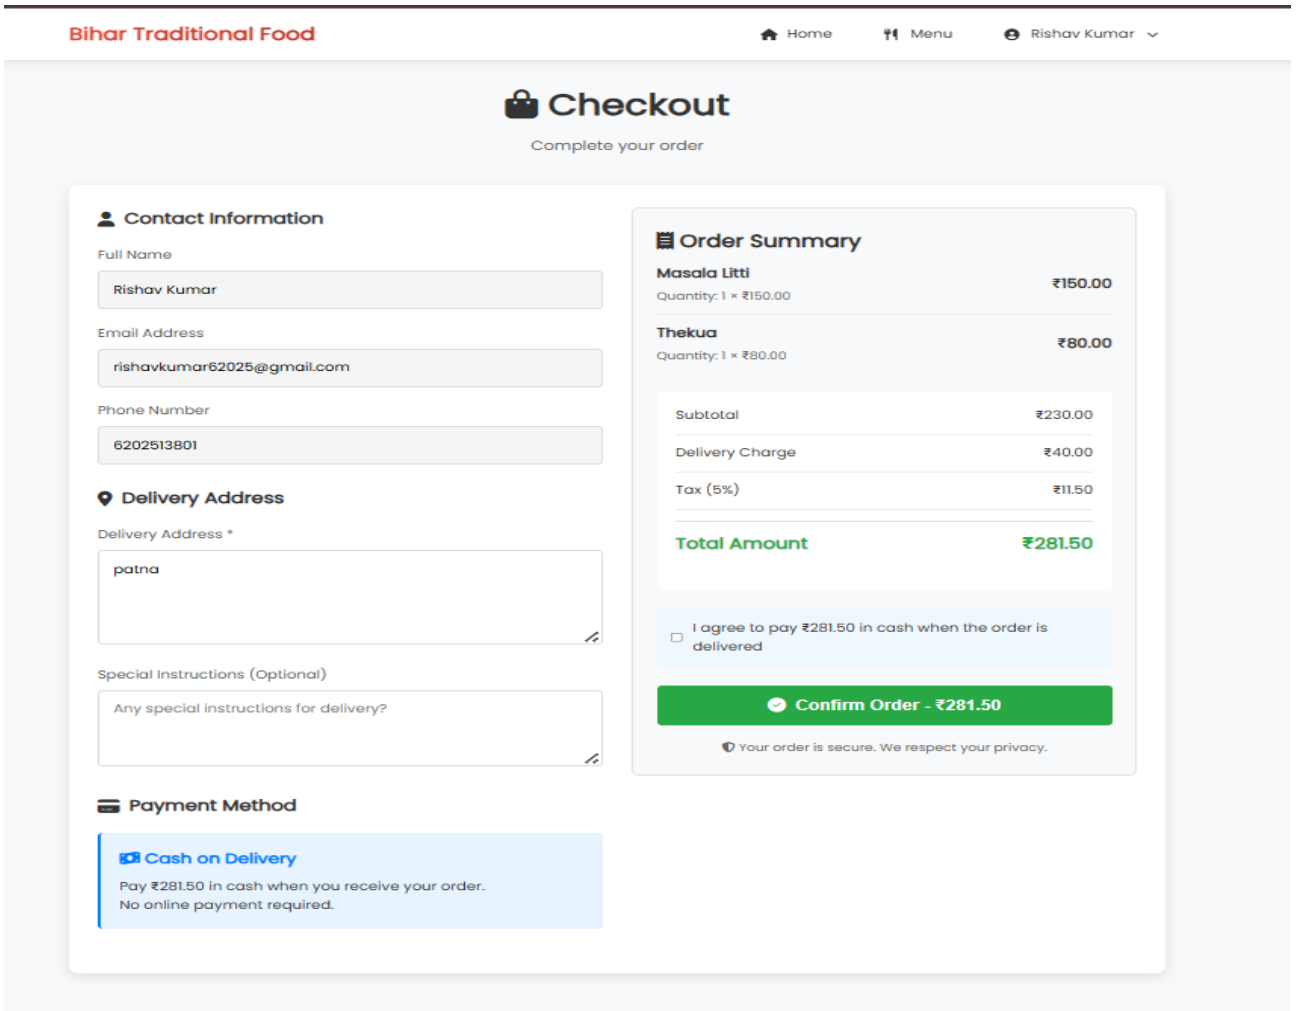

## Checkout.PHP:

```
<?php
session_start();
require_once '../includes/config.php';

// Check login
if (!isset($_SESSION['user_id'])) {
    header('Location: ../login.php');
    exit();
}
$userId = $_SESSION['user_id'];
$conn = getDBConnection();
// Get user details
$userQuery = "SELECT * FROM users WHERE id = $userId";
$userResult = mysqli_query($conn, $userQuery);
$user = mysqli_fetch_assoc($userResult);
// Get cart items
$cartQuery = "SELECT c.*, f.name, f.price FROM cart c
            JOIN foods f ON c.food_id = f.id
            WHERE c.user_id = $userId";
$cartResult = mysqli_query($conn, $cartQuery);
$cartItems = [];
$subtotal = 0;
while ($item = mysqli_fetch_assoc($cartResult)) {
    $item['subtotal'] = $item['price'] * $item['quantity'];
    $subtotal += $item['subtotal'];
    $cartItems[] = $item;
}
if (empty($cartItems)) {
    header('Location: cart.php');
    exit();
}
// Calculate totals
$delivery_charge = $subtotal > 300 ? 0 : 40;
$tax_amount = $subtotal * 0.05;
$discount_amount = 0; // You can add discount logic here
$total_price = $subtotal + $delivery_charge + $tax_amount - $discount_amount;

// Handle order placement
if ($_SERVER['REQUEST_METHOD'] == 'POST') {
    $delivery_address = mysqli_real_escape_string($conn, $_POST['delivery_address']);
    $delivery_instructions = mysqli_real_escape_string($conn, $_POST['notes'] ?? '');

    // Generate order number
    $order_number = 'ORD' . date('Ymd') . str_pad(rand(1, 9999), 4, '0',
STR_PAD_LEFT);
```

```
    // Insert into orders table
    $orderQuery = "INSERT INTO orders (
        user_id, order_number, total_price, subtotal, delivery_charge,
        tax_amount, discount_amount, status, payment_method, payment_status,
        delivery_address, delivery_instructions, customer_name, customer_phone,
        customer_email, estimated_delivery_time, order_date
    ) VALUES (
        $userId, '$order_number', $total_price, $subtotal, $delivery_charge,
        $tax_amount, $discount_amount, 'pending', 'cash', 'pending',
        '$delivery_address', '$delivery_instructions',
        '" . mysqli_real_escape_string($conn, $user['name']) . "',
        '" . mysqli_real_escape_string($conn, $user['phone'] ?? '') . "',
        '" . mysqli_real_escape_string($conn, $user['email']) . "',
        DATE_ADD(NOW(), INTERVAL 45 MINUTE), NOW()
    )";

    if (mysqli_query($conn, $orderQuery)) {
        $order_id = mysqli_insert_id($conn);

        // Insert into order_items table
        foreach ($cartItems as $item) {
            $itemQuery = "INSERT INTO order_items (
                order_id, food_id, food_name, quantity, unit_price, total_price
            ) VALUES (
                $order_id, {$item['food_id']},
                '" . mysqli_real_escape_string($conn, $item['name']) . "',
                {$item['quantity']}, {$item['price']}, {$item['subtotal']}
            )";
            mysqli_query($conn, $itemQuery);
        }

        // Clear cart
        mysqli_query($conn, "DELETE FROM cart WHERE user_id = $userId");

        // Set session variables
        $_SESSION['order_id'] = $order_id;
        $_SESSION['order_number'] = $order_number;
        $_SESSION['order_total'] = $total_price;

        // Redirect to success page
        header('Location: order-success.php');
        exit();
    } else {
        $error = "Error: " . mysqli_error($conn);
    }
}
?>
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
```

```
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Checkout - Bihar Traditional Food</title>
    <link rel="stylesheet" href="../assets/css/style.css">
    <link rel="stylesheet" href="https://cdnjs.cloudflare.com/ajax/libs/font-
awesome/6.4.0/css/all.min.css">
<body>
    <?php include '../includes/header.php'; ?>

    <div class="checkout-container">
        <div class="checkout-header">
            <h1><i class="fas fa-shopping-bag"></i> Checkout</h1>
            <p>Complete your order</p>
        </div>

        <?php if (isset($error)): ?>
        <div class="error-message"><?php echo $error; ?></div>
        <?php endif; ?>

        <form method="POST" class="checkout-form" id="checkoutForm">
            <div class="checkout-content">
                <div class="checkout-left">
                    <div class="checkout-section">
                        <h2><i class="fas fa-user"></i> Contact Information</h2>
                        <div class="form-group">
                            <label>Full Name</label>
                            <input type="text" value="<?php echo htmlspecialchars($user['name']);
?>" readonly>
                        </div>
                        <div class="form-group">
                            <label>Email Address</label>
                            <input type="email" value="<?php echo
htmlspecialchars($user['email']); ?>" readonly>
                        </div>
                        <div class="form-group">
                            <label>Phone Number</label>
                            <input type="tel" value="<?php echo htmlspecialchars($user['phone']
?? 'Not provided'); ?>" readonly>
                        </div>
                    </div>

                    <div class="checkout-section">
                        <h2><i class="fas fa-map-marker-alt"></i> Delivery Address</h2>
                        <div class="form-group">
                            <label for="delivery_address">Delivery Address *</label>
                            <textarea id="delivery_address" name="delivery_address" rows="4"
required
                                      placeholder="Enter your complete delivery address including
house number, street, area, city, and PIN code"><?php
                                      echo htmlspecialchars($user['address'] ?? ''); ?></textarea>
                        </div>
                        <div class="form-group">
```

```
                <label for="notes">Special Instructions (Optional)</label>
                <textarea id="notes" name="notes" rows="3"
  placeholder="Any special instructions for delivery?"></textarea>
              </div>
            </div>

            <div class="checkout-section">
              <h2><i class="fas fa-credit-card"></i> Payment Method</h2>

              <!-- Payment Method Selection -->
              <div id="paymentMethodSelection">
                <div class="payment-option">
                  <input type="radio" id="cashPayment" name="payment_method"
value="cash" checked>
                  <label for="cashPayment" class="payment-label">
                    <i class="fas fa-money-bill-wave"></i>
                    <div>
                      <strong>Cash on Delivery</strong>
                      <p>Pay ₹<?php echo number_format($total_price, 2); ?> in cash
when you receive your order</p>
                    </div>
                  </label>
                </div>

                <div class="payment-option">
                  <input type="radio" id="upiPayment" name="payment_method"
value="upi">
                  <label for="upiPayment" class="payment-label">
                    <i class="fas fa-mobile-alt"></i>
                    <div>
                      <strong>UPI Payment (Razorpay)</strong>
                      <p>Pay securely using UPI, Cards, or Wallets via Razorpay</p>
                    </div>
                  </label>
                </div>
              </div>

              <!-- Payment Info Messages -->
              <div id="cashInfo" class="payment-info" style="display: block; margin-
top: 15px;">
                <h3><i class="fas fa-info-circle"></i> Cash on Delivery</h3>
                <p>No online payment required.</p>
              </div>

              <div id="upiInfo" class="payment-info upi-info" style="display: none;
margin-top: 15px;">
                <h3><i class="fas fa-shield-alt"></i> Secure UPI Payment</h3>
                <p><strong>Pay Securely Using:</strong></p>
                <p style="margin: 10px 0;">
                  <i class="fas fa-check" style="color: #28a745;"></i> UPI Apps
(Google Pay, PhonePe, Paytm)
```

```
                </p>
                <p style="margin: 10px 0;">
                  <i class="fas fa-check" style="color: #28a745;"></i> Credit/Debit
Cards
                </p>
                <p style="margin: 10px 0;">
                  <i class="fas fa-check" style="color: #28a745;"></i> Digital Wallets
                </p>
              </div>
            </div>
          </div>

          <div class="checkout-right">
            <div class="order-summary">
              <h2><i class="fas fa-receipt"></i> Order Summary</h2>

              <div class="order-items">
                <?php foreach ($cartItems as $item): ?>
                <div class="order-item">
                  <div class="order-item-info">
                    <h4><?php echo htmlspecialchars($item['name']); ?></h4>
                    <p>Quantity: <?php echo $item['quantity']; ?> × ₹<?php echo
number_format($item['price'], 2); ?></p>
                  </div>
                  <div class="order-item-price">
                    ₹<?php echo number_format($item['subtotal'], 2); ?>
                  </div>
                </div>
                <?php endforeach; ?>
              </div>

              <div class="order-totals">
                <div class="total-row">
                  <span>Subtotal</span>
                  <span>₹<?php echo number_format($subtotal, 2); ?></span>
                </div>
                <div class="total-row">
                  <span>Delivery Charge</span>
                  <span><?php echo $delivery_charge == 0 ? 'FREE' : '₹' .
number_format($delivery_charge, 2); ?></span>
                </div>
                <div class="total-row">
                  <span>Tax (5%)</span>
                  <span>₹<?php echo number_format($tax_amount, 2); ?></span>
                </div>
                <?php if ($discount_amount > 0): ?>
                <div class="total-row" style="color: #28a745;">
                  <span>Discount</span>
                  <span>-₹<?php echo number_format($discount_amount, 2);
?></span>
                </div>
```

```
                    <?php endif; ?>
                    <div class="total-row grand-total">
                        <span><strong>Total Amount</strong></span>
                        <span><strong>₹<?php echo number_format($total_price, 2);
?></strong></span>
                    </div>
                </div>

                <div class="terms-agreement">
                    <label>
                        <input type="checkbox" required id="termsCheckbox">
                        I agree to pay ₹<?php echo number_format($total_price, 2); ?> in cash
when the order is delivered
                    </label>
                </div>

                <button type="submit" class="btn-place-order">
                    <i class="fas fa-check-circle"></i> Confirm Order - ₹<?php echo
number_format($total_price, 2); ?>
                </button>

                <div class="secure-checkout">
                    <i class="fas fa-shield-alt"></i>
                    <span>Your order is secure. We respect your privacy.</span>
                </div>
            </div>
        </div>
    </div>
  </form>
</div>
<?php include '../includes/footer.php'; ?>
<script src="https://checkout.razorpay.com/v1/checkout.js"></script>
<script>
// Payment method toggle
document.getElementById('cashPayment').addEventListener('change', function() {
    document.getElementById('cashInfo').style.display = 'block';
    document.getElementById('upiInfo').style.display = 'none';
    document.querySelector('.btn-place-order').innerHTML = '<i class="fas fa-check-
circle"></i> Confirm Order - ₹<?php echo number_format($total_price, 2); ?>';
    updateTermsText('cash');
});

document.getElementById('upiPayment').addEventListener('change', function() {
    document.getElementById('cashInfo').style.display = 'none';
    document.getElementById('upiInfo').style.display = 'block';
    document.querySelector('.btn-place-order').innerHTML = '<i class="fas fa-
lock"></i> Pay ₹<?php echo number_format($total_price, 2); ?> Securely';
    updateTermsText('upi');
});

function updateTermsText(paymentMethod) {
```

```
        const termsLabel = document.querySelector('.terms-agreement label');
        if (paymentMethod === 'cash') {
            termsLabel.innerHTML = '<input type="checkbox" required
id="termsCheckbox"> I agree to pay ₹<?php echo number_format($total_price, 2); ?> in
cash when the order is delivered';
        } else {
            termsLabel.innerHTML = '<input type="checkbox" required
id="termsCheckbox"> I agree to proceed with UPI payment for ₹<?php echo
number_format($total_price, 2); ?>';
        }
        document.getElementById('termsCheckbox').required = true;
    }

    // Form submission
    document.getElementById('checkoutForm').addEventListener('submit', function(e) {
        e.preventDefault();

        const address = document.getElementById('delivery_address').value.trim();
        const terms = document.getElementById('termsCheckbox');
        const paymentMethod =
document.querySelector('input[name="payment_method"]:checked').value;

        // Validate address
        if (address.length < 10) {
            alert('Please enter a complete delivery address (minimum 10 characters).');
            return;
        }

        // Validate terms
        if (!terms.checked) {
            alert('Please agree to the terms and conditions.');
            return;
        }

        if (paymentMethod === 'cash') {
            handleCashPayment();
        } else if (paymentMethod === 'upi') {
            handleUPIPayment();
        }
    });

    /**
     * Handle Cash on Delivery
     */
    function handleCashPayment() {
        const confirmOrder = confirm(`CONFIRM YOUR ORDER\n\nTotal Amount:
₹<?php echo number_format($total_price, 2); ?>\nPayment: Cash on Delivery\n\nClick
OK to place your order.`);

        if (confirmOrder) {
            // Submit the original form
```

```
        document.getElementById('checkoutForm').method = 'POST';
        document.getElementById('checkoutForm').submit();
    }
}

/**
 * Handle UPI Payment via Razorpay
 */
function handleUPIPayment() {
    const deliveryAddress = document.getElementById('delivery_address').value.trim();
    const notes = document.getElementById('notes').value.trim();

    // Show loading state
    showLoading(true);

    // Create Razorpay order
    fetch('../users/upi-payment-handler.php', {
        method: 'POST',
        headers: {
            'Content-Type': 'application/json',
        },
        body: JSON.stringify({
            action: 'create_razorpay_order',
            delivery_address: deliveryAddress,
            notes: notes
        })
    })
    .then(response => response.json())
    .then(data => {
        showLoading(false);

        if (!data.success) {
            alert('Error: ' + data.message);
            return;
        }

        // Open Razorpay checkout
        openRazorpayCheckout(data);
    })
    .catch(error => {
        showLoading(false);
        console.error('Error:', error);
        alert('Error creating payment request: ' + error.message);
    });
}

/**
 * Open Razorpay Payment Modal
 */
function openRazorpayCheckout(paymentData) {
    const options = {
```

```
    key: paymentData.key_id,
    amount: paymentData.amount * 100, // Amount in paise
    currency: paymentData.currency,
    order_id: paymentData.razorpay_order_id,

    name: 'Bihar Traditional Food',
    description: 'Food Delivery Order',
    image: '<?php echo BASE_URL; ?>assets/images/logo.png',

    customer_id: '<?php echo $_SESSION['user_id']; ?>',
    prefill: {
        name: paymentData.customer_name,
        email: paymentData.customer_email,
        contact: paymentData.customer_phone
    },
            // UPI-specific settings
    method: {
        upi: true,
        emandate: false
    },
    notes: {
        order_id: paymentData.order_id,
        receipt_id: paymentData.order_number
    },
            handling_international: {
        international: false
    },
    handler: function(response) {
        verifyPayment(response, paymentData.order_id);
    },
    modal: {
        confirmation_close: false,
        ondismiss: function() {
            console.log('Payment modal closed');
            if (confirm('Payment modal closed. Do you want to try again?')) {
                handleUPIPayment();
            }
        }
    },
    retry: {
        enabled: true,
        max_retries: 3
    },

    timeout: 900 // 15 minutes timeout
};

const rzp = new Razorpay(options);

// Handle payment errors
rzp.on('payment.failed', function(response) {
```

```
        console.error('Payment Failed:', response.error);
        alert('Payment failed: ' + response.error.description);
    });

    rzp.open();
  }

  /**
   * Verify Payment with Server
   */
  function verifyPayment(response, orderId) {
    showLoading(true);

    fetch('../users/upi-payment-handler.php', {
        method: 'POST',
        headers: {
            'Content-Type': 'application/json',
        },
        body: JSON.stringify({
            action: 'verify_payment',
            razorpay_payment_id: response.razorpay_payment_id,
            razorpay_order_id: response.razorpay_order_id,
            razorpay_signature: response.razorpay_signature,
            order_id: orderId
        })
    })
    .then(response => response.json())
    .then(data => {
        showLoading(false);

        if (data.success) {
            alert('Payment successful! Your order has been confirmed.');
            // Redirect to order success page
            window.location.href = '../users/order-
success.php?payment=success&order_id=' + orderId;
        } else {
            alert('Payment verification failed: ' + data.message);
            // Show retry option
            if (confirm('Would you like to try payment again?')) {
                handleUPIPayment();
            }
        }
    })
    .catch(error => {
        showLoading(false);
        console.error('Error:', error);
        alert('Error verifying payment: ' + error.message);
    });
  }
  /**
   * Show/Hide Loading Spinner
```

```
    */
   function showLoading(show) {
      const button = document.querySelector('.btn-place-order');
      if (show) {
         button.disabled = true;
         button.innerHTML = '<i class="fas fa-spinner fa-spin"></i> Processing...';
      } else {
         button.disabled = false;
         if (document.getElementById('upiPayment').checked) {
            button.innerHTML = '<i class="fas fa-lock"></i> Pay ₹<?php echo
number_format($total_price, 2); ?> Securely';
         } else {
            button.innerHTML = '<i class="fas fa-check-circle"></i> Confirm Order -
₹<?php echo number_format($total_price, 2); ?>';
         }
      }
   }

   // Auto-focus on address field
   document.addEventListener('DOMContentLoaded', function() {
      const addressField = document.getElementById('delivery_address');
      if (addressField.value === '') {
         addressField.focus();
      }
   });
   </script>
</body>
</html>
```

# CONCLUSION:

The project on **Bihar's traditional food** successfully achieves its objective of documenting, preserving, and promoting the rich, diverse, and often underappreciated culinary heritage of Bihar. Through this work, the uniqueness of Bihari cuisine – from the simplicity of *Litti Chokha* to the depth of *Thekua* and *Sattu Paratha* – has been systematically explored and presented.

Traditional Bihari food is not merely about taste; it reflects the state's agricultural lifestyle, seasonal cycles, historical influences, and socio-cultural values. Dishes prepared with minimal oil, locally grown grains, and ingredients like *sattu* (roasted gram flour), *poppy seeds*, and *mango pickle* highlight a deep understanding of nutrition, sustainability, and resource optimization.

By replacing fragmented oral knowledge with a structured, accessible digital and textual documentation, this project helps bridge the gap between generations. It brings attention to forgotten recipes and cooking techniques that are both eco-friendly and health-conscious.

The impact of this project lies in its potential to:

- Revive interest in Bihari cuisine among younger generations.
- Encourage culinary tourism in Bihar.
- Provide a foundation for food-based livelihood programs and local entrepreneurship.
- Preserve intangible cultural heritage before it fades due to urbanization and changing food habits.

In conclusion, Bihar's traditional food is a hidden gem of India's culinary landscape. This project demonstrates how documenting and promoting regional food culture can strengthen cultural identity, boost local economies, and offer healthier eating alternatives. Future enhancements may include recipe videos, nutritional analysis, a mobile recipe app, and integration with Bihar's tourism campaigns – ultimately putting Bihari food on the national and global food map.

# BIBLIOGRAPHY:

The following sources were consulted during the research and development of the **Bihar Traditional Food System** project. These references provided valuable insights into Bihari cuisine, cultural heritage, traditional recipes, and the technologies used for development.

- **Books and Academic Publications:**


| S. No. | Reference |
|---|---|
| 1 | Vidyarthi, L. P., Prasad, R. K., & Upadhyay, V. S. (1979). *Changing Dietary Patterns and Habits: A Socio-Cultural Study of Bihar*. New Delhi: Concept Publishing Company. |
| 2 | Singh, U., Singh, S., & Kamal, S. K. (2020). "Ethnic Fermented Foods and Beverages of Bihar and Jharkhand". In Tamang, J. P. (Ed.), *Ethnic Fermented Foods and Beverages of India: Science, History and Culture* (pp. 105-120). Springer. doi:10.1007/978-981-15-1486-9_4 |
| 3 | Mishra, S. S., Ruliya, R., & Mehta, L. (2025). "Sustainable Culinary Practices and Their Impact on Tourist Food Experience and Destination Loyalty: A Study of Bihar's Gastronomic Tourism". *Proceedings of the 2nd International Conference on Innovation and Regenerative Trends in Tourism and Hospitality Industry (IRTTHI 2025)* (pp. 339-351). Atlantis Press. doi:10.2991/978-94-6463-799-1_28 |
| 4 | Prasad, R. K. (1994). "Sweetmeats of Bihar and West Bengal in India: A Study in Diffusion". *Man in India*, 74(4), 383-401. |
| 5 | "Exploring the Cultural Text of Tirhut through the Socio Semiotics of Litti Chokha and Ahuna Meat". *Neliti Journal* (Academic Research Article on Bihari Cuisine Semiotics). |


- **Websites and Online Resources**


| S. No. | Website | Description | URL |
|---|---|---|---|
| 1 | Wikipedia | General information on Bihar's cuisine, culture, and history | https://en.wikipedia.org/wiki/Bihar |
| 2 | The Thali Tradition | Articles on Bihari cuisine, Sattu, and regional food heritage | https://www.foodbevg.com/ |

| | | | |
|---|---|---|---|
| 3 | Bihar and Jharkhand Portal | Traditional Bihari recipes and food culture | http://www.biharandjharkhand.com/ |

**Technology References (Tools & Technologies Used)**

The following technologies, programming languages, and software tools were used to develop the **Bihar Traditional Food System**:

| Category | Technology | Purpose |
|---|---|---|
| **Frontend** | HTML5 | Structuring web pages |
| **Frontend** | CSS3 | Styling and responsive design |
| **Frontend** | JavaScript | Client-side interactivity and validation |
| **Backend** | PHP (v7.4+) | Server-side logic and database interaction |
| **Database** | MySQL | Storing user, dish, rating, and recipe data |
| **Email Service** | PHPMailer | OTP-based password reset and notifications |
| **PDF Generation** | PHP PDF Libraries (TCPDF/FPDF) | Generating food catalog reports |
| **Screen Capture** | html2canvas | Capturing dish pages for sharing |
| **Local Server** | XAMPP / WAMP | Local development environment |
| **Code Editor** | Visual Studio Code | Writing and managing code |
| **API Testing** | Postman | Testing backend API endpoints |
| **Web Browsers** | Google Chrome, Mozilla Firefox, Microsoft Edge | Testing and running the application |

- **Additional References Consulted**


- Prasad, R. K. (1979). *Socio-Cultural Study of Bihari Food Habits* (Doctoral dissertation / Research Study).

- Online articles and blogs on traditional Bihari dishes such as Litti Chokha, Sattu Paratha, Khaja, Tilkut, Anarsa, Thekua, and Chura Dahi.

- Documentation from **PHP.net**, **MySQL.com**, **W3Schools**, and **MDN Web Docs** for technical implementation guidance.