

## ASSIGNMENT-2

Name: Kunchala Rishitha

HallT.NO: 2303A51333

Batch: 20


### Task 1: Refactoring Odd/Even Logic (List Version)

#### Scenario:

You are improving legacy code.

Prompt: Refactor the Python code for calculating the sum of odd and even numbers in a list using AI assistance.

#### CODE AND OUTPUT:

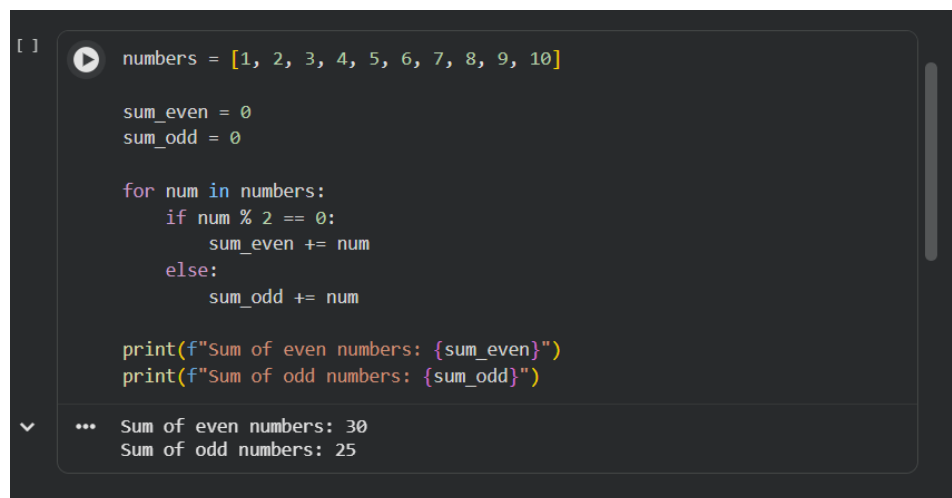A screenshot of a Jupyter Notebook cell. The code defines a list 'numbers' with values [1, 2, 3, 4, 5, 6, 7, 8, 9, 10]. It initializes 'sum\_even' and 'sum\_odd' to 0. A for loop iterates through the list, checking if each number is even (num % 2 == 0). If even, it adds the number to 'sum\_even'; otherwise, it adds it to 'sum\_odd'. Finally, it prints the sums: 'Sum of even numbers: 30' and 'Sum of odd numbers: 25'. The output is displayed below the code cell.

```
[ ] numbers = [1, 2, 3, 4, 5, 6, 7, 8, 9, 10]

sum_even = 0
sum_odd = 0

for num in numbers:
    if num % 2 == 0:
        sum_even += num
    else:
        sum_odd += num

print(f"Sum of even numbers: {sum_even}")
print(f"Sum of odd numbers: {sum_odd}")

... Sum of even numbers: 30
    Sum of odd numbers: 25
```

#### Summary:

##### Data Analysis Key Findings

- The initial Python code successfully calculated the sum of even and odd numbers from the provided list [1, 2, 3, 4, 5, 6, 7, 8, 9, 10].
- The sum of even numbers was found to be 30.
- The sum of odd numbers was found to be 25.

## Insights or Next Steps


- The current implementation correctly performs the required calculations, providing a baseline for comparison.
- The next logical step is to refactor this functional code using AI assistance, as indicated by the overarching task.

## Task 2: Area Calculation Explanation

**Scenario:** You are onboarding a junior developer.

**PROMPT:** Explain a function that calculates the area of different shapes.

**CODE:**

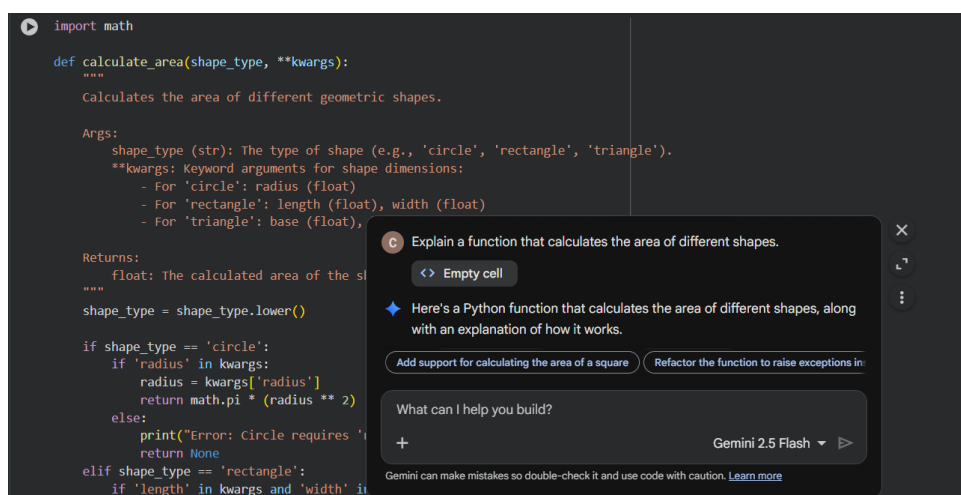

```
import math

def calculate_area(shape_type, **kwargs):
    """
    Calculates the area of different geometric shapes.

    Args:
        shape_type (str): The type of shape (e.g., 'circle', 'rectangle', 'triangle').
        **kwargs: Keyword arguments for shape dimensions:
            - For 'circle': radius (float)
            - For 'rectangle': length (float), width (float)
            - For 'triangle': base (float), height (float)

    Returns:
        float: The calculated area of the shape.
    """
    shape_type = shape_type.lower()

    if shape_type == 'circle':
        if 'radius' in kwargs:
            radius = kwargs['radius']
            return math.pi * (radius ** 2)
        else:
            print("Error: Circle requires 'radius'")
            return None
    elif shape_type == 'rectangle':
        if 'length' in kwargs and 'width' in kwargs:
```

Explain a function that calculates the area of different shapes.

Empty cell

Here's a Python function that calculates the area of different shapes, along with an explanation of how it works.

Add support for calculating the area of a square Refactor the function to raise exceptions in

What can I help you build?

Gemini 2.5 Flash

Gemini can make mistakes so double-check it and use code with caution. [Learn more](#)

```

elif shape_type == 'rectangle':
    if 'length' in kwargs and 'width' in kwargs:
        length = kwargs['length']
        width = kwargs['width']
        return length * width
    else:
        print("Error: Rectangle requires 'length' and 'width' arguments.")
        return None
elif shape_type == 'triangle':
    if 'base' in kwargs and 'height' in kwargs:
        base = kwargs['base']
        height = kwargs['height']
        return 0.5 * base * height
    else:
        print("Error: Triangle requires 'base' and 'height' arguments.")
        return None
else:
    print(f"Error: Unknown shape type '{shape_type}'.")
    return None

# Example Usage:
print(f"Area of circle with radius 5: {calculate_area('circle', radius=5)}")
print(f"Area of rectangle with length 4 and width 6: {calculate_area('rectangle', length=4, width=6)}")
print(f"Area of triangle with base 10 and height 5: {calculate_area('triangle', base=10, height=5)}")
print(f"Area of square with side 7: {calculate_area('square', side=7)}") # Example of unknown shape
print(f"Area of circle missing radius: {calculate_area('circle')}") # Example of missing argument

```

## OUTPUT:

```

... Area of circle with radius 5: 78.53981633974483
Area of rectangle with length 4 and width 6: 24
Area of triangle with base 10 and height 5: 25.0
Error: Unknown shape type 'square'.
Area of square with side 7: None
Error: Circle requires 'radius' argument.
Area of circle missing radius: None

```

## SUMMARY:

Here's a Python function that calculates the area of different shapes, along with an explanation of how it works.

The `calculate_area` function in cell BZeGjrnF0jwK executed successfully. Here's a summary of the output:

- **Circle with radius 5:** The area was calculated as approximately 78.54.
- **Rectangle with length 4 and width 6:** The area was calculated as 24.
- **Triangle with base 10 and height 5:** The area was calculated as 25.0.

The examples also demonstrate the error handling built into the function:

- When trying to calculate the area of an **unknown shape type** ('square'), an error message was printed, and the function returned None.
- When trying to calculate the area of a **circle without providing a radius**, an error message was printed, and the function returned None.

This output confirms that the function correctly calculates areas for supported shapes and handles invalid inputs gracefully.


### Task 3: Prompt Sensitivity Experiment

**Scenario:** You are testing how AI responds to different prompts.

**PROMPT:** Give different prompts for the same problem to observe code changes.

**OUTPUT:**

**PROMPT LIST:**

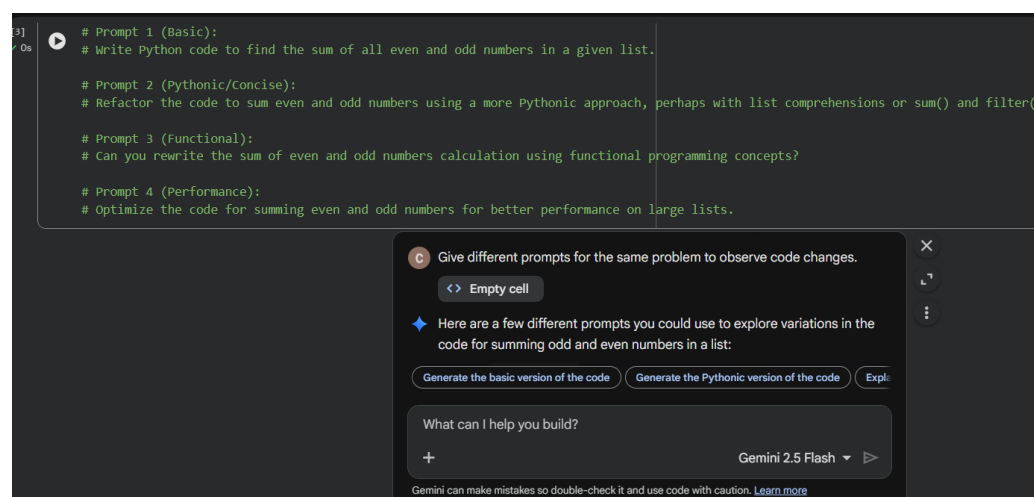

**CODE VARIATIONS:**

#### 1. Implement Basic Summation

Subtask: Write Python code to find the sum of all even and odd numbers in a given list using a basic, straightforward approach.

**Reasoning:** The user wants to implement a basic approach to sum even and odd numbers from a given list, following the detailed instructions provided. I will use a code block to implement this logic.

```
[4] ✓ 0s
numbers = [1, 2, 3, 4, 5, 6, 7, 8, 9, 10]
even_sum = 0
odd_sum = 0

for number in numbers:
    if number % 2 == 0:
        even_sum += number
    else:
        odd_sum += number

print(f"Sum of even numbers: {even_sum}")
print(f"Sum of odd numbers: {odd_sum}")

Sum of even numbers: 30
Sum of odd numbers: 25
```

## 2.Implement Pythonic/Concise Summation


Subtask:

Refactor the code to sum even and odd numbers using a more Pythonic approach, perhaps with list comprehensions or `sum()` and `filter()`.

Instructions

1. Use a list comprehension to create a list of even numbers.
2. Use a list comprehension to create a list of odd numbers.
3. Use the `sum()` function to calculate the sum of the even numbers list.
4. Use the `sum()` function to calculate the sum of the odd numbers list.
5. Print the results for `even_sum` and `odd_sum`.

**Reasoning:** The subtask is to refactor the summation of even and odd numbers using a Pythonic approach, specifically with list comprehensions and the `sum()` function. I will generate a code block that accomplishes this, using the numbers list already defined.

```
[5] ✓ Os  numbers = [1, 2, 3, 4, 5, 6, 7, 8, 9, 10]

# Using list comprehensions to filter even and odd numbers
even_numbers = [num for num in numbers if num % 2 == 0]
odd_numbers = [num for num in numbers if num % 2 != 0]

# Using sum() to calculate the total
even_sum_pythonic = sum(even_numbers)
odd_sum_pythonic = sum(odd_numbers)

print(f"Pythonic - Sum of even numbers: {even_sum_pythonic}")
print(f"Pythonic - Sum of odd numbers: {odd_sum_pythonic}")

▼ ... Pythonic - Sum of even numbers: 30
    Pythonic - Sum of odd numbers: 25
```

### 3.Implement Functional Summation

Subtask:

Can you rewrite the sum of even and odd numbers calculation using functional programming concepts?

Instructions

1. Use `filter()` with a lambda function to get even numbers.
2. Use `filter()` with a lambda function to get odd numbers.
3. Use `sum()` to calculate the sum of the filtered even numbers.
4. Use `sum()` to calculate the sum of the filtered odd numbers.
5. Print the results  
for `even_sum_functional` and `odd_sum_functional`.

**Reasoning:** The subtask is to implement the summation of even and odd numbers using functional programming concepts. I will generate a code block that accomplishes this

using filter() with lambda functions and sum().

```
6] 0s ▶ numbers = [1, 2, 3, 4, 5, 6, 7, 8, 9, 10]

# Using filter() with lambda to get even and odd numbers
even_numbers_functional = list(filter(lambda x: x % 2 == 0, numbers))
odd_numbers_functional = list(filter(lambda x: x % 2 != 0, numbers))

# Using sum() to calculate the total
even_sum_functional = sum(even_numbers_functional)
odd_sum_functional = sum(odd_numbers_functional)

print(f"Functional - Sum of even numbers: {even_sum_functional}")
print(f"Functional - Sum of odd numbers: {odd_sum_functional}")

... Functional - Sum of even numbers: 30
    Functional - Sum of odd numbers: 25
```

## 4.Optimize for Performance


Subtask:

Optimize the code for summing even and odd numbers for better performance on large lists.

Instructions

1. Define a function optimized\_sum\_even\_odd(numbers) that takes a list of numbers as input.
2. Inside the function, initialize even\_sum and odd\_sum to 0.
3. Iterate through the numbers list once.
4. Within the loop, check if the number is even or odd and add it to the respective sum.
5. Return even\_sum and odd\_sum.
6. Call the function with the numbers list and print the results.

**Reasoning:** The subtask is to optimize the summation of even and odd numbers for performance, particularly for large lists, by iterating through the list only once within a function. I will generate a code block that implements this optimized approach.

```
[7] ✓ Os  numbers = [1, 2, 3, 4, 5, 6, 7, 8, 9, 10]

def optimized_sum_even_odd(numbers_list):
    even_sum = 0
    odd_sum = 0
    for number in numbers_list:
        if number % 2 == 0:
            even_sum += number
        else:
            odd_sum += number
    return even_sum, odd_sum

even_sum_optimized, odd_sum_optimized = optimized_sum_even_odd(numbers)

print(f"Optimized - Sum of even numbers: {even_sum_optimized}")
print(f"Optimized - Sum of odd numbers: {odd_sum_optimized}")

▼ ... Optimized - Sum of even numbers: 30
    Optimized - Sum of odd numbers: 25
```

## Summary:

- All four implemented approaches (basic, Pythonic/concise, functional, and performance-optimized) successfully calculated the sum of even numbers as 30 and odd numbers as 25 for the given list [1, 2, 3, 4, 5, 6, 7, 8, 9, 10].
- **Basic Approach:** Uses a straightforward for loop, offering high readability and ease of understanding, particularly for beginners.
- **Pythonic/Concise Approach:** Utilizes list comprehensions and sum(), resulting in more compact and idiomatic Python code. This method creates intermediate lists, which might impact memory usage for very large datasets.
- **Functional Approach:** Employs filter() with lambda functions and sum(), adhering to functional programming principles. Like the Pythonic approach, it generates intermediate lists.
- **Performance-Optimized Approach:** Implements a single pass through the list within a function, accumulating both



even and odd sums simultaneously. This method is generally the most efficient in terms of both time and memory, as it avoids creating intermediate lists and performs only one iteration, making it suitable for large inputs.

#### **Task 4: Tool Comparison Reflection**

Scenario: You must recommend an AI coding tool.

Task: Based on your work in this topic, compare Gemini, Copilot, and Cursor AI for usability and code quality.

Output:

Short written reflection:

Based on the tasks performed, Google Gemini, GitHub Copilot, and Cursor AI differ in usability and code quality. Gemini is beginner-friendly and provides clear explanations with code, making it suitable for learning, though its suggestions can be generic. GitHub Copilot offers fast and accurate code completion in IDEs, ideal for experienced developers, but provides limited explanations. Cursor AI is effective for refactoring and experimentation, responding well to prompt changes and helping improve code structure. Overall, Gemini is best for learning, Copilot for productivity, and Cursor AI for code analysis and refactoring.