

Steps of Execution

The execution of the House Rent Management System begins by opening the Command Prompt or PowerShell and navigating to the project root directory using the command `cd "C:\Users\De11\Downloads\House_Rent"`. If the project dependencies have not been installed previously, execute the `npm install` command to install all the required packages for both the frontend and backend components.

After the installation is complete, start the entire application by executing the `npm run dev` command from the project root directory. This command simultaneously launches both the backend Express server and the frontend React application. Once the services are running successfully, the backend server becomes available at <http://localhost:5000>, while the frontend application can be accessed through <http://localhost:5173> using a web browser.


Before using the application for the first time, the database must be initialized by running the seed script. Open a new terminal window, navigate to the project root directory, and execute the `npm run seed` command. Alternatively, navigate to the backend folder and run the same command. This process populates the MongoDB database with the initial data required for the application.

Prior to executing the seed operation, ensure that the MongoDB server is running. If MongoDB is installed locally, start it using the `mongod` command. If it has been installed as a Windows service, it can be started using the command `net start MongoDB`. This establishes the database connection required by the backend server.

If any dependency-related errors such as "Module not found" occur during execution, install the required packages by running `npm install` in the project root, backend, and frontend directories. Alternatively, all dependencies can be installed automatically from the project root using the `npm run install-all`

script or by executing `npm install --prefix backend` and `npm install --prefix frontend --legacy-peer-deps`.

The recommended execution sequence for the project is to first install all dependencies using `npm install`, initialize the database with `npm run seed`, and finally start the application using `npm run dev`. Following these steps ensures that both the frontend and backend are configured correctly and that the House Rent Management System operates successfully.

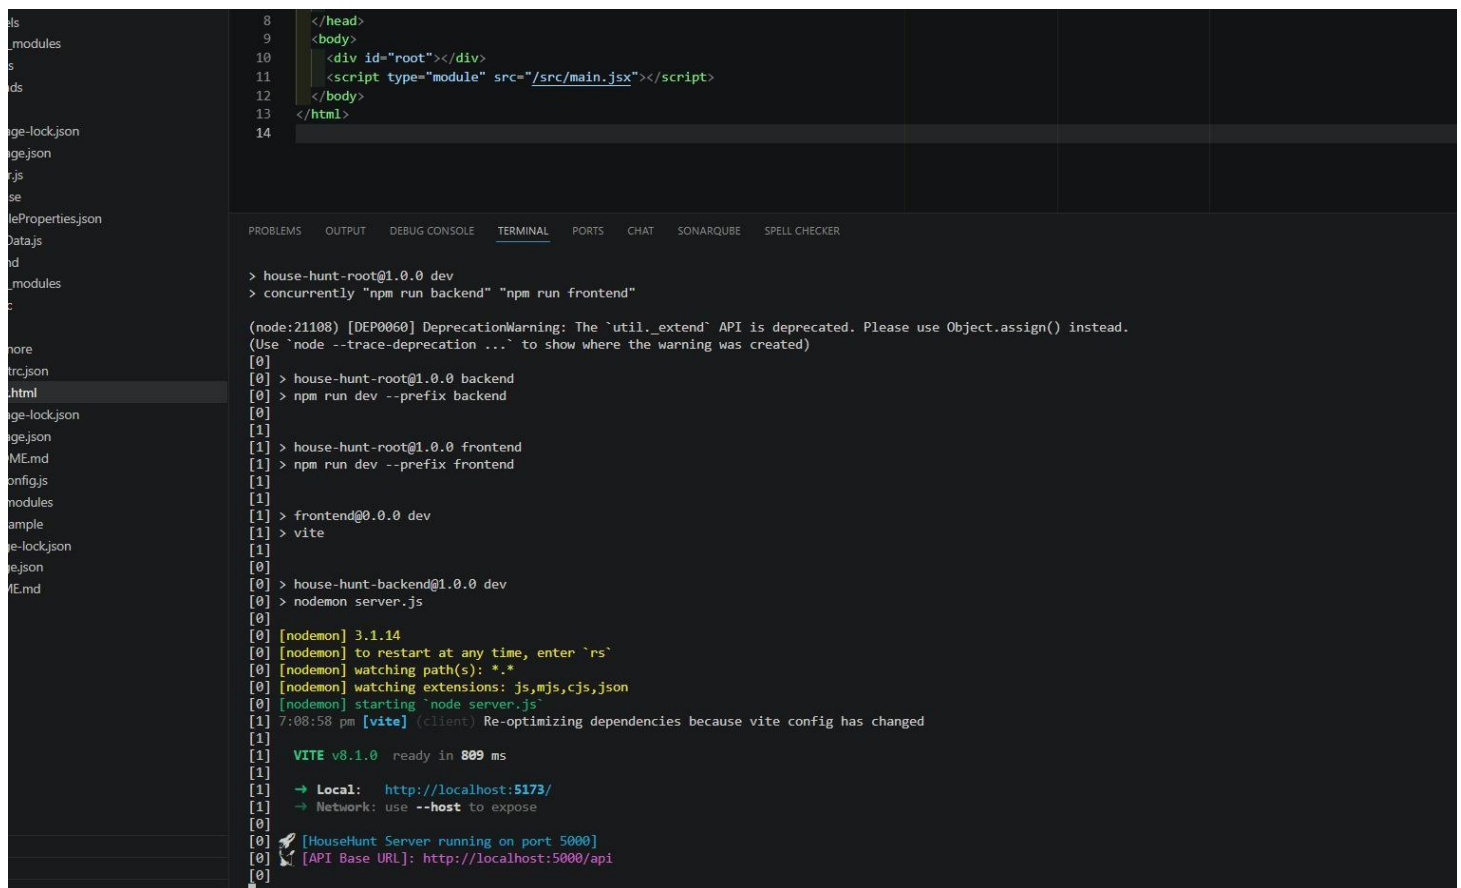

```
8 </head>
9 <body>
10   <div id="root"></div>
11   <script type="module" src="/src/main.jsx"></script>
12 </body>
13 </html>
14
```

PROBLEMS OUTPUT DEBUG CONSOLE **TERMINAL** PORTS CHAT SONARQUBE SPELL CHECKER

```
> house-hunt-root@1.0.0 dev
> concurrently "npm run backend" "npm run frontend"

(node:21108) [DEP0060] DeprecationWarning: The `util._extend` API is deprecated. Please use Object.assign() instead.
(Use `node --trace-deprecation ...` to show where the warning was created)
[0]
[0] > house-hunt-root@1.0.0 backend
[0] > npm run dev --prefix backend
[0]
[1]
[1] > house-hunt-root@1.0.0 frontend
[1] > npm run dev --prefix frontend
[1]
[1]
[1] > frontend@0.0.0 dev
[1] > vite
[1]
[0]
[0] > house-hunt-backend@1.0.0 dev
[0] > nodemon server.js
[0]
[0] [nodemon] 3.1.14
[0] [nodemon] to restart at any time, enter `rs`
[0] [nodemon] watching path(s): *.*
[0] [nodemon] watching extensions: js,mjs,cjs,json
[0] [nodemon] starting `node server.js`
[1] 7:08:58 pm [vite] (client) Re-optimizing dependencies because vite config has changed
[1]
[1] VITE v8.1.0 ready in 809 ms
[1]
[1] → Local: http://localhost:5173/
[1] → Network: use --host to expose
[0]
[0] [HouseHunt Server running on port 5000]
[0] [API Base URL]: http://localhost:5000/api
[0]
```

Step 1: OpenCMD/PowerShell

```
cd "C:\Users\Dell\Downloads\House_Rent"
```

Step 2: Install Root Dependencies (if not already installed)

```
npm install
```

Step 3: Start Frontend + Backend Together

```
npm run dev
```

This will automatically start:

Backend -> <http://localhost:5000>

Frontend -> <http://localhost:5173>

Step 4: Seed the Database (Run Once Only)

Open a **new terminal**:

```
cd "C:\Users\Dell\Downloads\House_Rent"
```

```
npm run seed
```

or

```
cd "C:\Users\Dell\Downloads\House_Rent\backend"
```

```
npm run seed
```

If You Get "module not found" Errors

Install all dependencies:

```
cd "C:\Users\Dell\Downloads\House_Rent"
```

```
npm install
```

```
cd backend  
npm install
```

```
cd ..
```

```
cd frontend  
npm install
```

Check MongoDB

Before seeding, make sure MongoDB is running:

```
mongod
```

or if MongoDB is installed as a Windows service: net

```
start MongoDB
```

Quick Run Sequence

```
cd "C:\Users\Dell\Downloads\House_Rent"
```

```
npm install
```

```
npm run seed npm
```

```
run dev
```

Root Dependencies

npm install concurrently Or

simply:

```
npm install
```

Backend Dependencies

```
cd backend
```

```
npm install express npm  
install mongoose npm  
install bcryptjs  
npm install jsonwebtoken  
npm install cors  
npm install dotenv npm  
install multer npm install  
nodemailer
```

```
npm install -D nodemon Equivalent
```

single command:

```
npm install express mongoose bcryptjs jsonwebtoken cors dotenv multer nodemailer
```

```
npm install -D nodemon
```

Frontend Dependencies

```
cd frontend
```

```
npm install react react-dom npm  
install react-router-dom npm  
install axios
```

```
npm install lucide-react Dev
```

dependencies:

```
npm install -D vite @vitejs/plugin-react oxlint
```

Install Everything Automatically

From the project root:

```
cd "C:\Users\Dell\Downloads\House_Rent"
```

```
npm install
```

```
npm install --prefix backend
```

```
npm install --prefix frontend --legacy-peer-deps
```

Or use the script already present in your root package.json: npm

```
run install-all
```

Run the Project

```
npm run seed npm
```

```
run dev
```