



Saccades and identifiability: Paradigm 1 vs Paradigm 2 — hand t_0 identified in both; saccadic t_0 held by a bound in both (P1 by the floor; P2 by the floor or the participant's fastest saccade)


A. Participant-level saccadic t_0 vs its two bounds
P1: 14/14 at floor, 0 at ceiling | P2: 10/15 at floor, 6 at ceiling

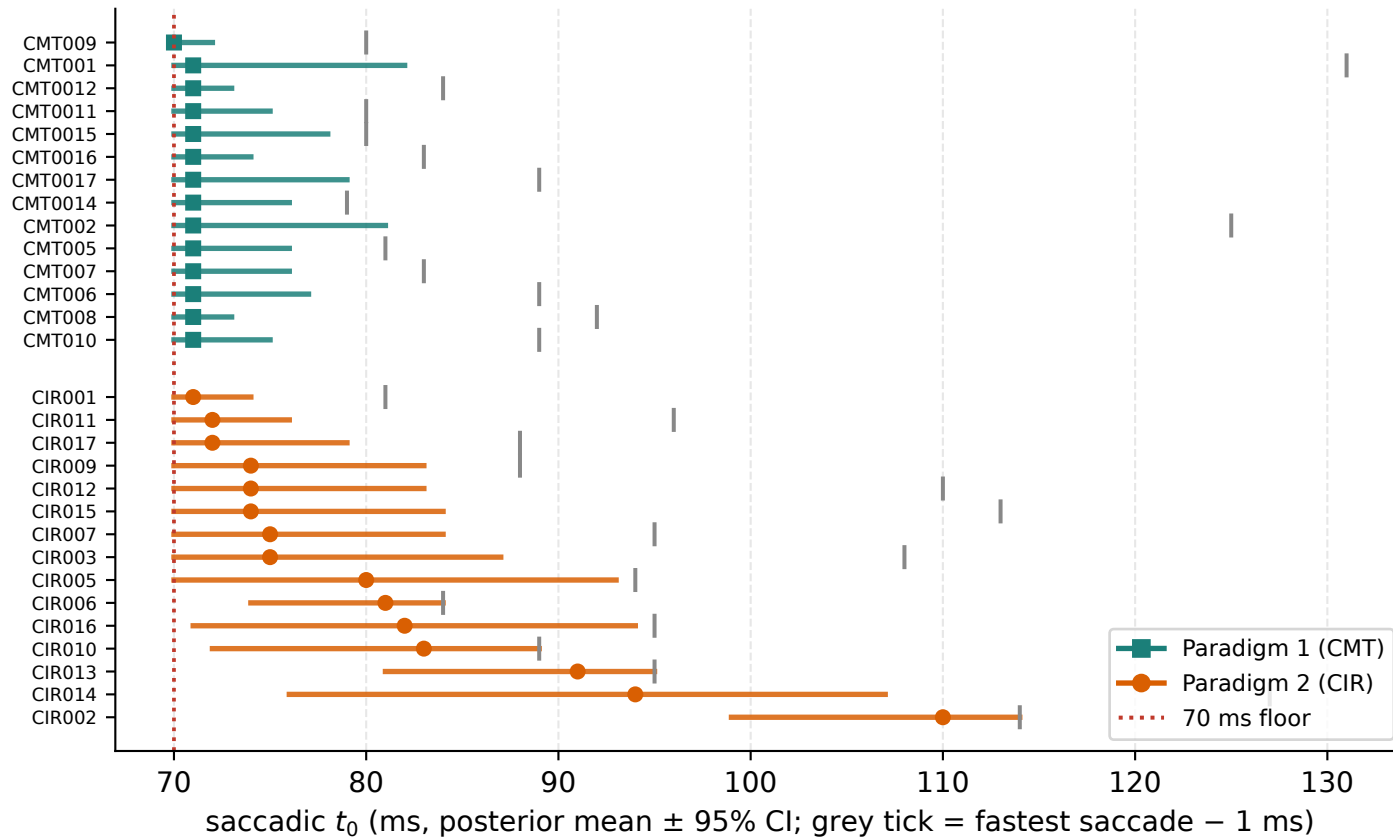

B. Raw median SRT (model-free)

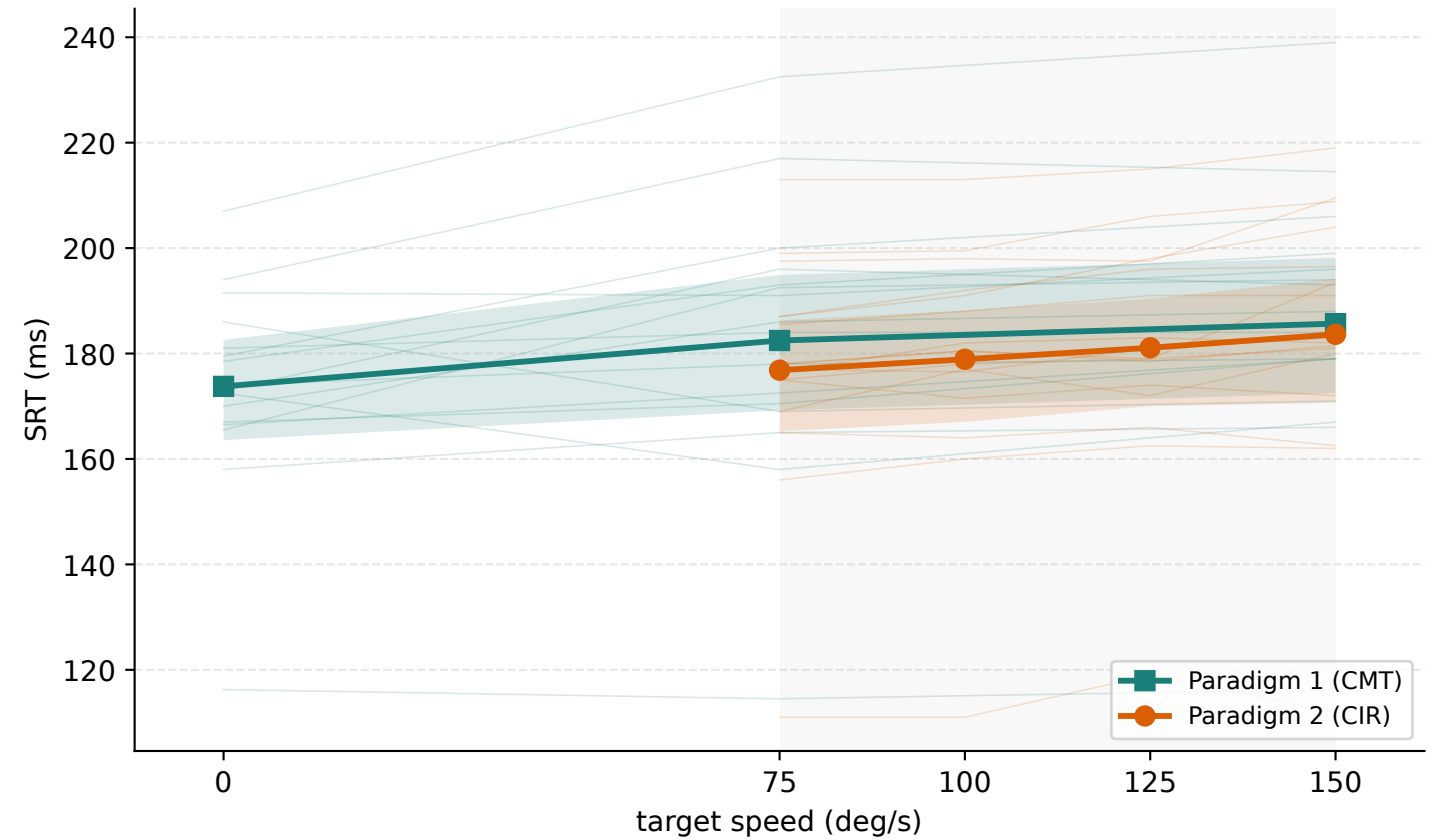

C. Does each cell's 95% interval for t_0 run into a bound?
red = floor, orange = the cell's fastest RT, purple = both, green = neither

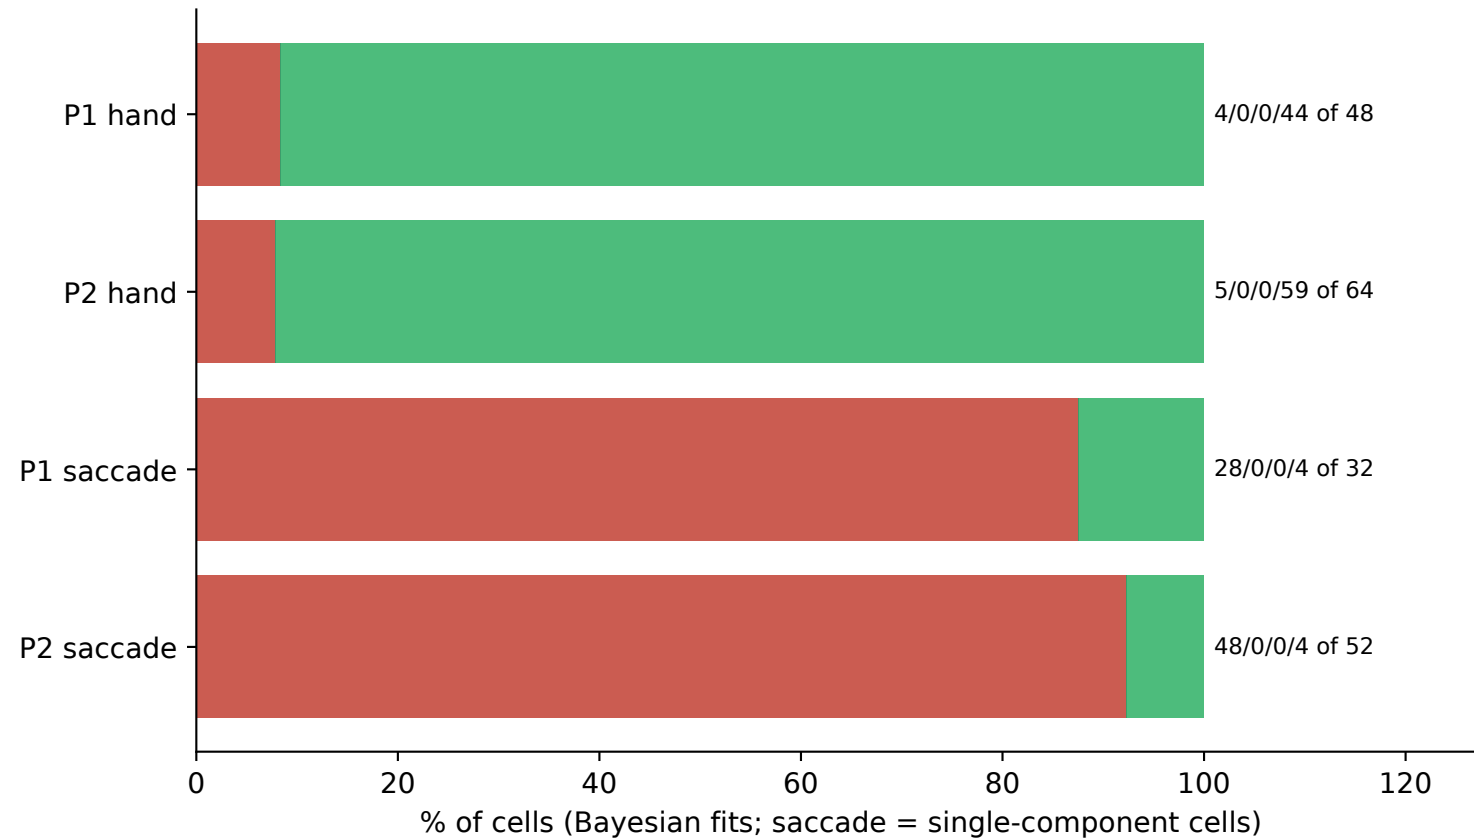

D. Floor sweep, same code on both paradigms: share of fits whose t_0 follows the floor
(dots = fits; above the dotted line = follows the floor; fits stuck at their fastest RT excluded)

