

Laxmi Charitable Trust's
Sheth L.U.J College of Arts & Sir M.V. College of Science and Commerce
Department of Information Technology (B.Sc.I.T Semester V)

Dot .Net Core and Progressive Web Application Practical

Practical – VIII

Roll No.: T005	Name: Ritesh Chaubey
Class: TYIT	Batch: 1
Date of Assignment: 08/06/26	Date/Time of Submission: 08/06/26

a. Create an HTML page that would be the starting point of the application. This HTML will contain a link to the file named manifest.json. This is an important file that would be created in the next step.

Code:-

StudentController.cs:-

```
using Microsoft.AspNetCore.Http;
using Microsoft.AspNetCore.Mvc;
namespace WebApplication13.Controllers
{
    [Route("api/[controller]")]
    [ApiController]
    public class StudentController : ControllerBase
    {
        [HttpGet]
        public IActionResult Get()
        {
            return Ok(new
            {
                RollNo = 5,
                Name = "Ritesh"
            });
        }
    }
}
```

Student.cs:-

```
namespace WebApplication13.Models
{
    public class Student
    {
        public int rollno { get; set; }
    }
}
```

```

    public String name { get; set; }
  }
}

```

Index.cshtml:-

```

@{
    ViewData["Title"] = "Home Page";
}

<div class="text-center">
    <h2>Student Record</h2>
    <button onclick="loadStudent()">Load Student</button>
    <p id="data"></p>
    <script>
        function loadStudent(){
            fetch("/api/student")
            .then(response => response.json())
            .then(student=>{
                document.getElementById("data").innerHTML=
                "Roll No : "+student.rollNo+
                "<br>Name : "+student.name;
            });
        }
    </script>
</div>

```


Manifest.json:-

```

{
  "name": "Student PWA(T005)",
  "short_name": "Student",
  "start_url": "/",
  "display": "standalone"
}

```

Output:-

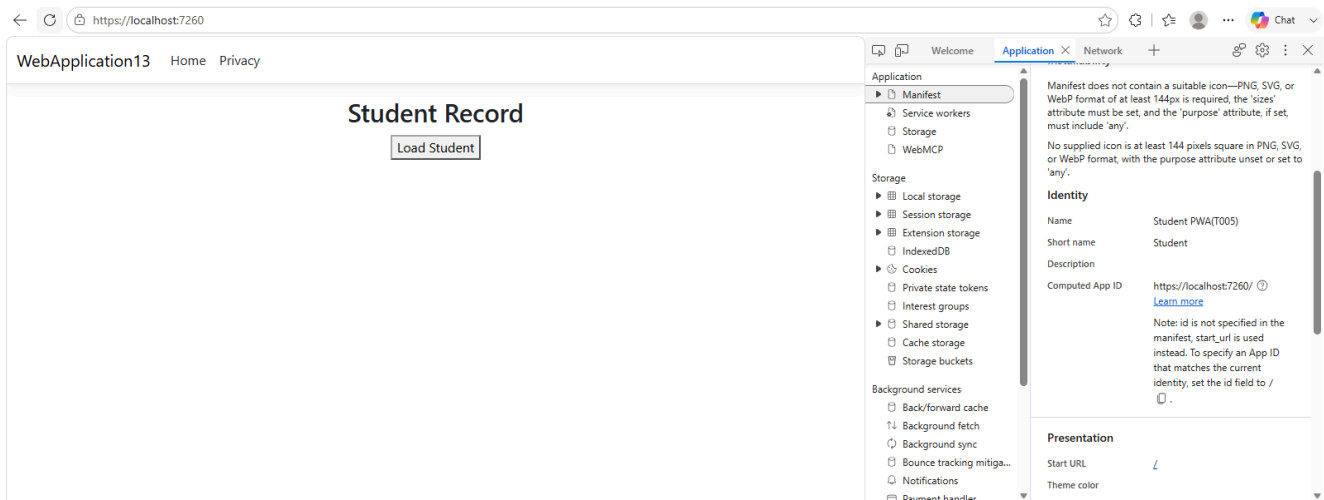

```
public class StudentController : ControllerBase
{
    [HttpGet]
    public IActionResult Get()
    {
        return Ok(new
        {
            RollNo = 5,
            Name = "Ritesh"
        });
    }
}
```

Student.cs:-

```
namespace WebApplication13.Models
{
    public class Student
    {
        public int rollno { get; set; }
        public String name { get; set; }
    }
}
```

Index.cshtml:-

```
@{
    ViewData["Title"] = "Home Page";
}

<div class="text-center">
    <h2>Student Record</h2>
    <button onclick="loadStudent()">Load Student</button>
    <p id="data"></p>
    <script>
        function loadStudent(){
            fetch("/api/student")
            .then(response => response.json())
            .then(student=>{
                document.getElementById("data").innerHTML=
                "Roll No : "+student.rollNo+
                "<br>Name : "+student.name;
            });
        }
    </script>
</div>
```

Output:-

Pretty-print ☐

```
{"rollNo":5,"name":"Ritesh"}
```

Student Record

Load Student

Roll No : 5
Name : Ritesh