Laxmi Charitable Trust's
Sheth L.U.J College of Arts & Sir M.V. College of Science and Commerce
Department of Information Technology (B.Sc.I.T Semester V)
Full Stack development MERN Practical

Practical – IV

Roll No.: T005	Name: Ritesh Chaubey
Class:TYIT	Batch:1
Date of Assignment: 15/07/2026	Date/Time of Submission: 15/07/2026

B)Pass data between components using props.

Code:-

Header.jsx:-

```
function Header(){
   return(
      <div>
         <h1> Online food delivery Dashboard </h1>
         <hr/>
      </div>
   );
}
export default Header;
```

Footer.jsx:-

```
function Footer(){
   return(
      <div>
         <h3>@ 2026 Food Delivery App</h3>
      </div>
   );
}
export default Footer;
```

HotelCard.jsx:-

```
function HotelCard(props){
   const discount =(props.price * props.discount) /100;
   const finalPrice=props.price - discount;

   return(
      <div>
         <h2>{props.restaurant}</h2>
         <p>Food Item :{props.food}</p>
```


```
          <p>Original Price:${props.price}</p>
          <p>Discount :{props.discount}%</p>
          <p>Discount Amount :${discount}</p>
          <p><b>Final Price: ${finalPrice}</b></p>
          <p>Ratings :{props.rating}</p>
        </div>
    );
}
export default HotelCard;
```

App.jsx:-

```
import Header from "./components/Header";
import Footer from "./components/Footer";
import HotelCard from "./components/HotelCard";

function App(){
  return(
    <div>
      <Header/>
      <HotelCard
      restaurant="Mojo Pizza"
      food="Farmhouse PIZZA"
      price={499}
      discount={45}
      rating={7.8}/>
      <HotelCard
      restaurant="Mojo Pizza"
      food="Paneer PIZZA"
      price={699}
      discount={45}
      rating={8.8}/>
      <HotelCard
      restaurant="Mojo Pizza"
      food="Paneer Farmhouse PIZZA"
      price={799}
      discount={45}
      rating={9.8}/>
    </div>
  );
}
export default App;
```

Output:-

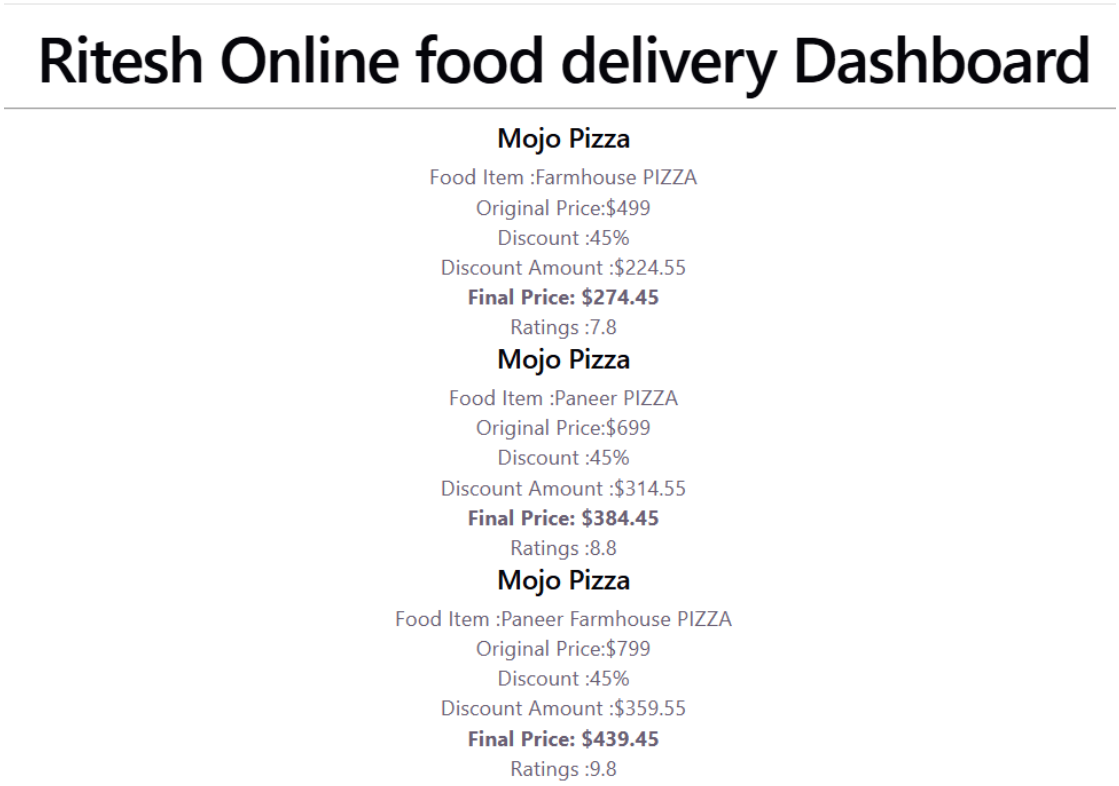


C) Use the useState hook to manage and update data.

Code:-

App.jsx:-

```
import {useState} from "react";
function App(){
  const[count,setCount] =useState(0);
  return(
    <div>
      <h1>Button click Counter</h1>
      <hr/>
      <h2>User Click (Ritesh) :{count} Times</h2>
      <button onClick={()=> setCount(count+1)}>Click me</button>
    </div>
  );
}
export default App;
```

Output:-

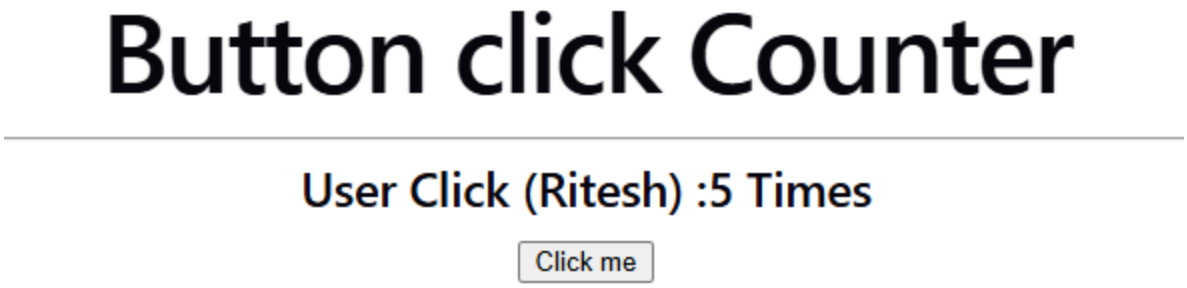

D)Create a form component to accept user input and display it dynamically.


Code:-

StudentForm.jsx:-

```
import { useState } from "react";
function StudentForm() {
  const [name, setName] = useState("");
  const [rollNo, setRollNo] = useState("");
  const [age, setAge] = useState("");
  const [course, setCourse] = useState("");
  return (
    <div style={{ padding: "20px" }}>
      <h2>Student Form</h2>
      <form>
        <label>Name:</label>
        <br />
        <input
          type="text"
          value={name}
          onChange={(e) => setName(e.target.value)}
        />
        <br /><br />
        <label>Roll No:</label>
        <br />
        <input
          type="text"
          value={rollNo}
          onChange={(e) => setRollNo(e.target.value)}
        />
        <br /><br />
        <label>Age:</label>
        <br />
```

```
        <input
          type="number"
          value={age}
          onChange={(e) => setAge(e.target.value)}
        />
        <br /><br />
        <label>Course:</label>
        <br />
        <input
          type="text"
          value={course}
          onChange={(e) => setCourse(e.target.value)}
        />
      </form>
      <hr />
      <h3>Student Details</h3>
      <p><strong>Name:</strong> {name}</p>
      <p><strong>Roll No:</strong> {rollNo}</p>
      <p><strong>Age:</strong> {age}</p>
      <p><strong>Course:</strong> {course}</p>
    </div>
  );
}
export default StudentForm;
```

Output:-

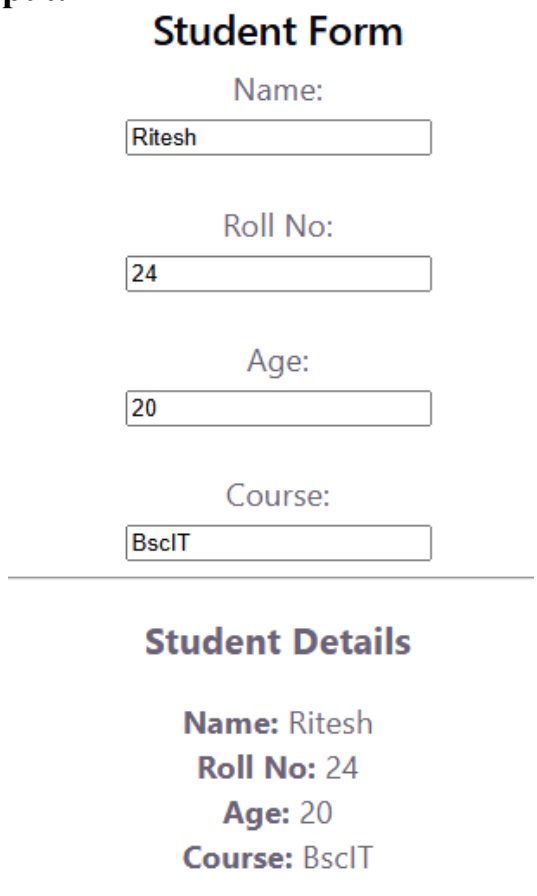


E)Display a list of items stored in the state using map().

Code:-

App.jsx:-

```
import { useState } from "react";
function App() {
 const [subjects] = useState([
   "React JS",
   "Node JS",
   "Express JS",
   "MongoDB",
   "JavaScript"
 ]);
 return (
   <div>
     <h1>(Ritesh) Subjects List</h1>
     <hr />
     <ul>
       {subjects.map((subject, index) => (
         <li key={index}>{subject}</li>
       ))}
     </ul>
   </div>
 );
}
export default App;
```

Output:-

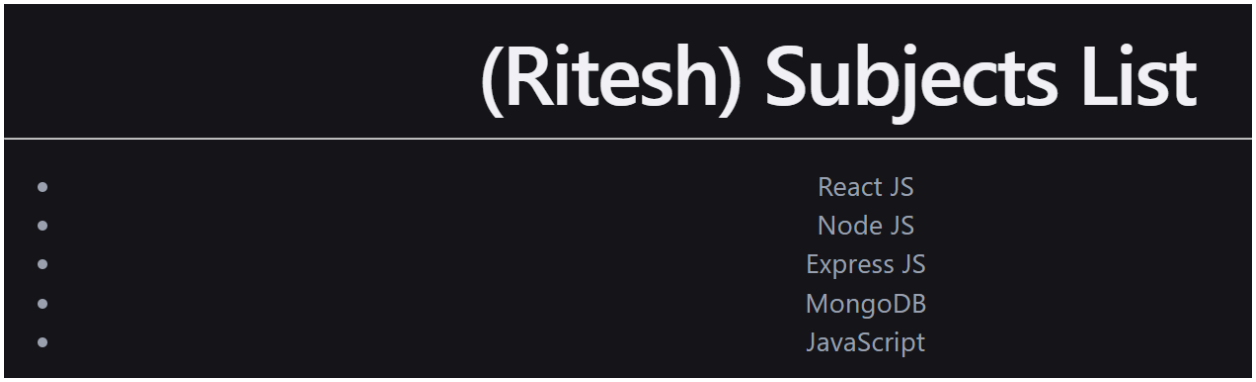

F)Build a small interactive component (e.g., counter or to-do list).

Code:-

App.jsx:-

```
import { useState } from "react";
function App() {
  // State Variable
  const [count, setCount] = useState(0);
  // Function to decrease count
  const handleDecrease = () => {
    if (count > 0) {
      setCount(count - 1);
    } else {
      setCount(0);
    }
  };
  return (
    <div>
      <h1>Button Click Counter</h1>
      <hr />
      <h2>Ritesh Clicks: {count} Times</h2>

      <button onClick={() => setCount(count + 1)}>
        Increase
      </button>
        
      <button onClick={handleDecrease}>
        Decrease
      </button>
       
```

```
      <button onClick={() => setCount(0)}>
        Reset
      </button>
    </div>
  );
}
export default App;
```

Output:-



Q)To do List:-

Code:-

App.jsx:-

```
import { useState } from "react";
function App() {
 const [task, setTask] = useState("");
 const [tasks, setTasks] = useState([]);
 // Add Task
 const addTask = () => {
   if (task.trim() !== "") {
     setTasks([...tasks, task]);
     setTask("");
   }
 };
 // Delete Task
 const deleteTask = (index) => {
```

```
  const newTasks = tasks.filter((_, i) => i !== index);
  setTasks(newTasks);
 };
 return (
  <div>
   <h1>To-Do List</h1>
   <hr />
   <input
    type="text"
    placeholder="Enter Task"
    value={task}
    onChange={(e) => setTask(e.target.value)}
   />
   <button onClick={addTask}>Add</button>
   <ul>
    {tasks.map((item, index) => (
     <li key={index}>
      {item}
       
      <button onClick={() => deleteTask(index)}>
       Delete
      </button>
     </li>
    ))}
   </ul>
  </div>
 );
}
```

export default App;

Output:-

