



Output11Eventexamplesapp.ReactJS-HOL

The page will show:


- Counter with Increment and Decrement buttons.

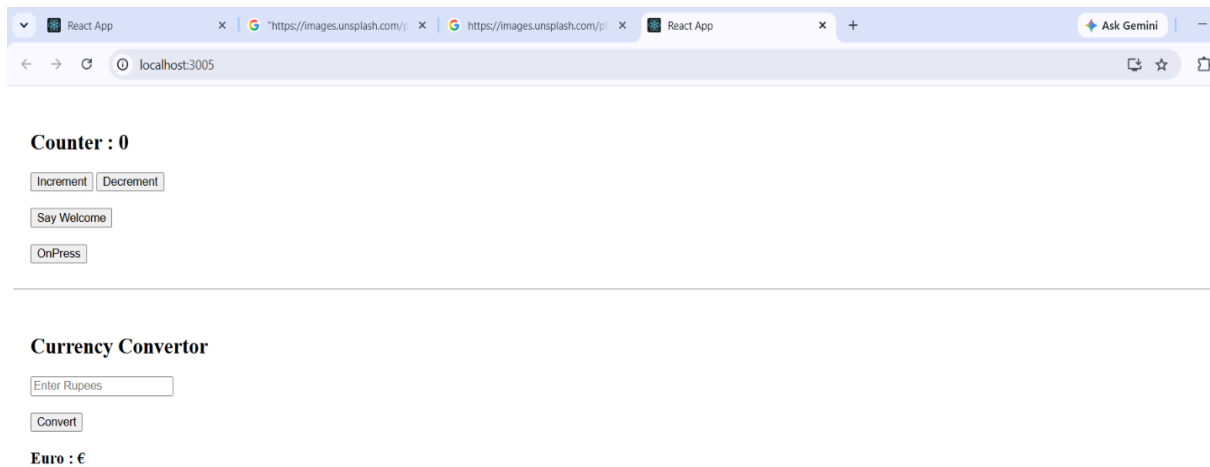


When I Clicked Increment it shows: Clicking Increment increases the counter and displays a Hello message.

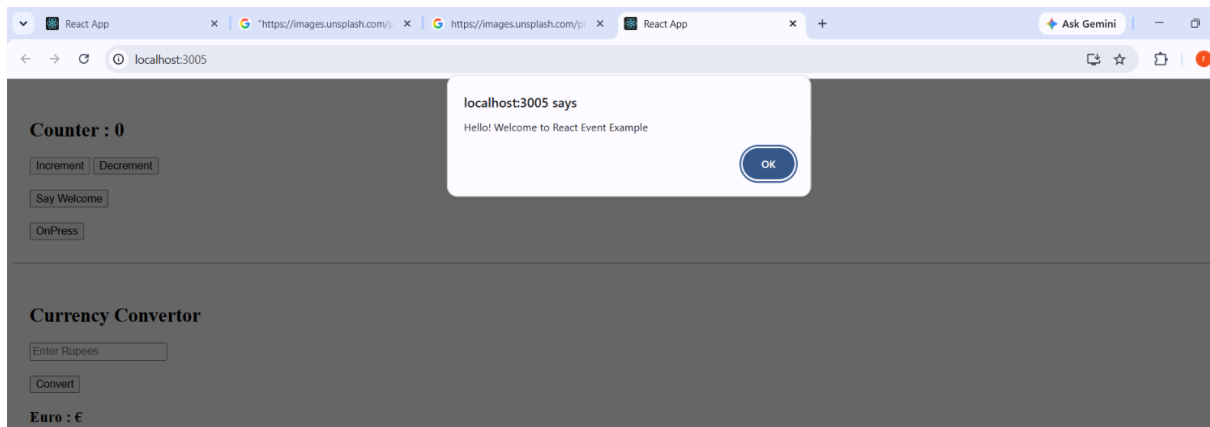



When I clicked Say Welcome button displays Welcome.

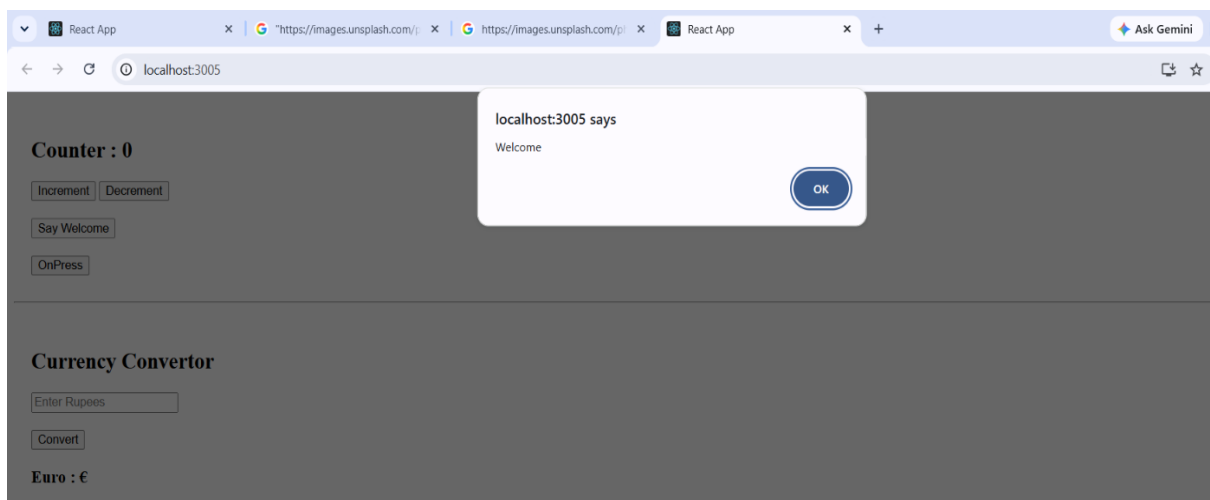

When I clicked OnPress button displays I was clicked.

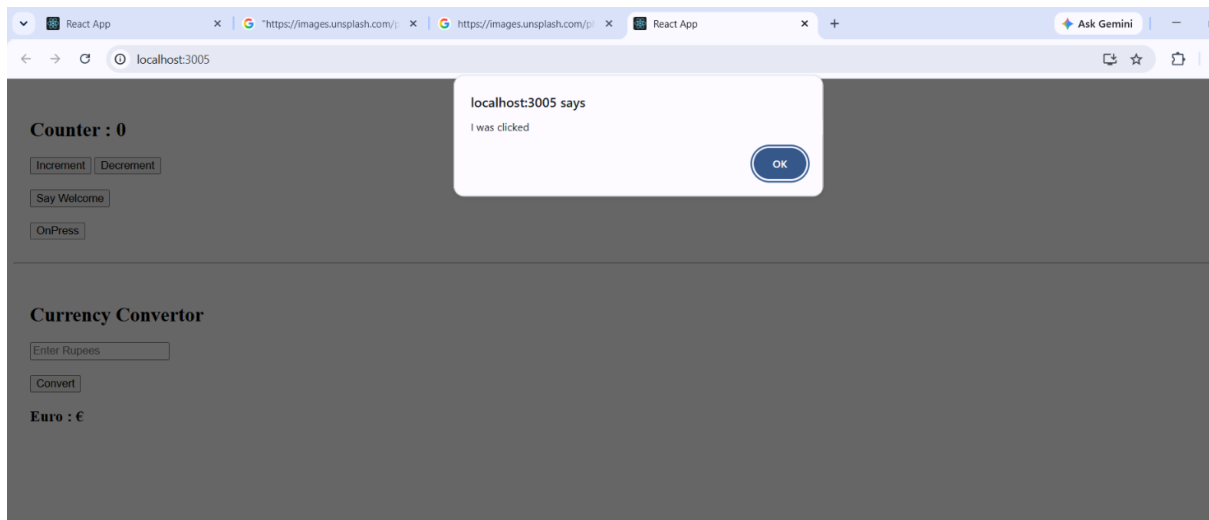

Currency Converter converts Indian Rupees to Euro when the Convert button is clicked. These features match the objectives described in your HOL document.

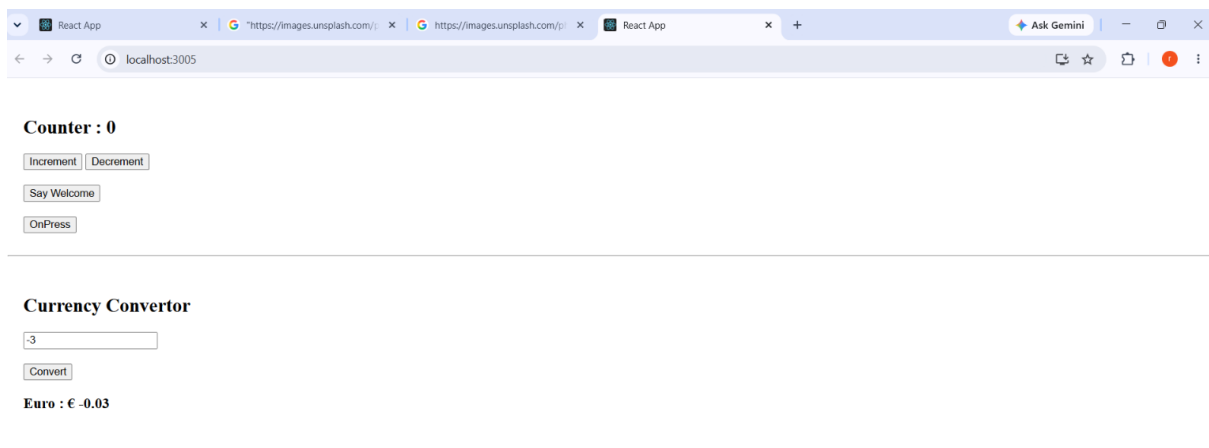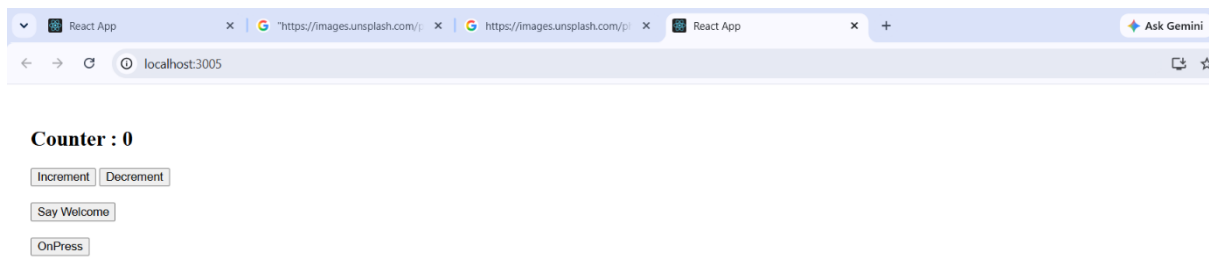

Objectives

1. Explain React Events

React Events are actions or interactions performed by the user, such as clicking a button, typing in a text box, submitting a form, or moving the mouse. React uses events to make web applications interactive and respond to user actions. Event handling in React is similar to JavaScript but follows React's syntax and conventions.

Common React Events

- `onClick` – Triggered when an element is clicked.
- `onChange` – Triggered when the value of an input changes.
- `onSubmit` – Triggered when a form is submitted.
- `onMouseOver` – Triggered when the mouse pointer moves over an element.
- `onKeyDown` – Triggered when a keyboard key is pressed.

2. Explain About Event Handlers

An event handler is a JavaScript function that executes automatically when a specific event occurs. In React, event handlers are passed as function references to event attributes such as `onClick`, `onChange`, or `onSubmit`.

Benefits

- Handles user interactions efficiently.
- Keeps the UI dynamic and responsive.
- Separates application logic from the user interface.
- Makes code reusable and easier to maintain.

3. Define Synthetic Event

A Synthetic Event is React's cross-browser wrapper around the browser's native event object. It provides a consistent event handling API so that events behave the same way across different browsers. Developers can use React events without worrying about browser compatibility issues.

Advantages

- Works consistently across browsers.
- Improves performance through React's event system.
- Provides the same properties and methods as native JavaScript events.

4. Identify React Event Naming Convention

React follows a specific naming convention for events:

- Event names use camelCase.
- Event handler functions are written inside curly braces `{}`.
- The value should be a function reference, not a function call.

Common React Event Names

React Event	Description
-------------	-------------

<code>onClick</code>	Triggered when an element is clicked.
<code>onChange</code>	Triggered when an input value changes.
<code>onSubmit</code>	Triggered when a form is submitted.

React Event	Description
-------------	-------------

onDoubleClick	Triggered on a double click.
---------------	------------------------------

onMouseOver	Triggered when the mouse pointer moves over an element.
-------------	---

onMouseOut	Triggered when the mouse pointer leaves an element.
------------	---

onKeyDown	Triggered when a keyboard key is pressed.
-----------	---

onKeyUp	Triggered when a keyboard key is released.
---------	--