


Output17exe17-fetchuserapp.ReactJS-HOL

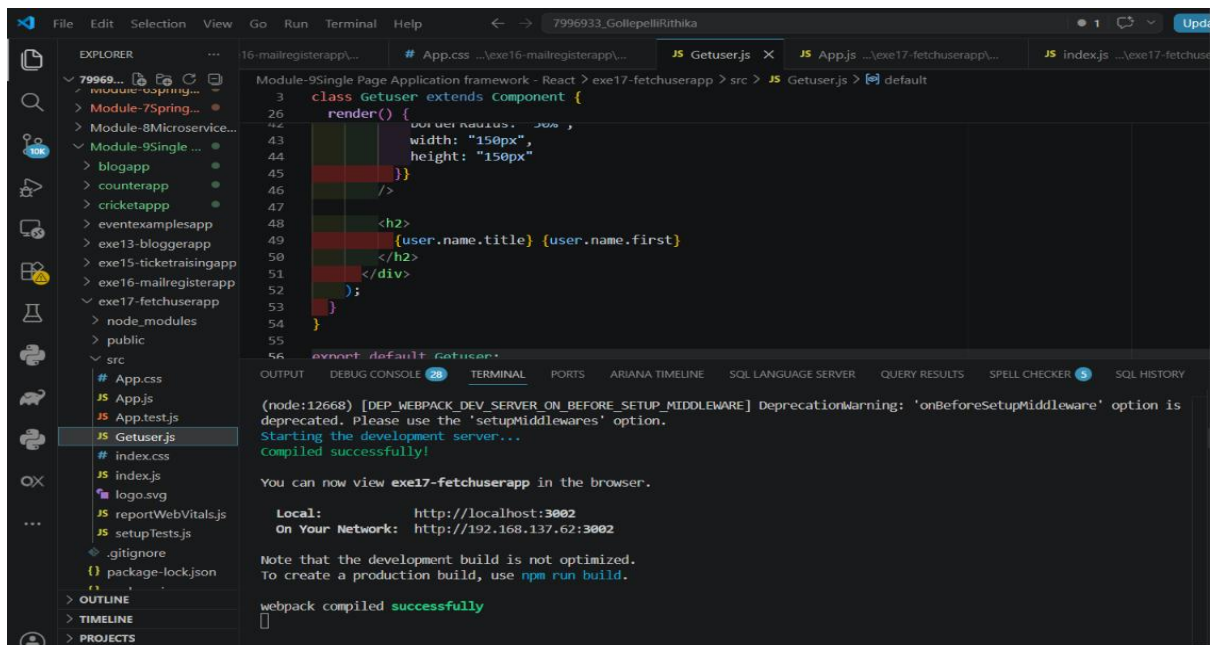

```
Module-9Single Page Application framework - React > exe17-fetchuserapp > src > JS Getuser.js > default
3  class Getuser extends Component {
26   render() {
42     const newUser = {
43       name: "Alex",
44       width: "150px",
45       height: "150px"
46     };
47   }
48   <h2>
49     {user.name.title} {user.name.first}
50   </h2>
51 </div>
52 );
53 }
54 }
55 }
56 export default Getuser;
```

OUTPUT DEBUG CONSOLE 28 TERMINAL PORTS ARIANA TIMELINE SQL LANGUAGE SERVER QUERY RESULTS SPELL CHECKER SQL HISTORY


(node:12668) [DEP_WEBPACK_DEV_SERVER_ON_BEFORE_SETUP_MIDDLEWARE] DeprecationWarning: 'onBeforeSetupMiddleware' option is deprecated. Please use the 'setupMiddlewares' option.
Starting the development server...
Compiled successfully!

You can now view exe17-fetchuserapp in the browser.

Local: http://localhost:3002
On Your Network: http://192.168.137.62:3002

Note that the development build is not optimized.
To create a production build, use `npm run build`.

webpack compiled successfully



Random User Details




Ms Alex



Random User Details



Mrs Samantha

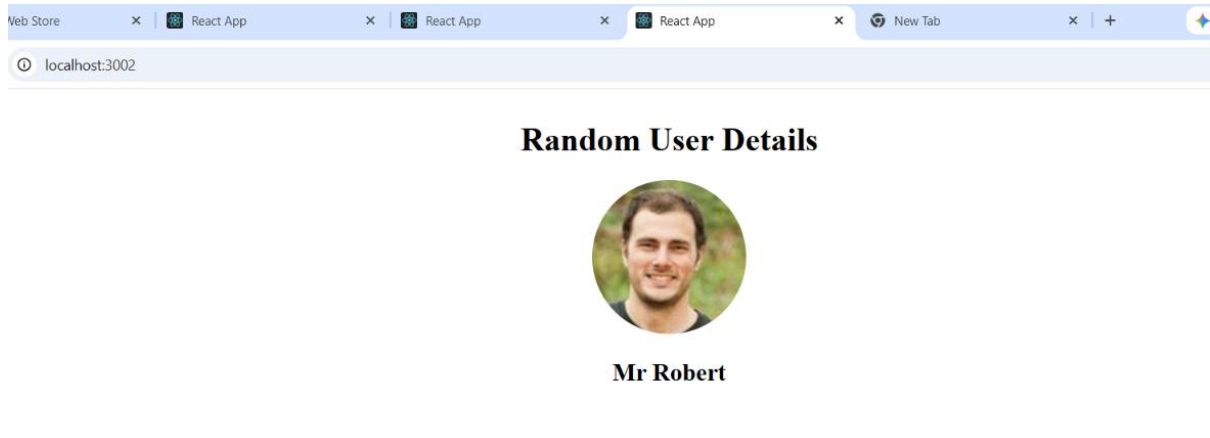

Objectives

Explain How to Consume REST APIs from React Applications

A REST API (Representational State Transfer Application Programming Interface) allows a React application to communicate with a backend server and exchange data over the internet using HTTP methods such as GET, POST, PUT, and DELETE. Consuming a REST API means sending requests to the server and receiving responses, usually in JSON format, which can then be displayed in the user interface.

In React, REST APIs are commonly consumed using the **Fetch API** or the **Axios** library. API calls are typically made inside the `useEffect()` Hook so that data is fetched automatically when the component loads. The retrieved data is stored in the component's **state** using the `useState()` Hook and then rendered on the screen.

How It Works

1. `useEffect()` runs when the component is first rendered.
2. `fetch()` sends an HTTP **GET** request to the REST API.
3. The server returns data in **JSON** format.
4. `response.json()` converts the response into a JavaScript object.
5. `setUsers()` stores the data in React state.
6. The `map()` function displays the list of users on the webpage.

Common HTTP Methods

Method	Purpose
--------	---------

GET	Retrieves data from the server.
------------	---------------------------------

POST	Sends new data to the server.
-------------	-------------------------------

PUT	Updates existing data.
------------	------------------------

DELETE	Removes data from the server.
---------------	-------------------------------