
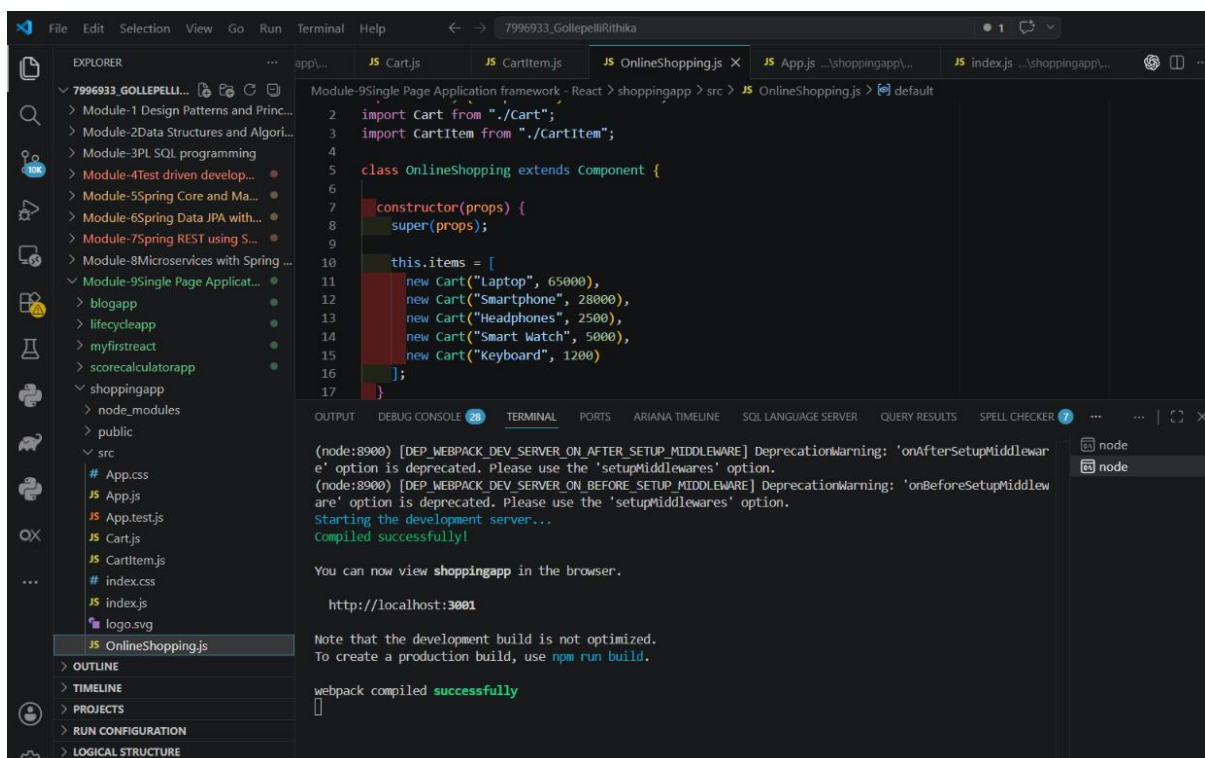


Output7 Online Shoppingapp Cart-React.HOL

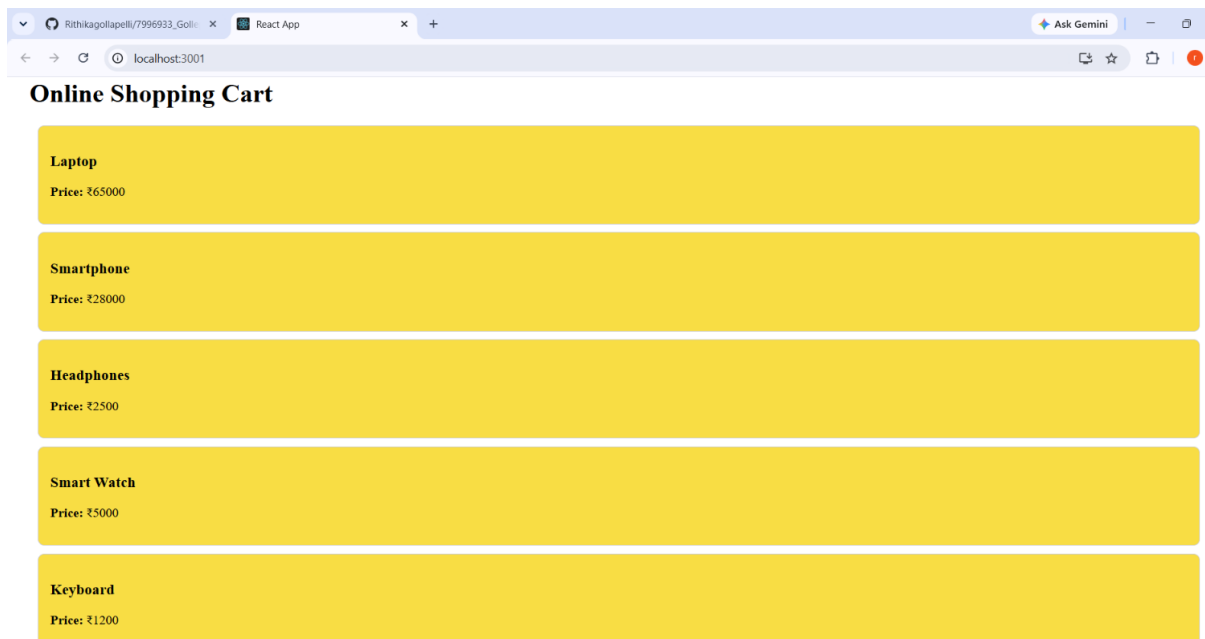

Objectives

1. Define Props

Props (Properties) are read-only inputs used to pass data from a parent component to a child component in React. They allow components to be reusable and dynamic by providing

different values without changing the component's internal code. Since props are immutable, child components cannot modify the data they receive.

2. Explain Default Props

Default Props provide predefined values for props when no value is passed by the parent component. They help prevent errors caused by missing data and ensure the component always displays meaningful information.

Benefits:

- Prevents undefined values.
- Makes components more reliable.
- Reduces the need for additional conditional checks.

3. Identify the Differences Between State and Props

Props	State
Passed from a parent component to a child component.	Managed within the component itself.
Read-only and cannot be modified by the receiving component.	Can be updated using state setter functions such as <code>setState()</code> or <code>useState()</code> .
Used to pass data and configuration.	Used to store and manage dynamic data.
Controlled by the parent component.	Controlled by the component that owns the state.
Helps in communication between components.	Triggers re-rendering when the state changes.

Example:

- **Props:** Passing a student's name from the parent to the child component.
- **State:** Updating a counter value when a button is clicked.

4. Explain ReactDOM.render()

`ReactDOM.render()` is a method used in earlier versions of React (React 17 and below) to render a React component into a specific HTML element in the browser. It connects the React application with the DOM and displays the user interface.

