


Output- JWT Handson Create authentication service that returns JWT

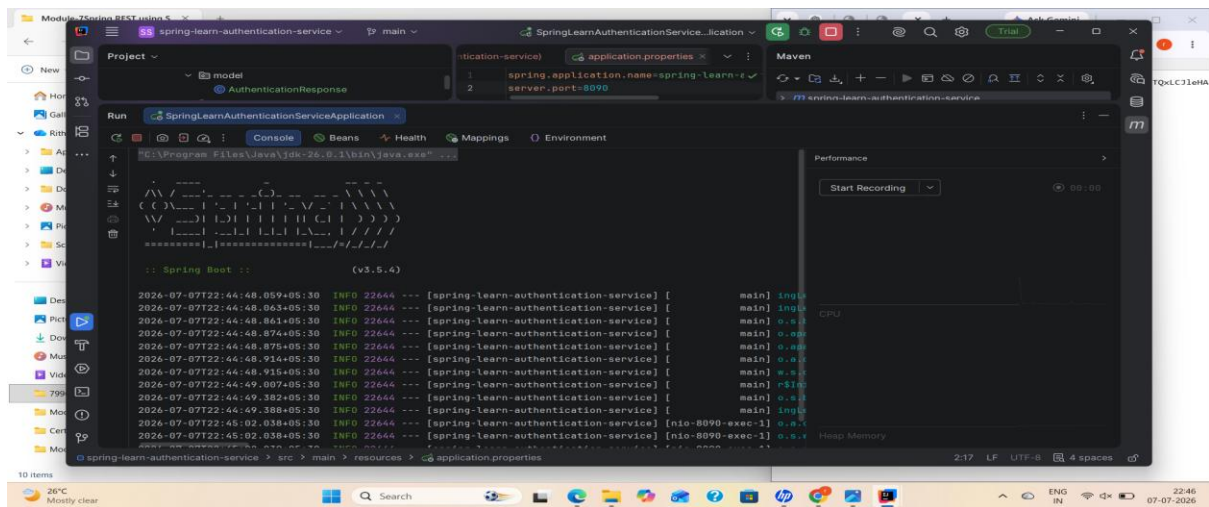

Test the API

Method 1: Browser

Run the application again and **leave it running** (don't click Stop).

Open:

<http://localhost:8090/authenticate>

and after entering:

A login dialog should appear.

Enter:

Username

user

Password

Pwd

Output:



Method 2: In Postman

1. Send the request to:

Open:

<http://localhost:8090/authenticate>

2. Go to the **Authorization** tab.
3. Select **Basic Auth**.
4. Enter:
 - Username: user
 - Password: pwd
5. Click **Send**.
6. After the response is received, click the **Headers** tab (next to **Body**, **Cookies**, etc.).

There you will see headers similar to:

Request Headers

Authorization: Basic dXNlcjpwd2Q=

Host: localhost:8090

Accept: */*

User-Agent: PostmanRuntime/...

Response Headers

Content-Type: application/json

Content-Length: 171

Date: Tue, 07 Jul 2026 ...

Output:



1. What happens in the Authentication Controller?

The client sends a request to /authenticate.

Spring Security authenticates the username and password.

The controller receives the authenticated user.

The controller calls JwtUtil.generateToken().

A JWT token is generated and returned as a JSON response.

2. How are the username and password read?

Spring Security reads the **Authorization** header.

It decodes the Basic Authentication credentials.

It validates them using the configured UserDetailsService.

After successful authentication, the username is available in the Authentication object.

3. How is the JWT generated?

The JwtUtil class creates the JWT by adding:

- Subject (username)
- Issued time ,
- Expiration time
- Secret key
- HS256 signature