


BLANCAS, JOHN RICHARD

ACTIVITY5


CODE

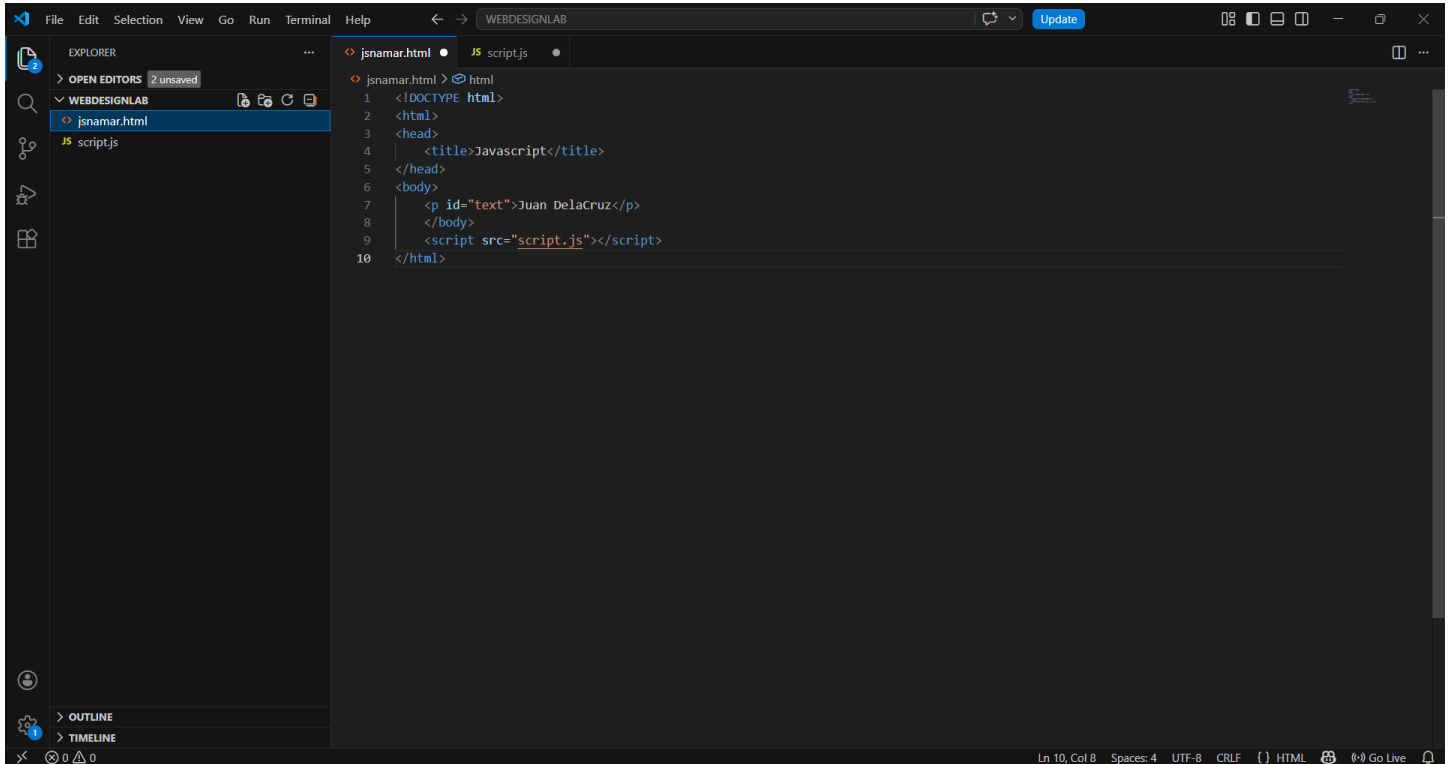

This screenshot shows the Visual Studio Code editor with the file 'jsnamar.html' open. The Explorer sidebar on the left shows the project structure with 'jsnamar.html' and 'script.js'. The main editor area displays the following HTML code:

```
1 <!DOCTYPE html>
2 <html>
3 <head>
4   <title>Javascript</title>
5 </head>
6 <body>
7   <p id="text">Juan DelaCruz</p>
8 </body>
9   <script src="script.js"></script>
10 </html>
```

The status bar at the bottom indicates the cursor is at Line 10, Column 8, with 4 spaces, UTF-8 encoding, CRLF line endings, and HTML syntax highlighting.

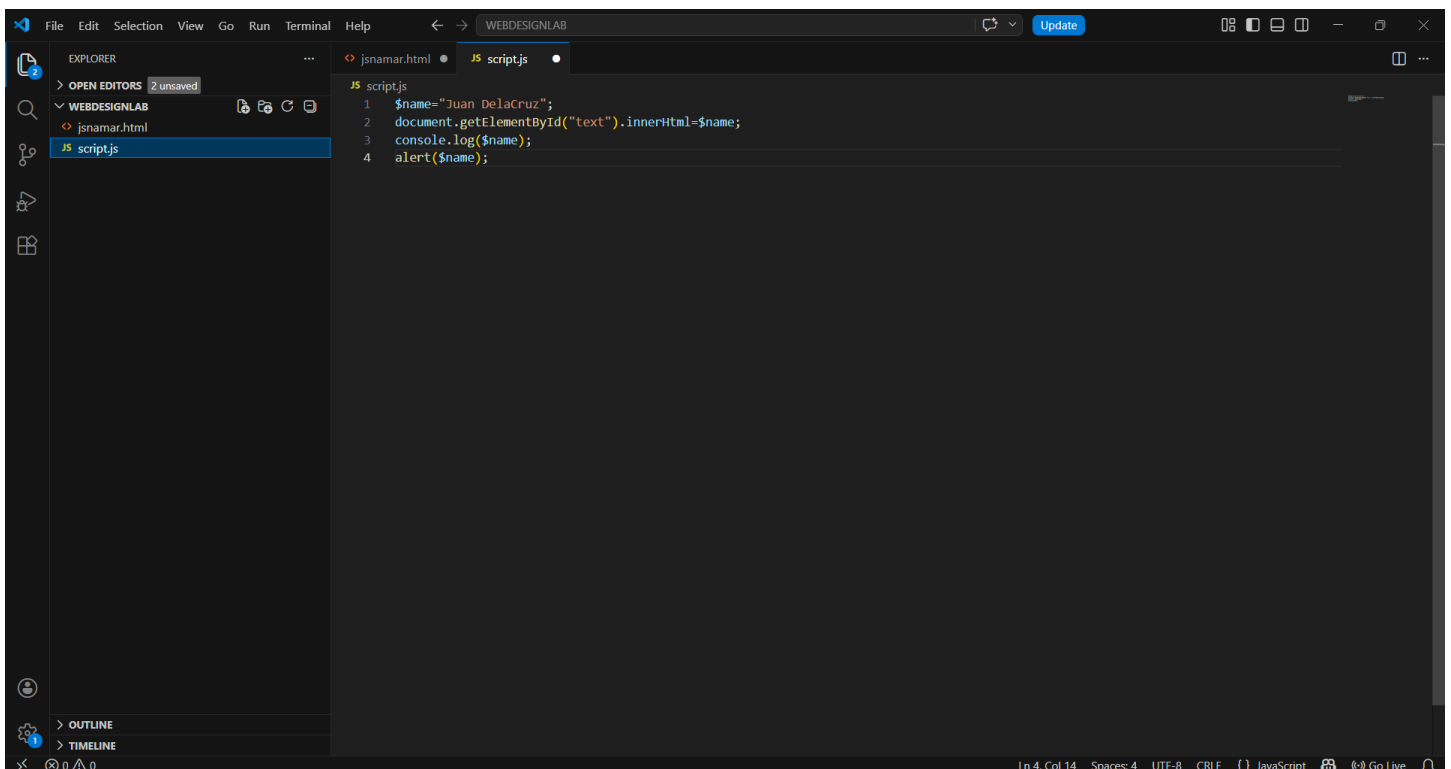

This screenshot shows the Visual Studio Code editor with the file 'script.js' open. The Explorer sidebar on the left shows the project structure with 'jsnamar.html' and 'script.js'. The main editor area displays the following JavaScript code:

```
1 $name="Juan DelaCruz";
2 document.getElementById("text").innerHTML=$name;
3 console.log($name);
4 alert($name);
```

The status bar at the bottom indicates the cursor is at Line 4, Column 14, with 4 spaces, UTF-8 encoding, CRLF line endings, and JavaScript syntax highlighting.

OUTPUT

