


BLANCAS, JOHN RICHARD

ACTIVITY8


CODE

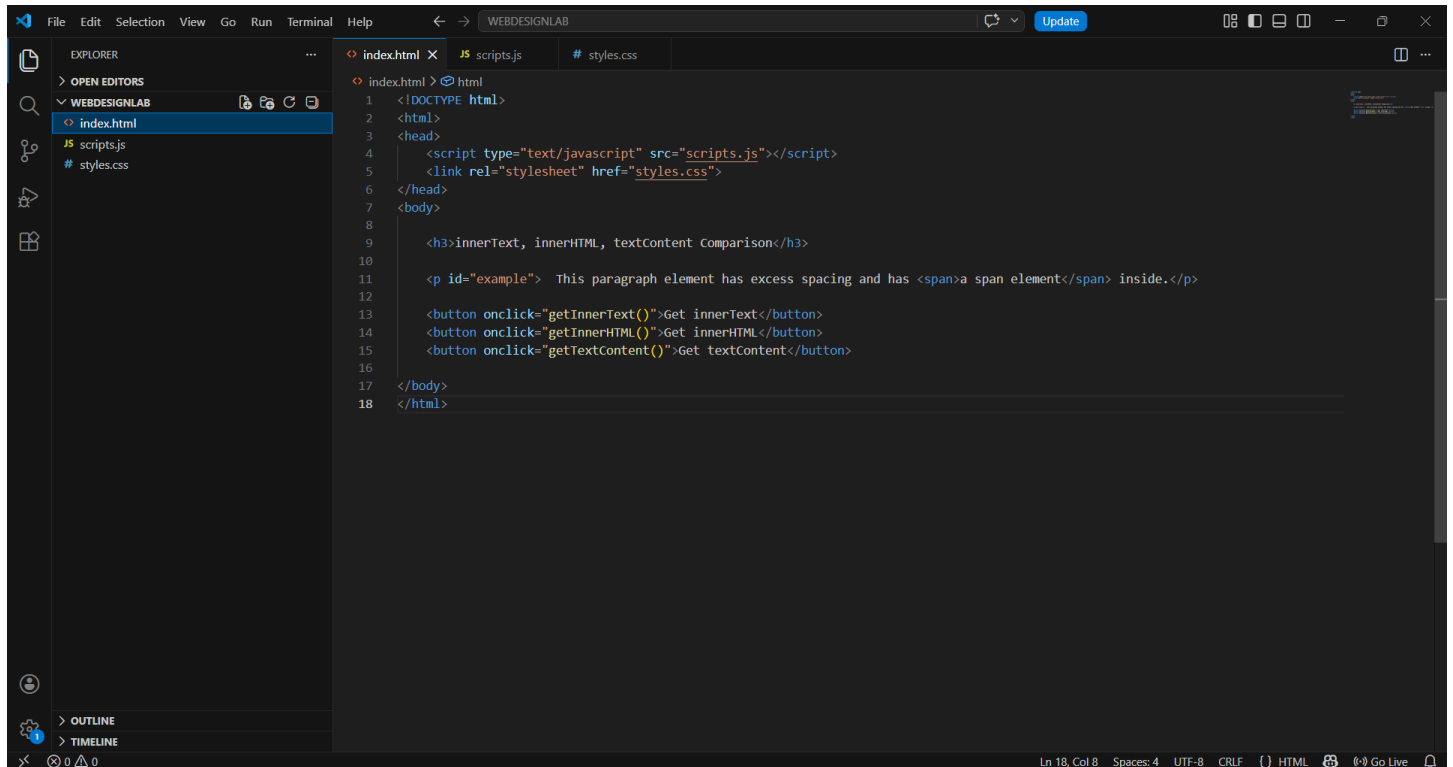

This screenshot shows the Visual Studio Code editor with the 'index.html' file open. The Explorer sidebar on the left shows the project structure with 'index.html', 'scripts.js', and 'styles.css'. The main editor area displays the HTML code for 'index.html'.

```
1 <!DOCTYPE html>
2 <html>
3 <head>
4   <script type="text/javascript" src="scripts.js"></script>
5   <link rel="stylesheet" href="styles.css">
6 </head>
7 <body>
8
9   <h3>innerText, innerHTML, textContent Comparison</h3>
10
11   <p id="example"> This paragraph element has excess spacing and has <span>a span element</span> inside.</p>
12
13   <button onclick="getInnerText()">Get innerText</button>
14   <button onclick="getInnerHTML()">Get innerHTML</button>
15   <button onclick="getTextContent()">Get textContent</button>
16
17 </body>
18 </html>
```


The status bar at the bottom indicates 'Ln 18, Col 8', 'Spaces: 4', 'UTF-8', 'CRLF', and 'HTML'.

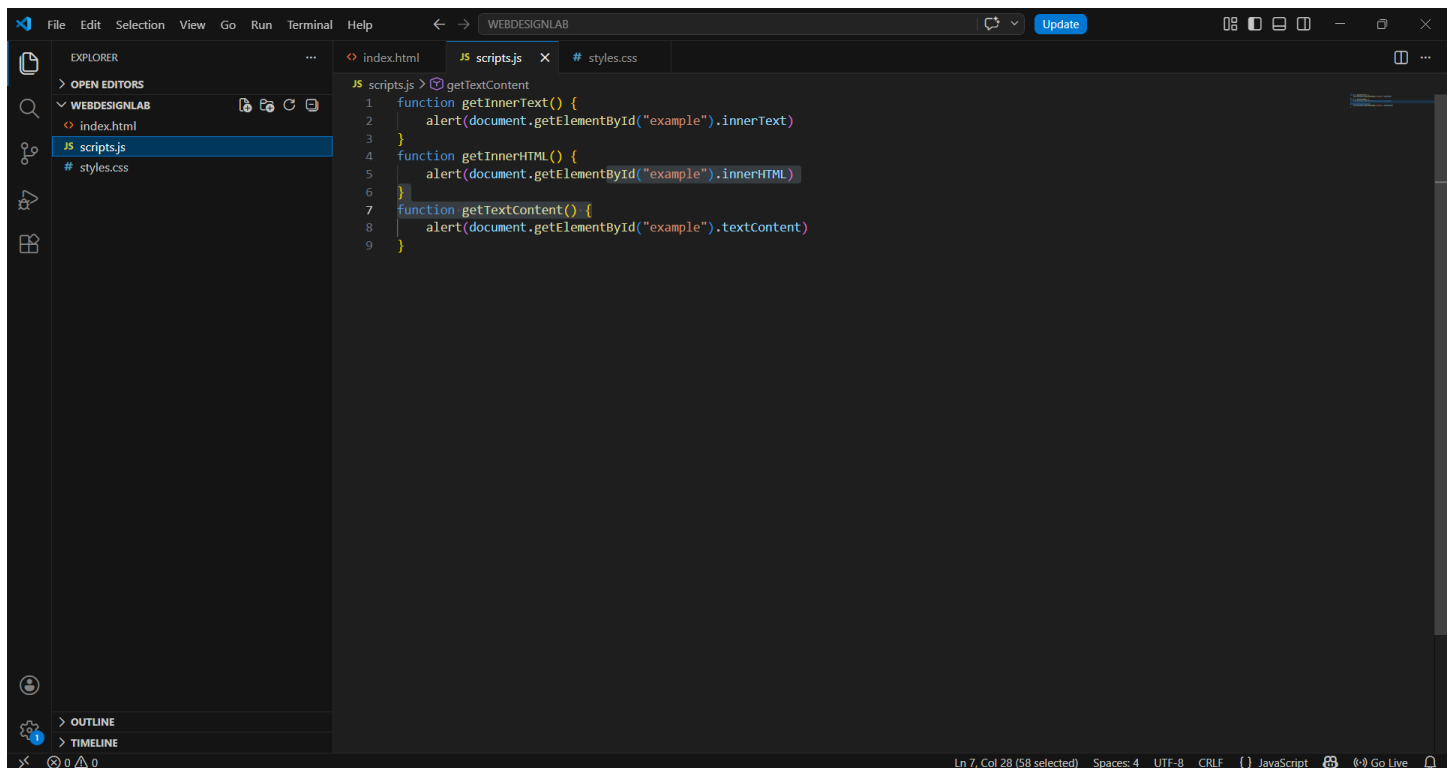

This screenshot shows the Visual Studio Code editor with the 'scripts.js' file open. The Explorer sidebar on the left shows the project structure with 'index.html', 'scripts.js', and 'styles.css'. The main editor area displays the JavaScript code for 'scripts.js'.

```
1 function getInnerText() {
2   alert(document.getElementById("example").innerText)
3 }
4 function getInnerHTML() {
5   alert(document.getElementById("example").innerHTML)
6 }
7 function getTextContent() {
8   alert(document.getElementById("example").textContent)
9 }
```

The status bar at the bottom indicates 'Ln 7, Col 28 (58 selected)', 'Spaces: 4', 'UTF-8', 'CRLF', and 'JavaScript'.

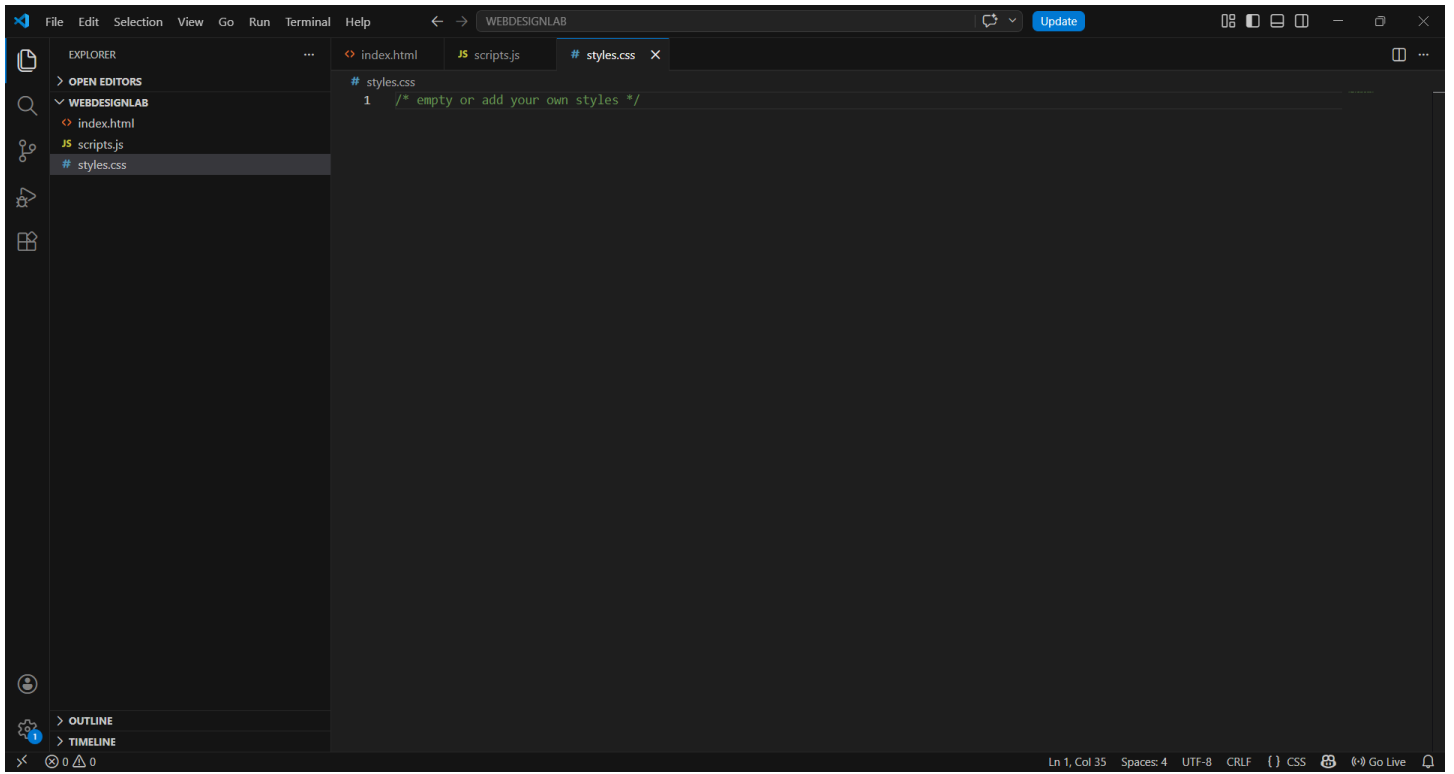

OUTPUT

