


PO - Samsara Remit- API Document / Testing

Document Number	OI-PO-20260202
Document status	PUBLISHED
Document owner	@Rizwan Zaffar @Arsalan Pervez @Muhammad Taimoor
Solutions Architect	@Maqsood Ali @Owais Khalid @Saqlain Raza
Project Manager	@Annus Ahmed
Priority	HIGH
Region	Nepal
Operator	Samsara Remit
Product	Remittance

PRODUCT CHECKLIST




IP Whitelisting is required for this, Current whitelisted IP is mentioned below:

- 125.209.82.254
- 110.93.241.250

Postman Collection



Send API Flow

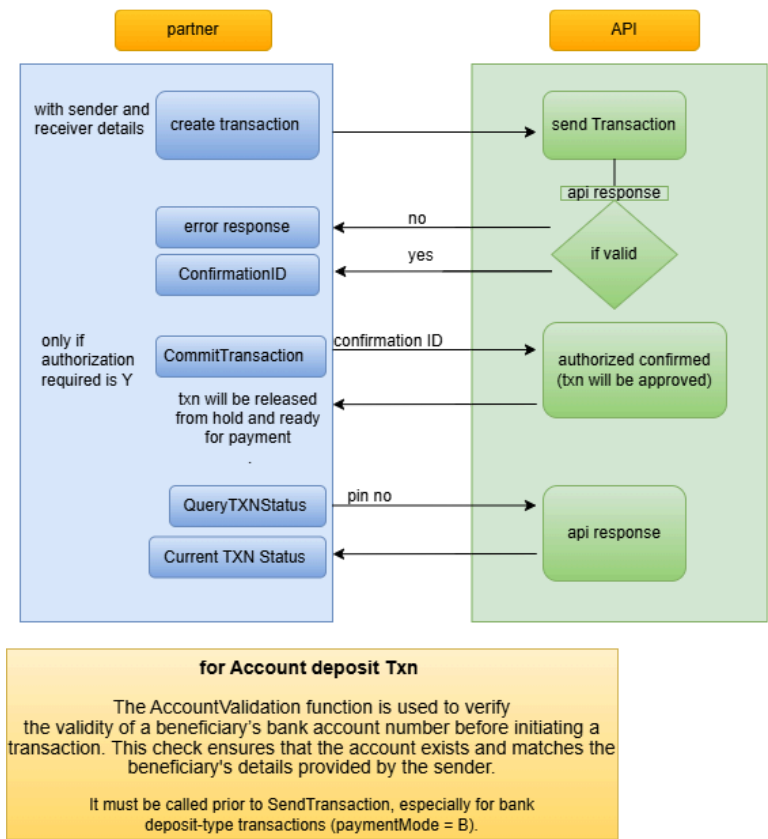

API DOCUMENT

 [Samsara_SendAPI_V1.1.pdf](#)

LIST OF METHODS

SNO	Method	Description
1	GetEcho	Test Connection
2	GetCatalogue	Get the Static Data - Countries that are available, - Payment Mode - Get Payout Agent List - Sender Occupation - Source of Fund - Relationship - Purpose of Remittance
3	GetAgentList	Get all the agent list and location ID
4	GetEXRate	Get Exchange Rate and calculate Service Fee
5	SendTransaction	Send Transaction
6	QueryTXNStatus	Check the status of TXN
7	ReconcileReport	Generate TXN Sent/Paid/Cancel Status Report
8	CommitTransaction	To Authorize a transaction. This function has to be called within 10 hours after SendTransaction.
9	AmendTransaction	This method is used to amend the transaction which partner has posted
10	CancelTransaction	Partner can call this function to cancel transaction that is posted.
11	CheckBalance	To enquire Partner Balance
12	AccountValidation	To check valid Beneficiary Account Number

Base URL: [Base URL](#)

1. GetEcho

Description: This method is used to test the connectivity between the Partner's system and the Samsara Remit system. It ensures the API is reachable and the authentication credentials are correct. It is often used for server "warm-up" or keep-alive purposes.

METHOD: POST

Endpoint: <https://uatsamsara.i remit.com.my/SendApi/api/webService/GetEcho>

REQUEST Parameters

TYPE	Data Type	Mandatory	PARAMETERS	Sample Values	Fixed/V ariable	Description
HEADER	String	M	Authorization	hmacauth simtestapi...	V	HMAC authentication header.
BODY	String	M	agentSessionId	1770108119	V	Unique session ID used to track

						the respons e.
--	--	--	--	--	--	----------------------

RESPONSE Parameters

Parameters	Data Type	Mandatory	Sample Values	Remarks
code	String	M	0	0 denotes SUCCESS (System is Up).
message	String	M	SUCCESS	Status description message.

Sample Request

```

1 | JSON
2 |
3 | {
4 |     "agentSessionId": "1770108119"
5 | }

```

Sample Response

```

1 | JSON
2 |
3 | {
4 |     "code": "0",
5 |     "message": "SUCCESS"
6 | }

```

2. GetCatalogue

Description: This method is used to retrieve static system data required for transaction processing, such as country lists, payment modes, occupations, and sources of funds.

METHOD: POST

Endpoint:

<https://uatsamsara.iremit.com.my/SendApi/api/webservice/GetCatalogue>

REQUEST Parameters

TYPE	Data Type	Mandatory	PARAMETERS	Sample Values	Fixed/V ariable	Description
HEADER	String	M	Authorization	hmacauth simtestapi...	V	HMAC authentication header.
BODY	String	M	agentSessionId	1770108119	V	Unique session ID used to track the response.
BODY	String	M	catalogueType	PTY	F	Type of data: CTY (Country), PTY (Payment Mode), OCC (Occupation), SOF (Source of Fund).
BODY	String	O	additionalField1	NPL	V	Contextual filter (e.g., Country code when requesting

						Payment Modes).
BODY	String	O	additionalField2		V	Reserved for future use or sub-filters.

RESPONSE Parameters

Parameters	Data Type	Mandatory	Sample Values	Remarks
code	String	M	0	0 denotes SUCCESS.
result	Array	M	See Sample Response	Contains a list of objects with "data" (code) and "value" (description).
data	String	M	B	The code value to be used in subsequent API calls.
value	String	M	Bank Transfer	The human-readable description of the item.

Sample Request

1	JSON
1	{
2	"agentSessionId": "1770108119",
3	"catalogueType": "PTY",

```

4     "additionalField1": "NPL",
5     "additionalField2": "",
6     "additionalField3": ""
7 }
8

```

Sample Response

```

1 | JSON

```

```

1 {
2     "code": "0",
3     "result": [
4         {
5             "data": "B",
6             "value": "Bank Transfer"
7         },
8         {
9             "data": "C",
10            "value": "Cash Pay"
11        },
12        {
13            "data": "W",
14            "value": "Mobile Wallet"
15        }
16    ]
17 }

```

3. GetAgentList

Description: This method is used to retrieve a list of active payout agents or locations based on the payment mode and the destination country. This list provides the `locationId` required for performing transactions.

METHOD: POST

Endpoint:

<https://uatsamsara.iemit.com.my/SendApi/api/webservice/Getagentlist>

REQUEST Parameters

TYPE	Data Type	Mandatory	PARAMETERS	Sample Values	Fixed/Variable	Description
HEADER	String	M	Authorization	hmacauth simtestapi...	V	HMAC authentication header.
BODY	String	M	agentSessionId	1770108119	V	Unique session ID used

						to track the response.
BODY	String	M	payment Mode	C	F	Payout mode (e.g., C for Cash, B for Bank Transfer).
BODY	String	M	payoutCountry	NPL	F	ISO-3 country code for the payout country.
BODY	String	M	payoutCurrency	NPR	F	The currency code for the payout.

RESPONSE Parameters (Array of Objects)

Parameters	Data Type	Mandatory	Sample Values	Remarks
code	String	M	0	0 denotes SUCCESS.
locationDetail	Array	M	See Sample Response	List containing available payout

				locations/agents.
locationId	String	M	CASHNPL	The unique identifier for the agent (Must be used in SendTransaction).
locationName	String	M	Anywhere Cash Pay In Nepal...	The human-readable name/description of the location.
optionalField	String	O		Reserved for additional agent information.

Sample Request

```

1 | JSON
2 | {
3 |   "agentSessionId": "1770108119",
4 |   "paymentMode": "C",
5 |   "payoutCountry": "NPL",
6 |   "payoutCurrency": "NPR"
7 | }

```

Sample Response

```

1 | JSON
2 | {
3 |   "code": "0",
4 |   "locationDetail": [
5 |     {
6 |       "locationId": "CASHNPL",
7 |       "locationName": "Anywhere Cash Pay In Nepal -Support
8 |       9801050921",
9 |       "optionalField": ""
10 |    }
11 |  ]
12 | }

```

4.GetEXRate

Description: This method is used to retrieve the latest exchange rate and calculate the total service fee based on the location ID and transfer amount. **METHOD:** POST **Endpoint:** {Base URL}/api/GetEXRate

REQUEST Parameters

TYPE	Data Type	Mandatory	PARAMETERS	Sample Values	Fixed/Variable	Description
HEADER	String	M	Authorization	hmacauth APPIId:Signature: Nonce:Timestamp	V	HMAC authentication header
BODY	String	M	agentSessionId	1770106299	V	Unique session ID to track the response
BODY	Number	M	transferAmount	500.00	V	The amount to be transferred
BODY	String	M	calcBy	P	F	Calculation basis (e.g., P

						for Payout)
BODY	String	M	payoutC urrency	NPR	F	The currency code for the payout
BODY	String	M	payment Mode	C	F	Mode of payout (e.g., C for Cash)
BODY	String	M	locationI d	CASHNP L	V	Unique ID for the payout agent location
BODY	String	M	payoutC ountry	NPL	F	ISO-3 country code of the payout country

RESPONSE Parameters

Parameters	Data Type	Mandatory	Sample Values	Remarks
------------	-----------	-----------	------------------	---------

code	String	M	0	0 denotes Success
agentSessionId	String	M	1770106299	Returns the same ID passed in request
message	String	M	NPL	Success message or status description
collectAmount	String	M	500.0000	Total amount to be collected from the sender
collectCurrency	String	M	NPR	Currency in which the amount is collected
serviceCharge	String	M	0.0000	Fee charged for the service
gstCharge	String	M	0.0000	Tax amount applied to the transaction

transferAmount	String	M	500.0000	Net amount to be transferred
exchangeRate	String	M	1.0000	The rate used for currency conversion
payoutAmount	String	M	500.0000	Final amount the beneficiary will receive
payoutCurrency	String	M	NPR	Currency the beneficiary will receive
settlementRate	String	O	1.0000	Internal rate used for partner settlement

Sample Request

```

1 | JSON
2 |
3 | {
4 |     "agentSessionId": "1770106299",
5 |     "transferAmount": "500.00",
6 |     "calcBy": "P",
7 |     "payoutCurrency": "NPR",
8 |     "paymentMode": "C",
9 |     "locationId": "CASHNPL",
10 |    "payoutCountry": "NPL"
11 | }

```

Sample Response

```

1 | JSON
2 |
3 | {
4 |     "code": "0",
5 |     "agentSessionId": "1770106299",

```

```

4      "message": "SUCCESS",
5      "collectAmount": "500.0000",
6      "collectCurrency": "NPR",
7      "serviceCharge": "0.0000",
8      "gstCharge": "0.0000",
9      "transferAmount": "500.0000",
10     "exchangeRate": "1.0000",
11     "payoutAmount": "500.0000",
12     "payoutCurrency": "NPR",
13     "feeDiscount": "0",
14     "additionalPremiumRate": "0",
15     "settlementRate": "1.0000"
16 }

```

5. SendTransaction

Description: This method is used to post a transaction to the Samsara Remit system with the relevant parameters. **METHOD:** POST **Endpoint:**

<https://uatsamsara.iemit.com.my/SendApi/api/webService/SendTransaction>

REQUEST Parameters

TYPE	Data Type	Mandatory	PARAMETERS	Sample Values	Fixed/V variable	Description
HEADER	String	M	Authorization	hmacauth simtestapi...	V	HMAC authentication header.
BODY	String	M	agentSessionId	1770122932	V	Unique session ID used to track the response.
BODY	String	M	agentTxnId	TXN998877	V	Partner's unique

						transacti on referenc e ID.
BODY	String	M	locationI d	CASHNP L	V	Payout agent/lo cation ID from GetAge ntLis t.
BODY	String	M	Remitter Type	I	F	I for Individu al, B for Business .
BODY	String	M	senderFi rstName	Annus	V	First name of the remitter.
BODY	String	O	senderM iddleNa me		V	Middle name of the remitter.
BODY	String	M	senderL astName	Rafiq	V	Last name of the remitter.
BODY	String	M	senderG ender	Male	F	Gender of the sender

						(Male/Female).
BODY	String	M	senderAddress	testaddress	V	Permanent address of the sender.
BODY	String	M	senderCity	testcity	V	City of the sender.
BODY	String	O	senderState		V	State code (from GetCatalogue STA).
BODY	String	O	senderZipCode		V	Zip/Postal code of the sender.
BODY	String	M	senderCountry	CAN	F	ISO-3 country code of the sender (e.g., CAN).

BODY	String	O	senderMobile		V	Contact mobile number of the sender.
BODY	String	M	senderNationality	CAN	F	ISO-3 nationality code of the sender.
BODY	String	M	senderIdType	02	F	ID type code (from GetCatalogue DOC).
BODY	String	M	senderIdNumber	123456	V	Identification number of the sender.
BODY	String	O	senderIdIssueCountry		F	ISO-3 country code where ID was issued.
BODY	String	M	senderIdIssueDate	2026-02-02	V	ID issue date (YYYY-MM-DD).

BODY	String	M	senderId ExpireDate	2030-01-22	V	ID expiry date (YYYY-MM-DD).
BODY	String	M	senderDateOfBirth	2001-01-15	V	Date of birth of the sender (YYYY-MM-DD).
BODY	String	M	senderOccupation		F	Occupation code (from GetCatalogue OCC).
BODY	String	M	senderSourceOfFund	02	F	Source of fund code (from GetCatalogue SOF).
BODY	String	O	senderSecondaryIdType		F	Secondary ID type if applicable.

BODY	String	O	senderSecondaryIdNumber		V	Secondary ID number.
BODY	String	O	senderEmail		V	Email address of the sender.
BODY	String	M	senderBeneficiaryRelationship	03	F	Relationship code (from GetCatalogue REL).
BODY	String	M	purposeOfRemittance	03	F	Purpose code (from GetCatalogue POR).
BODY	String	M	BeneficiaryType	I	F	I for Individual, B for Business.
BODY	String	M	receiverFirstName	Harsad	V	First name of the beneficiary.

BODY	String	O	receiver MiddleName		V	Middle name of the benefici ary.
BODY	String	M	receiver LastName	Joshi	V	Last name of the benefici ary.
BODY	String	M	receiver Address		V	Address of the benefici ary.
BODY	String	M	receiver Contact Number		V	Contact number of the benefici ary.
BODY	String	M	receiver City		V	City of the benefici ary.
BODY	String	M	receiver Country	NPL	F	ISO-3 country code of the benefici ary.
BODY	String	O	receiverIDType		F	Benefici ary ID type.

BODY	String	O	receiverIdNumber		V	Beneficiary ID number.
BODY	String	M	calcBy	P	F	P (Payout) or S (Send) amount calculation.
BODY	String	M	transferAmount	200	V	The amount to be transferred.
BODY	String	M	remitCurrency	NPR	F	ISO currency code for sending.
BODY	String	M	payoutCurrency	NPR	F	ISO currency code for payout.
BODY	String	M	paymentMode	C	F	C -Cash, B -Bank, W -Wallet.

BODY	String	O	bankName		V	Name of the bank (for Mode B).
BODY	String	O	bankBranchName		V	Name of the branch (for Mode B).
BODY	String	O	bankBranchCode		V	Branch code/IFSC (for Mode B).
BODY	String	O	bankAccountNumber		V	Account number (for Mode B).
BODY	String	O	promotionCode		V	Discount or promo code.
BODY	String	O	routePartner		V	Routing partner identifier.
BODY	Array	O	dynamicFields	[]	V	Custom fields required by specific corridors.

RESPONSE Parameters

Parameters	Data Type	Mandatory	Sample Values	Remarks
code	String	M	0	0 denotes SUCCESS. Any other code indicates a failure.
agentSessionId	String	M	1774864058	Unique session ID echoed from the request.
message	String	M	Transaction Accepted	Status message description of the transaction.
confirmationId	String	M	3168894	Critical: Internal ID required to call <code>CommitTransaction</code> .
pinNumber	String	M	345670	The PIN/Control number for the beneficiary to collect funds.
agentTxnId	String	M	345670	The partner's unique

				transaction reference ID.
collectAmount	Decimal	M	200.0000	Total amount to be collected from the sender.
collectCurrency	String	M	NPR	Currency in which the amount is collected.
serviceCharge	Decimal	M	0.0000	The fee charged for the transaction.
gstCharge	Decimal	O		Tax amount (if applicable).
transferAmount	Decimal	M	200.0000	Net amount to be transferred after fees.
exchangeRate	Decimal	M	1	The conversion rate applied to the transaction.
payoutAmount	Decimal	M	200.0000	Total amount the beneficiary will receive.
payoutCurrency	String	M	NPR	Currency of the payout at

				the destination.
feeDiscount	Decimal	O	0	Any discount applied to the service charge.
additionalPremiumRate	Decimal	O	0	Additional rate applied for specific corridors.
txnDate	String	M	2026-03-30 15:30:57	Server timestamp of the transaction.
settlementRate	Decimal	M	1	The rate used for partner settlement calculation.
sendCommission	Decimal	O	0.0000	Commission earned by the sending agent.
settlementAmount	Decimal	M	200.0000	Final amount to be settled between partners.

Sample Request

1 JSON

```

1 {
2   "agentSessionId": "1774864058",
3   "agentTxnId": "345670",
4   "locationId": "CASHNPL",
5   "RemitterType": "I",
6   "senderFirstName": "Annus",
7   "senderMiddleName": "",

```

```

8   "senderLastName": "Rafiq",
9   "senderGender": "Male",
10  "senderAddress": "testaddress",
11  "senderCity": "testcity",
12  "senderState": "",
13  "senderZipCode": "",
14  "senderCountry": "CAN",
15  "senderMobile": "1234567890",
16  "senderNationality": "CAN",
17  "senderIdType": "02",
18  "senderIdNumber": "123456",
19  "senderIdIssueCountry": "CAN",
20  "senderIdIssueDate": "2026-02-02",
21  "senderIdExpireDate": "2030-01-22",
22  "senderDateOfBirth": "2001-01-15",
23  "senderOccupation": "01",
24  "senderSourceOfFund": "02",
25  "senderSecondaryIdType": "",
26  "senderSecondaryIdNumber": "",
27  "senderEmail": "annus.rafiq@example.com",
28  "senderBeneficiaryRelationship": "03",
29  "purposeOfRemittance": "03",
30  "BeneficiaryType": "I",
31  "receiverFirstName": "Harsad",
32  "receiverMiddleName": "",
33  "receiverLastName": "Joshi",
34  "receiverAddress": "Kathmandu, Nepal",
35  "receiverContactNumber": "9801050921",
36  "receiverCity": "Kathmandu",
37  "receiverCountry": "NPL",
38  "receiverIdType": "01",
39  "receiverIdNumber": "",
40  "calcBy": "P",
41  "transferAmount": "200",
42  "remitCurrency": "NPR",
43  "payoutCurrency": "NPR",
44  "paymentMode": "C",
45  "bankName": "",
46  "bankBranchName": "",
47  "bankBranchCode": "",
48  "bankAccountNumber": "",
49  "promotionCode": "",
50  "routePartner": "",
51  "dynamicFields": []
52 }

```

Sample Response

```

1  JSON
2  {
3    "code": "0",
4    "agentSessionId": "1774864058",
5    "message": "Transaction Accepted",
6    "confirmationId": "3168894",
7    "pinNumber": "345670",
8    "agentTxnId": "345670",
9    "collectAmount": "200.0000",
10   "collectCurrency": "NPR",
11   "serviceCharge": "0.0000",
12   "gstCharge": "",
13   "transferAmount": "200.0000",
14   "exchangeRate": "1",
15   "payoutAmount": "200.0000",
16   "payoutCurrency": "NPR",
17   "feeDiscount": "0",

```

```

17     "additionalPremiumRate": "0",
18     "txnDate": "2026-03-30 15:30:57",
19     "settlementRate": "1",
20     "sendCommission": "0.0000",
21     "settlementAmount": "200.0000"
22 }

```

6. CommitTransaction

Description: This method is used to finalize and authorize a transaction that was previously posted using the `SendTransaction` method. A transaction must be committed before it can be processed for payment.

METHOD: POST

Endpoint:

<https://uatsamsara.iremit.com.my/SendApi/api/webservice/CommitTransaction>

REQUEST Parameters

TYPE	Data Type	Mandatory	PARAMETERS	Sample Values	Fixed/V variable	Description
HEADER	String	M	Authorization	hmacauth simtestapi:Signature:Nonce:Timestamp	V	HMAC authentication header for security.
BODY	String	M	agentSessionId	1770122932	V	Unique session ID used to track the response.
BODY	String	M	confirmationId	3167595	V	The internal ID received

						in the SendTr ansact ion respons e.
--	--	--	--	--	--	--

RESPONSE Parameters

Parameters	Data Type	Mandatory	Sample Values	Remarks
code	String	M	0	0 denotes Success.
agentSessionId	String	M	1770106658	The session ID returned by the server.
message	String	M	TXN Successfully Authorized	Status message indicating the result of authorization .
pinNumber	String	O	345678	The PIN number to be shared with the beneficiary for cash pickup.
senderName	String	M	ANNUS RAFIQ	Full name of the sender.
collectAmount	String	M	200.0000	The total amount collected

				from the sender.
payoutAmount	String	M	200.0000	The final amount to be paid to the beneficiary.
status	String	M	Payment	The current status of the transaction in the system.
isPinOnHold	String	M	False	Indicates if the transaction PIN is held for compliance or review.

Sample Request

```

1 | JSON
2 | {
3 |   "agentSessionId": "1770122932",
4 |   "confirmationId": "3167595"
5 | }

```

Sample Response

```

1 | JSON
2 | {
3 |   "code": "0",
4 |   "agentSessionId": "1770106658",
5 |   "message": "TXN Successfully Authorized",
6 |   "pinNumber": "345678",
7 |   "senderName": "ANNUS RAFIQ",
8 |   "collectAmount": "200.0000",
9 |   "collectCurrency": "NPR",
10 |  "payoutAmount": "200.0000",
11 |  "payoutCurrency": "NPR",
12 |  "status": "Payment",
13 |  "isPinOnHold": "False"

```

7. QueryTXNStatus

Description: This method is used to check the current status of a transaction using either the PIN number or the Partner's Transaction ID.

METHOD: POST

Endpoint:

<https://uatsamsara.iemit.com.my/SendApi/api/webService/QueryTXNStatus>

REQUEST Parameters

TYPE	Data Type	Mandatory	PARAMETERS	Sample Values	Fixed/V ariable	Description
HEADER	String	M	Authorization	hmacauth simtestapi:Signature:Nonce:Timestamp	V	HMAC authentication header.
BODY	String	M	agentSessionId	1770122932	V	Unique session ID used to track the request.
BODY	String	O*	pinNumber	345678	V	The PIN number of the transaction (Mandatory if agentTxnId is empty).

BODY	String	O*	agentTx nId		V	The Partner's unique transacti on ID (Mandat ory if pinNumb er is empty).
------	--------	----	----------------	--	---	--

RESPONSE Parameters

Parameters	Data Type	Mandatory	Sample Values	Remarks
code	String	M	0	0 denotes SUCCESS.
agentSessionId	String	M	1770106934	Returns the session ID for tracking.
message	String	M	Transaction Status	Status description message.
pinNumber	String	M	345678	The unique transaction PIN.
senderName	String	M	ANNUS RAFIQ	Full name of the sender.
receiverName	String	M	HARSAD JOSHI	Full name of the beneficiary.
payoutAmount	String	M	200.0000	The final amount to be paid.

status	String	M	UN-PAID	Current status (e.g., UN-PAID, PAID, CANCELLED).
agentTxnId	String	M	345678	The Partner's unique reference ID.

Sample Request

```

1 | JSON
2 |
3 | {
4 |   "agentSessionId": "1770122932",
5 |   "pinNumber": "345678",
6 |   "agentTxnId": ""
7 | }

```

Sample Response

```

1 | JSON
2 |
3 | {
4 |   "code": "0",
5 |   "agentSessionId": "1770106934",
6 |   "message": "Transaction Status",
7 |   "pinNumber": "345678",
8 |   "senderName": "ANNUS RAFIQ",
9 |   "receiverName": "HARSAD JOSHI",
10 |   "collectAmount": "200.0000",
11 |   "collectCurrency": "NPR",
12 |   "serviceCharge": "0.0000",
13 |   "gstCharge": "",
14 |   "transferAmount": "200.0000",
15 |   "exchangeRate": "1.0000",
16 |   "payoutAmount": "200.0000",
17 |   "payoutCurrency": "NPR",
18 |   "settlementAmount": "200.0000",
19 |   "sendCommission": "0.0000",
20 |   "settlementRate": "1.0000",
21 |   "status": "UN-PAID",
22 |   "statusDate": "",
23 |   "additionalMessage": "",
24 |   "agentTxnId": "345678"
25 | }

```


8. ReconcileReport

Description: This method is used to generate a report of transactions (Sent, Paid, or Cancelled) within a specific date and time range for reconciliation purposes. **METHOD:** POST **Endpoint:** <https://uatsamsara.iremit.com.my/SendApi/api/webservice/ReconcileReport>

REQUEST Parameters

TYPE	Data Type	Mandatory	PARAMETERS	Sample Values	Fixed/Variable	Description
HEADER	String	M	Authorization	hmacauthsimtestapi...	V	HMAC authentication header.
BODY	String	M	agentSessionId	1670399556	V	Unique session ID for the request.
BODY	String	M	reportType	A	F	Type of report: A (All), S (Sent), P (Paid), C (Cancelled).
BODY	String	M	fromDate	2026-02-01	V	Start date for the report (YYYY-MM-DD).
BODY	String	M	toDate	2026-02-02	V	End date for the report (YYYY-MM-DD).

						MM-DD).
BODY	String	O	fromDateTime	00:00:00	V	Start time for the report range.
BODY	String	O	toDateTime	23:59:59	V	End time for the report range.

RESPONSE Parameters (Array of Objects)

Parameters	Data Type	Mandatory	Sample Values	Remarks
code	String	M	0	0 denotes SUCCESS.
pinNumber	String	M	121212	The unique transaction PIN.
transactionStatus	String	M	Send	Current workflow status of the transaction.
status	String	M	Un-Paid	Payment status (e.g., Paid, Un-Paid).
senderName	String	M	ANNUS RAFIQ	Full name of the sender.
receiverName	String	M	HARSAD JOSHI	Full name of the beneficiary.

payoutAmount	String	M	200.0000	The amount to be paid to the beneficiary.
payoutCurrency	String	M	NPR	Currency of the payout.
transactionType	String	M	Cash Pay	Type of transaction (Cash or Bank).
transactionDate	String	M	2026-02-02...	Timestamp when the transaction was created.

Sample Request

```
1 | JSON
2 |
3 | {
4 |   "agentSessionId": "1670399556",
5 |   "reportType": "A",
6 |   "fromDate": "2026-02-01",
7 |   "fromDateTime": "00:00:00",
8 |   "toDate": "2026-02-02",
9 |   "toDateTime": "23:59:59"
10 | }
```

Sample Response

```
1 | JSON
2 |
3 | [
4 |   {
5 |     "code": "0",
6 |     "agentName": "Sim Paisa",
7 |     "transactionStatus": "Send",
8 |     "pinNumber": "121212",
9 |     "senderName": "ANNUS RAFIQ",
10 |    "receiverName": "HARSAD JOSHI",
11 |    "collectAmount": "1.4200",
12 |    "payoutAmount": "200.0000",
13 |    "transactionType": "Cash Pay",
14 |    "transactionDate": "2026-02-02 19:20:54.423",
15 |    "status": "Un-Paid"
16 |   }
17 | ]
```

9. Cancel Transaction

Description: This method is used to cancel a previously posted transaction that has not yet been paid or processed. It requires a valid reason for the cancellation.

METHOD: POST

Endpoint:

<https://uatsamsara.iemit.com.my/SendApi/api/webservice/CancelTransaction>

REQUEST Parameters

TYPE	Data Type	Mandatory	PARAMETERS	Sample Values	Fixed/Variable	Description
HEADER	String	M	Authorization	hmacauth simtestapi...	V	HMAC authentication header.
BODY	String	M	agentSessionId	1770122932	V	Unique session ID used to track the response.
BODY	String	M	pinNumber	345678	V	The unique PIN number of the transaction to be cancelled.
BODY	String	M	cancelReason	Test Cancel	V	The reason for

						requesting the cancellation.
--	--	--	--	--	--	------------------------------

RESPONSE Parameters

Parameters	Data Type	Mandatory	Sample Values	Remarks
code	String	M	0	0 denotes SUCCESS.
agentSessionId	String	M	1770107644	Returns the session ID for tracking.
message	String	M	Transaction Cancelled...	Confirmation message including the internal Authorized ID.
pinNumber	String	M	345678	The PIN number of the cancelled transaction.

Sample Request

```

1 | JSON
2 | {
3 |   "agentSessionId": "1770122932",
4 |   "pinNumber": "345678",
5 |   "cancelReason": "Test Cancel"
6 | }

```

Sample Response

```

1 | JSON
2 | {
3 |   "code": "0",
4 |   "agentSessionId": "1770107644",
5 |   "message": "Transaction Cancelled. Authorized ID:3167595",
6 | }

```

```
5   "pinNumber": "345678"  
6 }
```

10. Amend Transaction

Description: This method is used to modify specific details of a transaction (such as sender or receiver names and contact information) after it has been posted, provided it hasn't been paid yet.

METHOD: POST

Endpoint:

<https://uatsamsara.iemit.com.my/SendApi/api/webservice/AmendTransaction>

REQUEST Parameters

TYPE	Data Type	Mandatory	PARAMETERS	Sample Values	Fixed/V ariable	Description
HEADER	String	M	Authorization	hmacauth simtestapi...	V	HMAC authentication header.
BODY	String	M	agentSessionId	1770122932	V	Unique session ID used to track the response.
BODY	String	M	pinNumber	345678	V	The unique PIN number of the transaction to be amended.

BODY	String	M	amendmentField	SENDER_MOBILE	F	The field name to be changed (e.g., SENDER_NAME, RECEIVER_NAME).
BODY	String	M	amendmentValue	ANNUS RAFIQ	V	

RESPONSE Parameters

Parameters	Data Type	Mandatory	Sample Values	Remarks
code	String	M	5091	Error/Success code (5091 indicates manual intervention required).
agentSessionId	String	M	1770107929	Returns the session ID for tracking.
message	String	M	Can not amendment..	Detailed error or success message regarding the amendment.

Sample Request

1	JSON
---	------

```

1 {
2   "agentSessionId": "1770122932",
3   "pinNumber": "345678",
4   "amendmentField": "SENDER_MOBILE",
5   "amendmentValue": "ANNUS|RAFIQ"
6 }
7

```

Sample Response

```

1 JSON

```

```

1 {
2   "code": "5091",
3   "agentSessionId": "1770107929",
4   "message": "Can not amendment this TXN:345678: Contact HeadOffice
5   for amendment"
6 }

```

Based on the structure of the testing report and the field specifications from the **Samsara_SendAPI_V1.1.pdf**, here is the documentation for the **CheckBalance** method.

11. CheckBalance

Description: This method is used by the partner to enquire about their current account balance and available credit limit within the Samsara Remit system. **METHOD:** POST **Endpoint:**

<https://uatsamsara.iremit.com.my/SendApi/api/webservice/CheckBalance>

REQUEST Parameters

TYPE	Data Type	Mandatory	PARAMETERS	Sample Values	Fixed/Variable	Description
HEADER	String	M	Authorization	hmacauthsimtestapi...	V	HMAC authentication header.
BODY	String	M	agentSessionId	1770122932	V	Unique session ID used to track the response.

RESPONSE Parameters

Parameters	Data Type	Mandatory	Sample Values	Remarks
code	String	M	0	0 denotes SUCCESS.
agentSessionId	String	M	1770108051	Returns the session ID for tracking.
currentBalance	String	M	18.5200	The actual cash balance in the partner's account.
availableLimitBalance	String	M	999981.4800	The remaining credit limit available for transactions.
currency	String	M	NPR	The currency code for the balance amounts.

Sample Request

```
1 | JSON
2 |
3 | {
4 |   "agentSessionId": "1770122932"
5 | }
```

Sample Response

```
1 | JSON
2 |
3 | {
4 |   "code": "0",
5 |   "agentSessionId": "1770108051",
6 |   "currentBalance": "18.5200",
7 | }
```

```

5  "availableLimitBalance": "999981.4800",
6  "currency": "NPR"
7  }

```

12. Account Validation

Description: This method is used to verify the beneficiary's bank account details with the payout bank before initiating a transaction to ensure the funds reach the correct recipient.

METHOD: POST

Endpoint:

<https://uatsamsara.iemit.com.my/SendApi/api/webService/AccountValidation>

REQUEST Parameters

TYPE	Data Type	Mandatory	PARAMETERS	Sample Values	Fixed/Variable	Description
HEADER	String	M	Authorization	hmacauth simtestapi...	V	HMAC authentication header.
BODY	String	M	agentSessionId	1770122932	V	Unique session ID used to track the response.
BODY	String	M	paymentMode	B	F	Payout mode (Must be B for Bank Transfer).
BODY	String	M	locationId	KMBLNP KA	V	Unique ID for

						the payout bank/branch.
BODY	String	M	receiver FirstName	Sanatan	V	First name of the beneficiary.
BODY	String	O	receiver MiddleName		V	Middle name of the beneficiary.
BODY	String	M	receiver LastName	Shrestha	V	Last name of the beneficiary.
BODY	String	M	bankAccountNumber	0430136343100001	V	The bank account number to be validated.

RESPONSE Parameters

Parameters	Data Type	Mandatory	Sample Values	Remarks
code	String	M	0	0 denotes SUCCESS (Account is valid).

message	String	M	Account Validation Successfull y	Detailed status message from the bank.
---------	--------	---	---	--

Sample Request

```

1 | JSON
2 |
3 | {
4 |   "agentSessionId": "1770122932",
5 |   "paymentMode": "B",
6 |   "locationId": "KMBLNPKA",
7 |   "receiverFirstName": "Sanatan",
8 |   "receiverMiddleName": "",
9 |   "receiverLastName": "Shrestha",
10 |  "bankAccountNumber": "0430136343100001"
11 | }

```

Sample Response

```

1 | JSON
2 |
3 | {
4 |   "code": "0",
5 |   "message": "Account Validation Succcessfully"
6 | }

```