

hetmacro Codebook

A Comprehensive Guide to Numerical Tools
for Heterogeneous Agent Macroeconomics

Rafael Lincoln
New York University

January 2026

1	Introduction	5
1.1	Purpose and Philosophy	5
1.2	Package Architecture	6
1.2.1	Foundational Modules	6
1.2.2	Heterogeneous Agent Tools	6
2	Foundational Modules	7
2.1	grids.py – State Space Discretization	7
2.1.1	Introduction and Economic Motivation	7
2.1.2	Core Class: GridSpec	8
2.1.3	Function: make_grid_1d	9
2.1.4	Function: make_grid_nd	10
2.1.5	Function: make_asset_grid	11
2.1.6	Function: double_exponential_grid	12
2.1.7	Function: cartesian_product / gridmake	12
2.2	quadrature.py – Numerical Integration	13
2.2.1	Introduction and Economic Motivation	13
2.2.2	Function: qwnorm	13
2.2.3	Function: qnwlogn	14
2.2.4	Function: qnwlege	15
2.2.5	Function: qnwunif	15
2.2.6	Function: qnwbeta	15
2.2.7	Function: qnwgamma	15
2.2.8	Function: qwnorm_mv	16
2.2.9	Functions: qnwsimp, qnwtrap	16
2.3	interpolation.py – Function Approximation	17
2.3.1	Introduction and Economic Motivation	17
2.3.2	Function: interp_linear	17
2.3.3	Function: interp_bilinear	18

2.3.4	Function: <code>get_lottery</code>	18
2.3.5	Chebyshev Approximation Functions	19
2.3.6	Spline Functions	20
2.4	<code>optimize.py</code> – Root-Finding and Optimization	20
2.4.1	Introduction and Economic Motivation	20
2.4.2	Root-Finding Functions	21
2.4.3	Optimization Functions	22
2.5	<code>markov.py</code> – Markov Chain Tools	24
2.5.1	Introduction and Economic Motivation	24
2.5.2	Function: <code>rouwenhorst</code>	24
2.5.3	Function: <code>tauchen</code>	25
2.5.4	Function: <code>stationary_distribution</code>	26
2.5.5	Function: <code>simulate_markov</code>	26
2.6	<code>utils.py</code> – Economic Primitives and Utilities	27
2.6.1	Introduction	27
2.6.2	Utility Functions	27
2.6.3	Numerical Utilities	28
3	Heterogeneous Agent Tools	31
3.1	<code>backward.py</code> – Dynamic Programming Solvers	31
3.1.1	Introduction and Economic Motivation	31
3.1.2	Function: <code>backward_egm</code>	31
3.1.3	Function: <code>backward_vfi</code>	33
3.1.4	Function: <code>policy_iteration</code>	33
3.2	<code>forward.py</code> – Distribution Iteration	34
3.2.1	Introduction and Economic Motivation	34
3.2.2	Function: <code>forward_iteration</code>	34
3.2.3	Function: <code>stationary_distribution</code>	35
3.2.4	Functions: <code>expectation_iteration</code> , <code>expectation_functions</code>	35
3.3	<code>steady_state.py</code> – Equilibrium Solvers	36
3.3.1	Introduction	36
3.3.2	Function: <code>household_steady_state</code>	36
3.3.3	Function: <code>market_clearing</code>	37
3.4	<code>ssj.py</code> – Sequence-Space Jacobians	38
3.4.1	Introduction and Economic Motivation	38
3.4.2	Function: <code>jacobian</code>	38
3.4.3	Function: <code>step1_backward</code>	39
3.4.4	Function: <code>J_from_F</code>	39
4	Example: Aiyagari Model	41
4.1	<code>models/aiyagari.py</code>	41
4.1.1	Function: <code>solve_steady_state</code>	41

<i>CONTENTS</i>	5
5 Quick Reference	43
5.1 Module Dependency Graph	43
5.2 Common Workflows	44
5.2.1 Solving a Steady State	44
5.2.2 Computing Impulse Responses	44

1.1 Purpose and Philosophy

The `hetmacro` package provides a self-contained, modular toolkit for solving structural macroeconomic models with heterogeneity. These models—including Aiyagari, Krusell-Smith, and HANK models—require agents to make optimal decisions over continuous state spaces, typically involving savings/consumption choices under idiosyncratic and aggregate uncertainty.

Solving such models numerically requires a carefully orchestrated pipeline:

1. **Discretization:** Continuous state spaces must be approximated by grids; continuous stochastic processes (like income) must be discretized into Markov chains.
2. **Backward Iteration:** Given prices, solve for optimal policy functions via dynamic programming (VFI, EGM).
3. **Forward Iteration:** Given policies, compute the stationary distribution of agents across states.
4. **Equilibrium:** Find prices that clear markets (e.g., asset supply equals capital demand).
5. **Linearization:** For aggregate dynamics, compute sequence-space Jacobians.

This codebook documents each module in `hetmacro`, explaining not just *what* each function does, but *why* it exists and *how* it connects to other tools in the pipeline.

1.2 Package Architecture

The package is organized into two layers:

1.2.1 Foundational Modules

General-purpose numerical tools that can be used for any computational economics application:

- `grids.py` – State space discretization
- `quadrature.py` – Numerical integration
- `interpolation.py` – Function approximation
- `optimize.py` – Root-finding and optimization
- `markov.py` – Markov chain tools
- `utils.py` – Economic primitives and utilities

1.2.2 Heterogeneous Agent Tools

Specialized routines for HA models:

- `backward.py` – Dynamic programming solvers
- `forward.py` – Distribution iteration
- `steady_state.py` – Equilibrium solvers
- `ssj.py` – Sequence-space Jacobians
- `dp_tools.py`, `distributions.py` – High-level wrappers

2.1 `grids.py` – State Space Discretization

2.1.1 Introduction and Economic Motivation

In heterogeneous agent models, agents make decisions over continuous state variables—typically assets $a \in [a, \bar{a}]$ and possibly other states like productivity, human capital, or housing. Since computers cannot store functions over continuous domains, we must discretize these spaces into finite grids.

The choice of grid matters substantially for accuracy and computational cost:

- **Near borrowing constraints:** Policy functions often exhibit kinks near $a = \underline{a}$ where agents are constrained. Dense grid coverage here improves accuracy.
- **In the tail:** Wealthy agents' behavior matters less for aggregates but requires coverage for numerical stability.
- **Around specific values:** Some models have kinks at particular thresholds (e.g., tax brackets, collateral constraints).

This module provides flexible grid construction supporting various spacing strategies and the ability to concentrate points around specified locations.

2.1.2 Core Class: GridSpec

```

1 @dataclass
2 class GridSpec:
3     lower: float          # Lower bound of grid
4     upper: float          # Upper bound of grid
5     n_points: int         # Number of grid points
6     spacing: str = "linear" # Spacing method
7     power: float = 1.0     # Exponent for power spacing
8     concentration_points: Optional[Sequence[float]] = None
9     concentration_weight: float = 0.0
10    concentration_radius: Optional[float] = None
11    custom_func: Optional[Callable] = None

```

Purpose: A specification object for one dimension of a grid. Use GridSpec when constructing multi-dimensional grids via `make_grid_nd`.

Arguments:

`lower` Lower bound of the state variable (e.g., borrowing limit $\underline{a}$).

`upper` Upper bound (e.g., maximum asset level $\bar{a}$).

`n_points` Number of grid points. More points $\Rightarrow$ higher accuracy but slower computation.

`spacing` One of "linear", "power", "log", "double_exp", "chebyshev", or "custom".

`power` For `spacing="power"`: exponent γ where grid is $\underline{a} + (\bar{a} - \underline{a}) \cdot t^\gamma$ for $t \in [0, 1]$. Values > 1 concentrate points near lower bound.

`concentration_points` Sequence of values around which to concentrate grid points (e.g., kink locations).

`concentration_weight` Strength $\in [0, 1]$ of concentration effect.

`concentration_radius` Scale parameter for concentration kernel. Defaults to 10% of range.

`custom_func` For `spacing="custom"`: a function mapping $[0, 1] \rightarrow [\text{lower}, \text{upper}]$.

2.1.3 Function: make_grid_1d

```

1 def make_grid_1d(
2     lower: float,
3     upper: float,
4     n: int,
5     spacing: str = "linear",
6     power: float = 1.0,
7     concentration_points: Optional[Sequence[float]] = None,
8     concentration_weight: float = 0.0,
9     concentration_radius: Optional[float] = None,
10    custom_func: Optional[Callable] = None,
11 ) -> np.ndarray

```

Purpose: Create a one-dimensional grid with flexible spacing. This is the workhorse function for discretizing a single state variable.

Arguments:

lower, upper Bounds of the grid (inclusive). For assets, typically lower=0 (or natural borrowing limit) and upper large enough to be non-binding.

n Number of grid points (must be ≥ 2).

spacing Grid spacing method:

- "linear": Equidistant points. Simple but inefficient near constraints.
- "power": $a_i = \underline{a} + (\bar{a} - \underline{a})(i/(n-1))^\gamma$. Use $\gamma > 1$ to concentrate near $\underline{a}$.
- "log": Logarithmically spaced. Requires lower > 0.
- "double_exp": Rognlie-style double exponential. Very dense near lower bound.
- "chebyshev": Chebyshev nodes. Optimal for polynomial approximation.
- "custom": User-provided transformation.

power Exponent for power spacing (default 1.0 = linear).

concentration_* Optional point concentration (see GridSpec).

custom_func Required if spacing="custom".

Returns: 1D NumPy array of grid points, sorted and with exact endpoints.

Connections: Output feeds into `backward.py` for policy iteration, `interpolation.py` for function evaluation, and `forward.py` for distribution iteration.

Example:

```

1 import numpy as np
2 from hetmacro.grids import make_grid_1d
3
4 # Asset grid with power spacing (dense near borrowing constraint)
5 a_grid = make_grid_1d(
6     lower=0.0,
7     upper=50.0,
8     n=200,
9     spacing="power",
10    power=2.0
11 )
12 print(f"First 5 points: {a_grid[:5]}")
13 # Dense near 0, sparse near 50
14
15 # Grid with concentration around kink at a=10
16 a_grid_kink = make_grid_1d(
17     lower=0.0,
18     upper=50.0,
19     n=200,
20     spacing="linear",
21     concentration_points=[10.0],
22     concentration_weight=0.5,
23     concentration_radius=2.0
24 )

```

2.1.4 Function: `make_grid_nd`

```

1 def make_grid_nd(
2     specs: Sequence[GridSpec],
3     cartesian: bool = False,
4     order: str = "C",
5 ) -> Tuple[List[np.ndarray], Optional[np.ndarray]]

```

Purpose: Construct multi-dimensional grids from a list of GridSpec objects. Essential for models with multiple state variables (e.g., assets and human capital, or assets and housing).

Arguments:

`specs` Sequence of GridSpec objects, one per dimension.

`cartesian` If True, also return the Cartesian product of all grids as a 2D array where each row is a state combination.

`order` Memory layout: "C" (row-major) or "F" (column-major, Fortran-style).

Returns: Tuple of (list of 1D grids, optional Cartesian product array).

Connections: The 1D grids are used independently in `interpolation.py`; the Cartesian product is useful for computing expectations over joint distributions.

Example:

```

1 from hetmacro.grids import GridSpec, make_grid_nd
2
3 # Two-dimensional grid: assets and human capital
4 specs = [
5     GridSpec(lower=0, upper=50, n_points=100, spacing="power", power=2),
6     GridSpec(lower=0.5, upper=2.0, n_points=20, spacing="linear"),
7 ]
8 grids, product = make_grid_nd(specs, cartesian=True)
9 a_grid, h_grid = grids
10 print(f"Asset grid: {len(a_grid)} points")
11 print(f"Human capital grid: {len(h_grid)} points")
12 print(f"State space: {product.shape[0]} total states")

```

2.1.5 Function: `make_asset_grid`

```

1 def make_asset_grid(
2     amin: float,
3     amax: float,
4     n: int,
5     curvature: float = 2.0,
6 ) -> np.ndarray

```

Purpose: Convenience function for the common case of an asset grid with power spacing. This is a thin wrapper around `make_grid_1d` with sensible defaults for incomplete markets models.

Arguments:

`amin` Borrowing limit (often 0 or natural borrowing limit).

`amax` Upper bound on assets.

`n` Number of grid points.

`curvature` Power exponent (default 2.0 works well in practice).

Returns: 1D array of asset grid points.

Example:

```
1 from hetmacro.grids import make_asset_grid
2
3 # Standard Aiyagari-style asset grid
4 a_grid = make_asset_grid(amin=0, amax=50, n=500, curvature=2.0)
```

2.1.6 Function: `double_exponential_grid`

```
1 def double_exponential_grid(amin: float, amax: float, n: int) -> np.ndarray
```

Purpose: Rognlie-style double exponential grid, which provides extremely dense coverage near the lower bound. Useful when policy functions have sharp features near constraints.

Mathematical form: Let $\bar{u} = \log(1 + \log(1 + a_{\max} - a_{\min}))$. The grid is:

$$a_i = a_{\min} + \exp(\exp(u_i) - 1) - 1, \quad u_i \in \text{linspace}(0, \bar{u}, n)$$

2.1.7 Function: `cartesian_product` / `gridmake`

```
1 def cartesian_product(*grids, order: str = "C") -> np.ndarray
2 def gridmake(*grids, order: str = "C") -> np.ndarray # alias
```

Purpose: Compute the Cartesian product of multiple 1D grids. Each row of the output represents one combination of state values.

Arguments:

*grids Variable number of 1D arrays.

order Memory layout for iteration order.

Returns: 2D array of shape $(n_1 \times n_2 \times \dots, d)$ where d is the number of grids.

Example:

```

1 from hetmacro.grids import cartesian_product
2 import numpy as np
3
4 a_grid = np.array([0, 1, 2])
5 e_grid = np.array([0.5, 1.0, 1.5])
6 states = cartesian_product(a_grid, e_grid)
7 # states[0] = [0, 0.5], states[1] = [0, 1.0], etc.

```

2.2 quadrature.py – Numerical Integration

2.2.1 Introduction and Economic Motivation

Expectations are fundamental in dynamic economics. Agents form expectations over future states:

$$\mathbb{E}[V(a', e') \mid e] = \int V(a', e') dF(e' \mid e)$$

When shocks are continuous (e.g., normally distributed innovations), we cannot sum over states—we must integrate. Quadrature rules approximate integrals using weighted sums:

$$\int f(x)w(x) dx \approx \sum_{i=1}^n w_i f(x_i)$$

where $\{x_i\}$ are nodes and $\{w_i\}$ are weights chosen to make the approximation exact for polynomials up to some degree.

Key insight: Different distributions require different quadrature rules. Gauss-Hermite is optimal for normally distributed shocks; Gauss-Legendre for bounded uniform distributions.

2.2.2 Function: qnwnorm

```

1 def qnwnorm(
2     n: int,

```

```

3     mu: float = 0.0,
4     sigma: float = 1.0
5 ) -> Tuple[np.ndarray, np.ndarray]

```

Purpose: Gauss-Hermite quadrature for computing expectations under normal distributions. This is the most commonly used quadrature in macro for approximating:

$$\mathbb{E}[f(X)] \text{ where } X \sim \mathcal{N}(\mu, \sigma^2)$$

Arguments:

n Number of quadrature nodes. Higher n = more accurate but more expensive. Typically 5-9 is sufficient.

mu Mean of the normal distribution.

sigma Standard deviation.

Returns: Tuple (nodes, weights) where nodes are evaluation points and weights sum to 1.

Connections: Used in markov.py for discretizing AR(1) processes; can be used directly for computing expectations in models with continuous shocks.

Example:

```

1 from hetmacro.quadrature import qnwnorm
2 import numpy as np
3
4 # Approximate E[exp(X)] where X ~ N(0, 0.1^2)
5 # True answer: exp(0.5 * 0.1^2) = 1.00501
6 nodes, weights = qnwnorm(n=5, mu=0.0, sigma=0.1)
7 approx = np.dot(weights, np.exp(nodes))
8 print(f"Approximation: {approx:.5f}") # Very close to 1.00501

```

2.2.3 Function: qnwlogn

```

1 def qnwlogn(
2     n: int,
3     mu: float = 0.0,
4     sigma: float = 1.0
5 ) -> Tuple[np.ndarray, np.ndarray]

```


Purpose: Quadrature for lognormal distributions. If $\log X \sim \mathcal{N}(\mu, \sigma^2)$, this provides nodes and weights for $\mathbb{E}[f(X)]$.

Note: The nodes are exponentiated Gauss-Hermite nodes; weights remain the same.

2.2.4 Function: qnwlege

```
1 def qnwlege(n: int, a: float, b: float) -> Tuple[np.ndarray, np.ndarray]
```

Purpose: Gauss-Legendre quadrature for integrals over bounded intervals $[a, b]$. Optimal for smooth functions on compact domains.

Arguments:

n Number of nodes.

a, b Integration bounds.

Returns: Tuple (nodes, weights) for approximating $\int_a^b f(x)dx$.

2.2.5 Function: qnwunif

```
1 def qnwunif(n: int, a: float, b: float) -> Tuple[np.ndarray, np.ndarray]
```

Purpose: Quadrature for uniform distribution on $[a, b]$. Weights are normalized so $\sum w_i = 1$.

2.2.6 Function: qnwbeta

```
1 def qnwbeta(n: int, a: float = 1.0, b: float = 1.0) -> Tuple[np.ndarray, np.ndarray]
    ]
```

Purpose: Quadrature for Beta(a, b) distribution on $[0, 1]$. Useful for modeling bounded random variables like labor supply elasticities or preference heterogeneity.

2.2.7 Function: qnwgamma

```
1 def qnwgamma(n: int, a: float = 1.0, b: float = 1.0) -> Tuple[np.ndarray, np.ndarray]
```

Purpose: Quadrature for Gamma(a, b) distribution (shape a , scale b). Useful for modeling income distributions or shock processes with positive support.

2.2.8 Function: qwnorm_mv

```

1 def qwnorm_mv(
2     n: np.ndarray,
3     mu: np.ndarray,
4     Sigma: np.ndarray
5 ) -> Tuple[np.ndarray, np.ndarray]
```

Purpose: Multivariate normal quadrature via tensor product. For $X \sim \mathcal{N}(\mu, \Sigma)$, computes nodes and weights for $\mathbb{E}[f(X)]$.

Arguments:

n Array of number of nodes per dimension.

mu Mean vector.

Sigma Covariance matrix (must be positive definite).

Returns: Tuple (nodes, weights) where nodes has shape $(n_1 \times \dots \times n_d, d)$.

Example:

```

1 from hetmacro.quadrature import qwnorm_mv
2 import numpy as np
3
4 # Bivariate normal with correlation
5 mu = np.array([0.0, 0.0])
6 Sigma = np.array([[1.0, 0.5], [0.5, 1.0]])
7 nodes, weights = qwnorm_mv(n=np.array([5, 5]), mu=mu, Sigma=Sigma)
8 print(f"Number of quadrature points: {len(weights)}") # 25
```

2.2.9 Functions: qnwsimp, qnwtrap

```

1 def qnwsimp(n: int, a: float, b: float) -> Tuple[np.ndarray, np.ndarray]
2 def qnwtrap(n: int, a: float, b: float) -> Tuple[np.ndarray, np.ndarray]
```

Purpose: Newton-Cotes rules (Simpson's and Trapezoidal) for numerical integration. These use equally-spaced nodes and are simpler but less accurate than Gaussian quadrature for smooth functions.

When to use: When function values are only available on a pre-specified grid (e.g., integrating over a distribution that's already on an asset grid).

2.3 interpolation.py – Function Approximation

2.3.1 Introduction and Economic Motivation

In dynamic programming, we iterate on functions defined on grids. However, optimal policies often require evaluating functions at off-grid points. For example, in the Endogenous Grid Method (EGM), we compute:

$$c^*(a, e) = c_{\text{endog}}(a^{\text{endog}}(a, e))$$

where a^{endog} may not lie on the asset grid. Interpolation fills this gap.

Additionally, for computing stationary distributions with continuous policies, we need the “lottery” method: given a policy $a'(a, e)$ that falls between grid points $a_i < a' < a_{i+1}$, we split the mass probabilistically.

2.3.2 Function: interp_linear

```

1 def interp_linear(
2     x_grid: np.ndarray,
3     y: np.ndarray,
4     x_new: np.ndarray
5 ) -> np.ndarray

```

Purpose: Vectorized 1D linear interpolation. Given function values $y = f(x_{\text{grid}})$, evaluate at new points x_{new} .

Arguments:

`x_grid` 1D array of grid points (must be sorted ascending).

`y` Function values. Shape $(n,)$ for single function or (m, n) for m functions on the same grid.

`x_new` Points at which to interpolate.

Returns: Interpolated values, same shape as `x_new` (or $(m,)$ + `x_new.shape` for multiple functions).

Connections: Core building block for EGM (`backward.py`). Also used in `get_lottery` for distribution iteration.

Example:

```

1 from hetmacro.interpolation import interp_linear
2 import numpy as np
3
4 # Interpolate consumption policy at off-grid asset values
5 a_grid = np.linspace(0, 10, 100)
6 c_policy = 0.05 * a_grid + 1.0 # Example: linear consumption
7 a_new = np.array([2.5, 5.5, 7.3])
8 c_new = interp_linear(a_grid, c_policy, a_new)

```

2.3.3 Function: interp_bilinear

```

1 def interp_bilinear(
2     x_grid: np.ndarray,
3     y_grid: np.ndarray,
4     z: np.ndarray,
5     x_new: np.ndarray,
6     y_new: np.ndarray,
7 ) -> np.ndarray

```

Purpose: Bilinear interpolation on a 2D rectilinear grid. For functions of two state variables $f(x, y)$.

Arguments:

x_grid , y_grid 1D arrays defining the grid in each dimension.

z Function values, shape $(\text{len}(y_grid), \text{len}(x_grid))$.

x_new , y_new Points at which to interpolate.

Returns: Interpolated values at (x_new, y_new) pairs.

2.3.4 Function: get_lottery

```

1 def get_lottery(
2     a_policy: np.ndarray,
3     a_grid: np.ndarray
4 ) -> Tuple[np.ndarray, np.ndarray]

```

Purpose: Compute lottery indices and probabilities for distribution iteration. When agents choose $a' \in (a_i, a_{i+1})$, we assign probability π_i to a_i and $1 - \pi_i$ to a_{i+1} , where:

$$\pi_i = \frac{a_{i+1} - a'}{a_{i+1} - a_i}$$

Arguments:

`a_policy` Policy function values (any shape).

`a_grid` Asset grid (1D, sorted).

Returns: Tuple (`a_i`, `a_pi`) where `a_i` is the lower grid index and `a_pi` is the probability on `a_i`.

Connections: Essential input to `forward_iteration` in `forward.py`. The “lottery” method is how we iterate distributions forward when policies are continuous.

Example:

```
1 from hetmacro.interpolation import get_lottery
2 import numpy as np
3
4 a_grid = np.array([0, 1, 2, 3, 4])
5 a_policy = np.array([0.5, 1.7, 2.3]) # Off-grid choices
6
7 a_i, a_pi = get_lottery(a_policy, a_grid)
8 # a_i = [0, 1, 2] -- lower indices
9 # a_pi = [0.5, 0.3, 0.7] -- probabilities on lower point
```

2.3.5 Chebyshev Approximation Functions

```
1 def cheb_nodes(n: int, a: float, b: float) -> np.ndarray
2 def cheb_basis(x: np.ndarray, n: int, a: float, b: float) -> np.ndarray
3 def cheb_coef(f: Callable, n: int, a: float, b: float) -> np.ndarray
4 def cheb_eval(coef: np.ndarray, x: np.ndarray, a: float, b: float) -> np.ndarray
```

Purpose: Chebyshev polynomial approximation provides highly accurate function representation with minimal oscillation (Runge phenomenon avoidance).

Workflow:

1. Generate Chebyshev nodes with `cheb_nodes`

2. Fit coefficients with `cheb_coef` given a function
3. Evaluate approximation at arbitrary points with `cheb_eval`

Example:

```

1 from hetmacro.interpolation import cheb_coef, cheb_eval
2 import numpy as np
3
4 # Approximate exp(x) on [-1, 1]
5 coef = cheb_coef(np.exp, n=10, a=-1, b=1)
6 x_test = np.linspace(-1, 1, 100)
7 approx = cheb_eval(coef, x_test, a=-1, b=1)
8 error = np.max(np.abs(approx - np.exp(x_test)))
9 print(f"Max error: {error:.2e}") # Very small

```

2.3.6 Spline Functions

```

1 def spline_coef(x: np.ndarray, y: np.ndarray, kind: str = "cubic")
2 def spline_eval(coef, x_new: np.ndarray) -> np.ndarray

```

Purpose: Cubic spline interpolation for smooth function approximation. Returns a SciPy spline object.

2.4 optimize.py – Root-Finding and Optimization

2.4.1 Introduction and Economic Motivation

Equilibrium in economic models often requires finding roots of excess demand functions or optimizing objective functions. For example:

- **Market clearing:** Find interest rate r^* such that $A(r^*) - K(r^*) = 0$.
- **Optimal policy:** Find consumption c^* maximizing $u(c) + \beta E[V(a', e')]$.

This module wraps SciPy's optimization routines with a consistent API and sensible defaults.

2.4.2 Root-Finding Functions

bisect

```
1 def bisect(  
2     f: Callable,  
3     a: float,  
4     b: float,  
5     args=(),  
6     tol: float = 1e-12,  
7     max_iter: int = 100  
8 ) -> float
```

Purpose: Bisection method for finding roots. Guaranteed to converge if $f(a)$ and $f(b)$ have opposite signs.

When to use: For well-behaved monotonic functions like excess demand for capital. Simple and robust.

brentq

```
1 def brentq(  
2     f: Callable,  
3     a: float,  
4     b: float,  
5     args=(),  
6     tol: float = 1e-12  
7 ) -> float
```

Purpose: Brent’s method—combines bisection with inverse quadratic interpolation. Faster than bisection while retaining guaranteed convergence.

When to use: Default choice for 1D root-finding with bracketed roots.

newton

```
1 def newton(  
2     f: Callable,  
3     x0: float,  
4     fprime: Callable,  
5     args=(),  
6     tol: float = 1e-8,
```

```
7     max_iter: int = 50,  
8 ) -> float
```

Purpose: Newton-Raphson method using derivative information. Quadratic convergence near root.

When to use: When you have an analytical derivative and need fast convergence.

secant

```
1 def secant(  
2     f: Callable,  
3     x0: float,  
4     args=(),  
5     tol: float = 1e-8,  
6     max_iter: int = 50  
7 ) -> float
```

Purpose: Secant method—derivative-free approximation of Newton’s method.

broyden

```
1 def broyden(  
2     f: Callable,  
3     x0: np.ndarray,  
4     args=(),  
5     tol: float = 1e-8  
6 ) -> np.ndarray
```

Purpose: Broyden’s method for systems of nonlinear equations $F(x) = 0$.

When to use: Multi-dimensional root-finding (e.g., joint market clearing in multiple markets).

2.4.3 Optimization Functions

golden_search

```
1 def golden_search(  
2     f: Callable,  
3     a: float,
```



```

4     b: float,
5     args=(),
6     tol: float = 1e-8
7 ) -> float

```

Purpose: Golden section search for 1D minimization on a bounded interval.

When to use: Minimizing unimodal functions when derivative is unavailable.

brent_min

```

1 def brent_min(
2     f: Callable,
3     a: float,
4     b: float,
5     args=(),
6     tol: float = 1e-8
7 ) -> float

```

Purpose: Brent's method for 1D minimization. Generally faster than golden section.

nelder_mead

```

1 def nelder_mead(
2     f: Callable,
3     x0: np.ndarray,
4     args=(),
5     tol: float = 1e-8
6 ) -> Tuple[np.ndarray, float]

```

Purpose: Nelder-Mead simplex algorithm for derivative-free multi-dimensional optimization.

Returns: Tuple (x_opt, f_opt) of optimal point and function value.

Example:

```

1 from hetmacro.optimize import bisect, brentq
2
3 # Find equilibrium interest rate
4 def excess_demand(r, A_supply_func, K_demand_func):
5     return A_supply_func(r) - K_demand_func(r)
6

```

```

7 r_star = brentq(excess_demand, a=0.01, b=0.05,
8               args=(A_supply, K_demand))

```

2.5 markov.py – Markov Chain Tools

2.5.1 Introduction and Economic Motivation

Many economic models feature persistent idiosyncratic shocks, typically modeled as AR(1) processes:

$$\log e_{t+1} = \rho \log e_t + \sigma \varepsilon_{t+1}, \quad \varepsilon_t \sim \mathcal{N}(0, 1)$$

For numerical solution, we discretize this continuous process into a finite-state Markov chain with states $\{e_1, \dots, e_n\}$ and transition matrix Π where $\Pi_{ij} = \Pr(e_{t+1} = e_j \mid e_t = e_i)$.

Two main methods exist: **Tauchen** (older, based on CDF matching) and **Rouwenhorst** (more accurate for highly persistent processes).

2.5.2 Function: rouwenhorst

```

1 def rouwenhorst(
2     n: int,
3     rho: float,
4     sigma: float,
5     mu: float = 0.0
6 ) -> Tuple[np.ndarray, np.ndarray]

```

Purpose: Rouwenhorst discretization of AR(1) process. Preferred method for highly persistent processes ($\rho > 0.9$).

Arguments:

`n` Number of states (typically 5-11).

`rho` Persistence parameter of AR(1).

`sigma` Standard deviation of innovation ε_t .

`mu` Unconditional mean (default 0).

Returns: Tuple (states, Pi) where states is 1D array of state values and Pi is $n \times n$ transition matrix.

Connections: Output feeds directly into `backward.py` for computing conditional expectations in Bellman equations.

Example:

```
1 from hetmacro.markov import rouwenhorst, stationary_distribution
2
3 # Discretize typical income process
4 rho, sigma = 0.95, 0.1
5 e_states, Pi = rouwenhorst(n=7, rho=rho, sigma=sigma)
6
7 # Compute stationary distribution
8 pi = stationary_distribution(Pi)
9 print(f"States: {e_states}")
10 print(f"Stationary probabilities: {pi}")
```

2.5.3 Function: tauchen

```
1 def tauchen(
2     n: int,
3     rho: float,
4     sigma: float,
5     mu: float = 0.0,
6     n_std: float = 3.0,
7 ) -> Tuple[np.ndarray, np.ndarray]
```

Purpose: Tauchen method for AR(1) discretization. Uses equally-spaced states covering $\pm n_{\text{std}}$ standard deviations.

Arguments:

`n` Number of states.

`rho` Persistence.

`sigma` Innovation standard deviation.

`mu` Unconditional mean.

`n_std` Number of standard deviations to cover (default 3).

When to use: For less persistent processes ($\rho < 0.9$); Rouwenhorst is generally preferred otherwise.

2.5.4 Function: stationary_distribution

```
1 def stationary_distribution(  
2     P: np.ndarray,  
3     method: str = "eigen",  
4     tol: float = 1e-12  
5 ) -> np.ndarray
```

Purpose: Compute the stationary distribution π satisfying $\pi = \Pi' \pi$.

Arguments:

P Transition matrix (rows sum to 1).

method Either "eigen" (find unit eigenvalue) or "iterate" (power iteration).

tol Convergence tolerance for iteration method.

Returns: 1D array of stationary probabilities summing to 1.

2.5.5 Function: simulate_markov

```
1 def simulate_markov(  
2     P: np.ndarray,  
3     s0: int,  
4     T: int,  
5     random_state=None  
6 ) -> np.ndarray
```

Purpose: Simulate a sample path of Markov chain indices.

Arguments:

P Transition matrix.

s0 Initial state index.

T Number of periods to simulate.

random_state Seed for reproducibility.

Returns: 1D integer array of state indices over time.

2.6 utils.py – Economic Primitives and Utilities

2.6.1 Introduction

This module provides commonly-used economic functions (CRRA utility, CES aggregator) and general numerical utilities (fixed-point iteration, numerical differentiation, timing).

2.6.2 Utility Functions

cr ra_utility

```
1 def cr ra_utility(c: np.ndarray, gamma: float) -> np.ndarray
```

Purpose: Constant Relative Risk Aversion utility:

$$u(c) = \begin{cases} \frac{c^{1-\gamma}}{1-\gamma} & \gamma \neq 1 \\ \log(c) & \gamma = 1 \end{cases}$$

cr ra_marginal

```
1 def cr ra_marginal(c: np.ndarray, gamma: float) -> np.ndarray
```

Purpose: Marginal utility $u'(c) = c^{-\gamma}$.

Connections: Used in EGM (backward.py) to recover consumption from marginal value.

cr ra_inverse_marginal

```
1 def cr ra_inverse_marginal(u: np.ndarray, gamma: float) -> np.ndarray
```

Purpose: Inverse marginal utility $(u')^{-1}(m) = m^{-1/\gamma}$.

Connections: Core of EGM: given $u'(c) = \beta R E[u'(c')]$, we invert to get c .

ces_aggregator

```
1 def ces_aggregator(
2     x: np.ndarray,
3     y: np.ndarray,
4     sigma: float,
```

```

5     alpha: float = 0.5
6 ) -> np.ndarray

```

Purpose: CES aggregator:

$$F(x, y) = (\alpha x^\rho + (1 - \alpha)y^\rho)^{1/\rho}, \quad \rho = \frac{\sigma - 1}{\sigma}$$

where σ is the elasticity of substitution. Special case $\sigma = 1$ gives Cobb-Douglas.

2.6.3 Numerical Utilities

compute_fixed_point

```

1 def compute_fixed_point(
2     T: Callable,
3     v0: np.ndarray,
4     tol: float = 1e-6,
5     max_iter: int = 1000,
6     verbose: bool = False,
7 )

```

Purpose: Generic fixed-point iteration $v = T(v)$. Iterates until $\|v_{n+1} - v_n\|_\infty < \text{tol}$.

Connections: Can be used for custom Bellman operators or any contraction mapping.

numerical_derivative

```

1 def numerical_derivative(
2     f: Callable,
3     x: float,
4     h: float = 1e-7,
5     method: str = "central"
6 ) -> float

```

Purpose: Numerical differentiation using forward, backward, or central differences.

numerical_jacobian

```

1 def numerical_jacobian(
2     f: Callable,
3     x: np.ndarray,

```

```
4     h: float = 1e-7
5 ) -> np.ndarray
```

Purpose: Numerical Jacobian matrix of vector-valued function $f : \mathbb{R}^n \rightarrow \mathbb{R}^m$.

tic, toc

```
1 def tic()
2 def toc() -> float
```

Purpose: MATLAB-style timing. Call `tic()` to start timer, `toc()` to get elapsed seconds.

3.1 backward.py – Dynamic Programming Solvers

3.1.1 Introduction and Economic Motivation

The core of heterogeneous agent models is solving the household's Bellman equation:

$$V(a, e) = \max_{c, a'} \{u(c) + \beta \mathbb{E}[V(a', e') \mid e]\}$$

subject to the budget constraint $c + a' = y(e) + (1 + r)a$ and borrowing limit $a' \geq \underline{a}$.

Two main solution methods exist:

1. **Value Function Iteration (VFI):** Iterate on V directly. Simple but slow.
2. **Endogenous Grid Method (EGM):** Iterate on marginal value V_a . Much faster because it exploits the first-order condition to avoid numerical optimization.

3.1.2 Function: backward_egm

```

1 def backward_egm(
2     Va: np.ndarray,
3     Pi: np.ndarray,
4     a_grid: np.ndarray,
```

```

5     y: np.ndarray,
6     r: float,
7     beta: float,
8     eis: float,
9 ) -> Tuple[np.ndarray, np.ndarray, np.ndarray]

```

Purpose: Single backward step using the Endogenous Grid Method. Given tomorrow's marginal value V'_a , compute today's policies.

Algorithm:

1. Compute expected marginal value: $W_a = \beta \Pi V'_a$
2. Invert FOC to get consumption on endogenous grid: $c_{\text{endog}} = W_a^{-\text{eis}}$
3. For each income state, interpolate to get policy on exogenous asset grid
4. Apply borrowing constraint; update marginal value

Arguments:

Va Marginal value of assets, shape (n_e, n_a).

Pi Income transition matrix, shape (n_e, n_e).

a_grid Asset grid, shape (n_a,).

y Income levels for each state, shape (n_e,).

r Interest rate.

beta Discount factor.

eis Elasticity of intertemporal substitution ($= 1/\gamma$ for CRRA).

Returns: Tuple (Va_new, a_policy, c_policy) of updated marginal value and policy functions.

Connections: Called iteratively by policy_iteration. Policies feed into forward.py for distribution iteration.

Example:

```

1 from hetmacro.backward import backward_egm
2 import numpy as np
3
4 # Initial guess: consume everything

```

```

5 n_e, n_a = 7, 200
6 coh = y[:, np.newaxis] + (1 + r) * a_grid[np.newaxis, :]
7 Va_init = (1 + r) * (0.05 * coh) ** (-1/eis)
8
9 # One EGM step
10 Va_new, a_pol, c_pol = backward_egm(
11     Va_init, Pi, a_grid, y, r=0.02, beta=0.96, eis=1.0
12 )

```

3.1.3 Function: backward_vfi

```

1 def backward_vfi(
2     V: np.ndarray,
3     Pi: np.ndarray,
4     a_grid: np.ndarray,
5     y: np.ndarray,
6     r: float,
7     beta: float,
8     gamma: float,
9 ) -> Tuple[np.ndarray, np.ndarray, np.ndarray]

```

Purpose: Single VFI backward step with discrete choice over a' in the grid. Slower than EGM but more general (works with non-differentiable preferences).

Arguments: Similar to `backward_egm`, but uses `gamma` (risk aversion) instead of `eis`.

Returns: Tuple (`V_new`, `a_policy`, `c_policy`).

3.1.4 Function: policy_iteration

```

1 def policy_iteration(
2     Pi: np.ndarray,
3     a_grid: np.ndarray,
4     y: np.ndarray,
5     r: float,
6     beta: float,
7     eis: float,
8     method: str = "egm",
9     tol: float = 1e-9,
10    max_iter: int = 10000,

```

```
11 ) -> Tuple[np.ndarray, np.ndarray, np.ndarray]
```

Purpose: Iterate backward steps until policy functions converge.

Arguments:

method Either "egm" or "vfi".

tol Convergence tolerance on policy function.

max_iter Maximum iterations.

Returns: Converged (Va, a_policy, c_policy).

Connections: Main entry point for solving household problem. Output is used by forward.py and steady_state.py.

3.2 forward.py – Distribution Iteration

3.2.1 Introduction and Economic Motivation

Given optimal policies, we need the *distribution* of agents across states to compute aggregates:

$$A = \int a dD(a, e), \quad C = \int c(a, e) dD(a, e)$$

The stationary distribution D^* satisfies a fixed-point condition: if agents follow policy $a'(a, e)$ and income transitions according to Π , then D^* is invariant.

3.2.2 Function: forward_iteration

```
1 def forward_iteration(
2     D: np.ndarray,
3     Pi: np.ndarray,
4     a_i: np.ndarray,
5     a_pi: np.ndarray
6 ) -> np.ndarray
```

Purpose: Single forward step for distribution. Given current distribution D , compute next period's distribution after agents save according to policy and income transitions.

Arguments:

D Current distribution, shape (n_e, n_a).

Pi Income transition matrix.

a_i Lottery lower indices from get_lottery.

a_pi Lottery probabilities from get_lottery.

Returns: Next period's distribution, same shape as D.

Connections: Uses output of get_lottery from interpolation.py.

3.2.3 Function: stationary_distribution

```

1 def stationary_distribution(
2     Pi: np.ndarray,
3     a_policy: np.ndarray,
4     a_grid: np.ndarray,
5     tol: float = 1e-10,
6     max_iter: int = 10000,
7 ) -> np.ndarray

```

Purpose: Compute stationary distribution by iterating forward_iteration until convergence.

Arguments:

Pi Income transition matrix.

a_policy Asset policy function, shape (n_e, n_a).

a_grid Asset grid.

tol Convergence tolerance.

max_iter Maximum iterations.

Returns: Stationary distribution D^* , shape (n_e, n_a), summing to 1.

Connections: Called by household_steady_state in steady_state.py.

3.2.4 Functions: expectation_iteration, expectation_functions

```

1 def expectation_iteration(X, Pi, a_i, a_pi) -> np.ndarray
2 def expectation_functions(X, Pi, a_i, a_pi, T) -> np.ndarray

```

Purpose: Backward expectation operators for sequence-space Jacobian computation. Used internally by ssj.py.

3.3 steady_state.py – Equilibrium Solvers

3.3.1 Introduction

Heterogeneous agent models require market clearing. In the Aiyagari model:

$$\underbrace{\int a dD(a, e; r)}_{\text{Asset supply } A(r)} = \underbrace{K(r)}_{\text{Capital demand}}$$

We solve for the equilibrium interest rate r^* that clears the asset market.

3.3.2 Function: household_steady_state

```

1 def household_steady_state(
2     Pi: np.ndarray,
3     a_grid: np.ndarray,
4     y: np.ndarray,
5     r: float,
6     beta: float,
7     eis: float,
8     method: str = "egm",
9     tol: float = 1e-9,
10 ) -> Dict[str, np.ndarray]
```

Purpose: Solve for household policies and distribution *given* prices. This is the “partial equilibrium” household block.

Arguments:

`a_grid, y, r, beta, eis` Model parameters.

`method` Solution method ("egm" or "vfi").

`tol` Convergence tolerance.

Returns: Dictionary containing:

- "D": Stationary distribution
- "Va": Marginal value function
- "a", "c": Policy functions

- "a_i", "a_pi": Lottery indices/weights
- "A", "C": Aggregate asset holdings and consumption
- All input parameters

Connections: Called repeatedly by `market_clearing` at different interest rates.

3.3.3 Function: `market_clearing`

```

1 def market_clearing(
2     r_bounds: Tuple[float, float],
3     household_ss_func: Callable[[float], Dict],
4     K_demand_func: Callable[[float], float],
5     tol: float = 1e-6,
6     max_iter: int = 100,
7 ) -> Dict[str, np.ndarray]
```

Purpose: Find equilibrium interest rate using bisection on excess demand.

Arguments:

`r_bounds` Tuple (`r_low`, `r_high`) bracketing equilibrium rate.

`household_ss_func` Function mapping $r \mapsto$ household steady state dict.

`K_demand_func` Function mapping $r \mapsto$ capital demand.

`tol` Tolerance on excess demand.

`max_iter` Maximum bisection iterations.

Returns: Household steady state dict at equilibrium r^* .

Example:

```

1 from hetmacro.steady_state import market_clearing
2
3 def hh_ss(r):
4     y = w * np.exp(e) # wage * productivity
5     return household_steady_state(Pi, a_grid, y, r, beta, eis)
6
7 def K_demand(r):
8     return (alpha / (r + delta)) ** (1/(1-alpha))
```

```

9
10 ss = market_clearing(
11     r_bounds=(0.005, 0.04),
12     household_ss_func=hh_ss,
13     K_demand_func=K_demand
14 )
15 print(f"Equilibrium r = {ss['r']:.4f}")

```

3.4 ssj.py – Sequence-Space Jacobians

3.4.1 Introduction and Economic Motivation

For aggregate dynamics (impulse responses, business cycle analysis), we need to know how aggregates respond to shocks. The **sequence-space Jacobian** $\mathcal{J}$ captures:

$$\begin{pmatrix} dA_0 \\ dA_1 \\ \vdots \\ dA_{T-1} \end{pmatrix} = \mathcal{J} \begin{pmatrix} dr_0 \\ dr_1 \\ \vdots \\ dr_{T-1} \end{pmatrix}$$

The “fake news algorithm” (Auclert et al., 2021) efficiently computes these Jacobians by exploiting the structure of the household problem.

3.4.2 Function: jacobian

```

1 def jacobian(
2     ss: Dict[str, np.ndarray],
3     shocks: Dict[str, Dict[str, float]],
4     T: int
5 ) -> Dict[str, Dict[str, np.ndarray]]

```

Purpose: Compute Jacobians of aggregate outputs (A, C) with respect to input shocks.

Arguments:

`ss` Steady state dict from `household_steady_state`.

`shocks` Dict mapping shock names to input perturbations. E.g., `{"r": {"r": 1.0}}` for interest rate shock.

T Horizon length.

Returns: Nested dict: $J_s["A"]["r"]$ is the $T \times T$ Jacobian of assets w.r.t. interest rate.

Example:

```

1 from hetmacro.ssj import jacobian
2
3 # Compute Jacobian at steady state
4 shocks = {"r": {"r": 1.0}} # unit shock to r
5 T = 300
6 Js = jacobian(ss, shocks, T)
7
8 # Impulse response of assets to 1% interest rate shock
9 dA = Js["A"]["r"] @ (0.01 * np.ones(T))

```

3.4.3 Function: step1_backward

```

1 def step1_backward(
2     ss: Dict,
3     shock: Dict[str, float],
4     T: int,
5     h: float = 1e-4,
6 ) -> Tuple[Dict[str, np.ndarray], np.ndarray]

```

Purpose: Step 1 of fake news algorithm: compute “curlyY” (direct effect) and “curlyD” (distribution response).

3.4.4 Function: J_from_F

```

1 def J_from_F(F: np.ndarray) -> np.ndarray

```

Purpose: Convert fake news matrix F to Jacobian J via cumulative summation.

CHAPTER 4

Example: Aiyagari Model

4.1 models/aiyagari.py

This module demonstrates how to combine hetmacro tools to solve a complete model.

4.1.1 Function: solve_steady_state

```
1 def solve_steady_state(  
2     beta: float = 0.96,  
3     eis: float = 1.0,  
4     rho: float = 0.9,  
5     sigma: float = 0.2,  
6     n_e: int = 7,  
7     amin: float = 0.0,  
8     amax: float = 50.0,  
9     n_a: int = 500,  
10    alpha: float = 0.36,  
11    delta: float = 0.08,  
12    r_bounds: Tuple[float, float] = (0.005, 0.04),  
13 ) -> Dict[str, np.ndarray]
```

Purpose: Solve the Aiyagari model steady state with idiosyncratic income risk.


Workflow:

1. Discretize income process using rouwenhorst
2. Create asset grid using `make_asset_grid`
3. Define household problem given prices
4. Find market-clearing interest rate using `market_clearing`

Example:

```
1 from hetmacro.models.aiyagari import solve_steady_state
2 import matplotlib.pyplot as plt
3
4 # Solve model
5 ss = solve_steady_state(
6     beta=0.96,
7     eis=1.0,
8     rho=0.9,
9     sigma=0.2,
10    n_a=500
11 )
12
13 print(f"Equilibrium interest rate: {ss['r']:.4f}")
14 print(f"Aggregate capital: {ss['K']:.2f}")
15 print(f"Aggregate consumption: {ss['C']:.2f}")
16
17 # Plot consumption policy
18 plt.figure(figsize=(10, 6))
19 for i in range(ss['c'].shape[0]):
20     plt.plot(ss['a_grid'], ss['c'][i], label=f'e={i}')
21 plt.xlabel('Assets')
22 plt.ylabel('Consumption')
23 plt.title('Consumption Policy Functions')
24 plt.legend()
25 plt.show()
```

5.1 Module Dependency Graph

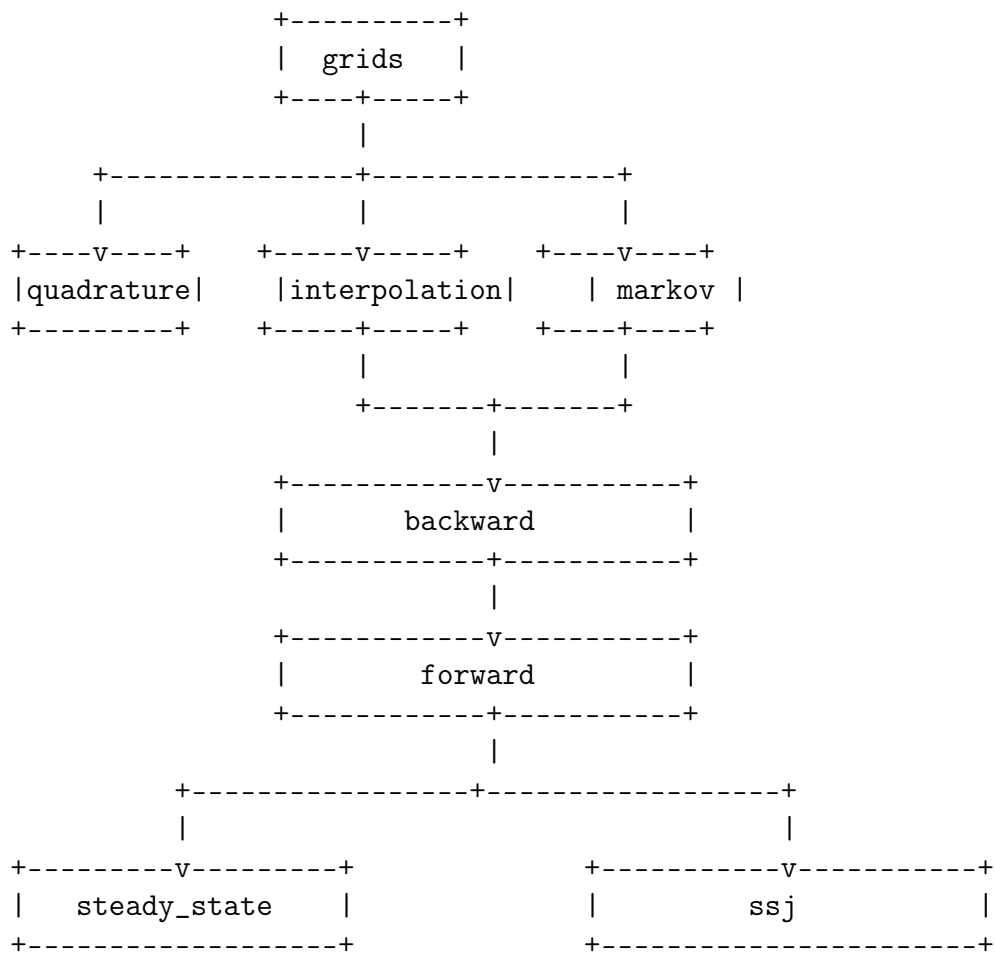

5.2 Common Workflows

5.2.1 Solving a Steady State

```

1 from hetmacro.grids import make_asset_grid
2 from hetmacro.markov import rouwenhorst
3 from hetmacro.steady_state import household_steady_state, market_clearing
4
5 # 1. Set up grids and income process
6 a_grid = make_asset_grid(0, 50, 500)
7 e, Pi = rouwenhorst(7, rho=0.95, sigma=0.1)
8
9 # 2. Define household problem
10 def hh_ss(r):
11     y = w(r) * np.exp(e)
12     return household_steady_state(Pi, a_grid, y, r, beta, eis)
13
14 # 3. Find equilibrium
15 ss = market_clearing((0.01, 0.04), hh_ss, K_demand)

```

5.2.2 Computing Impulse Responses

```

1 from hetmacro.ssj import jacobian
2
3 # 1. Get steady state
4 ss = solve_steady_state(...)
5
6 # 2. Compute Jacobians
7 Js = jacobian(ss, {"r": {"r": 1.0}}, T=300)
8
9 # 3. Construct impulse response
10 shock_path = np.zeros(300)
11 shock_path[0] = 0.01 # 1% shock at t=0
12 dA = Js["A"]["r"] @ shock_path

```