Binary Choice Analysis

Robert Hickman

Data shown for:

```
date
```
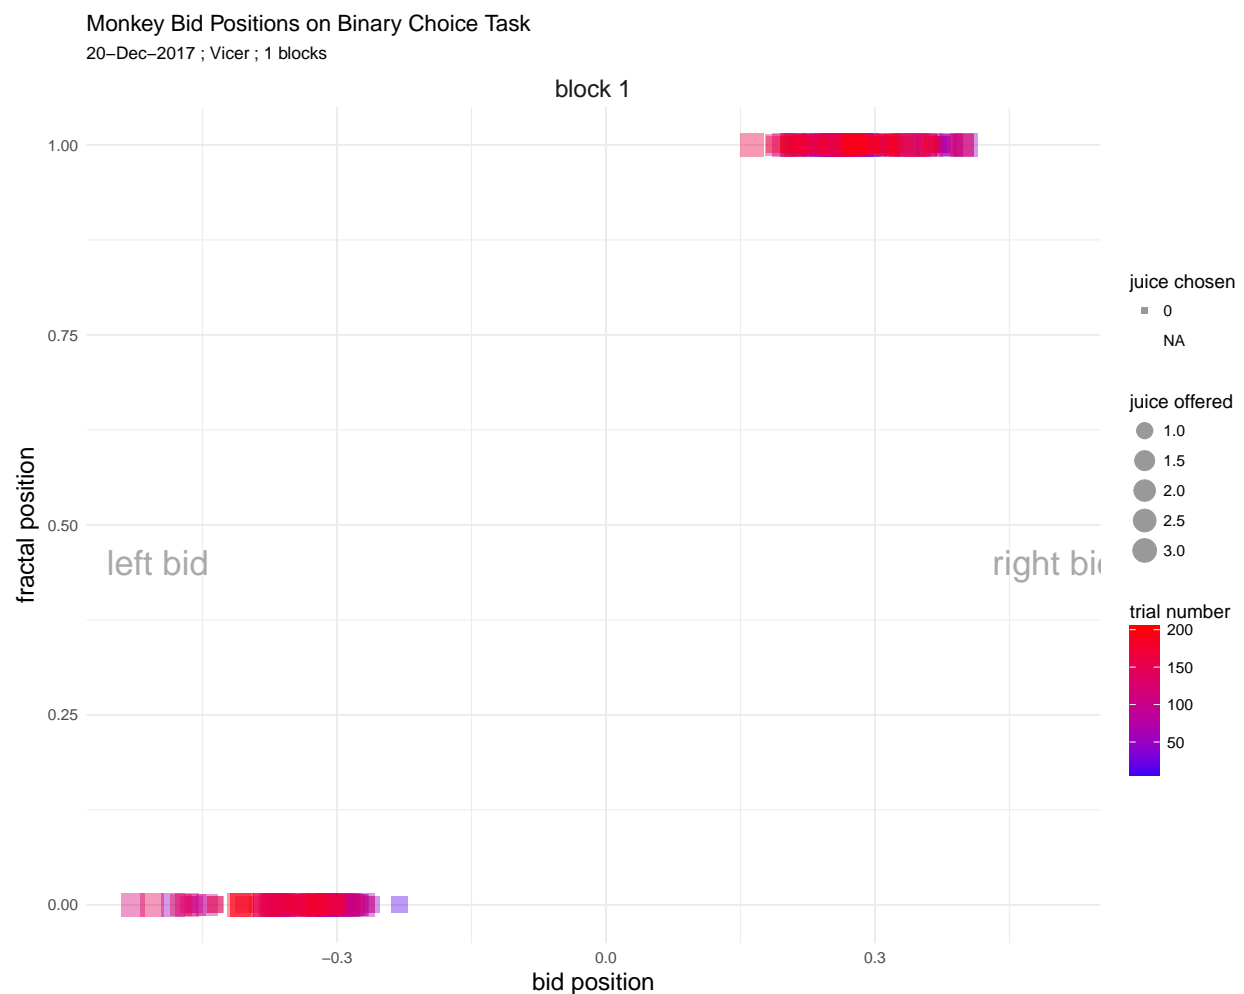
```
## [1] "20-Dec-2017"
```

```
monkey
```

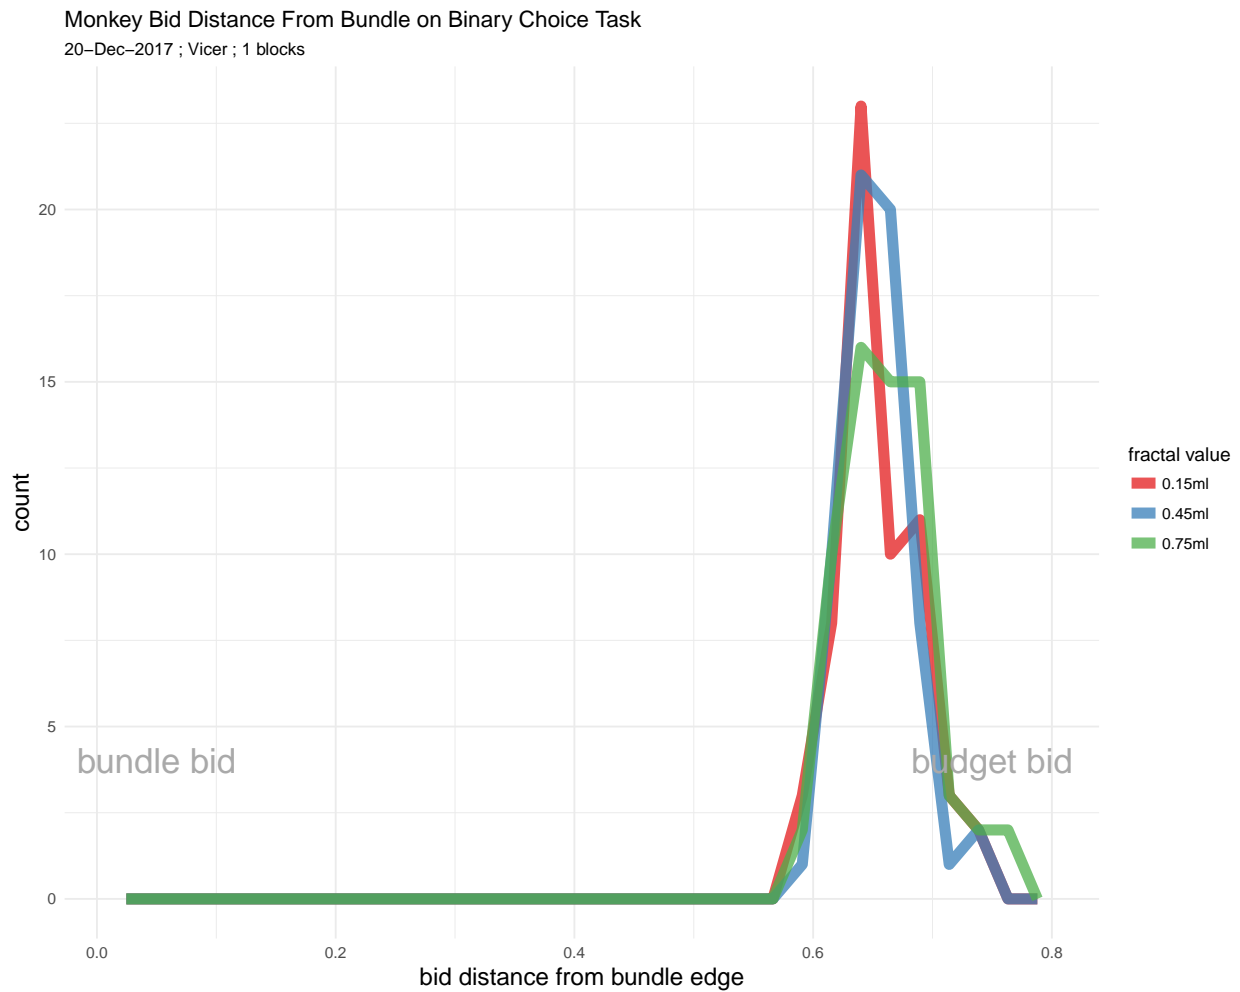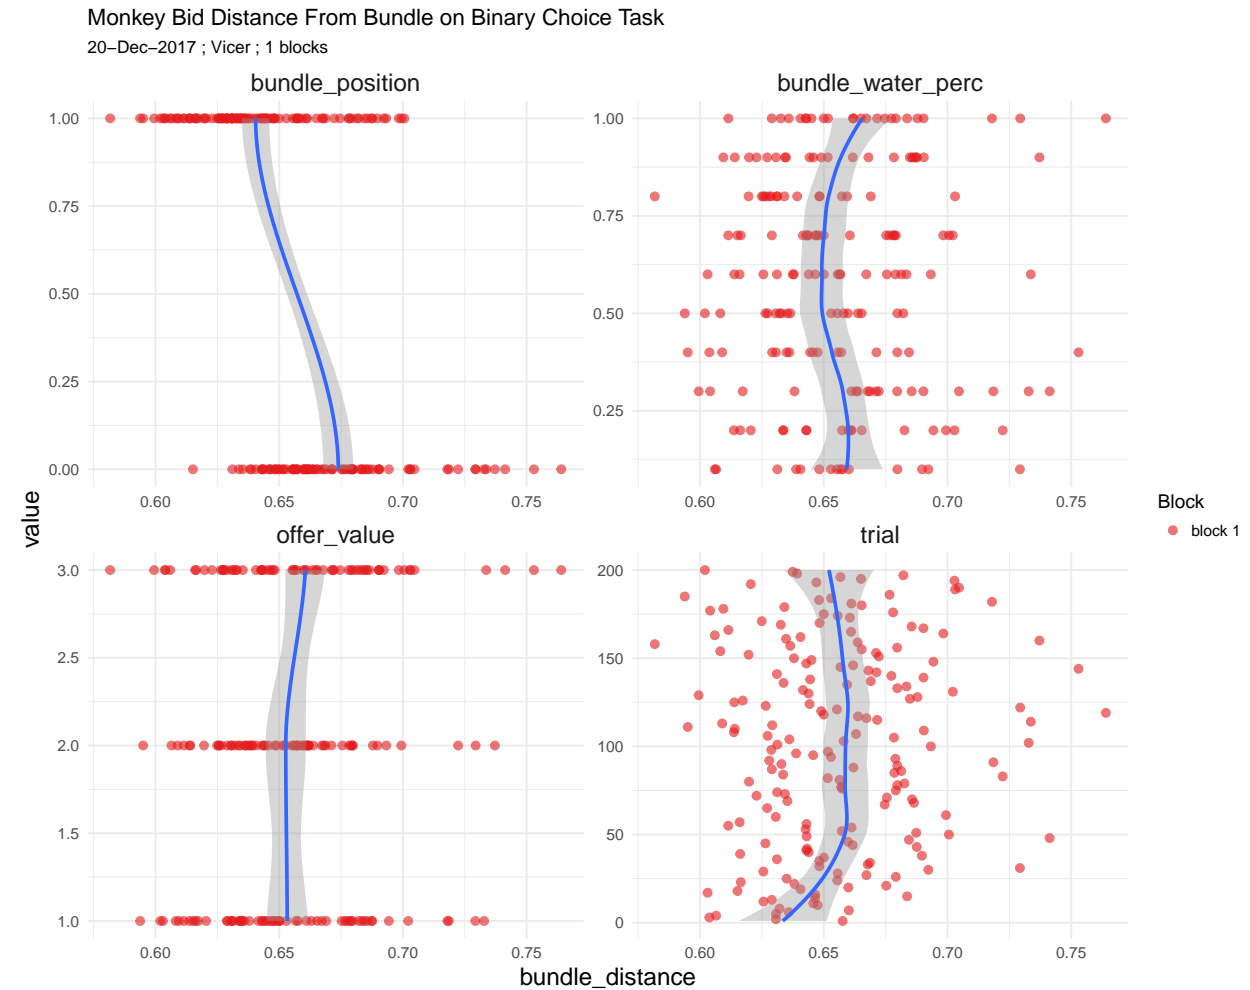```
[1] "Vicer"
```

```
#plot p1
p1
```


Graph of choices for each block. Circles indicate bid selecting the bundle, squares are bid selecting the budget. A fractal bid position of 1 means that the bundle is on the left hand side of the screen. Bids range from -1 (all the way to the left) to 1 (all the way to the right)

Monkey Bid Distance From Bundle on Binary Choice Task

20–Dec–2017 ; Vicer ; 1 blocks

Graph showing all choices and how far away they are from the edge of the screen on the bundle side. 0 indicates full movement to the bundle side of the screen and 1 represent full movement away. Count is over all blocks for all values of the fractal (in ml of juice).

p3

Monkey Bid Distance From Bundle on Binary Choice Task
20–Dec–2017 ; Vicer ; 1 blocks

Graphs of various factors against the distance from the bundle side of the screen the monkey bids.

A bundle position of 1 indicates that the bundle is on the left hand side of the screen. A bundle water percentage of 1 indicates that the bundle contains no water [CHECK THIS- PRETTY SURE ITS CORRECT], whereas zero means it contains the full 1.2ml. Offer values of 1, 2, and 3 represent 0.15ml, 0.45ml, and 0.75mls of apple and mango juice (150ml in 950ml of water).

Fit lines use LOESS method.

```
#generate a model of likelihood to bid for the fractal dependent on it's position,
#value and associated water
model <- glm(data = task_data,
             fractal_bid ~ bundle_position + bundle_water_perc + offer_value + trial,
             family = "binomial")

#summarise the parameters
summary(model)
```
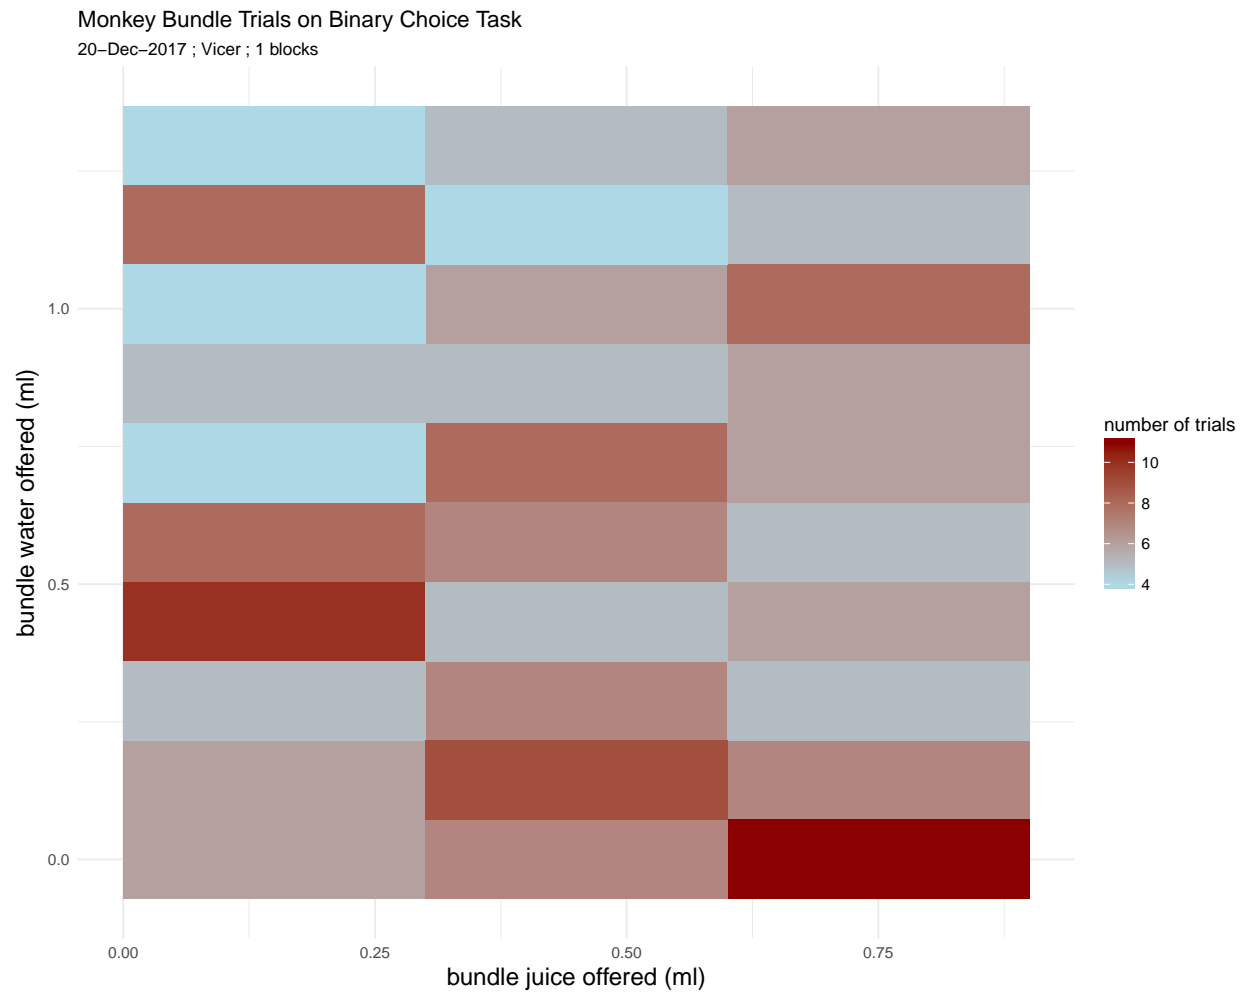
```
##
## Call:
## glm(formula = fractal_bid ~ bundle_position + bundle_water_perc +
##     offer_value + trial, family = "binomial", data = task_data)
##
## Deviance Residuals:
##        Min          1Q      Median          3Q         Max
## -2.409e-06  -2.409e-06  -2.409e-06  -2.409e-06  -2.409e-06
##
## Coefficients:
##                     Estimate Std. Error z value Pr(>|z|)
## (Intercept)       -2.657e+01  1.043e+05       0        1
## bundle_position   -1.328e-14  5.248e+04       0        1
## bundle_water_perc  4.126e-14  9.077e+04       0        1
## offer_value        1.054e-14  3.216e+04       0        1
## trial              1.977e-16  4.561e+02       0        1
##
## (Dispersion parameter for binomial family taken to be 1)
##
##     Null deviance: 0.0000e+00  on 187  degrees of freedom
## Residual deviance: 1.0907e-09  on 183  degrees of freedom
##   (12 observations deleted due to missingness)
## AIC: 10
##
## Number of Fisher Scoring iterations: 25
```
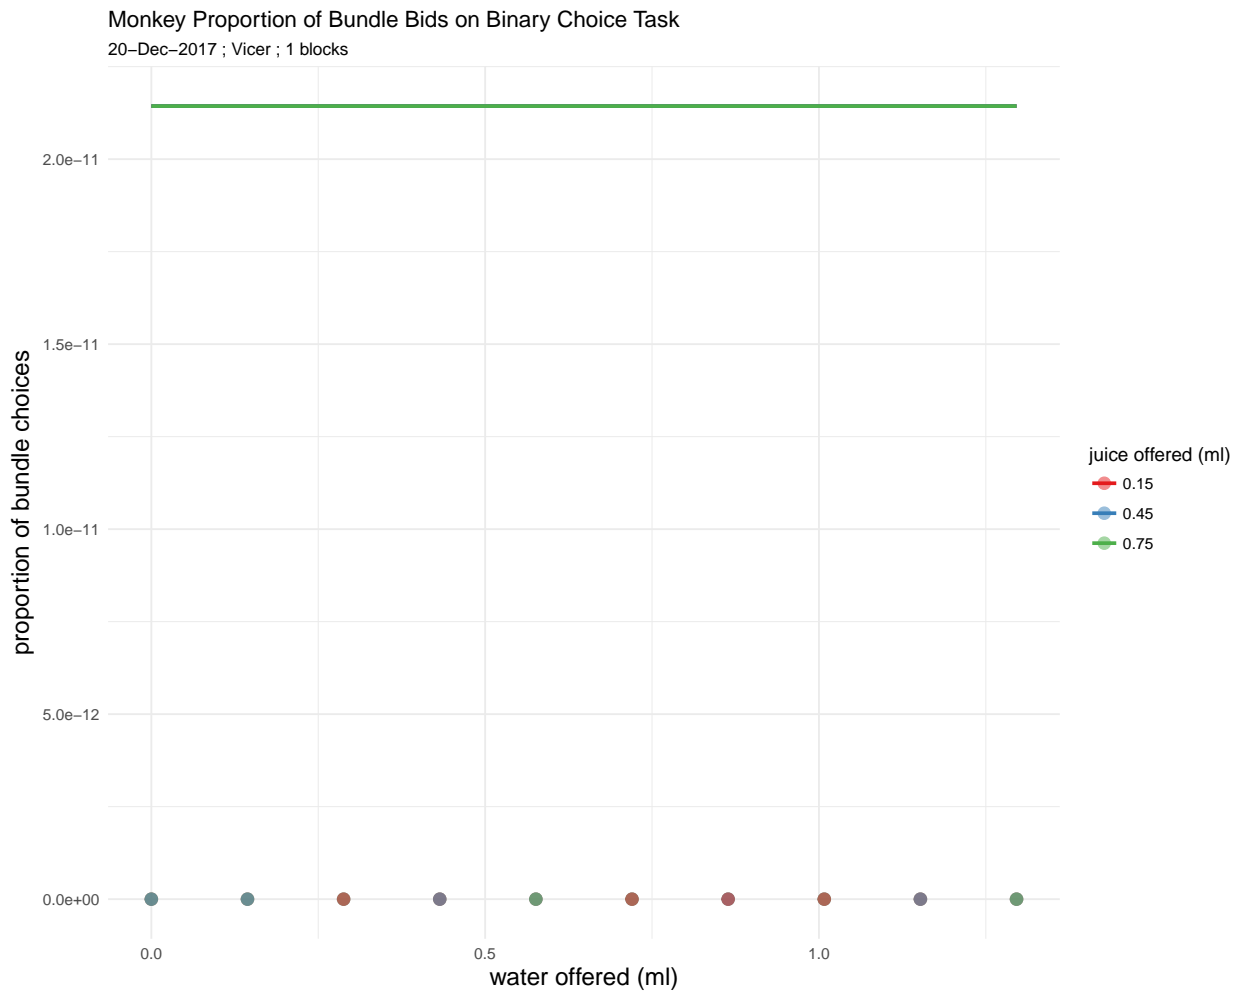
p4

Monkey Bundle Trials on Binary Choice Task

20–Dec–2017 ; Vicer ; 1 blocks

Graph showing the number of trials the monkey carried out for each bundle combination. Does not include failed trials.

Monkey Proportion of Bundle Bids on Binary Choice Task

20–Dec–2017 ; Vicer ; 1 blocks

Graph showing the proportion of bids for the bundle that a monkey makes, separated by the values of the juice offered in the bundles. Fits using a binomial glm model.