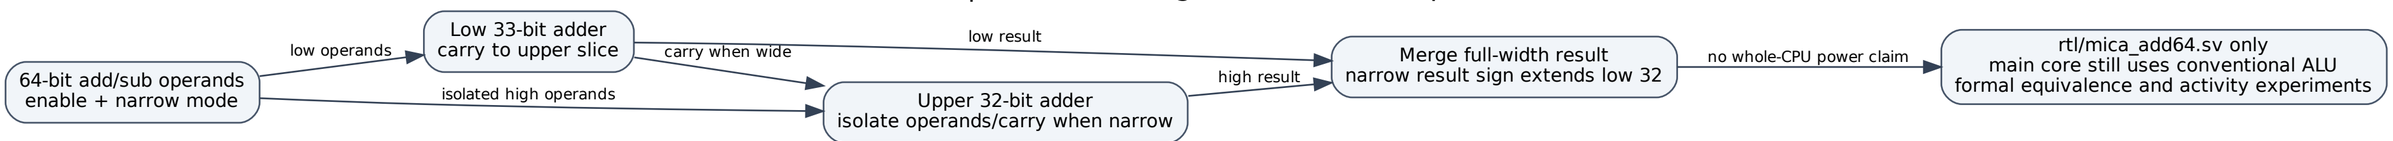
MICA 2.0 | standalone segmented-adder experiment
64-bit add/sub operands
enable + narrow mode
low operands
Low 33-bit adder
carry to upper slice
low result
carry when wide
isolated high operands
Upper 32-bit adder
isolate operands/carry when narrow
high result
Merge full-width result
narrow result sign extends low 32
no whole-CPU power claim
rtl/mica_add64.sv only
main core still uses conventional ALU
formal equivalence and activity experiments