
# INSTALACIÓN del ERP : ODOO (versión 18)

**1.- Web de ODOO**

*https://www.odoo.com/es_ES/*

Descargar **versión 18 de la comunidad** para Windows



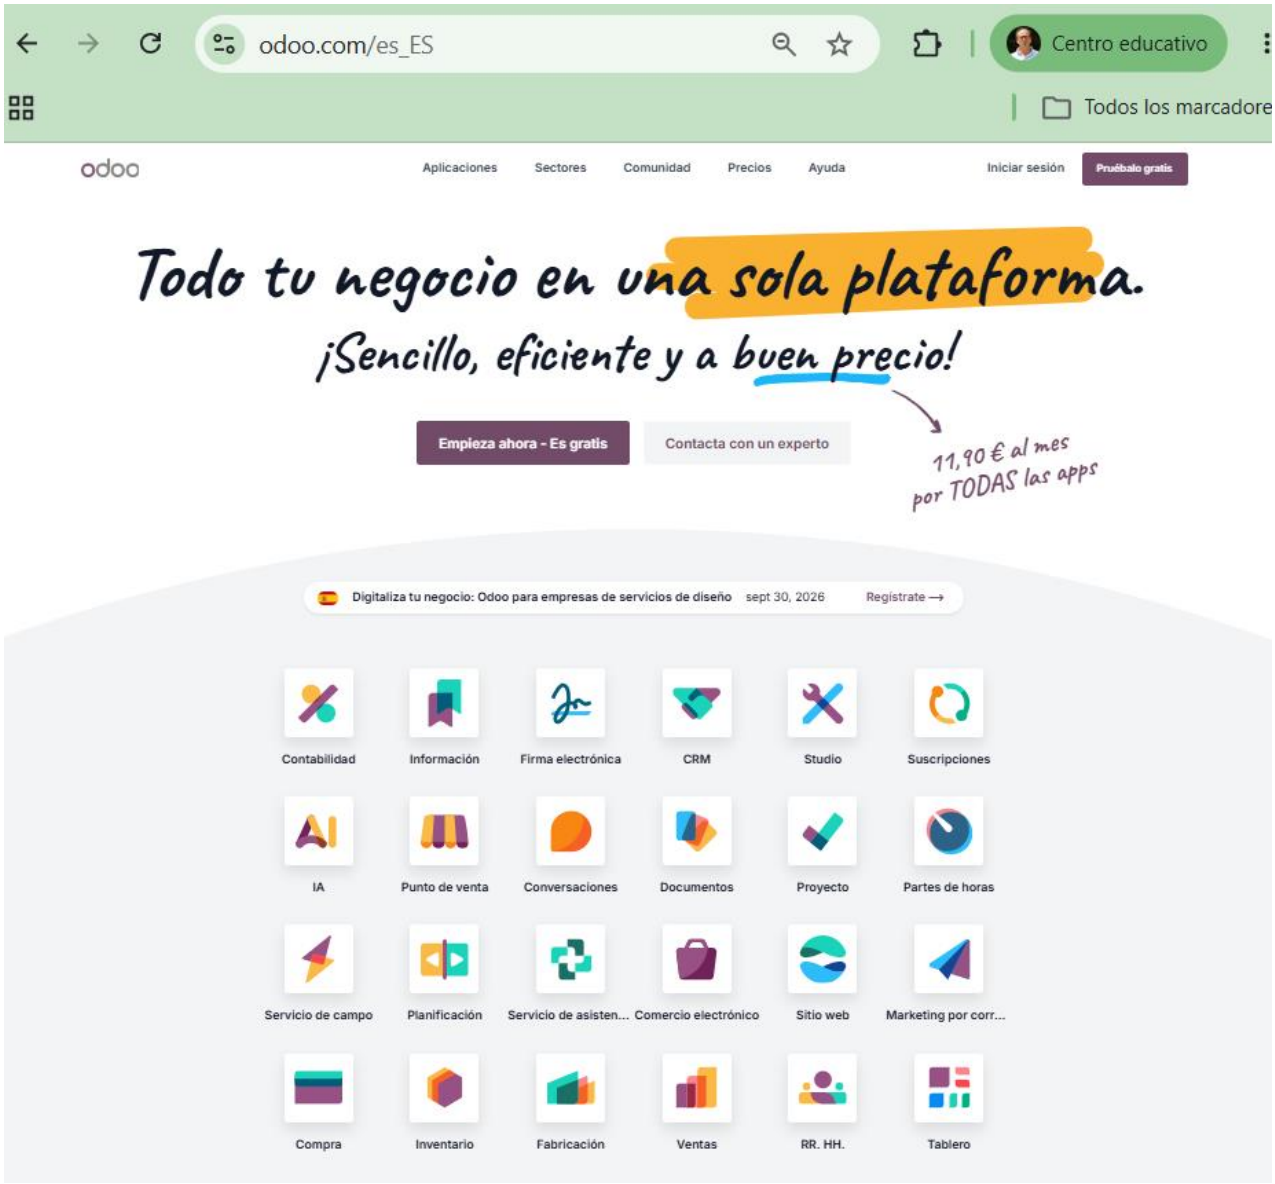




# Descargar

| | |
|---|---|
| Tu empresa | cfs |
| Tu nombre | txema |
| Número de teléfono | +34 666777888 |
| Tu correo electrónico | txema@cfs.com |
| Interés principal | Soy profesor o estudiante |
| Tamaño de la empresa | 50 - 250 empleados |

Trataremos tus datos personales como lo describimos en nuestra Política de privacidad.

**Pruébalo sin instalaciones**

### Comparar las ediciones de Odoo


Ediciones diseñadas para adaptarse a empresas de cualquier tamaño y necesidad.

Página de comparación

### Guía de instalación

Guías de instalación para Windows, Ubuntu/Debian, RedHat (RPM), Docker.


Más información ⟶

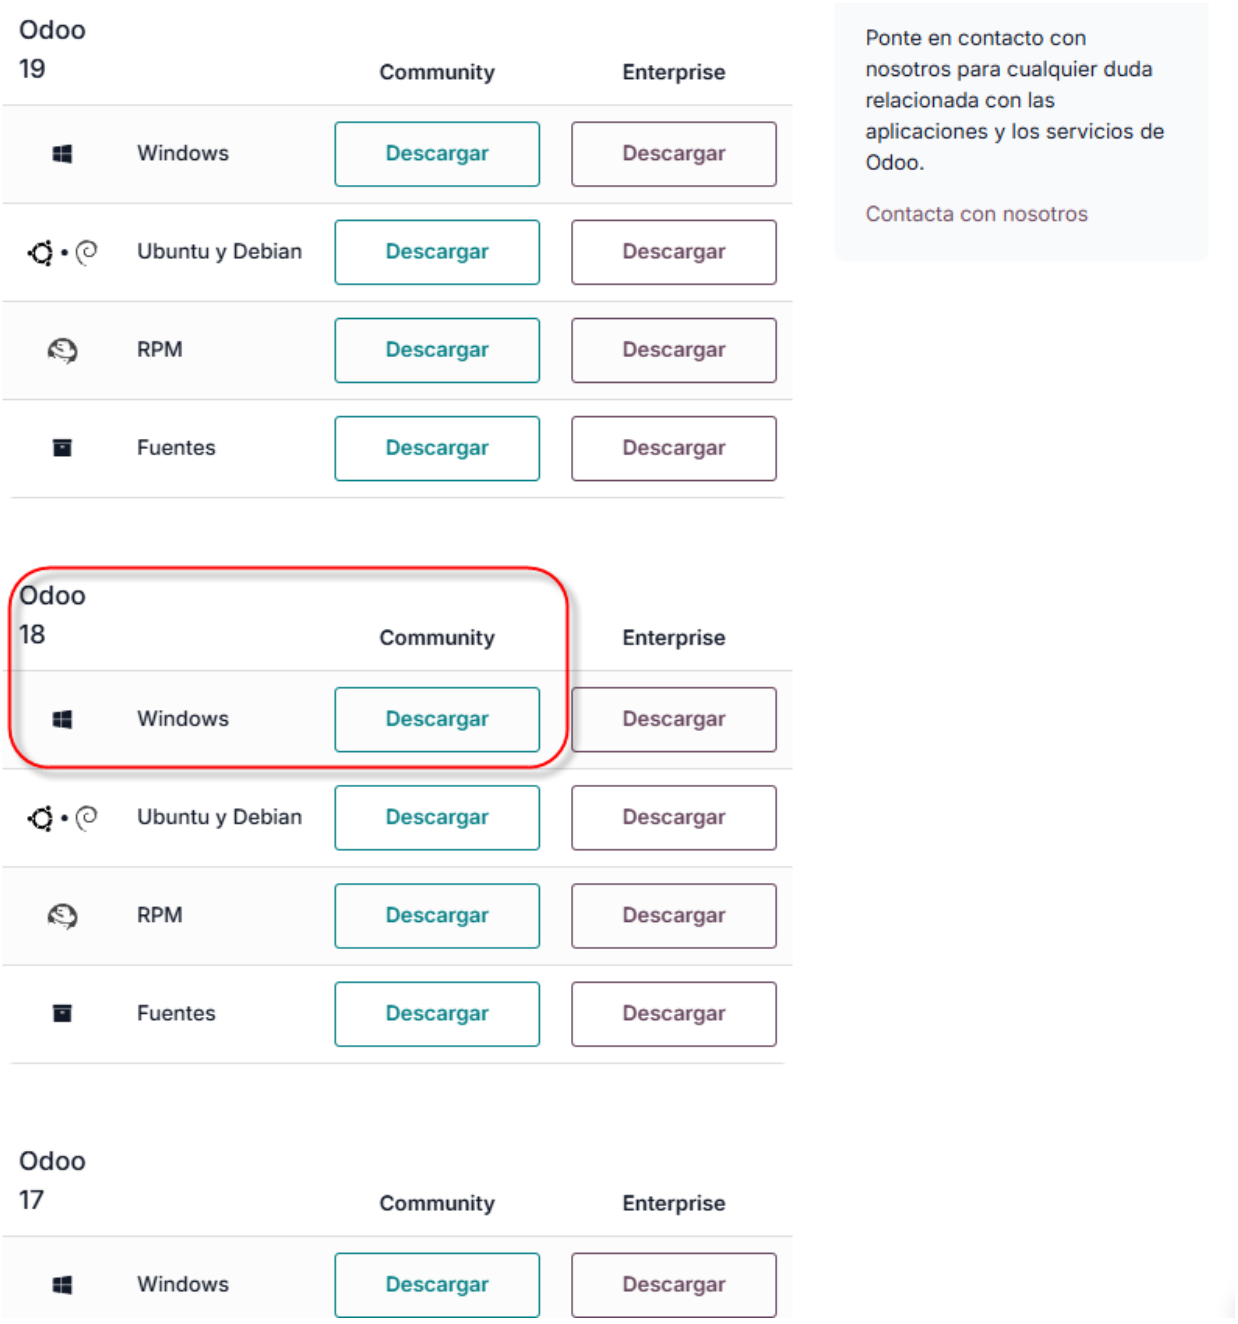


**Instalar**


**Apuntar datos conexión a PostgreSql:**

- Hostname
- Port (pto de escucha del SGBD)
- Username
- Password

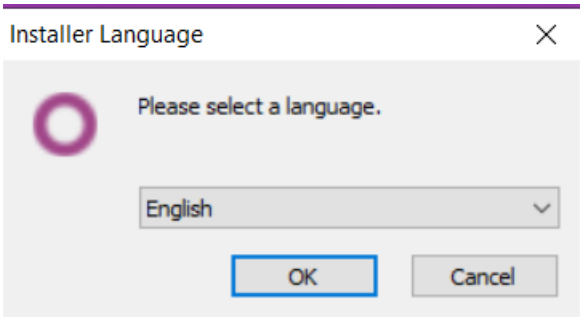
Installer Language
Please select a language.
English
OK
Cancel


Odoo 18.0.20260914 Setup
Welcome to Odoo 18.0 Setup
Setup will guide you through the installation of Odoo 18.0.
It is recommended that you close all other applications before starting Setup. This will make it possible to update relevant system files without having to reboot your computer.
Click Next to continue.
Next >
Cancel



Odoo 18.0.20260914 Setup
https://www.odoo.com
Press Page Down to see the rest of the agreement.
For copyright information, please see the COPYRIGHT file.
Odoo is published under the GNU LESSER GENERAL PUBLIC LICENSE, Version 3 (LGPLv3), as included below. Since the LGPL is a set of additional permissions on top of the GPL, the text of the GPL is included at the bottom as well.
Some external libraries and contributions bundled with Odoo may be published under other GPL-compatible licenses. For these, please refer to the relevant source files and/or license files, in the source code tree.
If you accept the terms of the agreement, click I Agree to continue. You must accept the agreement to install Odoo 18.0.
Odoo 18.0.20260914
< Back
I Agree
Cancel

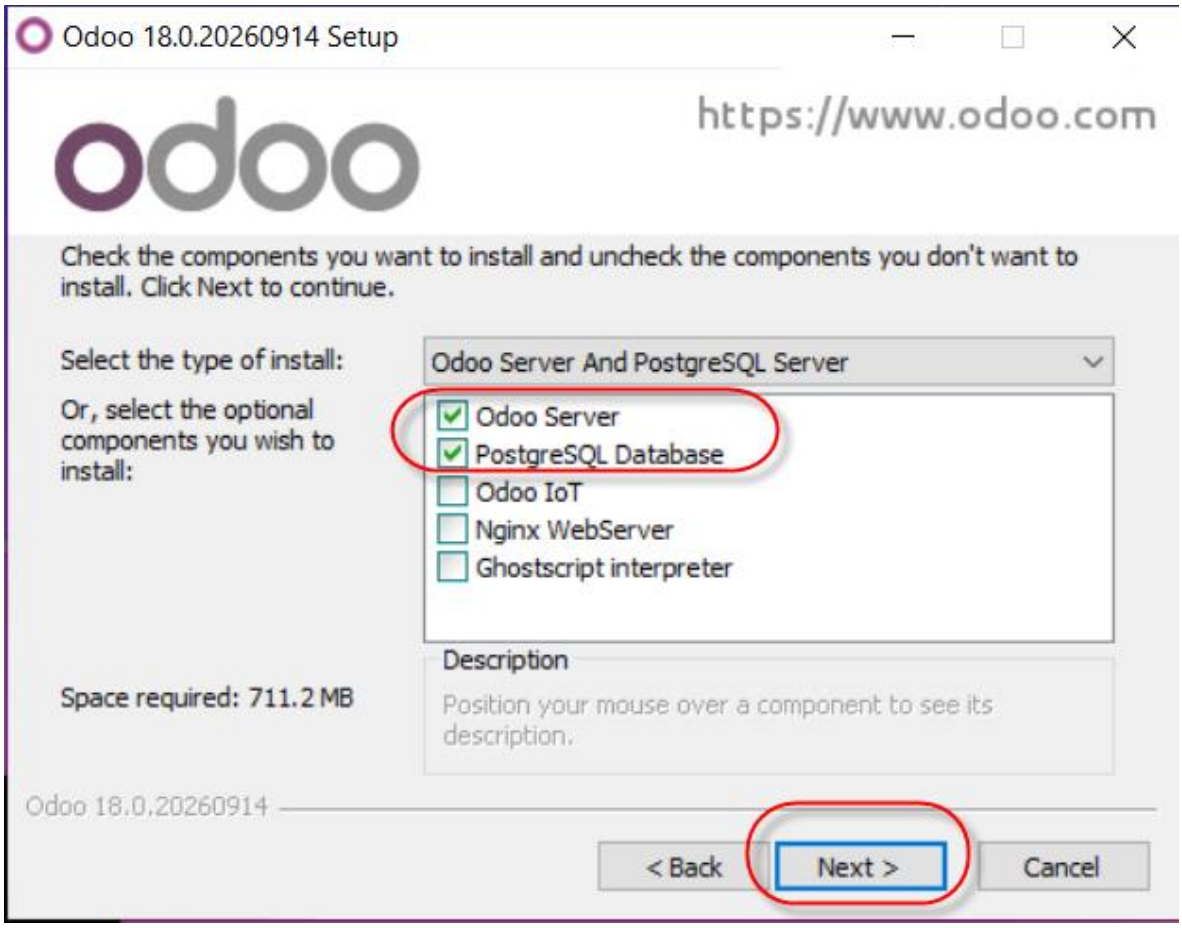
Odoo 18.0.20260914 Setup
https://www.odoo.com
Check the components you want to install and uncheck the components you don't want to install. Click Next to continue.
Select the type of install:
Odoo Server And PostgreSQL Server
Or, select the optional components you wish to install:
Odoo Server
PostgreSQL Database
Odoo IoT
Nginx WebServer
Ghostscript interpreter
Description
Position your mouse over a component to see its description.
Space required: 711.2 MB
Odoo 18.0.20260914
< Back
Next >
Cancel


Odoo 18.0.20260914 Setup
https://www.odoo.com
Configure the information for the PostgreSQL connection
Hostname
localhost
Port
5432
Username
openpg
Password
openpgpwd
Odoo 18.0.20260914
< Back
Next >
Cancel




**Apuntar cuál es el directorio de instalación**

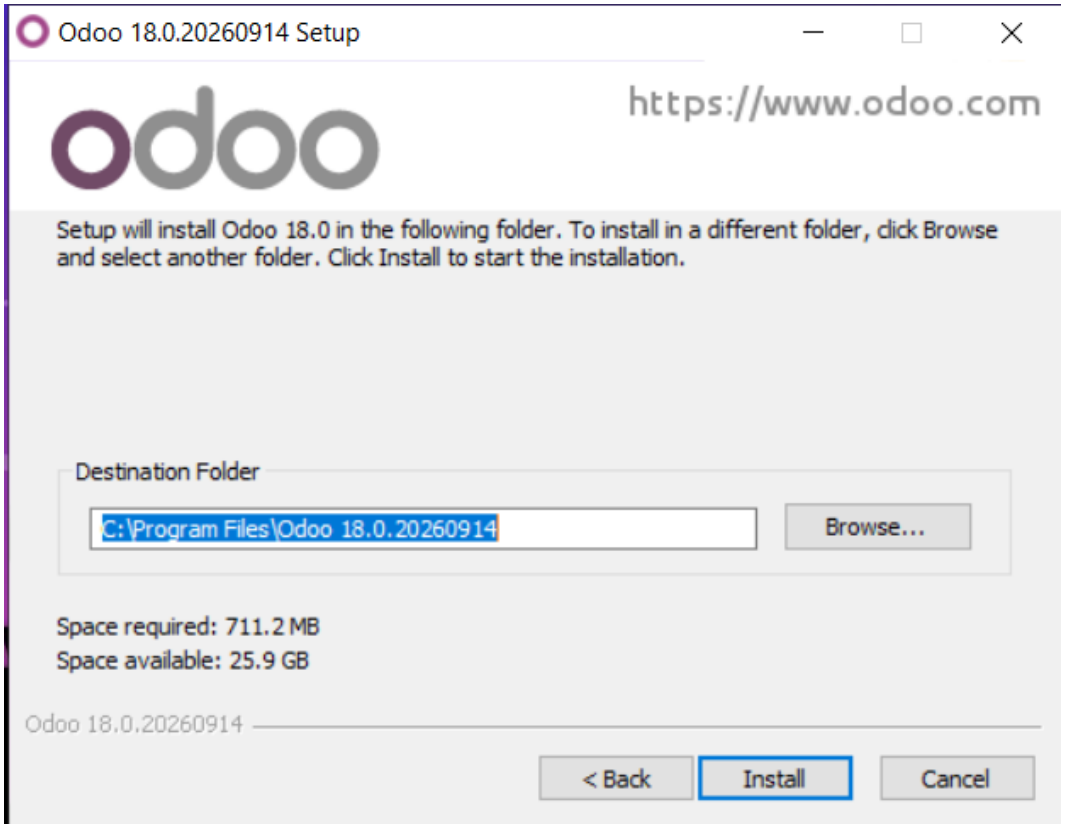








**2.- Ejecutar Odoo desde navegador.**


*localhost:8069 (pto de escucha del servidor odoo)*

**3.- Crear nueva BD.**

Anotar los siguientes datos:


- Database name
- Email (usuario administrador)
- Password
- Language
- Load demonstration data

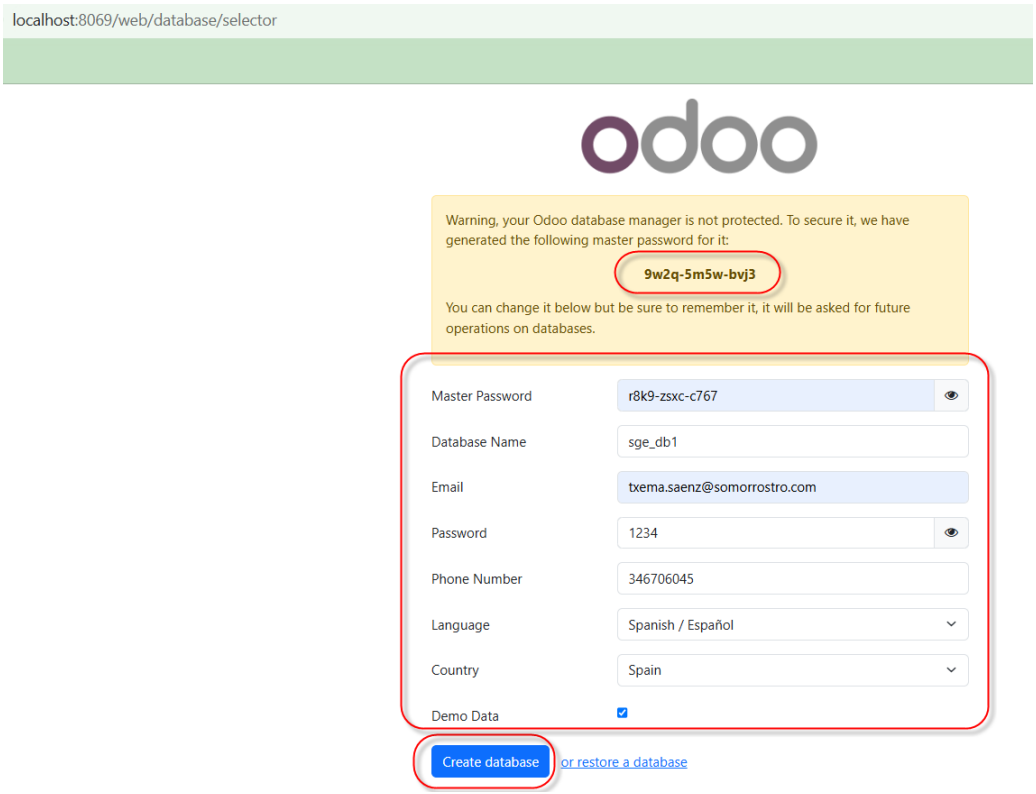

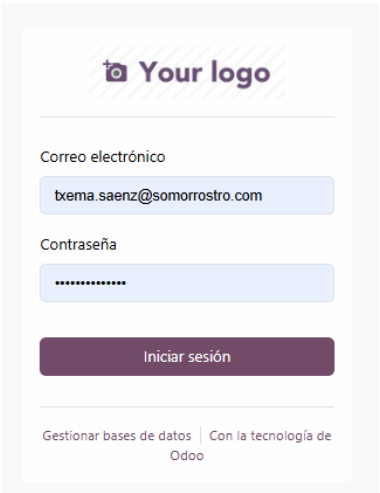




**4.- Instalar al menos 10 de los siguientes módulos:**


**Observar y sacar algún pantallazo de cada una de ellas.**

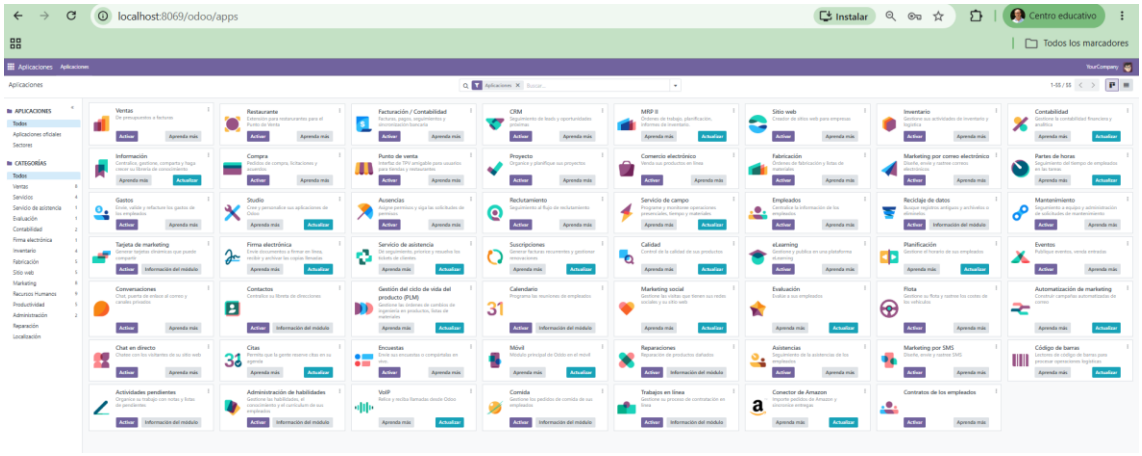



**PRIMER MÓDULO A INSTALAR: CRM**

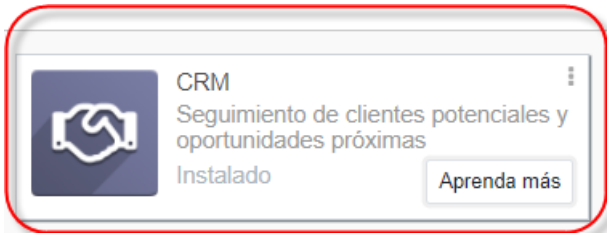

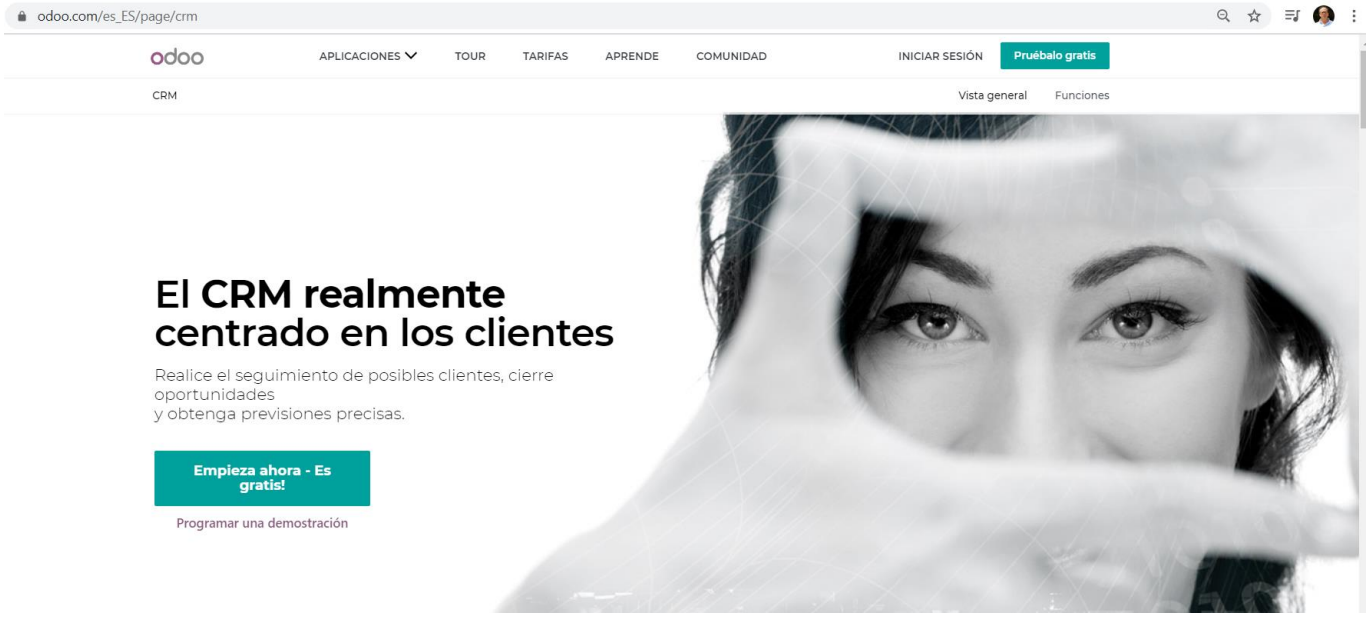



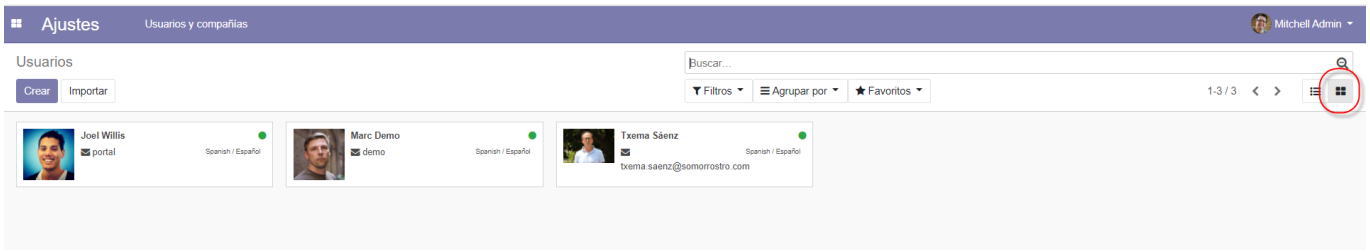



## 5.- Modificar los datos de USUARIO y de COMPAÑIA

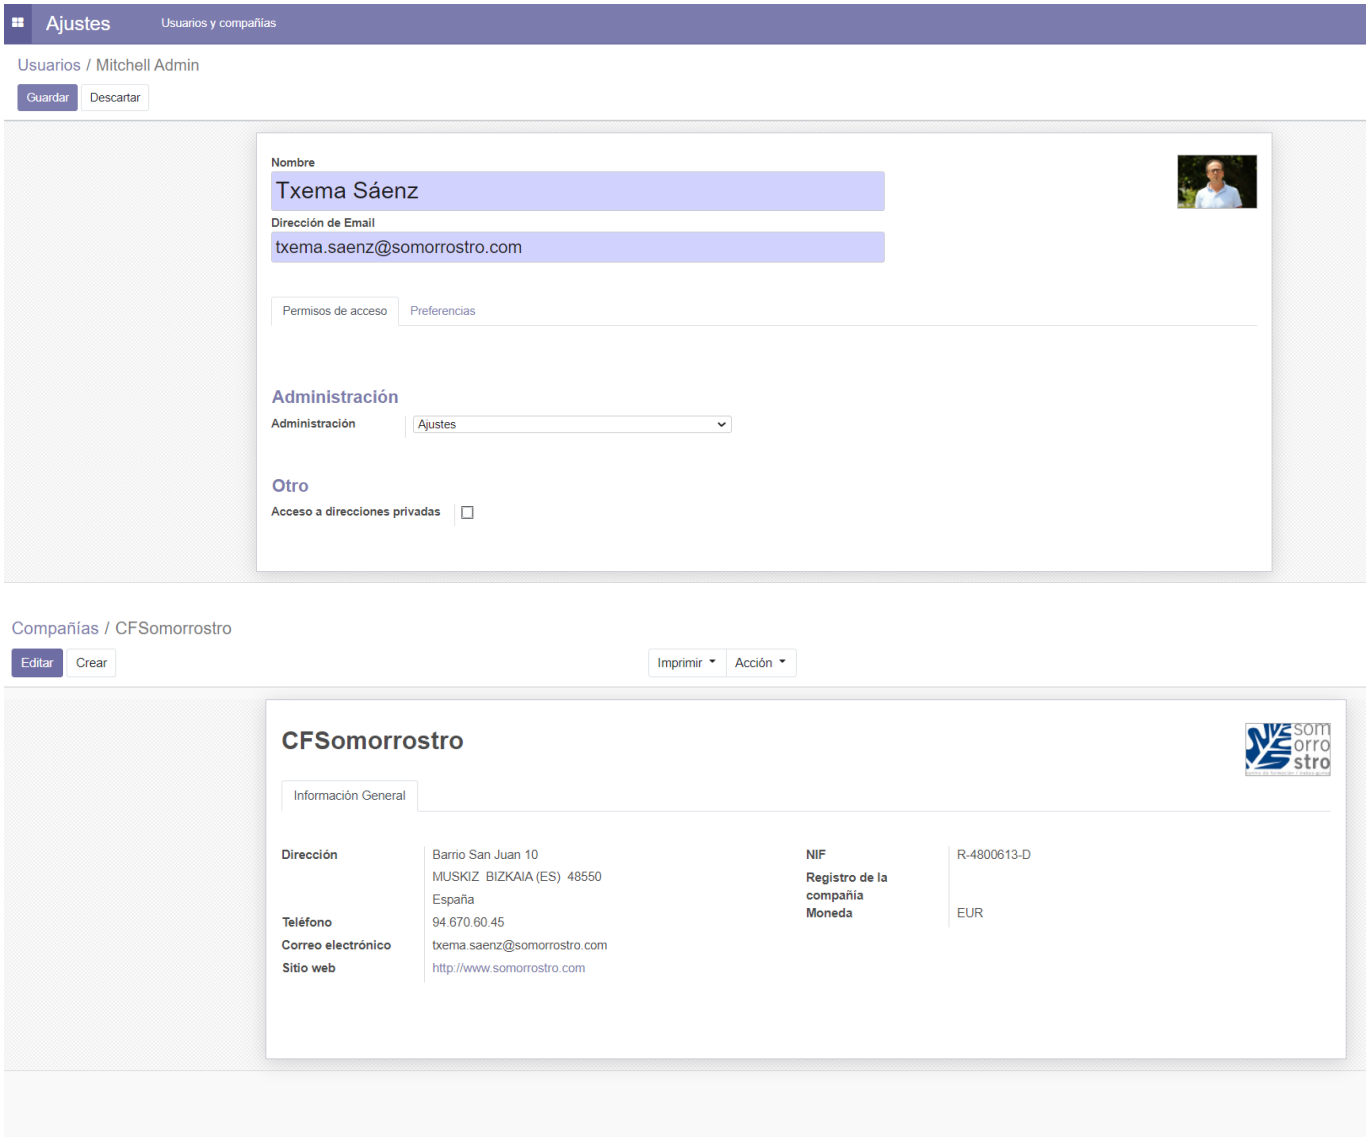


## Observa las VISTAS: TREE y KANBAN

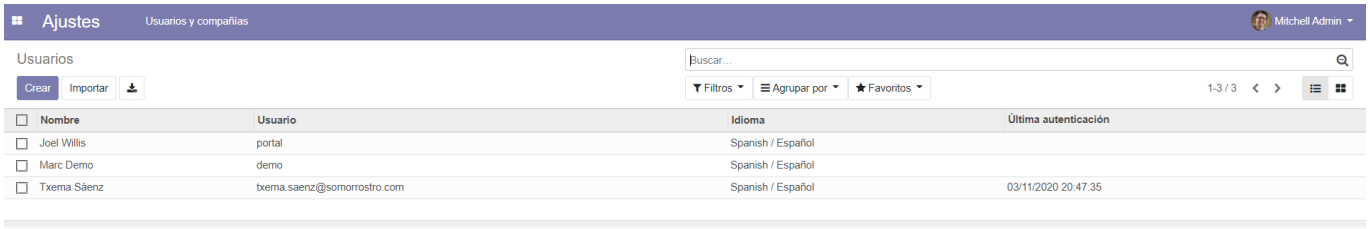





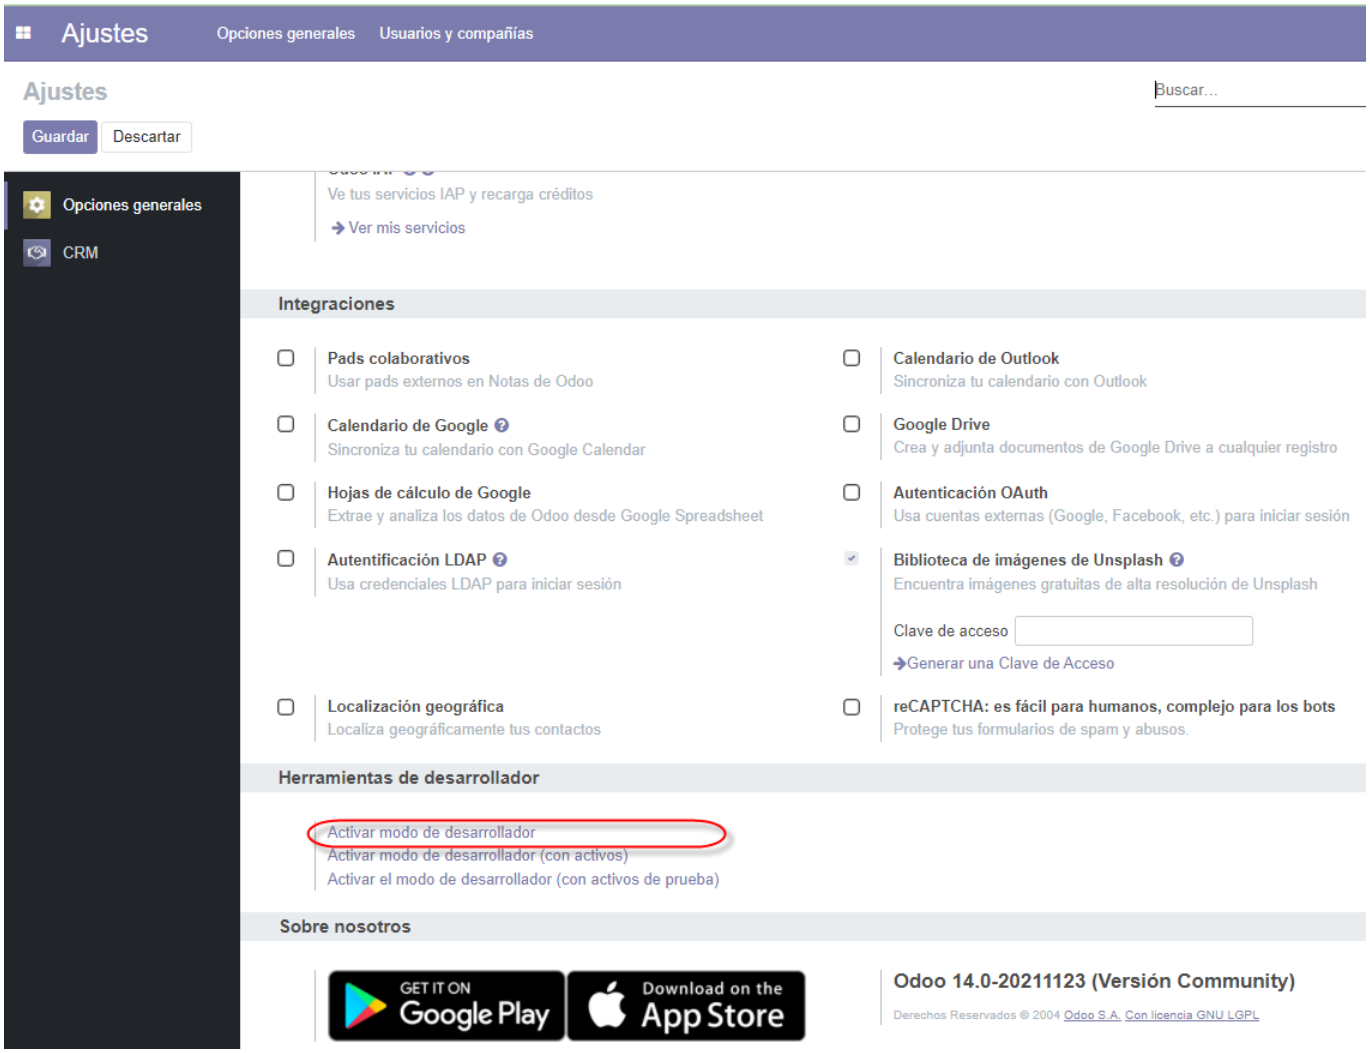

## 6.- ACTIVAR EL MODO DESARROLLADOR

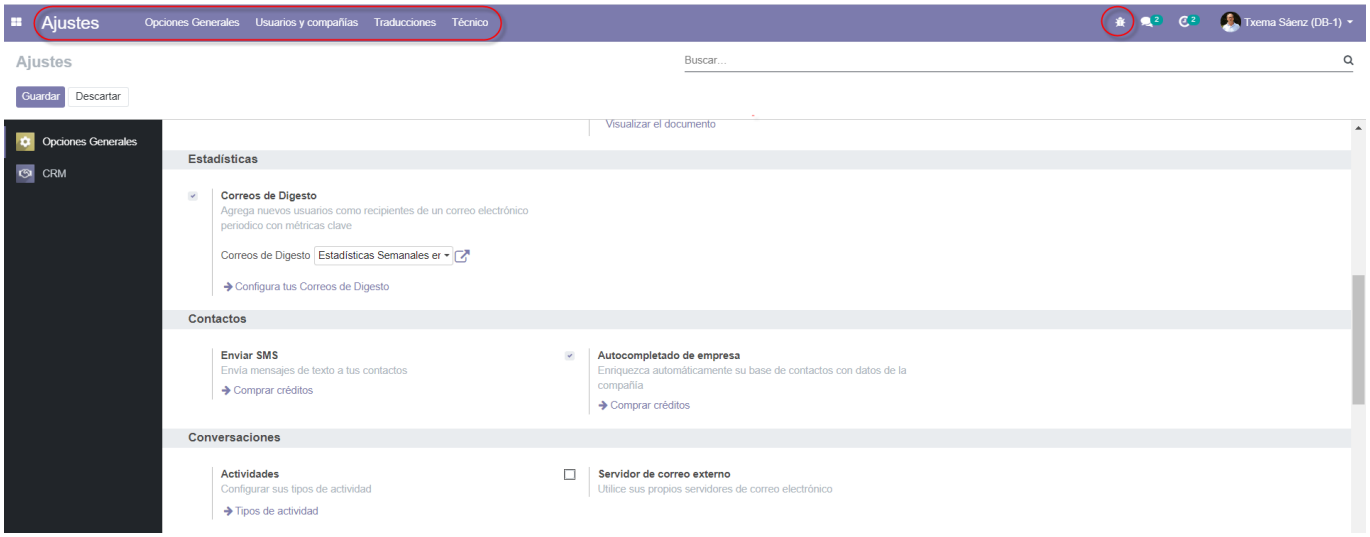



**OBSERVAR LAS NUEVAS OPCIONES**

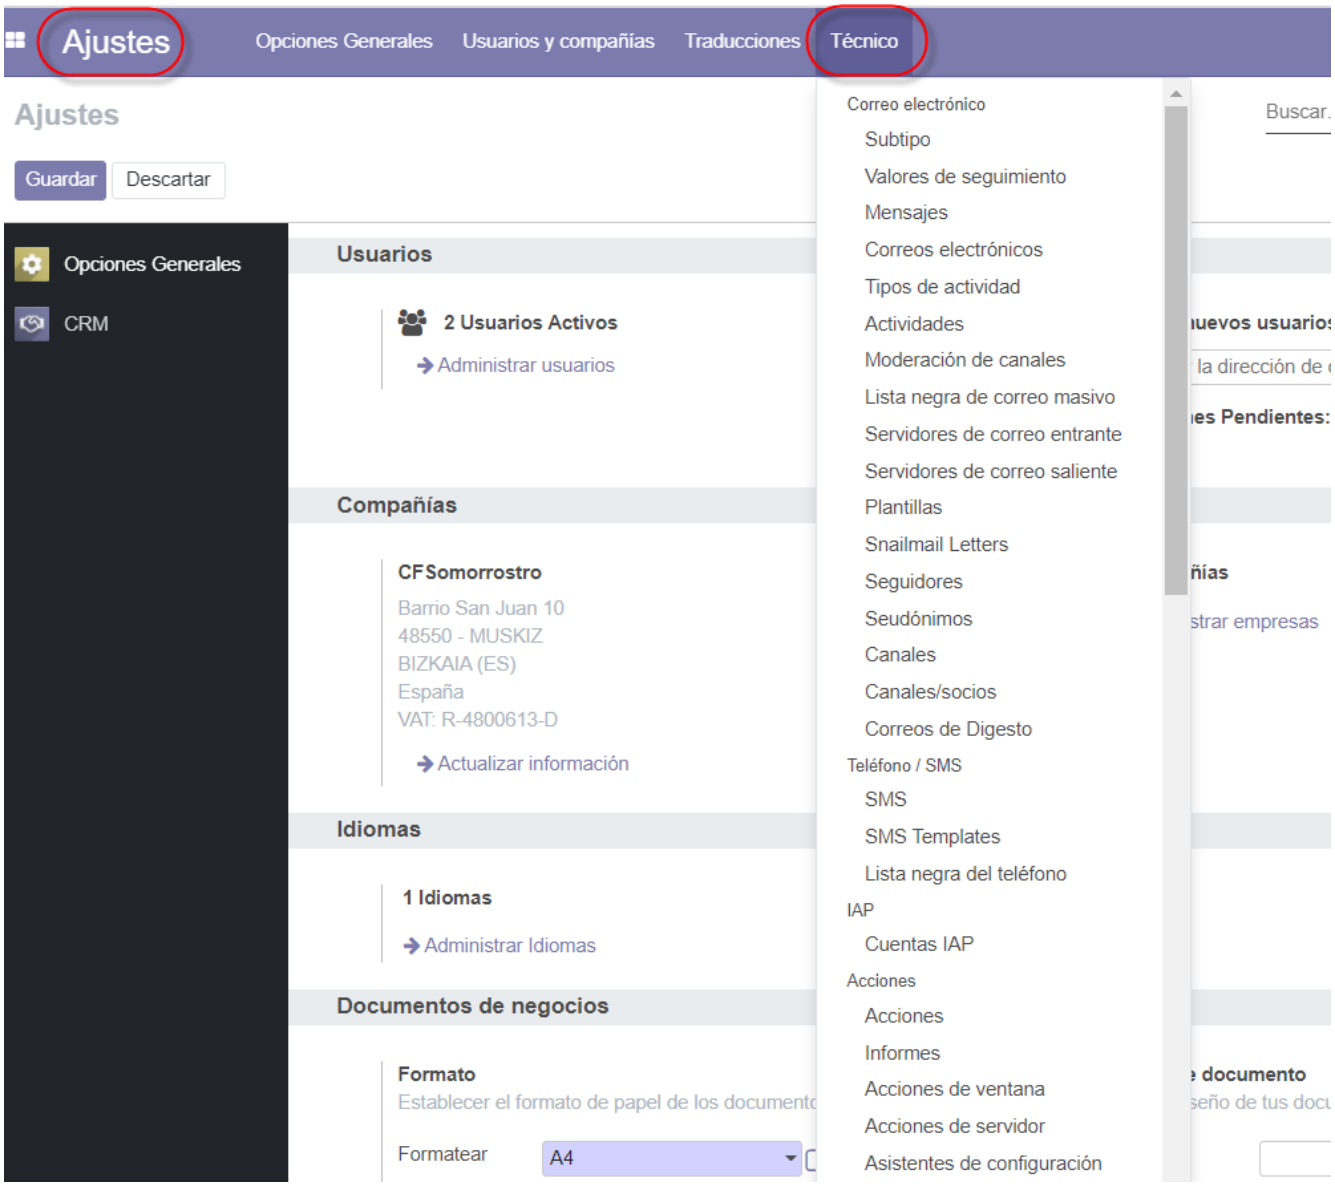


**7.- Tienda de Aplicaciones. Observar los módulos**
**Descargar al menos 2 módulos oficiales gratuitos (FREE)**
**Instalarlos.**

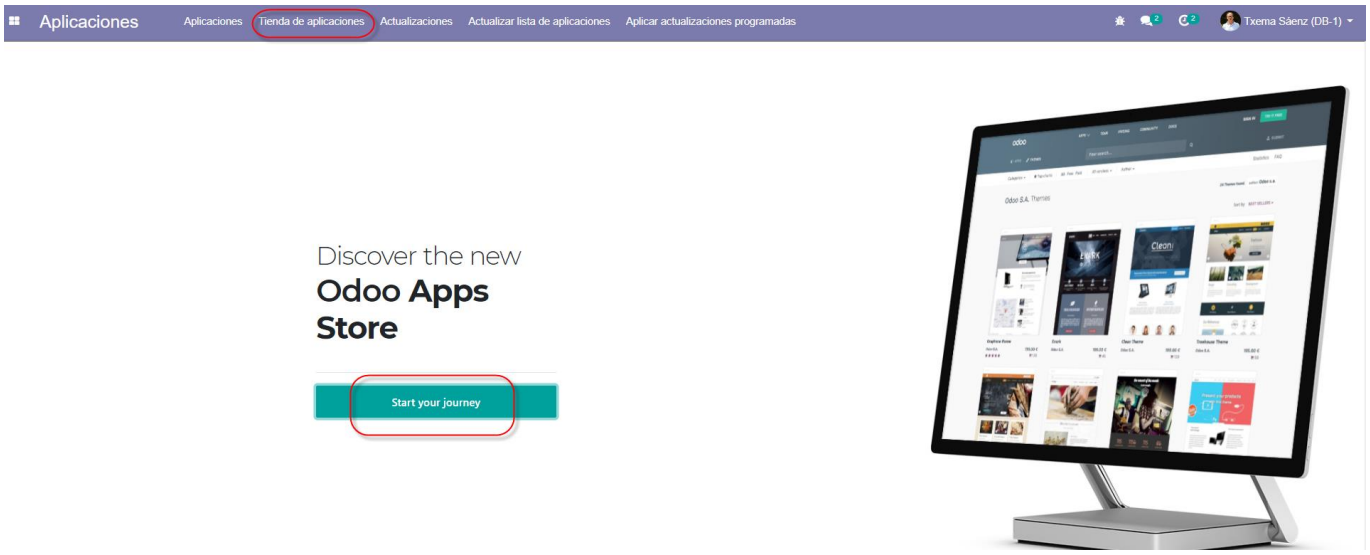

## 8.- Observar y anotar los nombres de los servicios arrancados

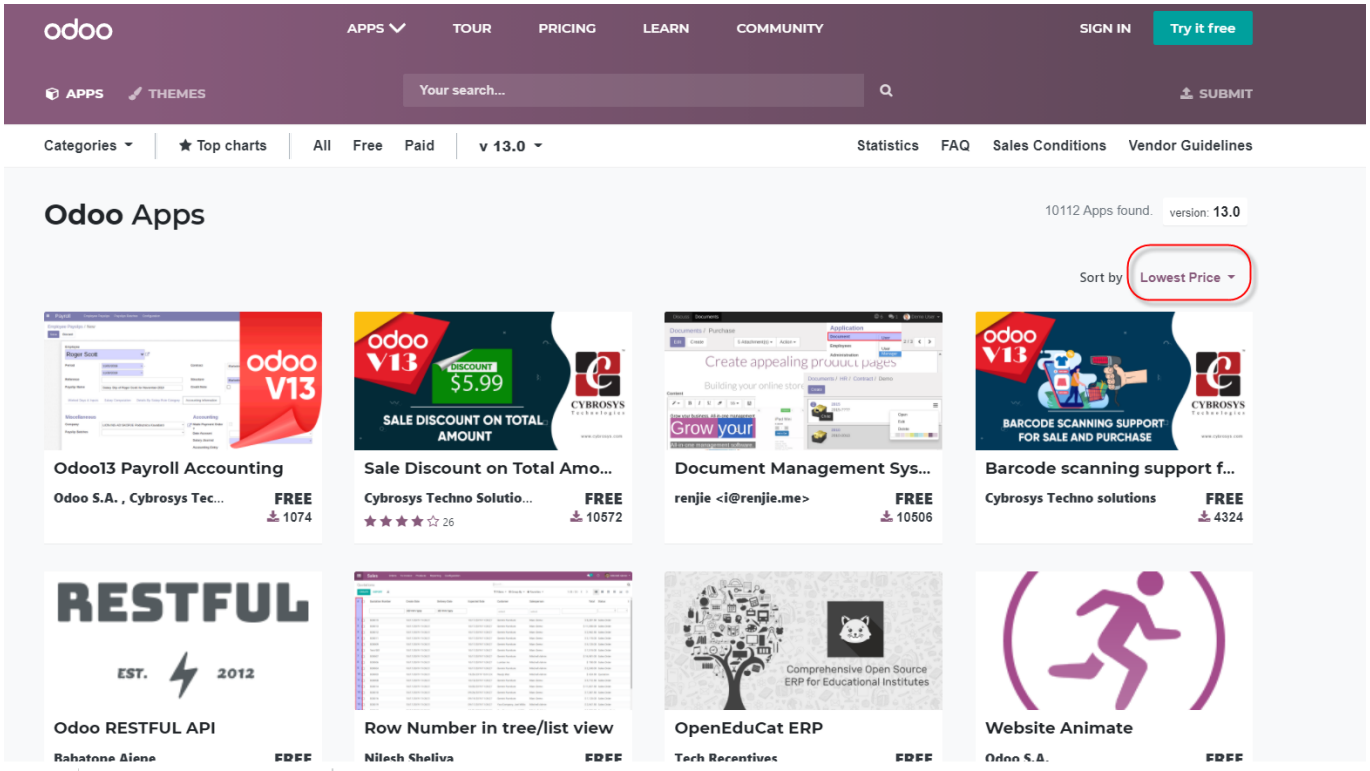- odoo
- postgresql

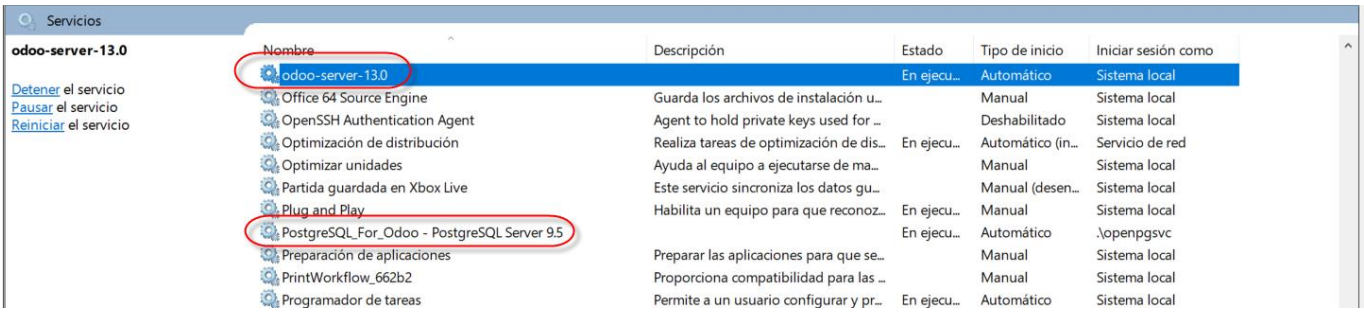


## 9.- Localizar archivo de configuración de odoo.
## Anotar los valores de las siguientes directivas:

- http_port
- smtp_port
- db_port
- db_host
- db_passwd
- db_user
- addons_path
- admin_passwd


---


```
[options]
addons_path = C:\Program Files (x86)\Odoo 13.0\ser-
ver\odoo\addons
admin_passwd = admin
bin_path = C:\Program Files (x86)\Odoo 13.0\thirdparty
csv_internal_sep = ,
data_dir = C:\Users\Txema\AppData\Local\OpenERP S.A\Odoo
db_host = localhost
db_maxconn = 64
db_name = False
db_password = openpgpwd
db_port = 5432
db_sslmode = prefer
db_template = template0
db_user = openpg
dbfilter =
demo = {}
email_from = False
geoip_database = C:\usr\share\GeoIP\GeoLite2-City.mmdb
http_enable = True
http_interface =
http_port = 8069
import_partial =
limit_memory_hard = None
limit_memory_soft = None
limit_request = None
limit_time_cpu = None
limit_time_real = None
limit_time_real_cron = None
list_db = True
log_db = False
log_db_level = warning
log_handler = :INFO
log_level = info
logfile = C:\Program Files (x86)\Odoo 13.0\server\odoo.log
longpolling_port = 8072
max_cron_threads = 2
osv_memory_age_limit = 1.0
osv_memory_count_limit = False
pg_path = C:\Program Files (x86)\Odoo 13.0\PostgreSQL\bin
pidfile =
proxy_mode = False
reportgz = False
screencasts =
screenshots = C:\Users\Txema\AppData\Local\Temp\odoo_tests
server_wide_modules = base,web
smtp_password = False
smtp_port = 25
smtp_server = localhost
smtp_ssl = False
smtp_user = False
syslog = False
test_enable = False
test_file =
test_tags = None
translate_modules = ['all']
unaccent = False
upgrade_path =
without_demo = False
workers = None
```

Final del documento

**10.- Ejecutar PgAdmin III**


- Conectarse a la BD (pantallazo)
- Echar un vistazo a las tablas (pantallazo)

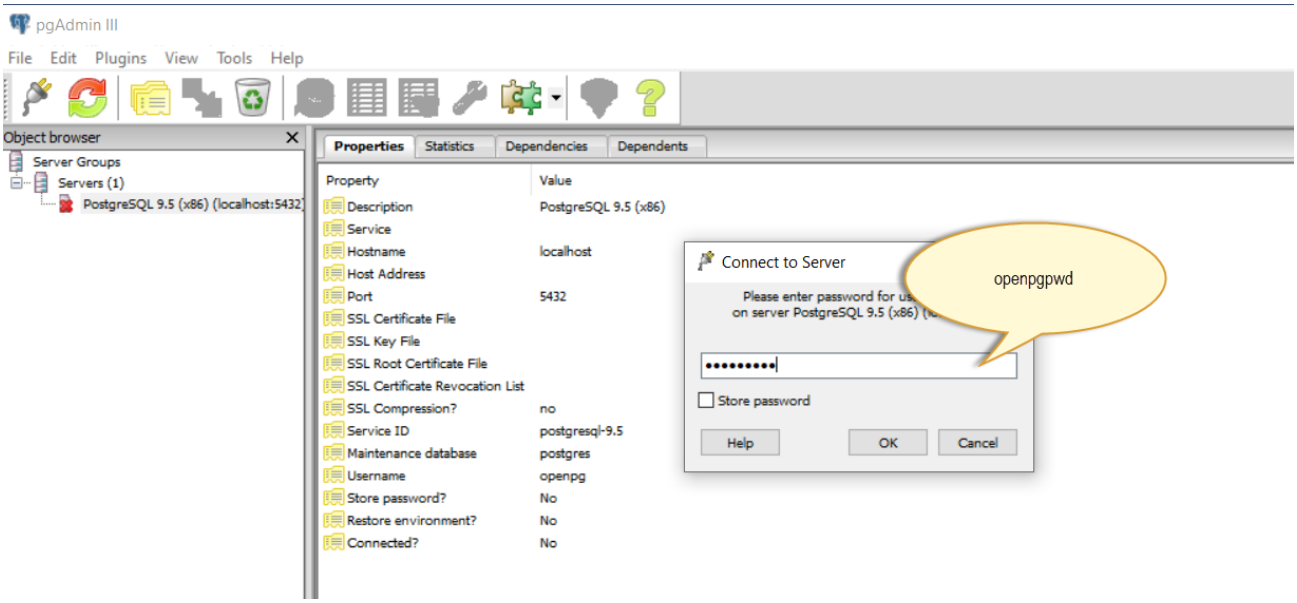

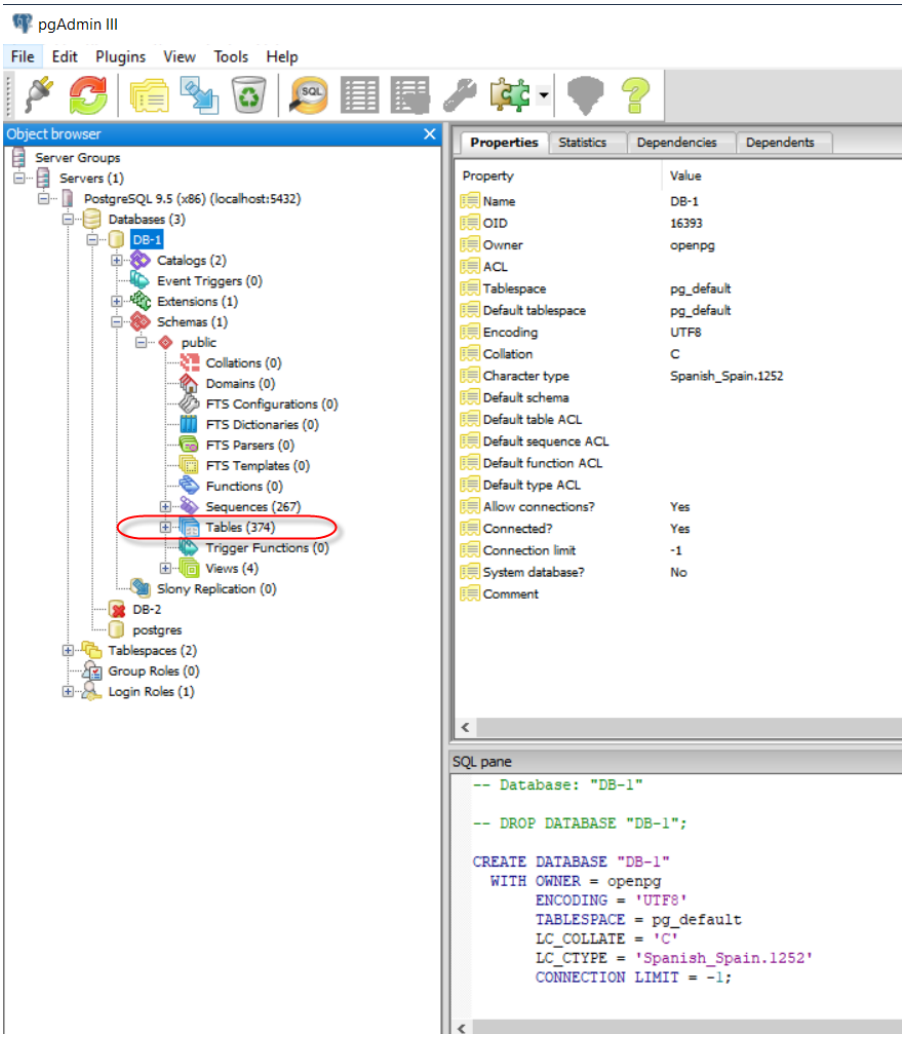**11.- Localiza la carpeta addons (módulos)**

- Abre cualquiera de ellas. Por ejemplo: product
- Observa y anota el contenido de:
    - _init_py
    - _manifest_.py
    - Cualquier archivo de la carpeta views
    - Cualquier archivo de la carpeta models
- ¿Sabrías deducir qué contienen el resto de carpetas?

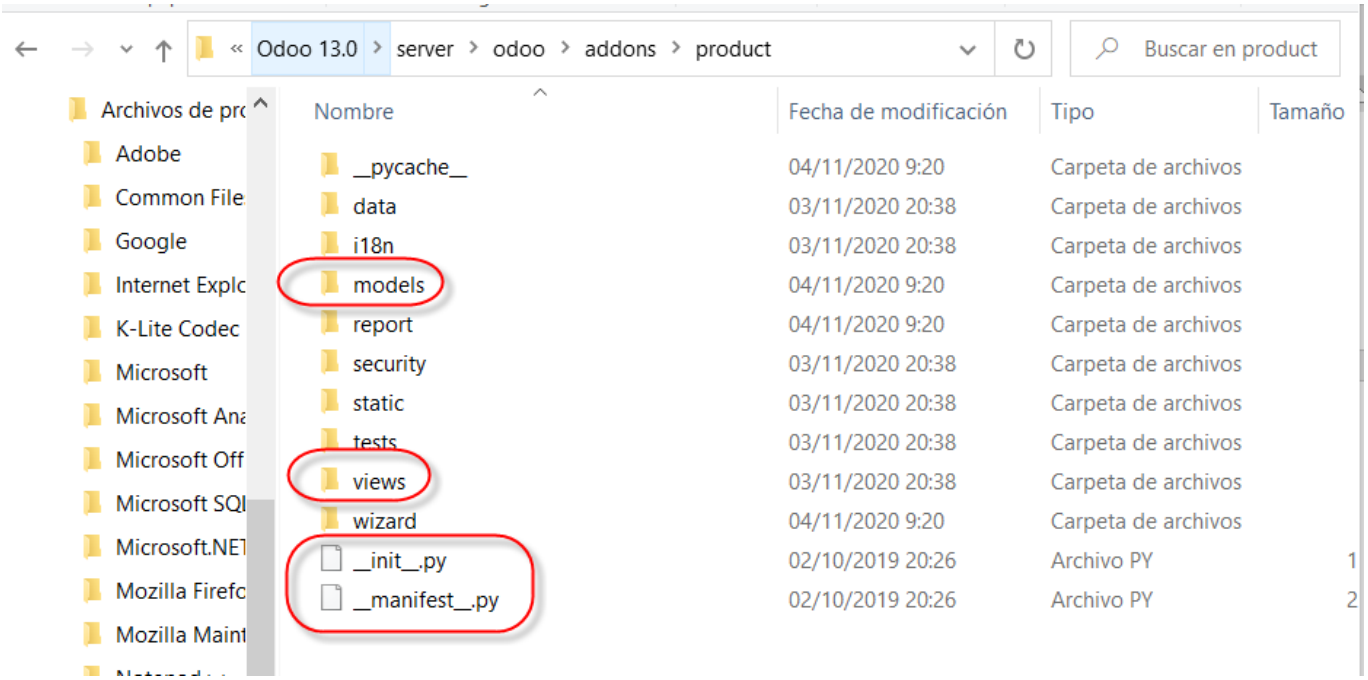


## __init.py__

```python
# -*- coding: utf-8 -*-
# Part of Odoo. See LICENSE file for full copyright and licensing details.

from . import models
from . import report
from . import wizard

```

# __manifest.py__

__init__.py | __manifest__.py

```
# -*- coding: utf-8 -*-
# Part of Odoo. See LICENSE file for full copyright and licensing details.

{
    'name': 'Products & Pricelists',
    'version': '1.2',
    'category': 'Sales/Sales',
    'depends': ['base', 'mail', 'uom'],
    'description': """
This is the base module for managing products and pricelists in Odoo.
========================================================================

Products support variants, different pricing methods, vendors information,
make to stock/order, different units of measure, packaging and properties.

Pricelists support:
-------------------
    * Multiple-level of discount (by product, category, quantities)
    * Compute price based on different criteria:
        * Other pricelist
        * Cost price
        * List price
        * Vendor price

Pricelists preferences by product and/or partners.

Print product labels with barcode.
    """,
    'data': [
        'data/product_data.xml',
        'security/product_security.xml',
        'security/ir.model.access.csv',
        'wizard/product_price_list_views.xml',
        'views/res_config_settings_views.xml',
        'views/product_attribute_views.xml',
        'views/product_views.xml',
        'views/product_template_views.xml',
        'views/product_pricelist_views.xml',
        'views/res_partner_views.xml',
        'report/product_reports.xml',
        'report/product_pricelist_templates.xml',
        'report/product_product_templates.xml',
        'report/product_template_templates.xml',
        'report/product_packaging.xml',
    ],
    'demo': [
        'data/product_demo.xml',
    ],
    'installable': True,
    'auto_install': False,
}
```

# product.py

__init__.py | __manifest__.py | product.py

```python
# -*- coding: utf-8 -*-
# Part of Odoo. See LICENSE file for full copyright and licensing details.

import logging
import re

from odoo import api, fields, models, tools, _
from odoo.exceptions import ValidationError
from odoo.osv import expression


from odoo.tools import float_compare

_logger = logging.getLogger(__name__)


class ProductCategory(models.Model):
    _name = "product.category"
    _description = "Product Category"
    _parent_name = "parent_id"
    _parent_store = True
    _rec_name = 'complete_name'
    _order = 'complete_name'

    name = fields.Char('Name', index=True, required=True)
    complete_name = fields.Char(
        'Complete Name', compute='_compute_complete_name',
        store=True)
    parent_id = fields.Many2one('product.category', 'Parent Category', index=True, ondelete='cascade')
    parent_path = fields.Char(index=True)
    child_id = fields.One2many('product.category', 'parent_id', 'Child Categories')
    product_count = fields.Integer(
        '# Products', compute='_compute_product_count',
        help="The number of products under this category (Does not consider the children categories)")

    @api.depends('name', 'parent_id.complete_name')
    def _compute_complete_name(self):
        for category in self:
            if category.parent_id:
                category.complete_name = '%s / %s' % (category.parent_id.complete_name, category.name)
            else:
                category.complete_name = category.name

    def _compute_product_count(self):
        read_group_res = self.env['product.template'].read_group([('categ_id', 'child_of', self.ids)], ['categ_id'], ['categ_id'])
        group_data = dict((data['categ_id'][0], data['categ_id_count']) for data in read_group_res)
        for categ in self:
            product_count = 0
            for sub_categ_id in categ.search([('id', 'child_of', categ.ids)]).ids:
                product_count += group_data.get(sub_categ_id, 0)
            categ.product_count = product_count
```

# product_views.py

__init__.py | __manifest__.py | product.py | product_views.xml

```xml
<?xml version="1.0" encoding="utf-8"?>
<odoo>
    <data>
    <!-- base structure of product.template, common with product.product -->
    <record id="product_template_form_view" model="ir.ui.view">
        <field name="name">product.template.common.form</field>
        <field name="model">product.template</field>
        <field name="mode">primary</field>
        <field name="arch" type="xml">
            <form string="Product">
                <header>
                    <button string="Configure Variants" type="action"
                        name="%(product_attribute_value_action)d"
                        attrs="{'invisible': ['|', ('attribute_line_ids', '&lt;=', 0), ('is_product_variant', '=', True)]}"
                        groups="product.group_product_variant"/>
                </header>
                <sheet>
                    <field name='product_variant_count' invisible='1'/>
                    <field name='is_product_variant' invisible='1'/>
                    <field name='attribute_line_ids' invisible='1'/>
                    <div class="oe_button_box" name="button_box"/>
                    <widget name="web_ribbon" title="Archived" bg_color="bg-danger" attrs="{'invisible': [('active', '=', True)]}"/>
                    <field name="id" invisible="True"/>
                    <field name="image_1920" widget="image" class="oe_avatar" options="{'preview_image': 'image_128'}"/>
                    <div class="oe_title">
                        <label class="oe_edit_only" for="name" string="Product Name"/>
                        <h1><field name="name" placeholder="Product Name"/></h1>
                        <div name="options" groups="base.group_user">
                            <div>
                                <field name="sale_ok"/>
                                <label for="sale_ok"/>
                            </div>
                            <div>
                                <field name="purchase_ok"/>
                                <label for="purchase_ok"/>
                            </div>
                        </div>
                    </div>
                    <notebook>
                        <page string="General Information" name="general_information">
                            <group>
                                <group name="group_general">
                                    <field name="active" invisible="1"/>
                                    <field name="type"/>
                                    <field name="categ_id" string="Product Category"/>
                                </group>
                                <group name="group_standard_price">
                                    <label for="list_price"/>
                                    <div name="pricing">
                                      <field name="list_price" class="oe_inline" widget='monetary'
                                        options="{'currency_field': 'currency_id', 'field_digits': True}"/>
                                      <button name="open_pricelist_rules" icon="fa-arrow-right" type="object"
```