

---

## Description of the Business Document

This documentation contains file-specific information.

---

## Attributes

Key word	Value
Name	/Sinacofi_C14_F1/Business Documents/ArchivosMomentaneos/C14_Archivo_Datos_Val.bdoc
Last modified	-0400
Label	
Business document type	Flat File
Parent delimiter	Fixed
Parent delimiter value	
Leaf element delimiter	Fixed
Leaf element delimiter value	
Open quote character	
Closed quote character	
Escape character	
Decimal character	
Encoding	iso8859
Trim	None
Truncate	FALSE
Pad reals with a leading and trailing zero	FALSE
Keep decimal separator character	TRUE
Keep decimal separator	TRUE
Keep + sign for positive real numbers	FALSE
Keep + sign for positive integer numbers	FALSE
Keep number of fractional digits	TRUE
Keep number of date characters	TRUE

---

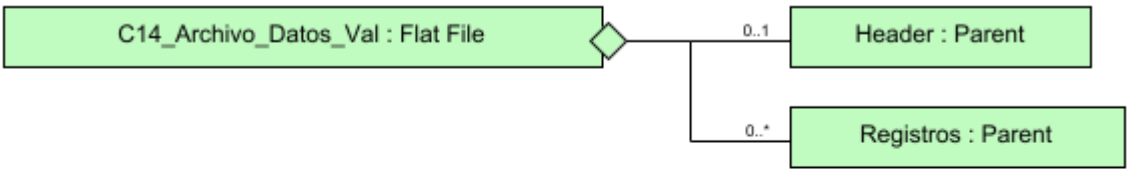
## Content

### Elements


## Validation rules

## Dependencies


## Flat File : C14\_Archivo\_Datos\_Val

UML Diagram										
Name	Name	Cardinality	Class	Data type	Definition	Default value	Label	Delimiter	Delimiter value	Alternative delimiter value
	<a href="#">Header</a>	0-1					Root	Implicit		
	<a href="#">Registros</a>	0-N						Implicit		

## Parent : Header

UML Diagram										
Cardinality	0..1									
Name	Name	Cardinality	Class	Data type	Definition	Default value	Label	Delimiter	Delimiter value	Alternative delimiter value
	<a href="#">Datos</a>	0-1	S - String	string (len)	99999			String	0x0a	!EOF!

## Parent : Registros

UML Diagram										
Cardinality	0..*									
Name	Name	Cardinality	Class	Data type	Definition	Default value	Label	Delimiter	Delimiter value	Alternative delimiter value
	<a href="#">Contenido</a>	0-1	S - String	string (len)	99999			String	0x0a	!EOF!

## Validation rules

[Elements](#)[Dependencies](#)

Name	Expression
InstanciarVariables	<pre>%Sinacofi_C14_F1.indice:=index(getAttribute( "B2BXGIRecei %Sinacofi_C14_F1.indice2:=index(getAttribute( "B2BXGIRece %Sinacofi_C14_F1.indice3:= index(getAttribute( "B2BXGIRec %Sinacofi_C14_F1.tipoDocumentoPrefijo:= getSubString(getA %Sinacofi_C14_F1.correlativoPrefijo:= getSubString(getAtt %Sinacofi_C14_F1.usuarioNAPrefijo:= getSubString(getAttri %Sinacofi_C14_F1.usuarioPrefijo:= getSubString(%Sinacofi_ %Sinacofi_C14_F1.TipoArchivo:= "Archivo de datos";  if ( 1=1 ) then True</pre>
Validation_V1_code65_V12_code75	<pre>%Sinacofi_C14_F1.Detalles2:="Lineas: "; %Sinacofi_C14_F1.Detalles3:="Lineas: "; %Sinacofi_C14_F1.indiceLoop:=1; loop on \Registros{     {# Validacion 1 de largo de registro codigo 65 #     %Sinacofi_C14_F1.indiceLoop:=%Sinacofi_C14_F1.indiceL     if( Sinacofi_C14_F1.GetLargoRegistroByTD(%Sinacofi_C14_         then{             %Sinacofi_C14_F1.Detalles2:=%Sina         };         if ( not( getSubString(this\Contenido,1,1) in ("1         then{             %Sinacofi_C14_F1.Detalles3:=%Sinacofi_C14_F1.         }     };     if ( %Sinacofi_C14_F1.Detalles2&lt;&gt;"Lineas: " )     then{         %Sinacofi_C14_F1.var_error1:= Sinacofi_C14_F1.InsertE             %Sinacofi_C14_F1.correlativoPrefijo,             "065",             %Sinacofi_C14_F1.TipoArchivo &amp; "-" &amp; getS             formatString(getDateAndTime(), "CCYY"-'MM         )     };     if ( %Sinacofi_C14_F1.Detalles3&lt;&gt;"Lineas: " )     then{         %Sinacofi_C14_F1.var_error1:= Sinacofi_C14_F1.InsertE             %Sinacofi_C14_F1.correlativoPrefijo,             "075",             %Sinacofi_C14_F1.TipoArchivo &amp; "-" &amp; getS             formatString(getDateAndTime(), "CCYY"-'MM         )     }; True</pre>
Validation_code05_V2	<pre>%Sinacofi_C14_F1.CodigoError:= "005"; if(Sinacofi_C14_F1.GetEntidadByCasilla(%Sinacofi_C14_F1.u then {     %Sinacofi_C14_F1.var_error1:= Sinacofi_C14_F1.Ins         %Sinacofi_C14_F1.correlativoPrefijo,         %Sinacofi_C14_F1.CodigoError,         %Sinacofi_C14_F1.TipoArchivo,         formatString(getDateAndTime(), "CCYY"-'MM     ) }; True</pre>
	<pre>%Sinacofi_C14_F1.CodigoError:= "074";</pre>

Validation_code74_V5	<pre> if (convertToI(getSubString(\Header\Datos, 8 , 4 )) &lt; 195 or convertToI(getSubString(\Header\Datos,12,2)) &gt;12 or convertToI(getSubString(\Header\Datos,12,2)) &lt;1) then{     %Sinacofi_C14_F1.var_error1:= Sinacofi_C14_F1.Ins     %Sinacofi_C14_F1.correlativoPrefijo,     %Sinacofi_C14_F1.CodigoError,     %Sinacofi_C14_F1.TipoArchivo,     formatString(getDateAndTime(), "CCYY"-'MM     ) }; True </pre>
Validation_container	<pre> if ( %Sinacofi_C14_F1.var_error1 &lt;&gt; " " ) then{     False }else{     True } </pre>

## Dependencies

### Elements

#### Validation rules

var	<a href="#">/Sinacofi_C14_F1/Extended Objects/var_error1.var</a>
fct	<a href="#">/Sinacofi_C14_F1/Extended Objects/GetLargoRegistroByTD.fct</a>
var	<a href="#">/Sinacofi_C14_F1/Extended Objects/Detalles3.var</a>
fct	<a href="#">/Sinacofi_C14_F1/Extended Objects/GetEntidadByCasilla.fct</a>
var	<a href="#">/Sinacofi_C14_F1/Extended Objects/Detalles2.var</a>
var	<a href="#">/Sinacofi_C14_F1/Extended Objects/correlativoPrefijo.var</a>
var	<a href="#">/Sinacofi_C14_F1/Extended Objects/indiceLoop.var</a>
var	<a href="#">/Sinacofi_C14_F1/Extended Objects/indice.var</a>
var	<a href="#">/Sinacofi_C14_F1/Extended Objects/usuarioNAPrefijo.var</a>
fct	<a href="#">/Sinacofi_C14_F1/Extended Objects/InsertErrorTBL.fct</a>
var	<a href="#">/Sinacofi_C14_F1/Extended Objects/tipoDocumentoPrefijo.var</a>
var	<a href="#">/Sinacofi_C14_F1/Extended Objects/TipoArchivo.var</a>
var	<a href="#">/Sinacofi_C14_F1/Extended Objects/CodigoError.var</a>
var	<a href="#">/Sinacofi_C14_F1/Extended Objects/indice3.var</a>
var	<a href="#">/Sinacofi_C14_F1/Extended Objects/usuarioPrefijo.var</a>
var	<a href="#">/Sinacofi_C14_F1/Extended Objects/indice2.var</a>

Creation Date: October 8, 2024

*Generated with Mapping Services*

Axway